



(43) International Publication Date
12 September 2013 (12.09.2013)

(51) International Patent Classification:
A61M 5/19 (2006.01)

(21) International Application Number:
PCT/US2013/029807

(22) International Filing Date:
8 March 2013 (08.03.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/608,451 8 March 2012 (08.03.2012) US

(71) Applicant: **BECTON, DICKINSON AND COMPANY**
[US/US]; 1 Becton Drive, Franklin Lakes, New Jersey
07417 (US).

(72) Inventors: **CRONENBERG, Richard**; 108 Kohout Drive,
Mahwah, New Jersey 07430 (US). **WU, Haiming**; 81 Gal-
way Drive, North Attleboro, Maine 02760 (US).

(74) Agents: **MILES, Kirk, M.** et al.; The Webb Law Firm,
One Gateway Center, 420 Fort Duquesne Boulevard, Suite
1200, Pittsburgh, Pennsylvania 15222 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

(54) Title: DRUG RECONSTITUTION SYSTEM

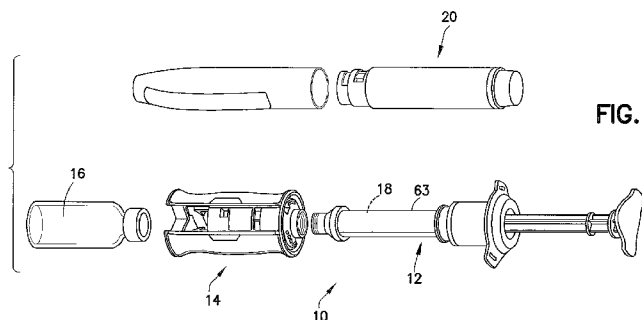


FIG.1

(57) Abstract: A system including an adapter for sequential engagement with a cartridge containing a first substance and a vial containing a second substance is disclosed. The adapter is configured to first engage with the vial and subsequently engage with the cartridge such that the cartridge is in fluid communication with the vial via the adapter. The system includes a latch member engageable with a portion of the cartridge. A plunger rod includes a protrusion and is adapted to communicate with the latch member, the plunger rod being transitionable from a disengaged position, in which the protrusion of the plunger rod is disengaged from the latch member and the latch member is locked to the cartridge, to an engaged position, in which the protrusion is engaged with the latch member and the latch member is unlocked from the cartridge and locked to the plunger rod.



WO 2013/134614 A2

DRUG RECONSTITUTION SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Disclosure

[0001] The present disclosure relates generally to drug reconstitution systems. More particularly, the present disclosure relates to a drug reconstitution system that reduces opportunities for user error.

2. Description of the Related Art

[0002] Certain drugs are preferably provided in powder or dry form (such as a lyophilized form), and require reconstitution prior to administration. Lyophilized drugs, for example, typically are supplied in a freeze-dried form that needs to be mixed with a diluent to reconstitute the substance into a form that is suitable for injection.

[0003] In addition, drugs may be provided as multipart systems which require mixing prior to administration. For example, one or more liquid components, such as flowable slurries, and one or more dry components, such as powdered or granular components, may be provided in separate containers which require mixing prior to administration.

[0004] There are a number of devices and methods for drug reconstitution. The most common method is to inject a diluent contained in a syringe into a vial containing a dry component of the drug. After shaking the vial to mix the dry and liquid components, the user withdraws the reconstituted drug fluid from the vial using a second syringe. The second syringe is then used to inject the reconstituted drug to a patient. This reconstitution process is labor intensive and introduces numerous opportunities for contamination of the needle tip or vial contents. In addition, there is also a danger that the patient or practitioner will accidentally be pricked by the exposed needle. These steps are even more intimidating for a patient attempting to self-inject a reconstituted drug for the first time. Further, the needle of the injection syringe may be dulled by insertion through the vial stopper. A dulled needle is more likely to be painful and/or cause scarring when later inserted into a patient.

[0005] Numerous prior art devices seek to simplify the process of reconstituting a drug and injecting the reconstituted drug into a patient. For example, a common transfer assembly includes a syringe with a removable cartridge. The liquid component of the drug is forced from the cartridge to a vial for reconstitution with a dry component of the drug. The reconstituted fluid is then drawn back into the cartridge. The cartridge can then be removed from the transfer assembly and inserted into an injection syringe to deliver the fluid to the patient. This type of transfer device is generally larger and more complex than a typical

syringe. Specifically, the device must include a structure to allow a user to easily remove the filled cartridge. In addition, the injection syringe must be compatible with the transfer device so that the cartridge removed from the transfer device can be inserted into the injection syringe.

[0006] Alternatively, an injector may be configured to permit mixing of dry and wet drug components prior to injection. To achieve mixing of substances in pen injectors, prior art devices have been developed that provide the wet component (e.g., liquid) and the dry component (e.g., powder) in separate chambers of a common container. The container is configured to permit the flow of the wet component to the dry component through a bypass channel to cause mixing thereof in preparing a solution for injection. However, these devices suffer several drawbacks. For example, these containers must be specifically configured for mixing and, typically, are more expensive to manufacture than conventional containers. In addition, these containers typically have a substantial amount of wasted dead space (e.g., volume of wasted dead space may be four to five times the volume of the accommodated substance). The excess wasted dead space results in larger-size containers, which may be less convenient to handle and more inaccurate for dosing purposes.

[0007] In view of the deficiencies of current methods and devices for drug reconstitution and injection, there is a need for a simpler device for reconstituting a drug and transferring the reconstituted drug to an injector for injection to a patient. Further, the system should reduce opportunities for user error by preventing exposure of needles before, during, and after use. Similarly, the system should reduce the opportunity for contamination by reducing the number of times that a needle must be inserted and removed from a drug vial or cartridge.

SUMMARY OF THE INVENTION

[0008] The present disclosure provides a system which, in one embodiment, includes an adapter for sequential engagement with a cartridge containing a first substance and a vial containing a second substance. The adapter is configured to first engage with the vial and with the vial engaged with the adapter, the adapter is configured to engage with the cartridge such that after an activation step the cartridge is in fluid communication with the vial via the adapter. In this manner, the system prevents unintentional loss of the first substance from the cartridge. The system further includes a latch member engageable with a portion of a cartridge and a portion of a plunger rod. The plunger rod includes a protrusion and is adapted to communicate with the latch member. The plunger rod is transitionable from a disengaged position, in which the protrusion of the plunger rod is disengaged from the latch member and

the latch member is locked to the cartridge, to an engaged position, in which the protrusion is engaged with the latch member and the latch member is unlocked from the cartridge and locked to the plunger rod. With the latch member locked to the cartridge, only actuation of the plunger rod protrusion can unlock the latch member from the cartridge.

[0009] A locking member may be connected to the cartridge to prevent a stopper from sliding out of the cartridge. In this manner, the locking member prevents accidental removal of the stopper from the cartridge and prevents a plunger rod from further actuating the stopper to expel a substance contained in the cartridge. In certain configurations, with the latch member locked to the plunger rod, one-handed swirling is enabled to mix substances contained in a vial provided in fluid communication with the cartridge via the adapter of the present disclosure.

[0010] In accordance with another embodiment of the present invention, a system includes a cartridge having a cartridge distal end, a cartridge proximal end, and a sidewall extending therebetween and defining a chamber having an interior. The system further includes a stopper slidably disposed within the interior of the cartridge. The system further includes a latch member engageable with a portion of the cartridge and a portion of the plunger rod and a plunger rod engageable with a portion of the stopper and adapted to communicate with the latch member. The plunger rod includes a protrusion, and the plunger rod is transitionable from a disengaged position, in which the protrusion of the plunger rod is disengaged from the latch member and the latch member is locked to the cartridge, to an engaged position, in which the protrusion is engaged with the latch member and the latch member is unlocked from the cartridge and locked to the plunger rod.

[0011] In one configuration, the plunger rod further includes a plunger rod distal end engageable with the portion of the stopper and a plunger rod proximal end, the protrusion extending from the plunger rod adjacent the plunger rod proximal end. In another configuration, with the plunger rod in the disengaged position, the latch member is locked to the cartridge proximal end. In one configuration, the stopper is slidably disposed within the interior of the cartridge between a first position adjacent the cartridge proximal end and a second position adjacent the cartridge distal end.

[0012] In one configuration, with the stopper in the first position the plunger rod is in the disengaged position. In another configuration, with the stopper in the second position the plunger rod is in the engaged position. In one configuration, a portion of the plunger rod is sized for movement within the cartridge interior from the disengaged position to the engaged position. In one configuration, a portion of the plunger rod is sized for movement within the

interior of the cartridge from the disengaged position to the engaged position. In one configuration, the system further includes a first substance contained within the chamber of the cartridge.

[0013] In accordance with another embodiment of the present invention, a system includes a cartridge having a cartridge distal end, a cartridge proximal end, and a sidewall extending therebetween and defining a cartridge chamber, a first substance contained within the cartridge chamber, and a stopper slidably disposed within the cartridge chamber. A latch member is engageable with a portion of the cartridge and a portion of the plunger rod, and a plunger rod is engageable with a portion of the stopper and adapted to communicate with the latch member. The plunger rod includes a protrusion, and the plunger rod is transitionable from a disengaged position, in which the protrusion of the plunger rod is disengaged from the latch member and the latch member is locked to the cartridge, to an engaged position, in which the protrusion is engaged with the latch member and the latch member is unlocked from the cartridge and locked to the plunger rod. The system further includes a vial defining a vial chamber, a second substance contained within the vial chamber, and an adapter having a first end adapted to engage the vial and a second end adapted to engage the cartridge after engagement with the vial.

[0014] In accordance with a further embodiment of the present invention, a system includes a cartridge having a cartridge distal end, a cartridge proximal end, and a sidewall extending therebetween and defining a cartridge chamber and a first substance contained within the cartridge chamber. The system of this embodiment includes a vial defining a vial chamber and a second substance contained within the vial chamber. The system further includes an adapter adapted for sequential engagement with the vial and the cartridge.

[0015] In one configuration, the adapter is adapted to first engage with the vial. In one configuration, with the vial engaged with the adapter, the adapter is adapted to engage with the cartridge such that the cartridge chamber is in fluid communication with the vial chamber via the adapter. In one configuration, the system further includes an actuation member adapted to expel the first substance from the cartridge chamber to the vial chamber via the adapter. In one configuration, the actuation member includes a stopper slidably disposed within the cartridge chamber between a first position adjacent the cartridge proximal end and a second position adjacent the cartridge distal end, and a plunger rod that includes a plunger rod distal end engageable with a portion of the stopper, a plunger rod proximal end, and a portion of the plunger rod sized for movement within the cartridge chamber to actuate the stopper between the first position and the second position. In one configuration, actuation of

the stopper from the first position to the second position by the plunger rod expels the first substance from the cartridge chamber to the vial chamber via the adapter. In one configuration, the first substance includes a diluent. In one configuration, the second substance includes a powder.

[0016] In accordance with another embodiment of the present invention, a system includes a cartridge having a cartridge distal end, a cartridge proximal end, and a sidewall extending therebetween and defining a chamber having an interior. The system of this embodiment includes a stopper slidably disposed within the interior of the cartridge between a first position adjacent the cartridge proximal end and a second position adjacent the cartridge distal end. The system further includes a locking member connected to the cartridge and adapted to prevent the stopper from sliding out of the cartridge.

[0017] In one configuration, the stopper defines a stopper outer diameter and the locking member defines a locking member inner diameter, the locking member inner diameter being less than the stopper outer diameter, thereby the locking member provides a physical barrier preventing the stopper from sliding out of the cartridge. In another configuration, the locking member is connected adjacent to the cartridge proximal end. In one configuration, the system further includes a plunger rod having a plunger rod distal end engageable with a portion of the stopper, a plunger rod proximal end, and a deformable restraining member transitionable between a deformed position to an undeformed position, a portion of the plunger rod sized for movement within the interior of the cartridge to actuate the stopper between the first position and the second position. In one configuration, with the plunger rod in an initial position the locking member deforms the restraining member of the plunger rod so that the plunger rod is capable of actuating the stopper from the first position to the second position. In one configuration, after the plunger rod actuates the stopper from the first position to the second position, as the plunger rod returns the stopper from the second position back to the first position and the restraining member of the plunger rod is advanced beyond the locking member, the restraining member of the plunger rod moves to its undeformed position and locks to the locking member, thereby the locking member prevents the plunger rod from actuating the stopper again from the first position to the second position.

[0018] In accordance with another embodiment of the present invention, a system includes a cartridge having a cartridge distal end, a cartridge proximal end, and a sidewall extending therebetween and defining a cartridge chamber. The system of this embodiment includes a first substance contained within the cartridge chamber, a vial defining a vial chamber, a second substance contained within the vial chamber, and an adapter adapted for sequential

engagement with the vial and the cartridge, the adapter having an adapter connection portion securable to the cartridge distal end. The system further includes an injector assembly for injecting a substance, the injector assembly having an injector connection portion, wherein the cartridge distal end is not connectable to the injector connection portion and the adapter connection portion is connectable to the injector connection portion.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The above-mentioned and other features and advantages of this disclosure, and the manner of attaining them, will become more apparent and the disclosure itself will be better understood by reference to the following descriptions of embodiments of the disclosure taken in conjunction with the accompanying drawings, wherein:

[0020] **Fig. 1** is an exploded perspective view of a drug reconstitution system in accordance with an embodiment of the present invention.

[0021] **Fig. 2** is an exploded perspective view of a portion of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0022] **Fig. 3** is an assembled perspective view of a portion of the drug reconstitution system of **Fig. 2** in accordance with an embodiment of the present invention.

[0023] **Fig. 4** is an assembled perspective view of a cartridge, a stopper, and a plunger rod of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0024] **Fig. 5** is a perspective view of the cartridge and the stopper of **Fig. 4** in accordance with an embodiment of the present invention.

[0025] **Fig. 6** is a perspective view of the plunger rod of **Fig. 4** in accordance with an embodiment of the present invention.

[0026] **Fig. 7** is a perspective view of an adapter assembly of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0027] **Fig. 8** is a perspective view of an adapter body of the adapter assembly of **Fig. 7** in accordance with an embodiment of the present invention.

[0028] **Fig. 9** is an assembled perspective view of a needle adapter, a slider, and a needle holder of the adapter assembly of **Fig. 7** in accordance with an embodiment of the present invention.

[0029] **Fig. 10** is a perspective view of the needle adapter of **Fig. 9** in accordance with an embodiment of the present invention.

[0030] **Fig. 11** is a perspective view of the slider of **Fig. 9** in accordance with an embodiment of the present invention.

[0031] **Fig. 12** is a perspective view of the needle holder of **Fig. 9** in accordance with an embodiment of the present invention.

[0032] **Fig. 13** is a perspective view of a locking member of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0033] **Fig. 14** is a cross-sectional view of the locking member of **Fig. 13** connected to a cartridge of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0034] **Fig. 15** is an assembled perspective view of a portion of the drug reconstitution system of **Fig. 2** in accordance with an embodiment of the present invention.

[0035] **Fig. 16** is a perspective view of the cartridge housing of **Fig. 15** including a latch member secured to the cartridge housing in accordance with an embodiment of the present invention.

[0036] **Fig. 17** is a top perspective view of a latch member of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0037] **Fig. 18** is a perspective view of the cartridge housing of **Fig. 16** including the latch member of **Fig. 17** secured to the cartridge housing in accordance with an embodiment of the present invention.

[0038] **Fig. 19** is a side perspective view of the latch member of **Fig. 17** in accordance with an embodiment of the present invention.

[0039] **Fig. 20** is a perspective view of the cartridge housing of **Fig. 18** in accordance with an embodiment of the present invention.

[0040] **Fig. 21** is an exploded cross-sectional perspective view of the latch member of **Fig. 19** and the cartridge housing of **Fig. 20** in accordance with an embodiment of the present invention.

[0041] **Fig. 22** is an assembled cross-sectional perspective view of **Fig. 21** with the plunger rod in a compressed position and including a protrusion of the plunger rod engaged with the latch member in accordance with an embodiment of the present invention.

[0042] **Fig. 23** is a schematic representation of the engagement of the protrusion of the plunger rod with the latch member in accordance with an embodiment of the present invention.

[0043] **Fig. 24** is an assembled cross-sectional perspective view of **Fig. 22** with the plunger rod in a pulled back position and including a protrusion of the plunger rod engaged with the latch member in accordance with an embodiment of the present invention.

[0044] **Fig. 25** is an exploded, perspective view of an adapter connection portion and a cartridge distal end of the drug reconstitution system of **Fig. 1** in accordance with an embodiment of the present invention.

[0045] **Fig. 26** is a perspective view of the adapter connection portion of **Fig. 25** in accordance with an embodiment of the present invention.

[0046] **Fig. 27** is a partial cross-sectional view of the adapter assembly of the drug reconstitution system of **Fig. 1** with the slider and the needle holder in an initial position in accordance with an embodiment of the present invention.

[0047] **Fig. 28** is a partial cross-sectional view of the adapter assembly of the drug reconstitution system of **Fig. 1** in which the slider and the needle holder have moved to a final position and in which the needle has punctured the septum of both the cartridge and the vial in accordance with an embodiment of the present invention.

[0048] **Fig. 29** is a perspective view of the adapter of **Fig. 1** in accordance with an embodiment of the present invention.

[0049] **Fig. 30** is a perspective view of the slider of **Fig. 11** in accordance with an embodiment of the present invention.

[0050] Corresponding reference characters indicate corresponding parts throughout the several views. The exemplifications set out herein illustrate exemplary embodiments of the disclosure, and such exemplifications are not to be construed as limiting the scope of the disclosure in any manner.

DETAILED DESCRIPTION

[0051] The following description is provided to enable those skilled in the art to make and use the described embodiments contemplated for carrying out the invention. Various modifications, equivalents, variations, and alternatives, however, will remain readily apparent to those skilled in the art. Any and all such modifications, variations, equivalents, and alternatives are intended to fall within the spirit and scope of the present invention.

[0052] For purposes of the description hereinafter, the terms “upper”, “lower”, “right”, “left”, “vertical”, “horizontal”, “top”, “bottom”, “lateral”, “longitudinal”, and derivatives thereof shall relate to the invention as it is oriented in the drawing figures. However, it is to be understood that the invention may assume various alternative variations, except where expressly specified to the contrary. It is also to be understood that the specific devices

illustrated in the attached drawings, and described in the following specification, are simply exemplary embodiments of the invention. Hence, specific dimensions and other physical characteristics related to the embodiments disclosed herein are not to be considered as limiting.

[0053] In the following discussion, “distal” refers to a direction generally toward an end of a syringe assembly adapted for contact with a patient and/or engagement with a separate device such as a needle assembly or IV connection assembly, and “proximal” refers to the opposite direction of distal, i.e., away from the end of a syringe assembly adapted for engagement with the separate device. For purposes of this disclosure, the above-mentioned references are used in the description of the components of a syringe assembly in accordance with the present disclosure.

[0054] Referring to **Figs. 1-6**, drug reconstitution system **10** includes cartridge housing **12**, adapter assembly **14**, drug vial **16**, and cartridge **18** each sequentially engageable with opposite ends of the adapter assembly **14** as will be described in more detail below. Drug reconstitution system **10** is also adaptable to be used with an injector, such as pen injector **20**, as shown in **Fig. 1**, to allow a user to perform a standard injection as will be described in more detail below.

[0055] In one embodiment, cartridge **18** contains a first substance or flowable substance (e.g., slurry or liquid) such as a diluent, and vial **16** contains a second substance, such as a powdered or granular substance intended for reconstitution.

[0056] Referring to **Figs. 1-5**, cartridge **18** includes barrel **30** defined by barrel sidewall **36** extending between cartridge distal or forward end **32** and proximal or rearward end **34**, thereby defining cartridge or interior chamber **38** of cartridge **18**. Barrel **30** may be in the general form of an elongated cylindrical barrel as is known in the art for the general shape of a hypodermic syringe, although other forms for containing a fluid for delivery are also contemplated by the present invention. Additionally, barrel **30** may be formed of glass, or may be injection molded from thermoplastic material such as polypropylene, polyethylene, and/or cyclic olefin, according to techniques known to those of ordinary skill in the art, though it is to be appreciated that barrel **30** may be made from other suitable materials and according to other applicable techniques.

[0057] In one embodiment, barrel **30** may include markings, such as graduations on sidewall **36** thereof, for providing an indication as to the level or amount of fluid contained within barrel **30**. Such markings may be provided on the external wall, the internal wall, or integrally formed or otherwise within the wall of barrel **30**. Alternatively, or in addition

thereto, the markings may provide a description of the contents of the barrel, or other identifying information, as may be known in the art.

[0058] Interior chamber 38 of cartridge 18 may be adapted to contain a flowable material, such as a liquid diluent or other substance intended for drug reconstitution therein. The flowable material may be a liquid or slurry component of a drug or medicament. It is further understood that the flowable material may include one or more constituent elements (e.g., two different types of drug components) containing one or more pharmacologically active agents. Alternatively, the flowable material may serve solely as a diluent for a dry drug and contain no pharmacologically active elements.

[0059] In one embodiment, interior chamber 38 of cartridge 18 may be pre-filled with the liquid diluent or other substance intended for drug reconstitution. In this manner, cartridge 18 and/or cartridge housing 12 can be manufactured, pre-filled with a diluent, sterilized, and packaged in appropriate packaging for delivery, storage, and use by the end user. Distal end 32 of cartridge 18 terminates in a tip 37 having an outlet opening 39.

[0060] Referring to Figs. 4 and 5, cartridge 18 includes stopper 40 which is moveably or slidably disposed within interior chamber 38 of cartridge 18, and in sealing contact with the internal surface of sidewall 36 of barrel 30. Stopper 40 is sized relative to barrel 30 to provide sealing engagement with the interior surface of sidewall 36 of barrel 30. Additionally, stopper 40 may include one or more annular ribs 41 extending around the periphery of stopper 40 to increase the sealing engagement between stopper 40 and the interior surface of sidewall 36 of barrel 30. In alternate embodiments, a singular O-ring or a plurality of O-rings may be circumferentially disposed about stopper 40 to increase the sealing engagement with the interior surface of sidewall 36. Referring to Figs. 4, 5, 21, and 24, stopper 40 also includes a plunger connection portion 42 for securing a plunger rod 44 to stopper 40. In one embodiment, plunger connection portion 42 includes a threaded portion.

[0061] Referring to Figs. 1-4 and 6, cartridge 18 further includes plunger rod 44 which provides a mechanism or actuation member for dispensing fluid, such as a first substance, contained within interior chamber 38 of barrel 30 through outlet opening 39 upon connection of barrel 30 with adapter assembly 14 as will be described in more detail below. Plunger rod 44 is adapted for advancing stopper 40. In one embodiment, plunger rod 44 is sized for movement within interior chamber 38 of barrel 30, and generally includes a first or distal end 46, a second or proximal end 48, a plunger rod body 49 extending between distal end 46 and proximal end 48, a protruding member or protrusion 50 extending from plunger rod 44 adjacent plunger rod proximal end 48, a securement feature or stopper connection portion 52

for securing plunger rod **44** to stopper **40**, a deformable restraining member or flexible arms **54** disposed adjacent plunger rod distal end **46**, and thumb press or flange portion **56** disposed adjacent plunger rod proximal end **48**. Plunger rod **44** provides a mechanism for actuation of stopper **40** between a first position adjacent cartridge proximal end **34** and a second position adjacent cartridge distal end **32**. Actuation of plunger rod **44**, upon the application of a distal force to flange portion **56** of plunger rod **44**, to move stopper **40** from the first position to the second position expels fluid from barrel **30**.

[0062] Referring to **Figs. 1-3**, in certain configurations, cartridge **18** includes a cartridge housing **12** having a wall **63** extending between a cartridge housing distal or forward end **62** and a proximal or rearward end **64**, thereby defining a cartridge housing interior chamber **66** of cartridge housing **12**. Chamber **66** of cartridge housing **12** may be sized and adapted to receive cartridge **18** at least partially therein. In this configuration, cartridge housing **12** may be configured to receive a pre-filled cartridge **18** therein. In other configurations, cartridge **18** may not include exterior cartridge housing **12**, and may have the features on the cartridge housing **12** as described herein directly formed on the cartridge **18**, as would be found in a unitary construction. Cartridge housing **12** may also include a viewing window **68** allowing a user to view the volume of liquid present in the interior **38** of cartridge **18**. At least one of the cartridge tip **37** and/or a tip **70** of cartridge housing **12** is adapted to be engageable with adapter assembly **14**. However, in one embodiment, neither of tip **37** nor tip **70** is adapted to be directly engageable with a pen needle normally used with injector **20**, as shown in **Fig. 1**. In this manner, a user is prevented from injecting an un-mixed diluent contained within cartridge **18** to a needle or needle hub for direct injection to the user as there is no place to attach a needle for injection. In such an embodiment, cartridge **18** is only able to be useable by the needle or needle hub used with the injector **20** after cartridge **18** and/or cartridge housing **12**, with at least a portion of cartridge **18** contained therein, has been engaged with adapter assembly **14** so that the first substance contained within chamber **38** of cartridge **18** may be expelled to vial chamber **60** via adapter assembly **14**, mixed with the second substance contained within vial chamber **60**, and the mixture of the first and second substances returned back to barrel **30** of cartridge **18** via adapter assembly **14**. A pen needle preferably cannot be attached to the cartridge **18** and/or cartridge housing **12** until needle adapter **82**, shown and described with reference to **Figs. 7-12**, has been transferred to the cartridge holder **12**. In one embodiment, all of the components of cartridge housing **12** may be constructed of any known material, and are desirably constructed of medical grade polymers.

[0063] Adapter assembly 14 is provided in removable engagement with tip 37 of cartridge 18 and/or tip 70 of cartridge housing 12. Adapter assembly 14 allows for cartridge 18 and cartridge housing 12 to be coupled in fluid communication with vial 16. In this manner, with vial 16 engaged with adapter assembly 14 and cartridge 18 engaged with adapter assembly 14, interior chamber 38 of cartridge 18 may be in fluid communication with vial chamber 60 of vial 16 via adapter assembly 14.

[0064] Referring to Fig. 1, vial 16 may be a standard drug vial of any type having an open head portion covered by a pierceable septum of an elastomeric material. The walls of vial 16 define vial chamber 60 for containing a substance. Drug vial 16 contains the second component of the drug to be reconstituted. The second drug component may be provided in powdered or granular form (e.g., a lyophilized powder). Alternatively, the second component is provided in a wet form, such as a liquid or slurry, for combination with the flowable material in cartridge 18.

[0065] Referring to Figs. 7-12, adapter assembly 14 includes a cylindrical or adapter body 80, a needle adapter 82, a slider 84, a needle holder 86, and a needle 88. Adapter assembly 14 is adapted to contain structure that provides for sequential engagement first with vial 16 and second with cartridge 18. In this manner, liquid contained within chamber 38 of cartridge 18 is prevented from dripping out of adapter assembly 14 with no vial engaged to adapter assembly 14 to receive the liquid.

[0066] Referring to Figs. 7 and 8, adapter body 80 defines a hollow passage 90 therethrough. Adapter body 80 also includes a vial receiving portion 92 that is adapted to engage vial 16 at a first end of adapter body 80 and a cartridge holder receiving portion 94 that is adapted to engage cartridge 18 and/or cartridge housing 12 at an opposite end of adapter body 80.

[0067] Referring to Figs. 7, 9, and 11, adapter assembly includes slider 84, such as a slidable adapter, that is adapted to slide longitudinally along a portion of hollow passage 90 of adapter body 80. Slider 84 also includes an engagement or connection end 100, such as a threaded portion 102, that is provided on or within a top portion of slider 84 for connecting slider 84, in one embodiment, to cartridge housing 12, such as by corresponding threaded engagement. In another embodiment, connection end 100 of slider 84, as shown in Figs. 7 and 9, is adapted to connect to needle adapter 82, as shown in Fig. 10.

[0068] Referring to Fig. 10, needle adapter 82 includes a needle or slider connection portion 110, such as a threaded portion 112, at a first end and a cartridge housing connection portion 114 including locking tabs 116 at an opposing second end. This threaded portion 112

may be provided with corresponding threads for engagement with the threaded portion of a pen needle. As shown in **Figs. 7 and 9**, needle adapter **82** is engageable with slider **84** via engagement of slider connection portion **110** of needle adapter **82** and connector end **100** of slider **84**. Cartridge housing **12** and/or cartridge **18** may be received at least partially therein and connectable to adapter assembly **14** via cartridge housing connection portion **114** of needle adapter **82**. With cartridge housing **12** connected to cartridge housing connection portion **114**, after a first substance or liquid contained within chamber **38** of cartridge **18** has been expelled and mixed with a second substance or powder contained within vial **16** and the mixture of substances transferred back into chamber **38** of cartridge **18** via adapter assembly **14**, rotation of cartridge housing **12** while connected to adapter assembly **14** causes locking tabs **116** to engage cartridge housing **12**. In this manner, upon removal of cartridge housing **12** from adapter assembly **14**, needle adapter **82** is connected to cartridge housing **12** which contains cartridge **18** including the mixture of the substances.

[0069] Once needle adapter **82** has been transferred to cartridge housing **12**, a user may then secure cartridge housing **12** containing cartridge **18** to injector **20** by connecting housing distal end to a connection portion of injector **20**. Needle connection portion **110** of needle adapter **82** is adapted to be attached to injector **20** while tip **37** of cartridge **18** is not engageable with injector **20**. In this manner, a user is prevented from accidentally securing cartridge **18** containing a pre-reconstituted composition to the injector **20** for injection to the body of the user.

[0070] As shown in **Fig. 8**, grooves **96-1** and **96-2** are included on the interior walls in hollow passage **90** of adapter body **80**. Grooves **96-1** and **96-2** support slider **84** which is movable from an initial position, in which slider **84** is disposed adjacent cartridge holder receiving portion **94** of adapter body **80** as shown in **Fig. 27**, to a final position in which slider **84** is disposed adjacent vial receiving portion **92**, as shown in **Fig. 8**, of adapter body **80** as shown in **Fig. 28**.

[0071] Referring to **Fig. 11**, slider **84** includes a locking tab **104** which is engagable with a riser slot **98**, as shown in **Fig. 8**, defined within or connected to a portion of adapter body **80** and which holds slider **84** in the initial position until adapter body **80** is twisted. Twisting adapter body **80** in the direction of **arrow F**, as shown in **Fig. 7**, forces a ratchet **105**, as shown in **Fig. 11**, specifically a ratchet surface **105a**, to pass from groove **96-1** to groove **96-2**, as shown in **Fig. 8**, thereby releasing slider **84** and allowing slider **84** to move longitudinally within adapter body **80**. In effect, ratchet **105** and groove **96-1** offers torque resistance requiring the user to provide sufficient rotational (e.g., twisting) force before slider

84 is released and can be moved from the initial position shown in **Fig. 27** to the final position shown in **Fig. 28**.

[0072] Referring to **Fig. 11**, slider **84** includes a plurality of push fingers **106** which are attached to the body of slider **84**. Latch ends or assembly supports **108** are located at the free end of each of the push fingers **106**. Slider **84** further includes guide channels **120** for receiving a guide rib **96**, as shown in **Fig. 29**, located on the interior of hollow chamber or passage **90** of adapter body **80**. As shown in **Figs. 27** and **28**, push fingers **106** are adapted to contact, but not connect, with needle holder **86** (see also **Figs. 9** and **12**). Needle holder **86** includes a dual tipped needle **88** and a supporting structure **130**. Supporting structure **130** includes a slide ledge **132**. Referring to **Fig. 30**, ledge **132**, shown in **Fig. 12**, contacts engaging surface **107** of the needle holder **86** until the needle holder **86** encounters resistance. At that time, finger tabs **109** of latch ends **108** deflect outwardly and allow the needle holder **86** to move upwards. Ledge **132** becomes clamped between finger tabs **109a** and finger tab **109b** forcing needle holder **86** to longitudinally advance through hollow chamber **90** of adapter body **80** of adapter assembly **14**. Support structure **130** of needle holder **86** also includes a needle locking tab **134** extending from the side of needle holder **86** for securing needle holder **86** and needle **88** to slider **84** when slider **84** is in the final (e.g., end of use) position. In this manner, needle holder **86** and needle **88** are prevented from being removed from adapter assembly **14** once fluid communication is established between cartridge **18** and vial **16**.

[0073] In use, drug reconstitution system **10** of the present invention is assembled by sequentially or first attaching vial **16** to one end of adapter assembly **14**, for example, vial receiving portion **92** of adapter body **80**. Next, referring to **Figs. 2** and **25**, cartridge housing **12** is attached to the opposite end of adapter assembly **14** by engaging a connection portion **72**, such as a male threaded connection, as shown in **Fig. 3**, of cartridge housing **12** to the corresponding cartridge housing connection portion **114**, such as a corresponding female threaded portion, of needle adapter **82** of adapter assembly **14**. Connection portion **72** of cartridge housing **12** includes a locking latch **74**, as shown in **Fig. 25**, which is adapted to cooperate with locking tabs **116** of needle adapter **82**. For example, with cartridge housing **12** connected to cartridge housing connection portion **114** of needle adapter **82**, after a first substance or liquid contained within chamber **38** of cartridge **18** has been expelled and mixed with a second substance or powder contained within vial **16** via adapter assembly **14** and the mixture of substances transferred back into chamber **38** of cartridge **18** via adapter assembly **14**, rotation of cartridge housing **12** while connected to adapter assembly **14** via needle

adapter **82** causes locking tabs **116** to engage locking latches **74** of cartridge housing **12**. In this manner, upon removal of cartridge housing **12** from adapter assembly **14**, needle adapter **82** is connected to cartridge housing **12** which contains cartridge **18** including the mixture of the substances. Subsequently, a user may then secure cartridge housing **12** containing cartridge **18** to injector **20** and connect a pen to the needle connection portion **110** of needle adapter **82** to a connection portion of injector **20**, such as by threaded connection. In certain configurations, the connection portion **72** may include a half turned threaded profile which does not correspond to the threaded profile of the injector **20**. Accordingly, in this manner, a user is prevented from accidentally securing cartridge housing **12** containing cartridge **18** which includes a liquid to the injector **20** for injection to the body of the user as these threaded profiles do not correspondingly engage.

[0074] In one embodiment, drug reconstitution system **10** is provided as a pre-assembled kit in which cartridge housing **12**, cartridge **18**, and vial **16** are connected to adapter assembly **14** but are not yet in fluid communication with one another through needle **88**.

[0075] Once the cartridge holder **12** and vial **16** are securely connected to adapter assembly **14**, system **10** is activated by first twisting then pushing cartridge housing **12** towards vial **16** and twisting adapter body **80** of adapter assembly **14** to release ratchet arm **105**. Following activation, the user pushes on cartridge housing **12** to advance slider **84** through adapter body **80**. Slider **84** is supported by grooves **96-1** then **96-2** which correspond to guide channels **120** of slider **84** as discussed above. Latch ends **108** of slider **84** contact slide ledge **132** of needle holder **86**, thereby pushing needle holder **86** and needle **88** longitudinally along the interior wall of adapter body **80**. Continued force on slider **84** causes a vial end of needle **88** to contact and eventually pierce septum **61** of vial **16**, as shown in **Fig. 28**. At this point, locking tab **104** of slider **84** engages with the end of a lock slot **99** (**Figs. 7 and 8**), located near vial receiving portion **92** of adapter body **80** to hold slider **84** in this position. Similarly, locking tabs **134** of needle holder **86** engage with corresponding tabs on the interior of slider **84** to secure needle holder **86** in this position. Referring to **Figs. 12 and 30**, ledge **132** is seated within finger tabs **109a** and finger tab **109b**. In this way, needle holder **86** is prevented from being removed from adapter body **80** exposing needle **88**.

[0076] Referring to **Fig. 28**, as the user continues to advance cartridge **18** and cartridge housing **12** by applying force to slider **84**, a septum **31** of cartridge **18** is brought into contact with a cartridge end of needle **88**. As pressure increases, needle **88** pierces septum **31** of cartridge **18**, thereby establishing fluid communication between vial **16** and cartridge **18** through needle **88**.

[0077] At this point, the user presses down on plunger rod **44** in the direction of **arrow A**, as shown in **Figs. 3 and 4**, advancing stopper **40** within cartridge **18** from the first position to the second position. Stopper **40** expels the liquid from cartridge **18** and into vial **16** via adapter assembly, i.e., needle **88**. Once the liquid is entirely injected into the vial, the user may shake system **10** to mix the dry and liquid components of the drug. In some embodiments, mixing may be accomplished in a matter of seconds whereas in other embodiments mixing can take as long as 20 minutes. The user can determine how much fluid has been expelled from cartridge **18** by observing the fluid level through the viewing window **68** of cartridge housing **12**. The user also can tell that all fluid has been expelled from cartridge **18** when stopper **40** is at the base of cartridge **18** and plunger rod **44** cannot be further advanced. The amount of mixing required is based on the composition, solubility, and viscosity of the dry and liquid components initially present in vial **16** and cartridge **18** to be reconstituted.

[0078] In one embodiment, a locking system of the present disclosure allows plunger rod **44** to be in a locked position thereby allowing the user to shake system **10** to mix the dry and liquid components of the drug using only one hand. Referring to **Figs. 15-24**, system **10** may include a locking latch or latch member **150** which is engageable with a portion of cartridge housing **12** and a portion of plunger rod **44**. Referring to **Figs. 17, 19, 21, and 22**, latch member **150** includes opposing bayonet slots **152** and opposing pivoting rockers **154** pivotable relative to latch member **150** via a pivot axis point **156**. Rockers **154** each include an upper arm **158** above pivot point **156** and a lower arm **160** below pivot point **156** and including a claw **162**. Referring to **Figs. 20 and 21**, cartridge housing **12** includes opposing bayonet tabs **190** and a recessed portion **192** on the interior surface of wall **63** of cartridge housing **12**.

[0079] In use, latch member **150** is secured or locked to cartridge housing **12** through a mating bayonet connection, i.e., bayonet slot **152** of latch member **150**, and is slid over bayonet tab **190** on cartridge housing **12**. Once tab **190** of cartridge housing **12** is disposed within slot **152** of latch member **150**, latch member **150** is rotated relative to cartridge housing **12** so that tab **190** of cartridge housing **12** locks within slot **152**, as shown in **Fig. 19**. In use, bayonet tab **190** is directed first vertically along the direction of **arrow Y**, as shown in **Fig. 19**, then horizontally along the direction of **arrow X**. Rotation of latch member **150** to lock on to cartridge housing **12** also forces upper arm **158** of latch member **150** into recessed portion **192** of cartridge housing **12** as shown in **Figs. 20 and 21**. In this manner, latch member **150** is locked to cartridge housing **12** and a user is prevented from removing latch

member **150** unless plunger rod **44** is actuated in accordance with the present disclosure as will now be discussed. The unlocking of latch member **150** from cartridge housing **12** is only possible when plunger rod **44** is used to actuate stopper **40** from a first position, in which stopper **40** is located adjacent cartridge proximal end **34** (and a first substance is contained within chamber **38** of cartridge **18**), to a second position, in which stopper **40** is located adjacent cartridge distal end **32** (and thus the first substance contained within chamber **38** of cartridge **18** is expelled, e.g., to vial chamber **60** via needle **88** for drug mixture). Referring to **Figs. 22** and **23**, plunger rod **44** unlocks latch member **150** because as plunger rod **44** is actuated within cartridge housing **12** in a direction generally along **arrow C**, as shown in **Fig. 23**, until protrusion **50** of plunger rod **44** engages claw **162** of pivoting rocker **154** of latch member **150** and as protrusion **50** slides over and past claw **162** as shown in **Figs. 22** and **23**, protrusion **50** of plunger rod **44** engages claw **162** and forces lower arm **160** of pivoting rocker **154** in a direction generally along **arrow D**, as shown in **Fig. 23**. Actuation of lower arm **160** in the direction generally along **arrow D** causes upper arm **158** of pivoting rocker **154** to pivot via pivot point **156** in a direction generally along **arrow E**, as shown in **Fig. 23**, and thus upper arm **158** pivots out of the locked position within recess **192** of cartridge housing **12**. In this manner, the engagement of plunger rod **44** and latch member **150** causes latch member **150** to rotationally unlock (latch member **150** is at this point still axially constrained) from cartridge housing **12** and latch member **150** to lock to plunger rod **44** via claw **162** engaging protrusion **50** of plunger rod **44** as shown in **Fig. 22**. Advantageously, with latch member **150** locked to plunger rod **44** and latch member **150** axially locked to cartridge housing **12** as shown in **Fig. 22**, a user may mix the liquid and dry substances now contained in vial **16** by shaking system **10** with one hand.

[0080] Next, with upper arm **158** unlocked from recess **192**, latch member **150** which is locked to plunger rod **44** can be rotated relative to cartridge housing **12** thus removing bayonet tab **190** of cartridge housing **12** from bayonet slot **152** of latch member **150**. In this manner, latch member **150** is completely detached from cartridge housing **12**. Next, plunger rod **44** can be used to actuate stopper **40** back from the second position to the first position to draw the mixed drug back into cartridge **18** via a suction force or a vacuum. Actuation of plunger rod **44** back out of cartridge **18** moves latch member **150**, which is locked to plunger rod **44**, out from cartridge housing **12** as shown in **Fig. 24**.

[0081] After mixing the substances as described above, the user may invert system **10** and pull plunger rod **44** in a direction generally along **arrow B**, as shown in **Figs. 3, 4, and 22**, away from vial **16** and adapter assembly **14** to draw the mixed drug back into cartridge **18** via

suction. Referring to **Figs. 13 and 14**, in one embodiment, system **10** includes a locking ring or locking member **170** which is connected to cartridge housing **12** and is adapted to prevent stopper **40** from sliding out of cartridge **18** or being accidentally pulled out from cartridge **18** when plunger rod **44** is pulled out from cartridge **18**. Referring to **Fig. 13**, locking member **170** includes opposing slots **172**, a top portion of locking member **170** defines opposing receiving channels **174**, and locking member **170** defines a locking member inner diameter **176**. Referring to **Fig. 14**, cartridge housing **12** includes locking member tab(s) **180**. To secure locking member **170** to cartridge housing **12**, locking member **170** is inserted into cartridge housing **12** so that slots **172** are aligned with locking member tabs **180**. Next, locking member **170** is pushed into cartridge housing **12** until locking member tabs **180** of cartridge housing **12** are located beyond slots **172** of locking member **170**. Then locking member **170** is rotated so that tabs **180** provide a physical barrier abutting a top portion of locking member **170** thereby securing locking member **170** in cartridge housing **12**. In one embodiment, a tool may be inserted into receiving channels **174** of locking member **170** to rotate and lock locking member **170** in cartridge housing **12**.

[0082] With locking member **170** connected to cartridge housing **12** as described above, locking member **170** provides a physical barrier preventing stopper **40** from sliding out of cartridge **18**. For example, referring to **Figs. 13, 14, and 24**, because locking member inner diameter **176** is less than a stopper outer diameter **43** (**Fig. 5**), locking member **170** provides a physical barrier preventing stopper **40** from sliding out of cartridge **18**.

[0083] Referring to **Fig. 24**, locking member **170** also provides a physical barrier to prevent plunger rod **44** from compressing stopper **40** and traveling back within cartridge **18** after flexible arms **54** of plunger rod **44** have moved beyond locking member **170** as shown in **Fig. 24**. With plunger rod **44** in an initial position, flexible arms **54** of plunger rod **44** are deformed by locking member **170** so that plunger rod **44** is capable of actuating stopper **40** from the first position to the second position. After plunger rod **44** actuates stopper **40** from the second position back to the first position and flexible arms **54** of plunger rod **44** are advanced beyond locking member **170** as shown in **Fig. 24**, flexible arms **54** of plunger rod **44** move to the non-deformed position and lock to locking member **170** as shown in **Fig. 24**. In this manner, locking member **170** prevents plunger rod **44** from actuating stopper **40** again from the first position to the second position, thereby preventing injection by plunger **44**.

[0084] Referring to **Figs. 13 and 14**, in one embodiment, locking member **170** may also include an elastomeric layer or gasket **178** which is disposed between locking member **170** and cartridge **18** which may be formed of glass to protect and constrain cartridge **18**. Gasket

178 may be either overmolded to locking member 170 or inserted in cartridge housing 12 and placed above cartridge 18 so that when locking member 170 is secured to cartridge housing 12, gasket 178 is disposed between cartridge 18 and locking member 170.

[0085] Before cartridge housing 12 is removed from adapter assembly 14 (with cartridge housing 12 connected to cartridge housing connection portion 114 of needle adapter 82), and after a first substance or liquid contained within chamber 38 of cartridge 18 has been expelled and mixed with a second substance or powder contained within vial 16 and the mixture of substances transferred back into chamber 38 of cartridge 18 via adapter assembly 14 as discussed above, rotation of cartridge housing 12 while connected to adapter assembly 14 causes locking tabs 116 of needle adapter 82 to engage cartridge housing 12. In this manner, upon removal of cartridge housing 12 from adapter assembly 14, needle adapter 82 is connected to cartridge housing 12 which contains cartridge 18 including the mixture of the substances.

[0086] At this point, the user may disengage plunger rod 44 from stopper 40, such as by disengaging the threaded engagement therebetween, i.e., stopper connection portion 52 of plunger rod 44 and plunger connection portion 42 of stopper 40, as shown in Fig. 24.

[0087] Subsequently, a user may then load or secure cartridge 18 or cartridge holder 12 with cartridge 18 therein containing the reconstituted drug to an injection apparatus such as injector 20, or an autoinjector for injection into a patient, by connecting the holder 12 or alternatively the needle adapter 82 to a connection portion of injector 20. Needle connection portion 110 of needle adapter 82 may be adapted to be attached to injector 20 while tip 37 of cartridge 18 is not directly engageable with a pen needle for injection. In this manner, a user is prevented from accidentally securing cartridge 18 containing a pre-constituted liquid to the injector 20 for use in injection to the body of the user.

[0088] The drug vial 16 and adapter assembly 14, which are still connected together, can then be discarded. Advantageously, since one end of needle 88 is still inserted into vial 16 and the other end is enclosed within adapter assembly 14, the device can be disposed of without exposing needle 88. Therefore, there is no danger that the user will be pierced by needle 88 while removing cartridge 18 or otherwise handling the device.

[0089] While this disclosure has been described as having exemplary designs, the present disclosure can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the disclosure using its general principles. Further, this application is intended to cover such departures

from the present disclosure as come within known or customary practice in the art to which this disclosure pertains and which fall within the limits of the appended claims.

WHAT IS CLAIMED IS:

1. A system comprising:
 - a cartridge holder having a cartridge holder distal end, a cartridge holder proximal end, and a sidewall extending therebetween and defining a chamber having an interior adapted to receive a cartridge therein;
 - a stopper slidably disposed within an interior of the cartridge; and
 - a latch member engageable with a portion of the cartridge holder and a portion of a plunger rod, wherein the plunger rod is engageable with a portion of the stopper and adapted to communicate with the latch member, the plunger rod comprising a protrusion, wherein the plunger rod is transitionable from a disengaged position, in which the protrusion of the plunger rod is disengaged from the latch member and the latch member is locked to the cartridge holder, to an engaged position, in which the protrusion is engaged with the latch member and the latch member is unlocked from the cartridge holder and locked to the plunger rod.
2. The system of claim 1, wherein the plunger rod further comprises a plunger rod distal end engageable with the portion of the stopper and a plunger rod proximal end, the protrusion extending from the plunger rod adjacent the plunger rod proximal end.
3. The system of claim 1, wherein with the plunger rod in the disengaged position, the latch member is locked to the cartridge holder proximal end.
4. The system of claim 3, wherein the stopper is slidably disposed within the interior of the chamber of the cartridge between a first position adjacent the cartridge holder proximal end and a second position adjacent the cartridge holder distal end.
5. The system of claim 4, wherein with the stopper in the first position the plunger rod is in the disengaged position.
6. The system of claim 4, wherein with the stopper in the second position the plunger rod is in the engaged position.

7. The system of claim 1, wherein a portion of the plunger rod is sized for movement within the interior of the chamber of the cartridge from the disengaged position to the engaged position.

8. The system of claim 1, further comprising a first substance contained within the chamber of the cartridge holder.

9. A system comprising:
a cartridge holder having a cartridge holder distal end, a cartridge holder proximal end, and a sidewall extending therebetween and defining a cartridge chamber;
a first substance contained within the cartridge chamber;
a stopper slidably disposed within the cartridge chamber;
a latch member engageable with a portion of the cartridge holder and a portion of a plunger rod, wherein the plunger rod is engageable with a portion of the stopper and adapted to communicate with the latch member, the plunger rod comprising a protrusion, wherein the plunger rod is transitionable from a disengaged position, in which the protrusion of the plunger rod is disengaged from the latch member and the latch member is locked to the cartridge holder, to an engaged position, in which the protrusion is engaged with the latch member and the latch member is unlocked from the cartridge holder and locked to the plunger rod;
a vial defining a vial chamber;
a second substance contained within the vial chamber; and
an adapter having a first end adapted to engage the vial and a second end adapted to engage the cartridge holder after engagement with the vial.

10. A system comprising:
a cartridge having a cartridge distal end, a cartridge proximal end, and a sidewall extending therebetween and defining a cartridge chamber;
a first substance contained within the cartridge chamber;
a vial defining a vial chamber;
a second substance contained within the vial chamber; and
an adapter adapted for sequential engagement with the vial and the cartridge.

11. The system of claim 10, wherein the adapter is adapted to first engage with the vial.

12. The system of claim 11, wherein with the vial engaged with the adapter, the adapter is adapted to engage with the cartridge such that the cartridge chamber is in fluid communication with the vial chamber via the adapter.

13. The system of claim 12, further comprising an actuation member adapted to expel the first substance from the cartridge chamber to the vial chamber via the adapter.

14. The system of claim 13, wherein the actuation member comprises:
a stopper slidably disposed within the cartridge chamber between a first position adjacent the cartridge proximal end and a second position adjacent the cartridge distal end;
and

a plunger rod having a plunger rod distal end engageable with a portion of the stopper, a plunger rod proximal end, and a portion of the plunger rod sized for movement within the cartridge chamber to actuate the stopper between the first position and the second position.

15. The system of claim 14, wherein actuation of the stopper from the first position to the second position by the plunger rod expels the first substance from the cartridge chamber to the vial chamber via the adapter.

16. The system of claim 10, wherein the first substance comprises a diluent.

17. The system of claim 11, wherein the second substance comprises a powder.

18. A system comprising:
a cartridge holder having a cartridge holder distal end, a cartridge holder proximal end, and a sidewall extending therebetween and defining a chamber having an interior adapted to receive a cartridge therein;

a stopper slidably disposed within the interior of the chamber of the cartridge holder between a first position adjacent the cartridge holder proximal end and a second position adjacent the cartridge holder distal end; and

a locking member connected to the cartridge holder and adapted to prevent the stopper from sliding out of the cartridge holder.

19. The system of claim 18, wherein:

the stopper defines a stopper outer diameter; and

the locking member defines a locking member inner diameter, the locking member inner diameter less than the stopper outer diameter, thereby the locking member provides a physical barrier preventing the stopper from sliding out of the cartridge holder.

20. The system of claim 18, wherein the locking member is connected adjacent to the cartridge proximal end.

21. The system of claim 19, further comprising a plunger rod having a plunger rod distal end engageable with a portion of the stopper, a plunger rod proximal end, and a deformable restraining member transitionable between a deformed position to an undeformed position, a portion of the plunger rod sized for movement within the interior of the chamber of the cartridge holder to actuate the stopper between the first position and the second position.

22. The system of claim 21, wherein with the plunger rod in an initial position the locking member deforms the restraining member of the plunger rod so that the plunger rod is capable of actuating the stopper from the first position to the second position.

23. The system of claim 22, wherein after the plunger rod actuates the stopper from the first position to the second position, as the plunger rod returns the stopper from the second position back to the first position and the restraining member of the plunger rod is advanced beyond the locking member, the restraining member of the plunger rod moves to its undeformed position and locks to the locking member, thereby the locking member prevents the plunger rod from actuating the stopper again from the first position to the second position.

24. A system comprising:

a cartridge holder having a cartridge holder distal end, a cartridge holder proximal end, and a sidewall extending therebetween and defining a cartridge chamber adapted to receive a cartridge therein;

a first substance contained within the cartridge chamber;

a vial defining a vial chamber;

a second substance contained within the vial chamber;

an adapter adapted for sequential engagement with the vial and the cartridge holder, the adapter having an adapter connection portion securable to the cartridge holder distal end; and

an injector assembly for injecting a substance, the injector assembly having an injector connection portion, wherein the cartridge holder distal end is not connectable to the injector connection portion and the adapter connection portion is connectable to the injector connection portion.

1/21

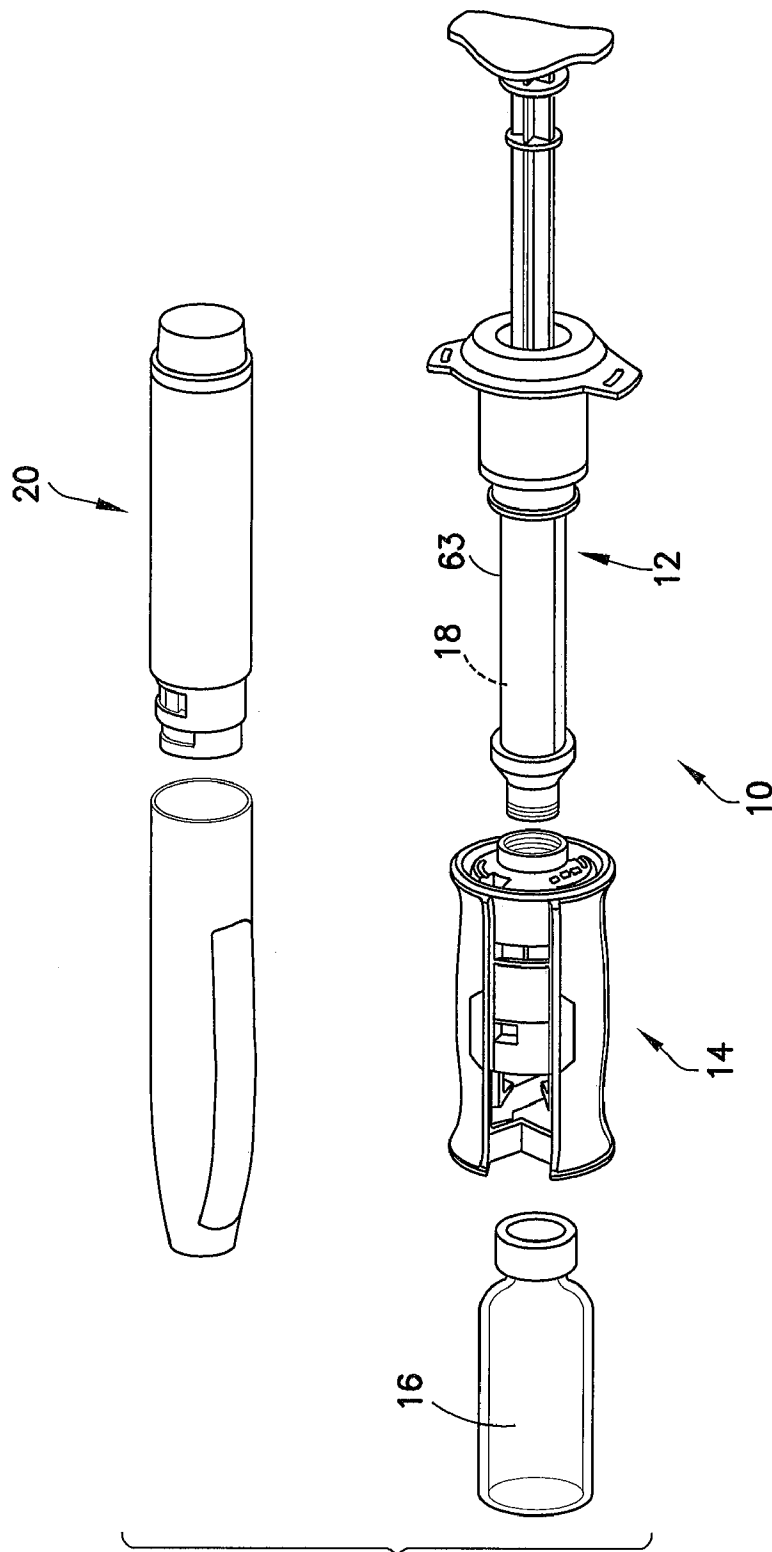
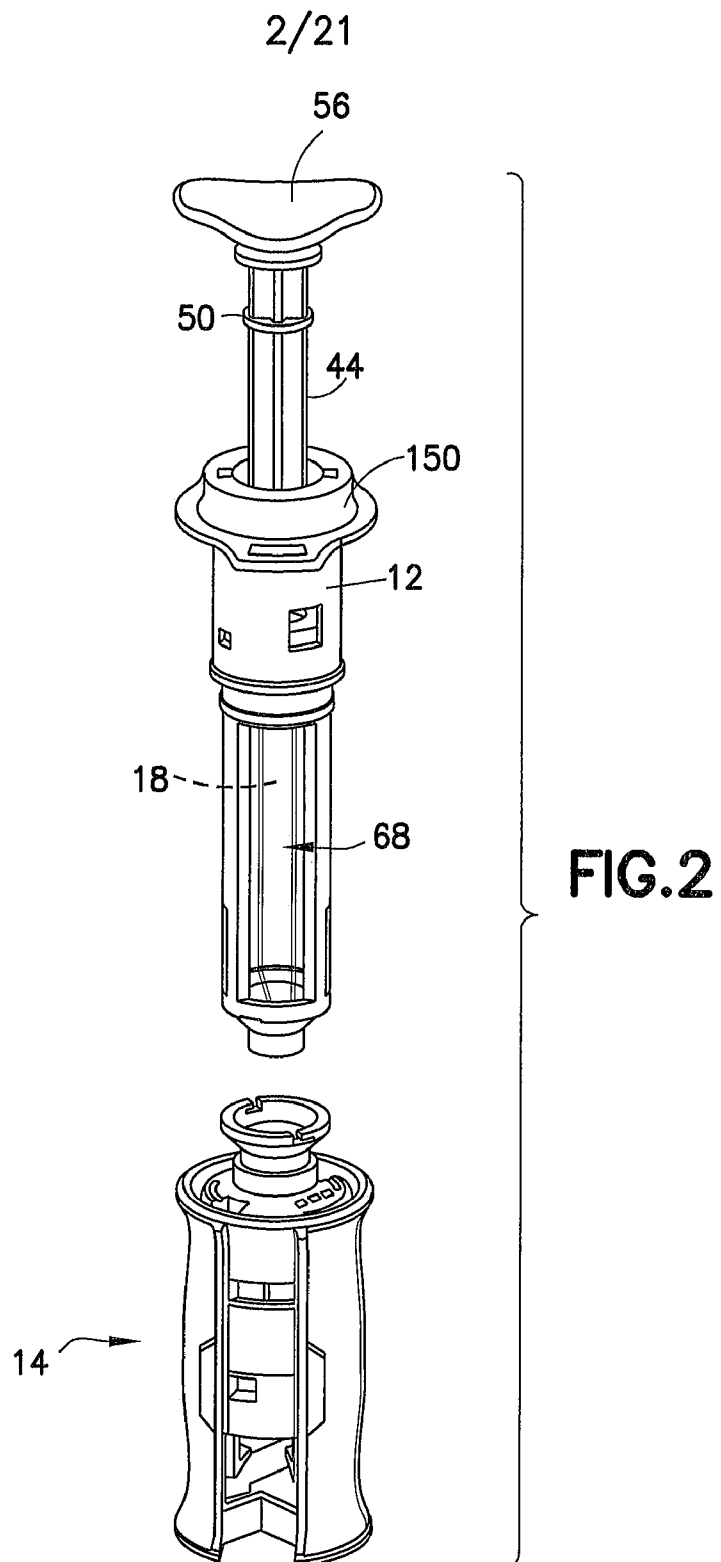


FIG. 1



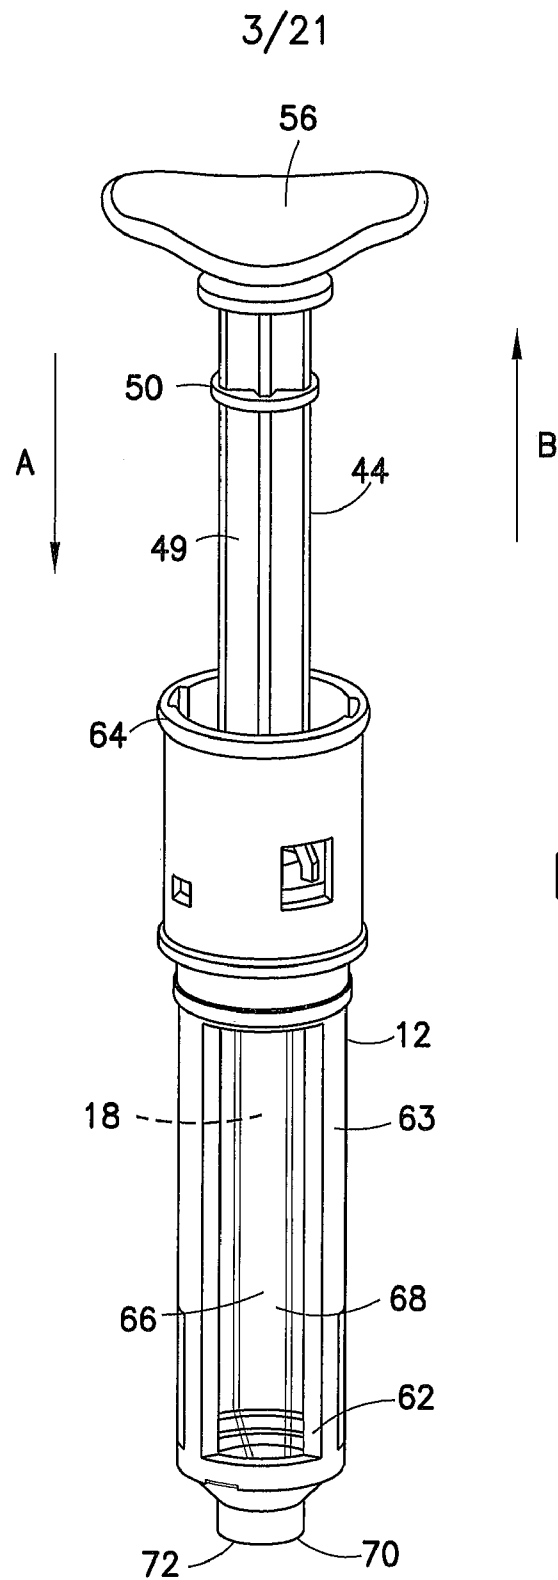


FIG.3

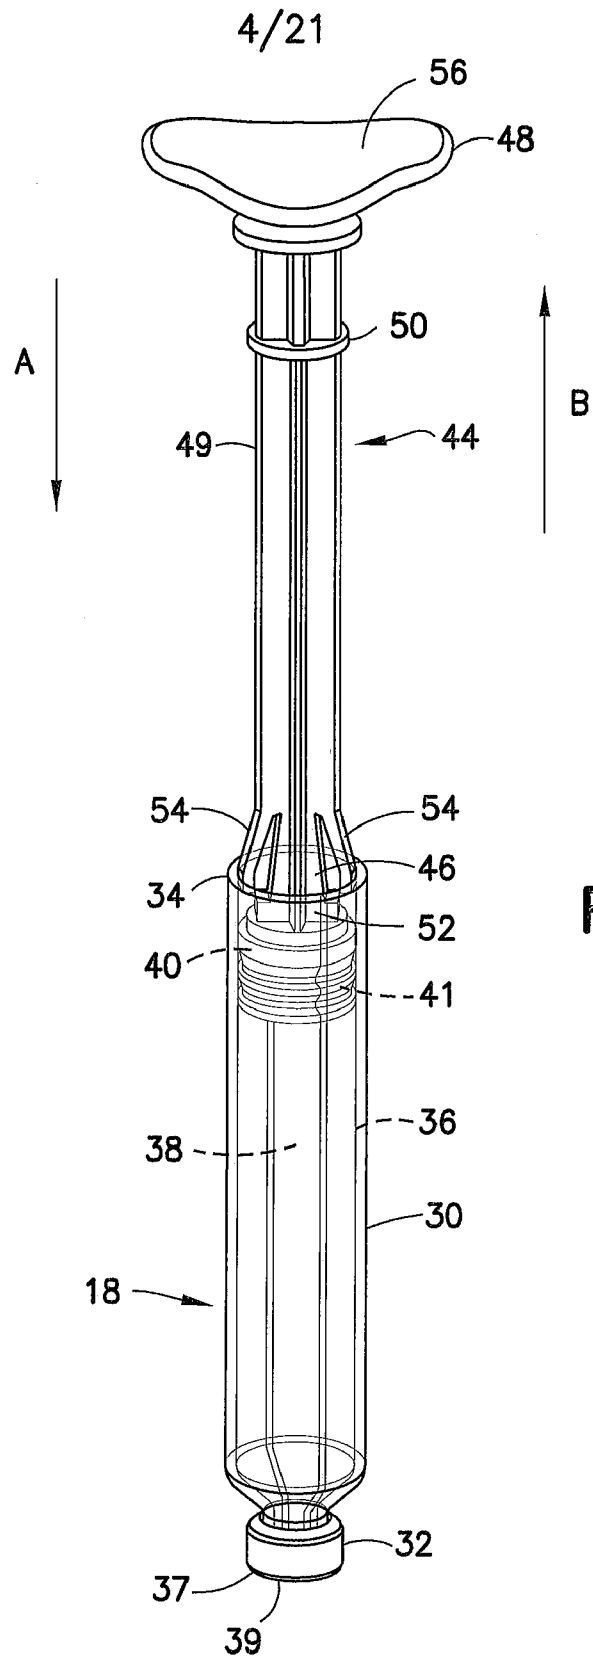


FIG. 4

5/21

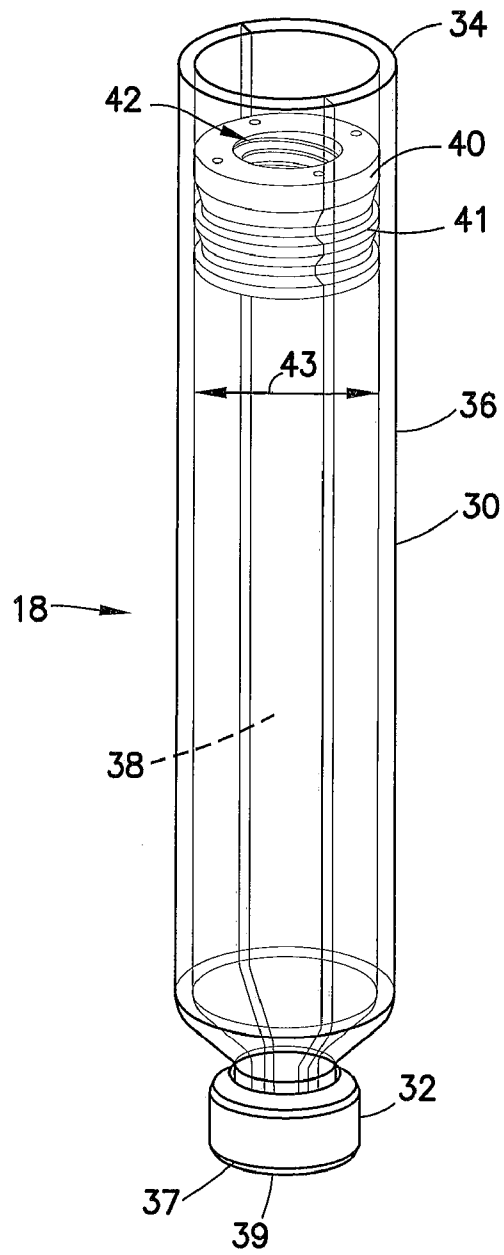


FIG.5

6/21

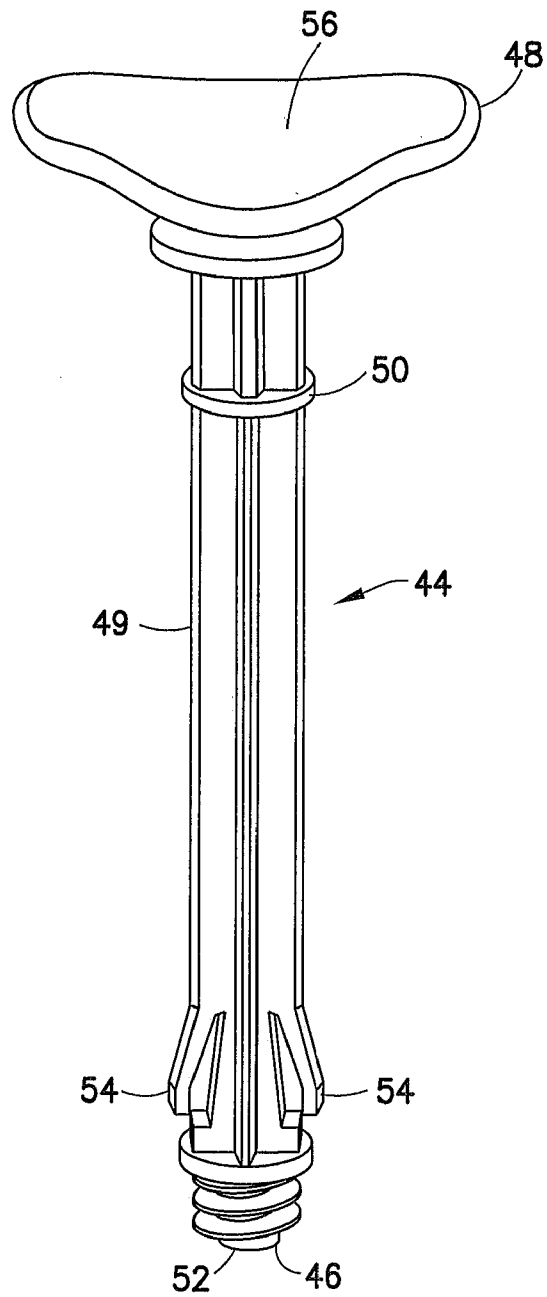


FIG. 6

7/21

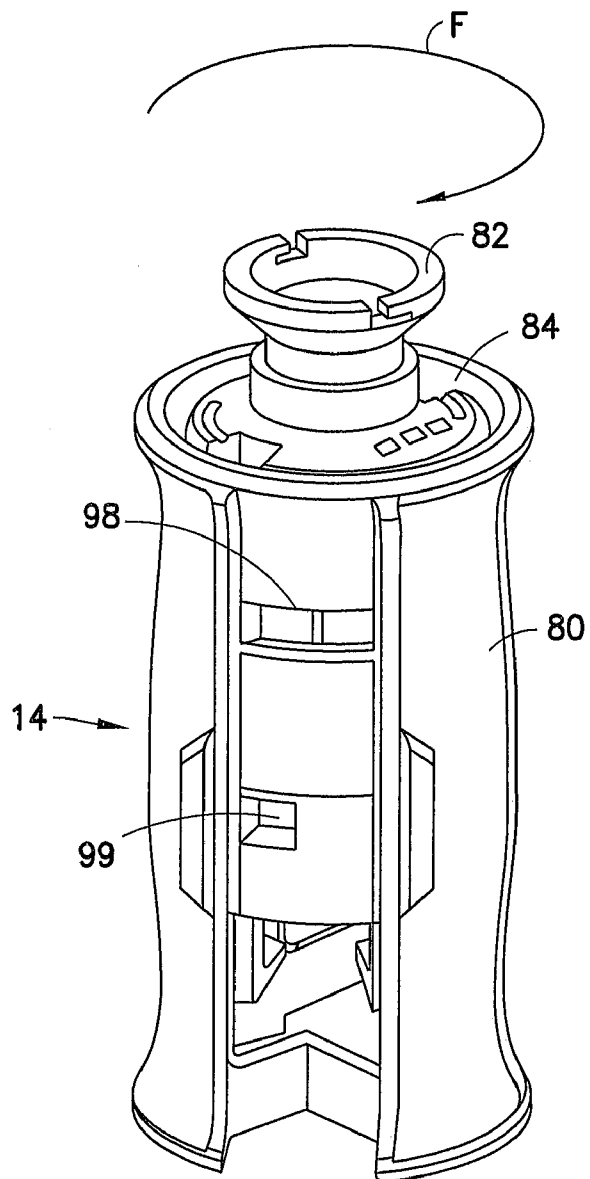


FIG. 7

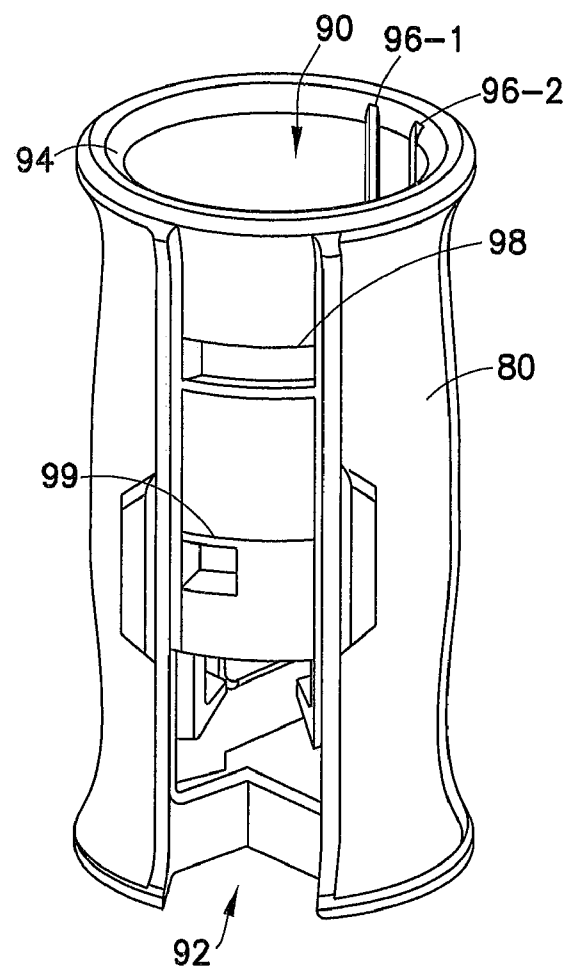


FIG. 8

8/21

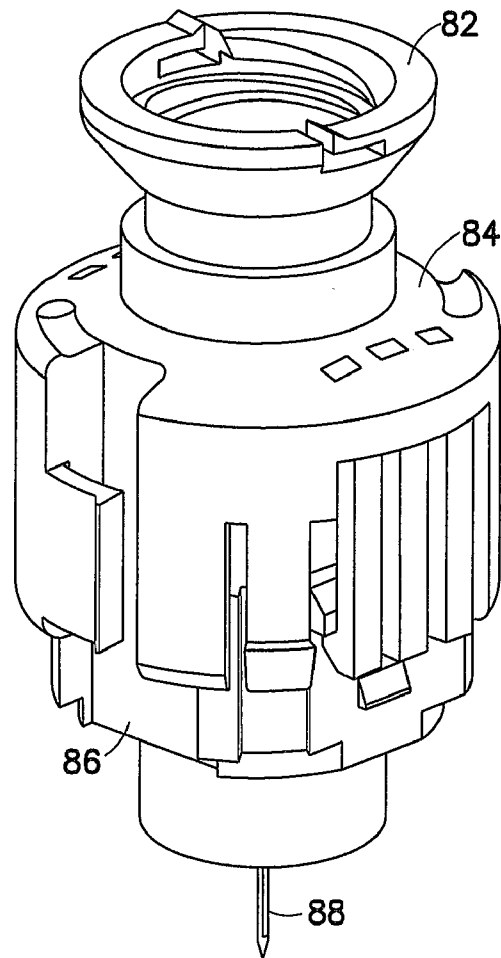


FIG. 9

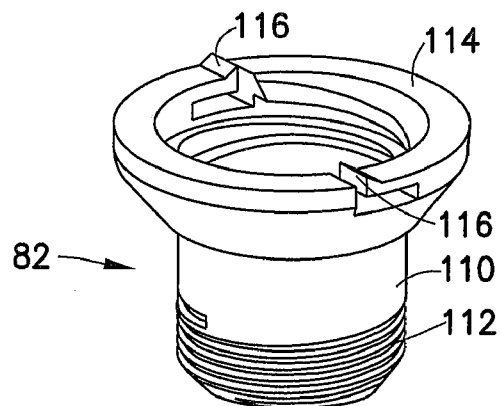


FIG. 10

9/21

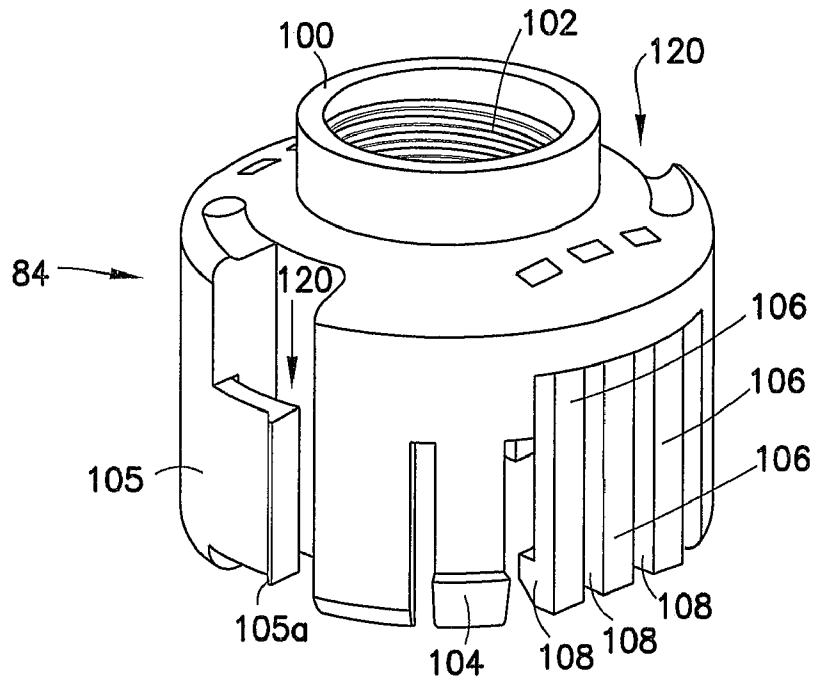


FIG.11

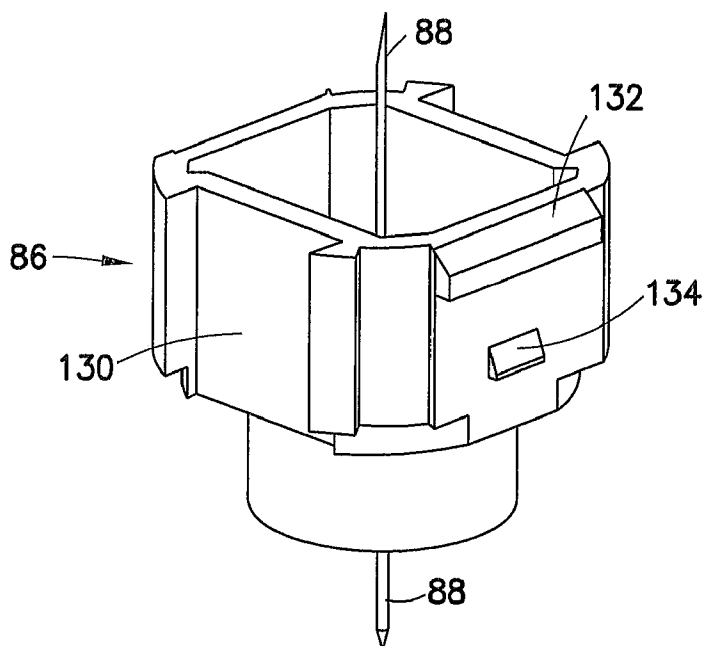


FIG.12

10/21

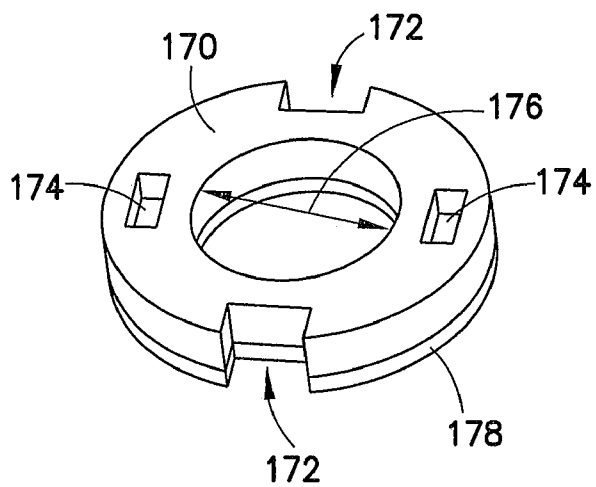


FIG. 13

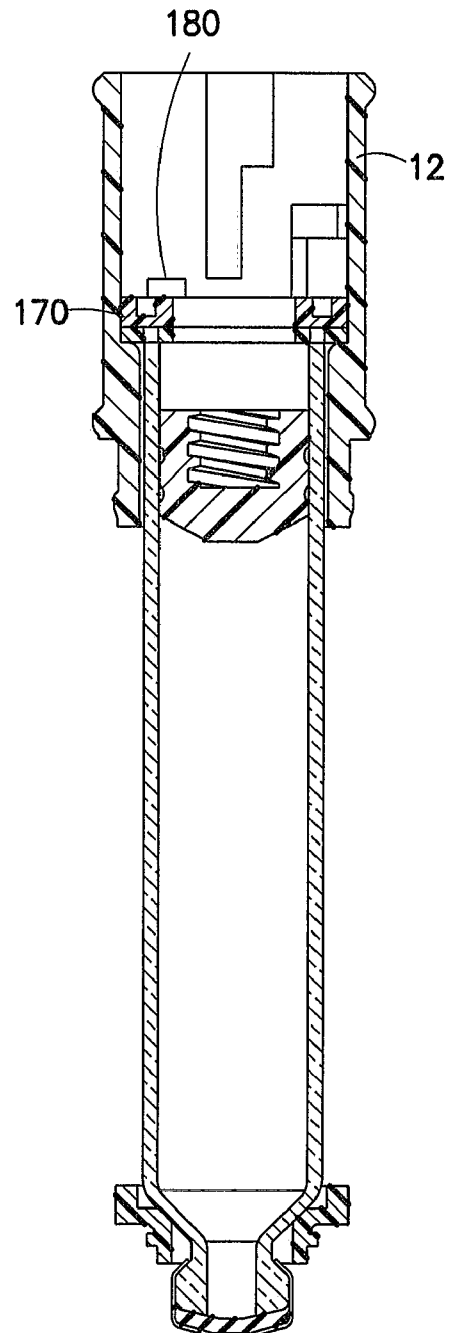


FIG. 14

11/21

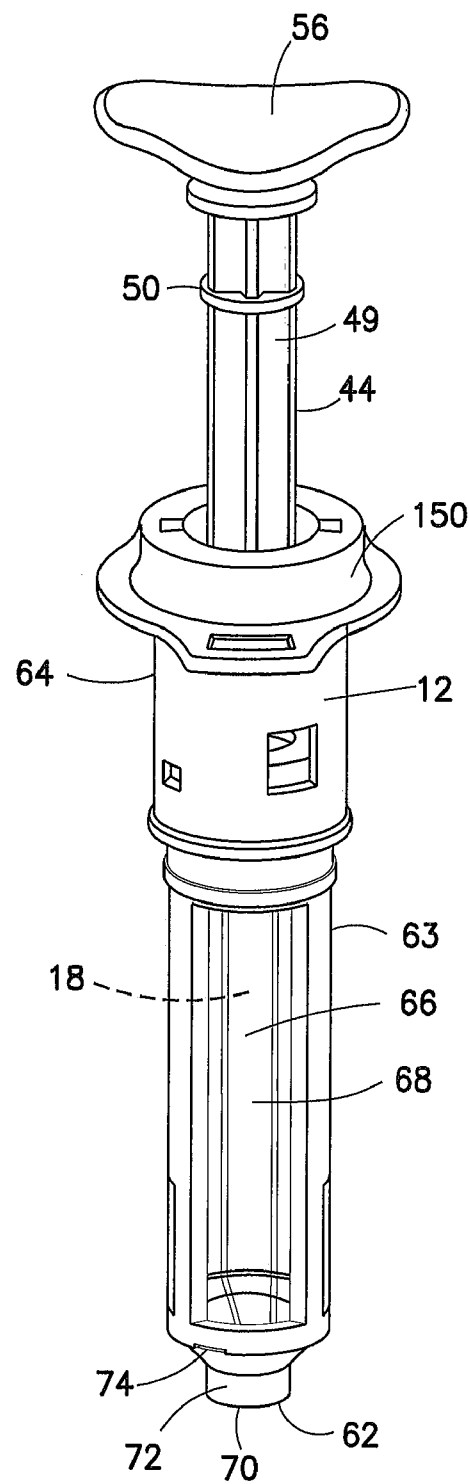


FIG.15

12/21

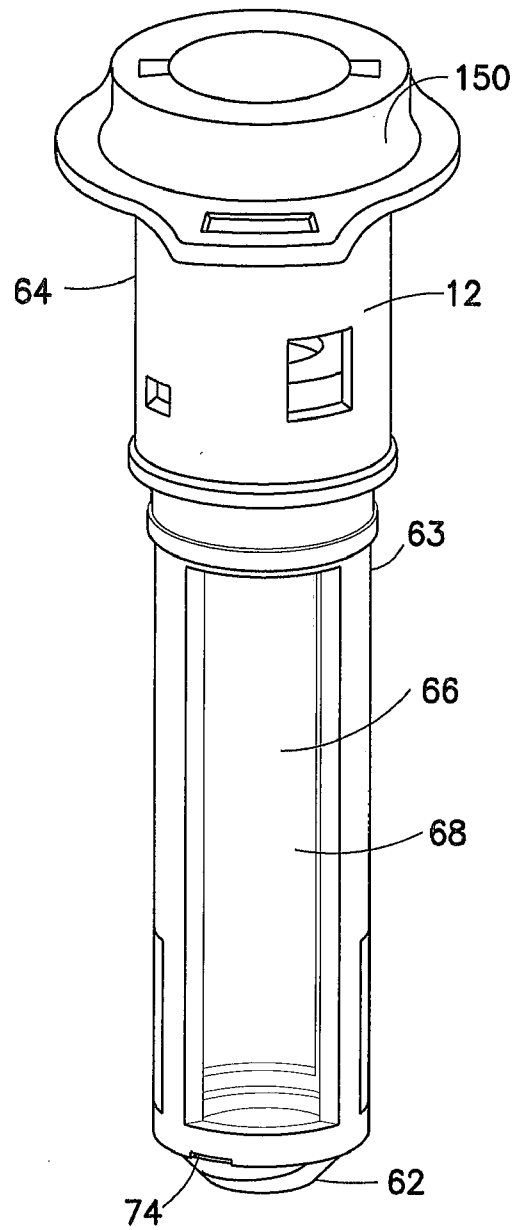


FIG. 16

13/21

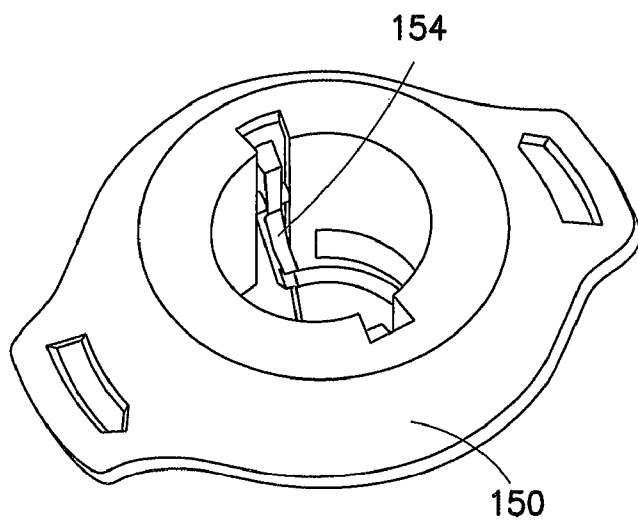


FIG. 17

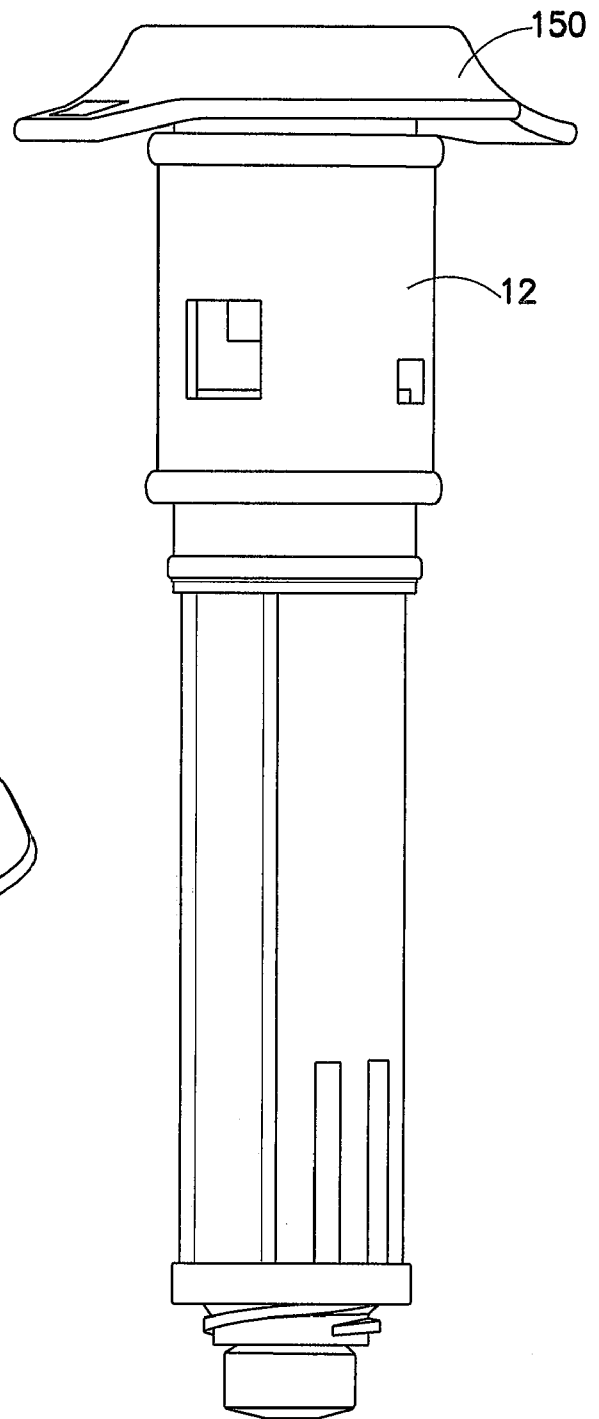


FIG. 18

14/21

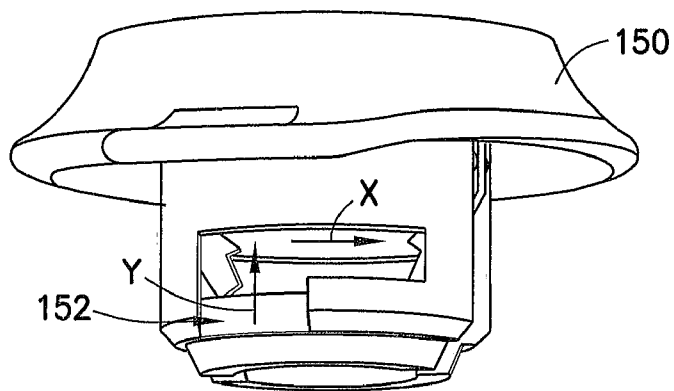


FIG. 19

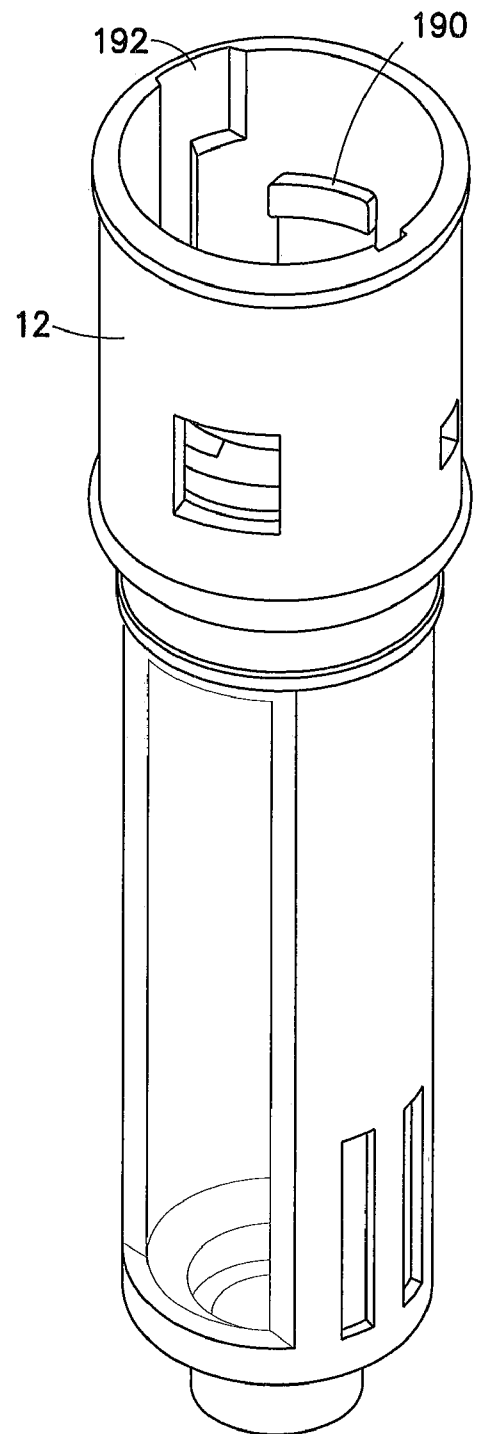
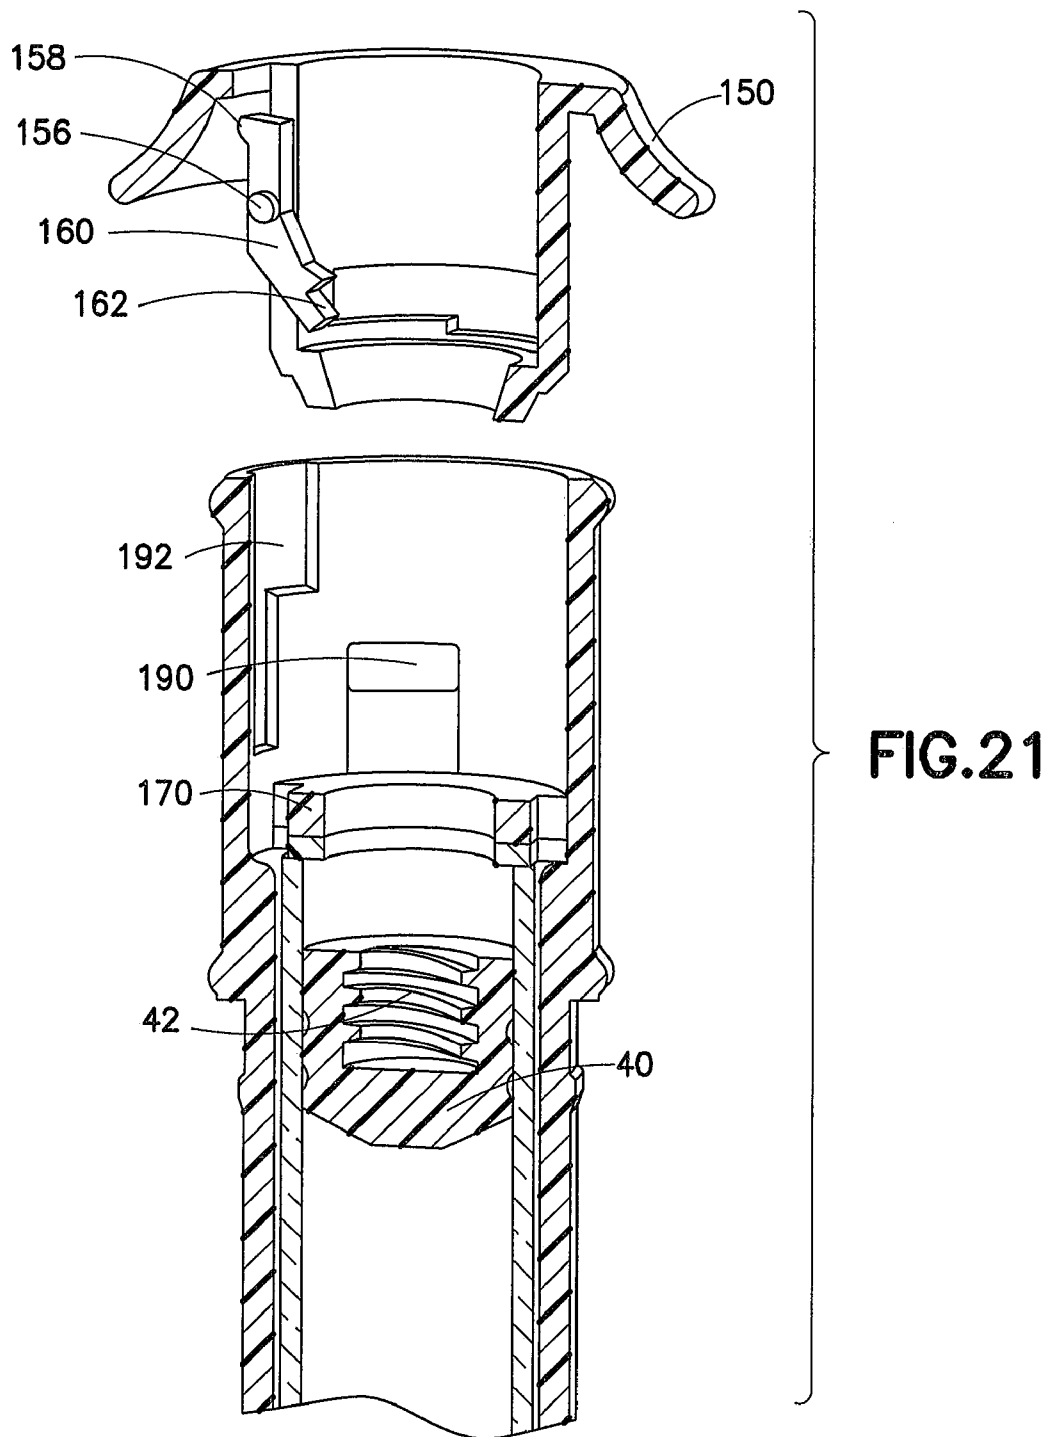


FIG. 20

15/21



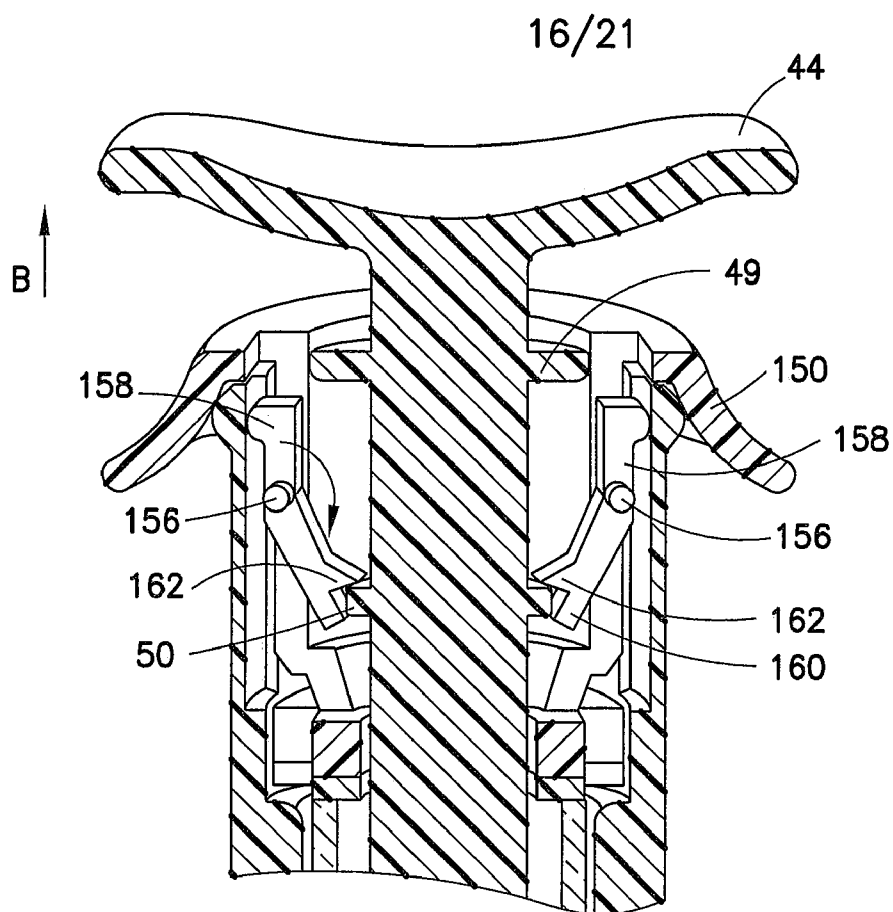


FIG. 22


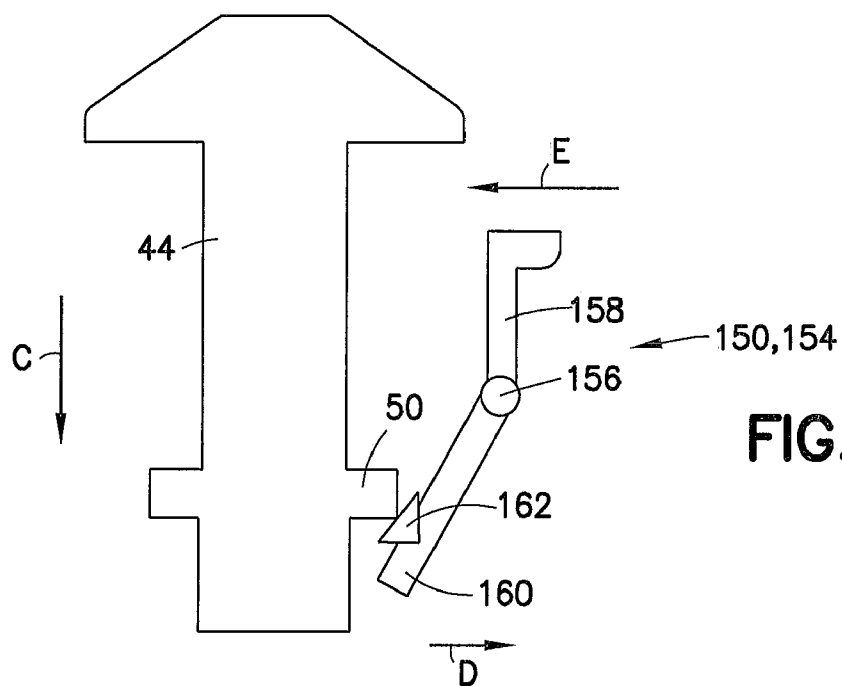


FIG. 23

17/21

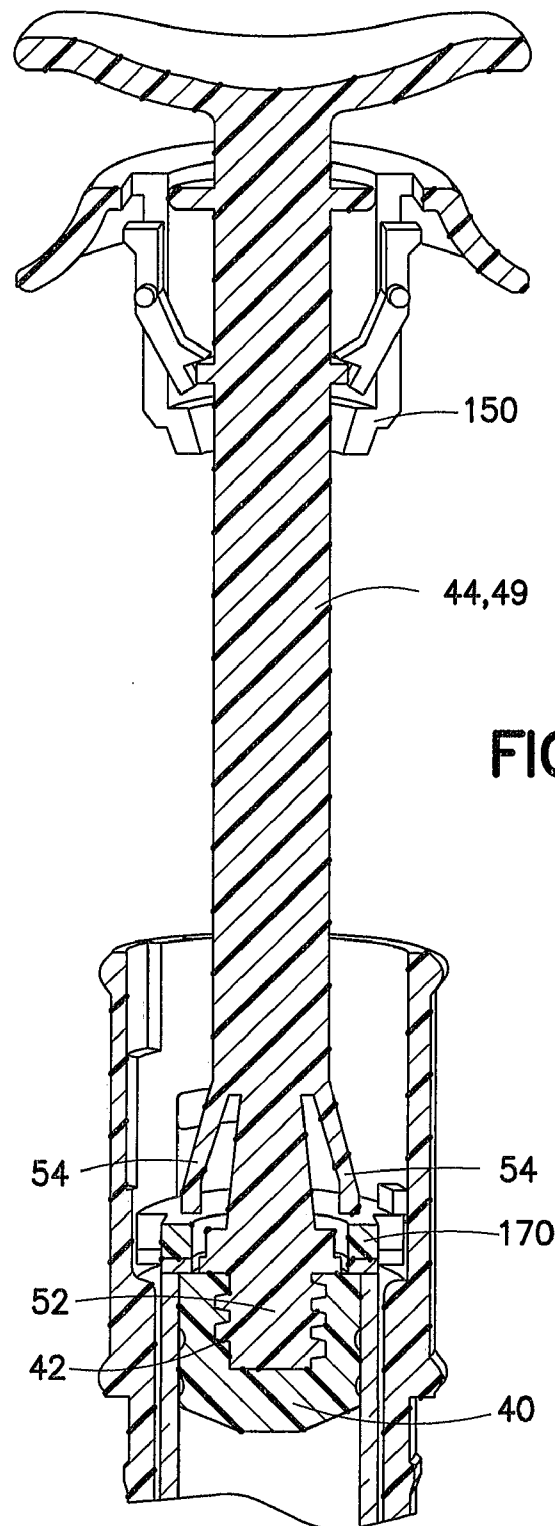

18/21

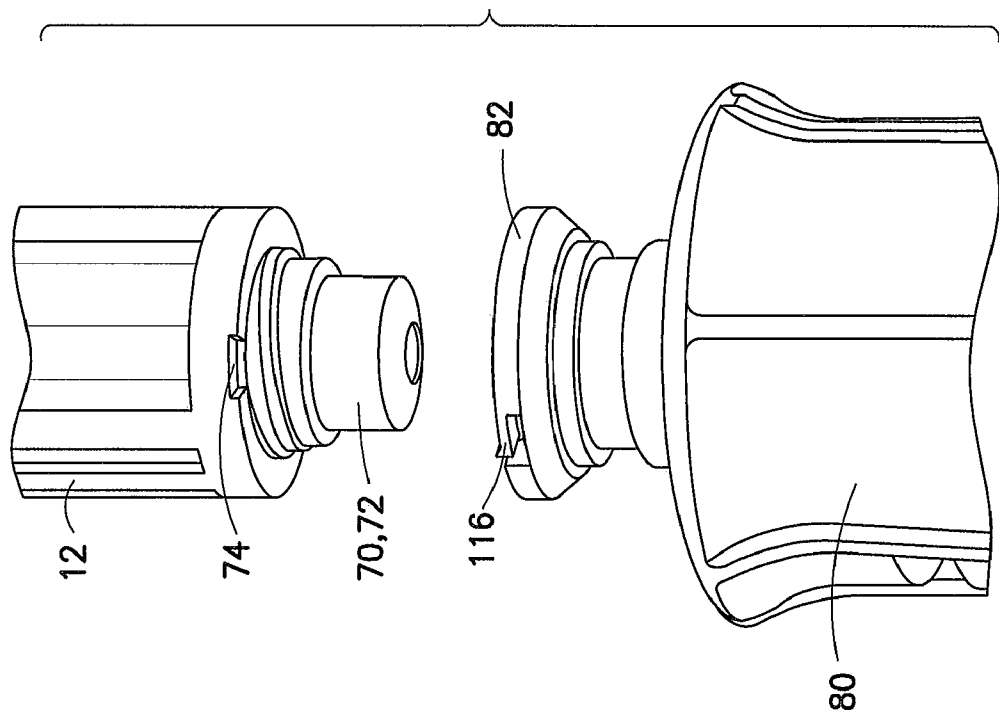


FIG.25

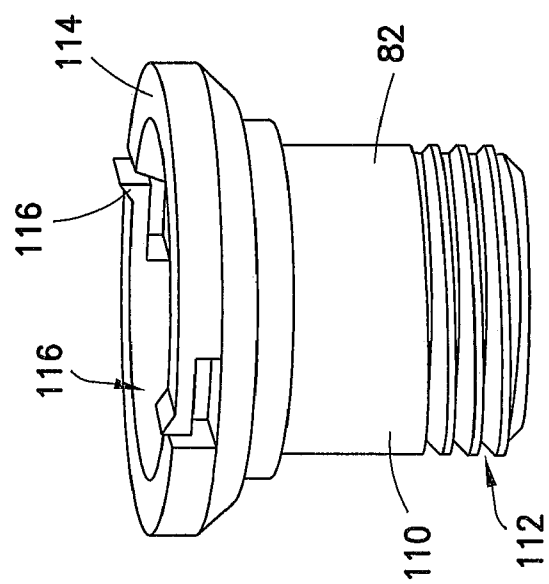


FIG.26

19/21

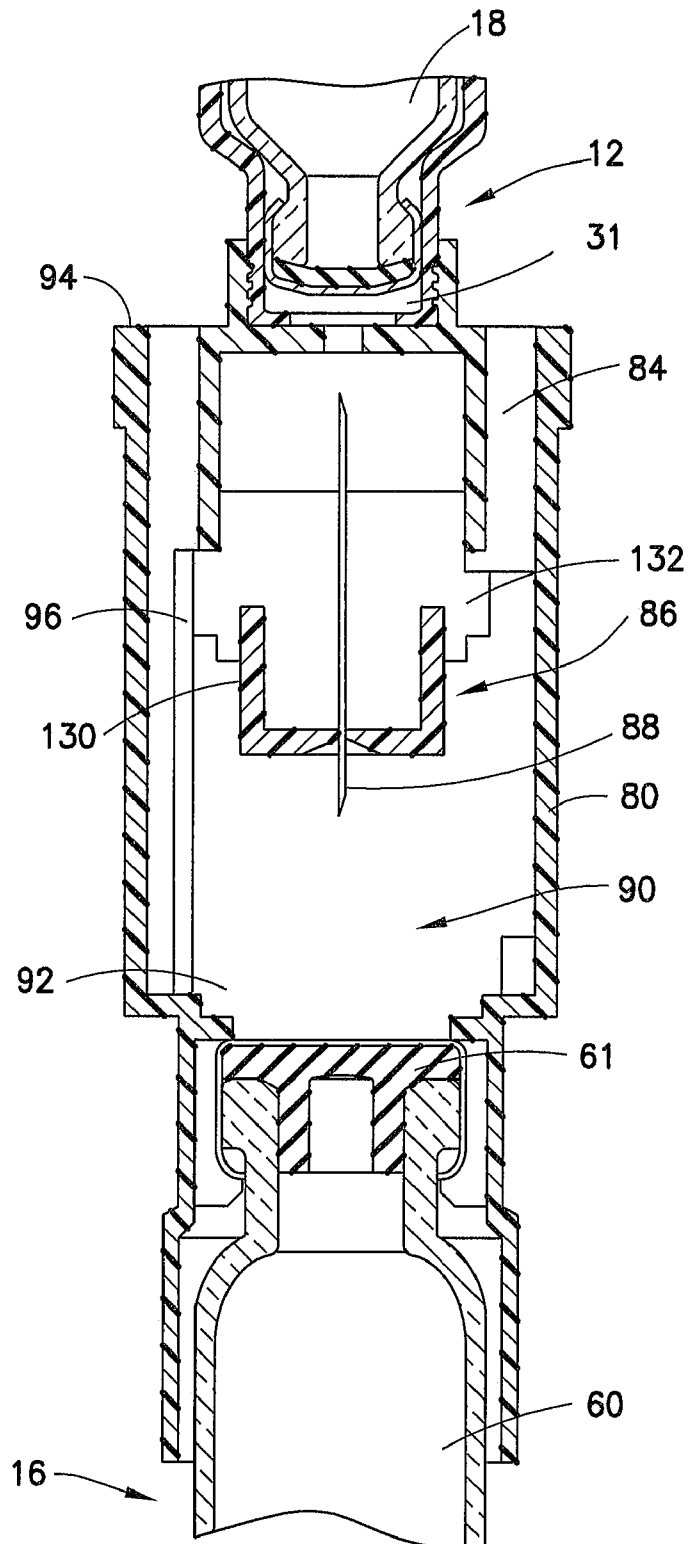


FIG.27

20/21

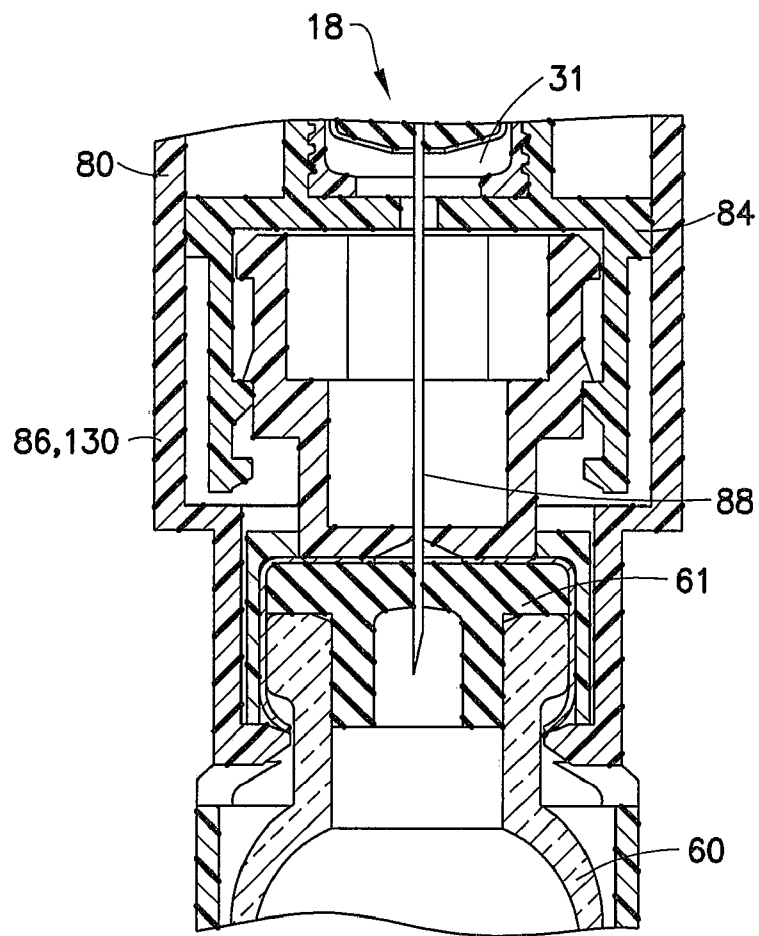


FIG.28

21/21

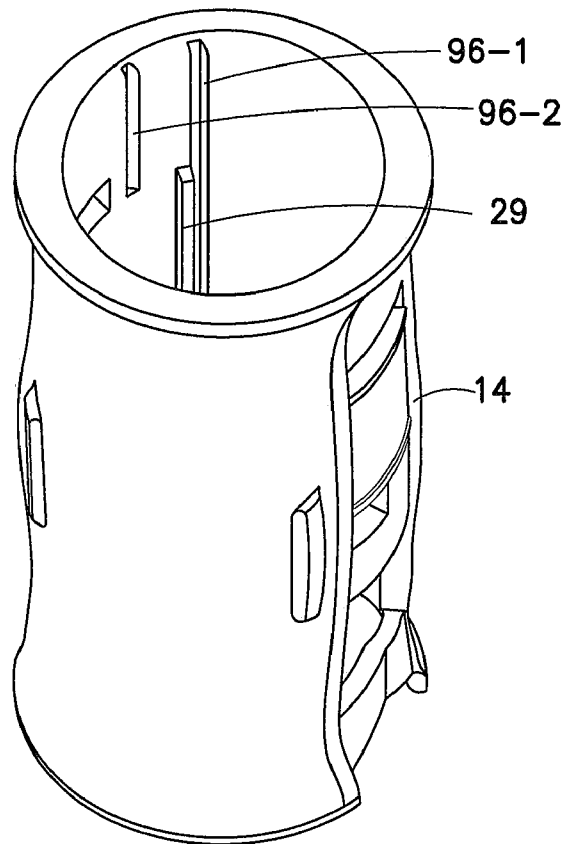


FIG. 29

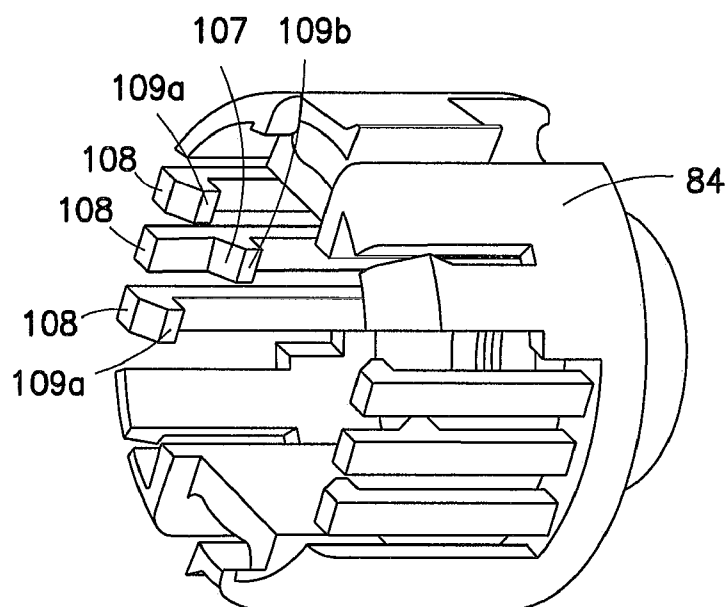


FIG. 30