

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 February 2001 (08.02.2001)

PCT

(10) International Publication Number  
**WO 01/08638 A1**

(51) International Patent Classification<sup>7</sup>: **A61K 6/087**,  
A61C 13/267

**James, Jr.**; 4332 Winchester Road, Dover, PA 17315 (US). **NALBONE, Craig, L.**; 2187 Derry Road, York, PA 17404 (US). **DECAVALCANTE, Michael, L.**; 2926 Lincoln Street, Camp Hill, PA 17011 (US).

(21) International Application Number: PCT/US00/20248

(22) International Filing Date: 26 July 2000 (26.07.2000)

(74) Agents: **LOVERCHECK, Dale, R.** et al.; DENTSPLY International Inc., 570 West College Avenue, P.O. Box 872, York, PA 17404-0872 (US).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): CA, CN, IN, KR, SG.

(30) Priority Data:  
09/362,364 28 July 1999 (28.07.1999) US

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


(71) Applicant: **DENTSPLY INTERNATIONAL INC.**  
[US/US]; 570 West College Avenue, P.O. Box 872, York, PA 17405-0872 (US).

Published:  
— With international search report.

(72) Inventors: **LICHKUS, Andrew, M.**; 1445 Rosepointe Drive, York, PA 17404 (US). **SCHIFFER, William**,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DENTAL PRODUCT, KIT, SYSTEM AND METHOD

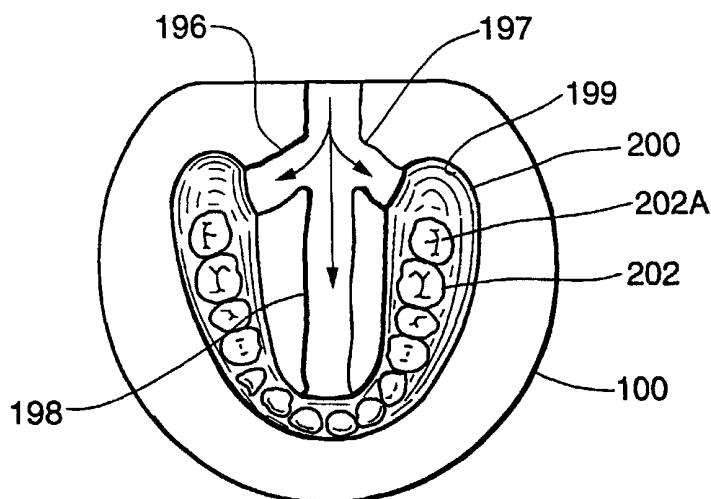

WO 01/08638 A1

(57) **Abstract:** The invention provides a dental device comprising thermoplastic polyamide having a Charpy notched impact strength of at least 3.5 ft-lb/in<sup>2</sup>. Preferably the polyamide comprises at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers. Preferably the device is a Denture base, denture, partial denture, clasp, splint, or night guard. Preferably the polyamide has an opacity of less than 30 percent. The invention provides a metal cartridge container containing particles of thermoplastic polyamide effectively free of pigment. The metal cartridge is used in a method of making a partial dental prosthesis having a substantially transparent clasp. First a substantially transparent thermoplastic is injected into a first portion of a mold cavity of a mold containing an artificial tooth, and then a substantially opaque thermoplastic injecting into a second portion of the mold cavity. The removable partial dental prosthesis formed includes an artificial tooth supported by a base integrally connected to a clasp, wherein the base includes pigment and is substantially opaque, and the clasp is substantially transparent and effectively without pigment.

## DENTAL PRODUCT, KIT, SYSTEM AND METHOD

The invention relates to dental devices, denture products, kits, systems and methods therefor. The invention provides a dental device such as a denture base, clasp, denture and partial denture. The invention provides kits, systems and methods for molding dentures having clasps. The invention provides a semi-crystalline transparent clasp, and partial dentures having a transparent clasp. This invention provides removable partial denture having clasps composed of a transparent semi-crystalline polyamide formed by an injection molding.

## BACKGROUND OF THE INVENTION

Thermoplastic partial denture clasps have been fabricated with pigmented polyamide/copolymer, polyacetal, which have poor aesthetic properties, and transparent 'amorphous' polymer compounds, which results in poor physical properties and require laborious fabrication methods. Amorphous polyamides display a clear and colorless quality however; very high viscosities and poor physical/mechanical properties preclude their use as injection molded dental resins.

Removable partial dental prostheses are employed to restore one or more, but not all, of the natural teeth of a patient. The primary objectives of a properly designed dental prosthesis include the preservation of remaining teeth, along with hard and soft oral tissue, the restoration of oral function, and the restoration of dental and facial aesthetics.

Removable partial dental prostheses are commonly

formed with a base or saddle which rests on the oral mucosa in an edentulous space and is coupled by connector means to one or more abutment teeth, that is, a tooth which abuts or is adjacent to the edentulous space.

Perhaps one of the most common forms of partial dental prosthesis is the distal extension removable partial denture which is used to replace posterior teeth with artificial teeth on one or both sides of the mouth. Distal extensions are commonly secured to an abutment tooth by clasps, which are mounted on the abutment tooth to provide for stabilization and retention of the prosthesis, and a connector, which extends between the clasp and the base of the distal extension. The base or saddle of the distal extension rests on the alveolar ridge.

Prefabricated clear and tooth colored thermoplastic clasps are described in US Patent Number 5,102,337. The prefabricated clasps are contoured by applying heat to the area which the technician wishes to shape and bend. Kulwiec et al. In U.S. Patent 4,412,824 discloses removable partial dental prosthesis and method of forming and supporting the same.

Prior art dental devices have low impact strength. These problems of the prior art are overcome by the present invention. The prior art does not disclose a dental device including thermoplastic polyamide having a Charpy notched impact strength of at least 3.5, or a dental device including polyamide having at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers, as provided by the present invention.

## OBJECTS OF THE INVENTION

It is an object of the invention to provide a dental device including thermoplastic polyamide having a Charpy notched impact strength of at least 3.5.

It is an object of the invention to provide a dental device including polyamide having at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.

It is an object of the invention to provide a metal cartridge container containing particles of thermoplastic polyamide effectively free of pigment.

It is an object of the invention to provide a method of making a partial dental prosthesis having a substantially transparent clasp, by injecting substantially transparent thermoplastic into a first portion of a mold cavity of a mold containing an artificial tooth, and injecting substantially opaque thermoplastic into a second portion of the mold cavity.

It is an object of the invention to provide a removable partial dental prosthesis including an artificial tooth supported by a base integrally connected to a clasp, wherein the base includes pigment and is substantially opaque, and the clasp is substantially transparent and effectively without pigment.

It is an object of the invention to provide a kit for making a denture, including: a package supporting a first cartridge enclosing pigment and first particles of thermoplastic and a second cartridge enclosing second particles of thermoplastic effectively free of pigment.

It is an object of the present invention to provide a removable partial dental prosthesis which is capable of restoring

oral function and dental and facial aesthetics without destruction of adjacent teeth and soft oral tissue.

Another object of the present invention is to provide a method of supporting a removable partial dental prosthesis in the mouth and particularly on the alveolar ridge which greatly reduces stress on the ridge and abutment teeth.

Still a further object of the present invention is to provide a method for the manufacture or formation of removable partial dentures which is adaptable to denture manufacturing techniques and yet includes structure providing enhanced performance of the prosthesis.

Another object of the present invention is to provide a method for supporting a dental prosthesis which enhances the life of the remaining teeth in the mouth and which does not afford a habitat for decay and infection causing debris.

It is also an object of the present invention to provide a dental prosthesis which is compact, relatively easy to manufacture, highly durable, and distributes and redirects localized stress forces.

The removable dental prosthesis and method of the present invention have other objects and features of advantage which will become more apparent from and are set forth in the following description of the preferred embodiment and the accompanying drawings.

Opacity as used herein refers to the percentage of impinging white light transmitted from a spectrophotometer through a 1 mm thick sample of material being tested.

Charpy notched impact strength as used herein refers to Notched impact strength in foot-pounds/inch<sup>2</sup> (ft-lb/in<sup>2</sup>) measured

by ISO 179:1993

## SUMMARY OF THE INVENTION

The invention provides a metal cartridge container containing particles of thermoplastic polyamide effectively free of pigment. The metal cartridge is used in a method of making a partial dental prosthesis having a substantially transparent clasp. First a substantially transparent thermoplastic is injected into a first portion of a mold cavity of a mold containing an artificial tooth, and then a substantially opaque thermoplastic injecting into a second portion of the mold cavity. The removable partial dental prosthesis formed includes an artificial tooth supported by a base integrally connected to a clasp, wherein the base includes pigment and is substantially opaque, and the clasp is substantially transparent and effectively without pigment. The invention provides a dental device including thermoplastic polyamide having a Charpy notched impact strength of at least 3.5 ft-lb/in<sup>2</sup>. Preferably the polyamide comprises at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers, and has an opacity less than 50%. More preferably the polyamide comprises at least 20 percent by weight of micro-crystals having a largest dimension less than 750 nanometers, and has a Charpy notched impact strength of at least 4.5 ft-lb/in<sup>2</sup>, and an opacity less than 40%. Most preferably the polyamide comprises at least 30 percent by weight of micro-crystals having a largest dimension less than 750 nanometers, and has a Charpy notched impact strength of at least 5 and an opacity less than 30%. The polyamide beneficially may have a Charpy notched impact

strength of at least 6, and more beneficially may have a Charpy notched impact strength of at least 7. Preferably the device is a denture, partial denture, clasp, splint, or night guard. Preferably the polyamide has an opacity of less than 30 percent.

## DESCRIPTION OF THE DRAWING

FIGURE 1 is a cross-section side view of a cartridge container tube enclosing polyamide from a kit for making a partial denture in accordance with the present invention.

FIGURE 2 is an end view of the cartridge container tube shown in FIGURE 1 in accordance with the present invention.

FIGURE 3 is a cross-section side view of a cartridge plug which is inserted into the plug end of the cartridge container tube in accordance with the present invention.

FIGURE 4 is an end view of the cartridge plug shown in FIGURE 3 in accordance with the present invention.

FIGURE 5 is a cross-section side view of a cartridge container tube enclosing polyamide from a kit for making a partial denture in accordance with the present invention.

FIGURE 6 is an end view of the cartridge container tube shown in FIGURE 5 in accordance with the present invention.

FIGURE 7 is a cross-section side view of a cartridge plug from a kit for making a partial denture in accordance with the present invention.

FIGURE 8 is an end view of the cartridge cap shown in FIGURE 7 in accordance with the present invention.

FIGURE 9 is a view of an injection mold with sprues for use in accordance with the present invention.

FIGURE 10 is a schematic diagram of a system for making molded dental devices from polyamide enclosed in a cartridge container tube in accordance with the present invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENT

The invention is now described with more particular reference to FIGURES. 1-10. With more particular reference to FIGURES. 1-4 is seen cartridge container 12 and cartridge plug 14 enclosing nylon pellets 16. Plug 14 is inserted into plug end 18 of container 12. During shipping and storage cartridge container 12 with cartridge plug 14 inserted plug end 18 encloses nylon pellets 16. In use cartridge container 12, cartridge plug 14 and nylon pellets 16 are heated to melt the nylon pellets 16 to form liquid nylon. The liquid nylon is pressed through burstable end 19 into a mold from cartridge container 12.

With more particular reference to FIGURES. 5-8 is seen cartridge container 22 and cartridge plug 24 enclosing nylon pellets 26. Plug 24 is inserted into plug end 28 of container 22. During shipping and storage cartridge container 22 with cartridge plug 24 inserted plug end 28 encloses nylon pellets 26. Cap 30 is supported by threaded nozzle 36. Nozzle inner wall 38 encloses an output channel. In use cartridge container 22, cartridge plug 24 and nylon pellets 26 are heated to melt the nylon pellets 26 to form liquid nylon. The liquid nylon is pressed through the output



channel and burstable end 29 into a mold from cartridge container 22.

With more particular reference to FIGURES 9-10 is seen a mold 100 and a system 110 for making molded dental devices 200 from polyamide 26 enclosed in a cartridge container tube 22. Polyamide 26 enclosed in a cartridge container tube 22 is heated in heater 112. Cap 30 is removed from threaded nozzle 36. Threaded nozzle 36 is positioned under ram 120 in guide 122 of press 114 to force burstable end 29 to open the output channel of nozzle inner wall 38 into mold 100 when pressure is applied to polyamide 26 enclosed in a cartridge container tube 22. Mold 100 is supported by metal flask 102. Mold 100 has molded artificial teeth 202A and 202 supported therein and made of an acrylic interpenetrating polymer network (IPN). Ram 120 is moved down pressing cartridge plug 24 down. As Ram 120 moves down pressing cartridge plug 24 down cartridge container tube 22 is crushed and pressure is applied to heated polyamide 26 pushing polyamide 26 through passage 196, 197 and 198 into a mold cavity wall 199 enclosing a mold cavity within mold 100 to form dental device 200 having molded polyamide 26 and artificial teeth 202. The mold cavity within mold 100 has the shape of dental device 200. Mold 100 is removed from press 114 and metal flask 102. From mold 100 is removed dental device 200 having molded polyamide 26.

The transparent polymer used in clasps made in accordance with the invention preferably consists of a permanently transparent, chemical and stress crack resistant, high impact strength, UV and visible light stable, low water sorption, dimensionally stable, highly water resistant, steam sterilizable, semi-crystalline

polyamide resin. This resin is beneficially maintains excellent physical properties while remaining permanently clear and colorless. The transparent semi-crystalline polyamide is preferably injection molded using dental flask/stone investment, a compact heating oven together with a low pressure injection molding machine (less than 90psi) to sequentially fabricate a partial denture containing a "clear" aesthetic clasp attached to a tissue shaded base resin. The base material consists of a pigmented version of the transparent semi-crystalline polyamide resulting in a monolithic prosthetic device. Sequential injection molding of 'clear' aesthetic clasps allows for precise replication of waxed clasp design with high-strength, durable thermoplastic resin. Preferably acetal resins are used in sequential injection molding to fabricate clasps. Preferably bases are made of an opaque/pigmented semi-crystalline acetal resin.

#### EXAMPLE 1

23 grams of pellets of transparent crystalline nylon, Lucitone FRS crystalline nylon without pigment are poured into an aluminum container having a threaded end and then a cap is pressed onto the threaded end and supported by the threads on the threaded end of the container. The cylindrical container body is 1 inch in diameter and 3.5 inches in length. The cylindrical container body is 0.005 inch thick. The conical container end extends from the cylindrical container body and is 0.4 inch in length and has a cylindrical nozzle which is 0.375 inch in diameter. The burstable end of the nozzle is 0.4 inch thick. Transparent crystalline nylon Lucitone® FRS™ in the container is useful for injection molding to form temporary, flexible, and monomer free denture base. It is

useful for the fabrication of complete or partial removable dentures as well as occlusal splints and night guards.

## EXAMPLE 2

23 grams of pellets of transparent crystalline nylon, Lucitone® FRS™ crystalline nylon are coated with red pigment. The nylon pellets are poured into an aluminum container having a threaded end and then a cap is pressed onto the threaded end and supported by the threads on the threaded end of the container. The cylindrical container body is 1 inch in diameter and 3.5 inches in length. The cylindrical container body is 0.005 inch thick. The conical container end extends from the cylindrical container body and is 0.4 inch in length and has a cylindrical nozzle which is 0.375 inch in diameter. The burstable end of the nozzle is 0.4 inch thick.

Table 1 describes typical properties, of transparent crystalline nylon, Lucitone FRS used in EXAMPLES 1 and 2, and molding temperatures, and injection, heating and cooling times used in EXAMPLE 3.

Table 1

Type and Class (according to ADA Spec. 12)	Type III,
Class 1	
Storage temperature for powder and liquid	60°F-90°F (16°C-
32°C)	
Dosage:	1 cartridge (23g)
Processing Time /Temp. (To reach injectable stage)	18 minutes
@575F	
Injection Time	<1 minute
Material used to invest wax-up	Dental
Stone	
Cool time (prior to deflask)	5minutes

## EXAMPLE 3

A partial denture with a transparent clasp is prepared by:

## INVESTMENT AND SPRUING -

Soak a cast and wax up of a patients mount in water for 25 minutes prior to investing. Mix investment and embed the cast and wax-up in the lower half of a flask. Using wax sticks, D-shaped Success™ Sprue Wax Sticks (7 mm X 180 mm, Item # 904584) injection sprues are built. On upper dentures, attach the sprue to the posterior border of the denture and make sure the sprue is sufficiently wide. For lower full dentures, attach the sprue to both lingual extensions as well as in the mid-line. Then embed the upper half of the flask.

## WAX ELIMINATION AND SEPARATOR APPLICATION

The flask is placed in boiling water for a 4 to 6 minutes to soften the wax. The bolts on the flask are loosened and the Metal Flask Brackets are removed. The flask is opened and the Space Maintainer is removed. Then a boil out procedure is completed to form a clasp mold and the wax is discarded.

The flask is placed in boiling water for a 4 to 6 minutes to soften the wax. The bolts on the flask are loosened and the Metal Flask Brackets are removed. The flask is opened and the Space Maintainer is removed. Then a boil out procedure is completed to form a partial denture mold and the wax is discarded.

The molds are flushed with clean boiling water. Bevel the stone with a lab knife around the mouth of the sprue. The flask margin and cavities are checked to ensure that both flask halves fit together with intimate metal contact. A thin coat of Al-Cote® Separating Agent is applied to the model and the model is allowed to dry completely. Mechanical retention is added by grinding diatorics into the teeth. Thermoplastic Injection Insert is positioned on one side of the flask and the flask halves are placed under an infrared heat source.

### CLEAR CLASP FABRICATION

The clasp is waxed to full contour, slightly over building the body of the clasp. All excess model is trimmed away, leaving a small core with the clasp attached. Two clasps are fabricated. Investment and spruing are completed. Wax is eliminated. Clear transparent Lucitone® FRS™ crystalline nylon is Injected into the mold to form the clasps while heating.

### HEATING AND INJECTION

After removing the cap from a cartridge, formed by following the procedure of EXAMPLE 1, the container of transparent Lucitone FRS crystalline nylon is placed in an injection sleeve to form an assembly. When the container of transparent Lucitone FRS crystalline nylon is placed in an injection sleeve the threaded end of the container is positioned in the injection sleeve to face away from the injection sleeve handle. A sleeve plug is placed into the remaining space in the heating sleeve. The assembly is inserted into a cartridge furnace (preheated to 575 °F) and a timer is

set for 18 minutes. While heating the assembly in the furnace for 18 minutes, the flask halves are assembled and placed in front of the Success Injection System manufactured and sold by Dentsply. The sleeve assembly is removed from the furnace and positioned on top of the flask such that the threaded end of the container fits into the opening of a thermoplastic injection insert to form a combination. The combination is then slid into the Success Injection System and the piston is engaged to press the transparent Lucitone FRS crystalline nylon from the container into the clasp mold enclosed by the flask. Injection into the mold is complete within one (1) minute. Then the flask and sleeve assembly combination is removed from the Injection system. The heating sleeve is then twisted off of the flask and the used container is expelled from the heating sleeve using a knock out base and knock out rod. The injected flask is deflasked five minutes after injection. The clear clasps are finished to final contour with carbide burrs and the clasps are fitted to denture mold. After removing the cap from a cartridge, formed by following the procedure of EXAMPLE 2, the container of pigmented Lucitone FRS crystalline nylon is placed in an injection sleeve to form an assembly. When the container of pigmented Lucitone FRS crystalline nylon is placed in an injection sleeve the threaded end of the container is positioned in the injection sleeve to face away from the injection sleeve handle. A sleeve plug is placed into the remaining space in the heating sleeve. The assembly is inserted into a cartridge furnace (preheated to 575 °F) and a timer is set for 18 minutes. While heating the assembly in the furnace for 18 minutes, the flask halves are assembled and placed in front of the Success Injection System

manufactured and sold by Dentsply. The sleeve assembly is removed from the furnace and positioned on top of the flask such that the threaded end of the container fits into the opening of a thermoplastic injection insert to form a combination. The combination is then slid into the Success Injection System and the piston is engaged to press the pigmented Lucitone FRS crystalline nylon from the container into a partial denture mold enclosed by the flask. Injection into the partial denture mold is complete within one (1) minute. Then the flask and sleeve assembly combination is removed from the Injection system. The heating sleeve is then twisted off of the flask and the used container is expelled from the heating sleeve using a knock out base and knock out rod. The injected flask is deflasked five minutes after injection.

FINISHING AND POLISHING - The flexible partial denture with a transparent clasp is finished using coarse pumice and polished using Tripoli TM polishing compound and High Shine TM polishing compound.

#### EXAMPLE 4

A full denture is prepared by:

#### INVESTMENT AND SPRUING -

Soak a cast and wax up of a patients mount in water for 25 minutes prior to investing. Mix investment and embed the cast and wax-up in the lower half of a flask. Using wax sticks, D-shaped Success™ Sprue Wax Sticks (7 mm X 180 mm, Item # 904584) injection sprues are built. On upper dentures, attach the sprue to the posterior border of the denture and make sure the sprue is sufficiently wide. For lower full dentures, attach the sprue to

both lingual extensions as well as in the mid-line. Then embed the upper half of the flask.

#### WAX ELIMINATION AND SEPARATOR APPLICATION

The flask is placed in boiling water for a 4 to 6 minutes to soften the wax. The bolts on the flask are loosened and the Metal Flask Brackets are removed. The flask is opened and the Space Maintainer is removed. Then a boil out procedure is completed to form a clasp mold and the wax is discarded.

The flask is placed in boiling water for a 4 to 6 minutes to soften the wax. The bolts on the flask are loosened and the Metal Flask Brackets are removed. The flask is opened and the Space Maintainer is removed. Then a boil out procedure is completed to form a full denture mold and the wax is discarded.

The molds are flushed with clean boiling water. Bevel the stone with a lab knife around the mouth of the sprue. The flask margin and cavities are checked to ensure that both flask halves fit together with intimate metal contact. A thin coat of Al-Cote® Separating Agent is applied to the model and the model is allowed to dry completely. Mechanical retention is added by grinding diatorics into the teeth. Thermoplastic Injection Insert is positioned on one side of the flask and the flask halves are placed under an infrared heat source.

After removing the cap from a cartridge, formed by following the procedure of EXAMPLE 2, the container of pigmented Lucitone FRS crystalline nylon is placed in an injection sleeve to form an assembly. When the container of pigmented



Lucitone FRS crystalline nylon is placed in an injection sleeve the threaded end of the container is positioned in the injection sleeve to face away from the injection sleeve handle. A sleeve plug is placed into the remaining space in the heating sleeve. The assembly is inserted into a cartridge furnace (preheated to 575 °F) and a timer is set for 18 minutes. While heating the assembly in the furnace for 18 minutes, the flask halves are assembled and placed in front of the Success Injection System manufactured and sold by Dentsply. The sleeve assembly is removed from the furnace and positioned on top of the flask such that the threaded end of the container fits into the opening of a thermoplastic injection insert to form a combination. The combination is then slid into the Success Injection System and the piston is engaged to press the pigmented Lucitone FRS crystalline nylon from the container into a denture mold enclosed by the flask. Injection into the denture mold is complete within one (1) minute. Then the flask and sleeve assembly combination is removed from the Injection system. The heating sleeve is then twisted off of the flask and the used container is expelled from the heating sleeve using a knock out base and knock out rod. The injected flask is deflasked five minutes after injection.

**FINISHING AND POLISHING** - The flexible denture is finished using coarse pumice and polished using Tripoli TM polishing compound and High Shine TM polishing compound.

TABLE 2 shows physical properties of the products of Examples 3 and 4 and. The products of Examples 3 and 4 have more than 50 percent greater Charpy notched impact strength than commercially marketed dental products.

TABLE 2

Property	Examples 3 and 4
Formulation	Microcrystalline polyamide
Tensile strength (psi)	9000
Tensile Modulus (psi)	232000
Flexural Strength (psi)	9300
Flexural Modulus (psi)	200000
Charpy notched ft-lb/in <sup>2</sup>	7.6
Charpy unnotched	No break
Specific Gravity	1.06
Melt point °C	248
Glass transition T <sub>g</sub> °C	155
Melt flow (g/10min)	N/A
Water Absorption %24hrs	.45

It should be understood that while the present invention has been described in considerable detail with respect to certain specific embodiments thereof, it should not be considered limited to such embodiments but may be used in other ways without departure from the spirit of the invention and the scope of the appended claims.

## WHAT IS CLAIMED IS:

1. A dental device comprising thermoplastic polyamide having a Charpy notched impact strength of at least 3.5 ft-lb/in<sup>2</sup>.
2. A dental device comprising thermoplastic polyamide having a Charpy notched impact strength of at least 4.5 ft-lb/in<sup>2</sup>.
3. The device of Claim 1 wherein said polyamide comprises at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers and said polyamide has an opacity less than 30%.
4. The device of Claim 1 wherein said polyamide comprises at least 20 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.
5. The device of Claim 1 wherein said polyamide comprises at least 30 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.
6. The device of Claim 1 wherein said device is a denture, partial denture, clasp, splint, or night guard.
7. The device of Claim 1 wherein said polyamide has an opacity of less than 30 percent.
8. A dental prosthesis comprising semi-crystalline thermoplastic polyamide having a Charpy notched impact strength of at least 3.5.
9. The device of Claim 7 wherein said polyamide comprises at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.

10. The device of Claim 7 wherein said polyamide comprises at least 20 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.
11. The device of Claim 7 wherein said polyamide comprises at least 30 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.
12. The device of Claim 7 wherein said device is a denture, partial denture, clasp, splint, or night guard.
13. The device of Claim 7 wherein said polyamide has an opacity of less than 30 percent.
14. A cartridge containing polyamide for making a substantially transparent clasp integrally connected to a denture, comprising: a cartridge and particles of thermoplastic polyamide said cartridge comprising a metal container and enclosing said particles of thermoplastic polyamide, said particles of thermoplastic polyamide being effectively free of pigment.
15. The cartridge of claim 14 wherein said cartridge further comprises a cover.
16. A kit for making a denture, comprising: a package, a first cartridge and a second cartridge, said package supporting said first cartridge and said second cartridge, said first cartridge enclosing pigment and first particles of thermoplastic, and said second cartridge enclosing second particles of thermoplastic, said second particles of thermoplastic enclosed in said second cartridge being effectively free of pigment.

17. The kit of claim 16 wherein said first cartridge and said second cartridge comprise a metal.

18 A removable partial dental prosthesis comprising base, an artificial tooth and a clasp, said base being integrally connected to said clasp, said base comprising pigment and being substantially opaque, said clasp effectively not comprising pigment and being substantially transparent, said base being formed to mate with oral mucosa for support of said prosthesis thereon, said artificial tooth being supported by said base.

19. The dental prosthesis of claim 18 wherein said base and said clasp are formed by molding first particles of thermoplastic from an enclosure enclosing the first particles of thermoplastic with enclosing pigment in a first cartridge, and second particles of thermoplastic from an enclosure enclosing second particles of thermoplastic effectively without pigment in the second cartridge.

20 A method of making a removable partial dental prosthesis comprising an artificial tooth and an opaque base comprising pigment integrally connected to a substantially transparent clasp, comprising:

providing a mold having a mold cavity and containing said artificial tooth,

injecting substantially transparent thermoplastic into a first portion of said mold cavity,

injecting substantially opaque thermoplastic into a second portion of said mold cavity,  
whereby said removable partial dental prosthesis is formed.

21. A system for making a partial denture, comprising: a package, a first cartridge and a second cartridge, said package supporting said first cartridge and said second cartridge, said first cartridge enclosing pigment and first particles of thermoplastic polyamide having a Charpy notched impact strength of at least  $3.5 \text{ ft-lb/in}^2$ , and said second cartridge enclosing second particles of thermoplastic, said second particles of thermoplastic polyamide having a Charpy notched impact strength of at least  $3.5 \text{ ft-lb/in}^2$  enclosed in said second cartridge being effectively free of pigment.

22. The device of Claim 21 wherein said polyamide comprises at least 20 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.

23. The device of Claim 21 wherein said polyamide comprises at least 30 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.

24. The device of Claim 21 wherein said polyamide has an opacity of less than 30 percent.

25.A dental device comprising thermoplastic polyamide having at least 10 percent by weight of micro-crystals having a largest dimension less than 750 nanometers.

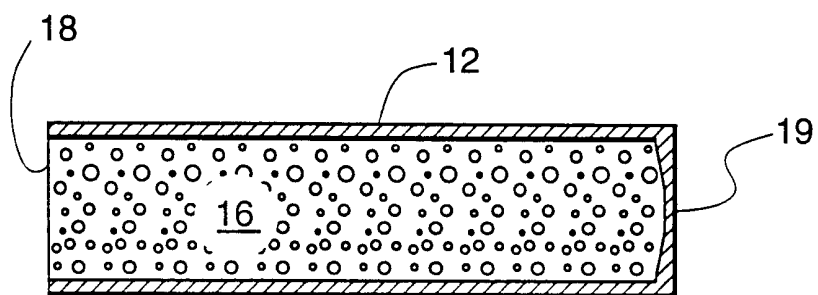


Fig. 1




Fig. 2




Fig. 3




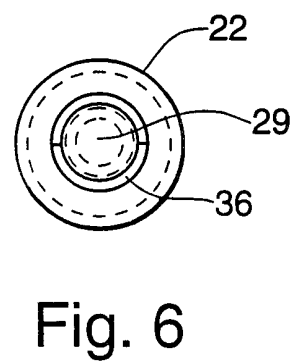
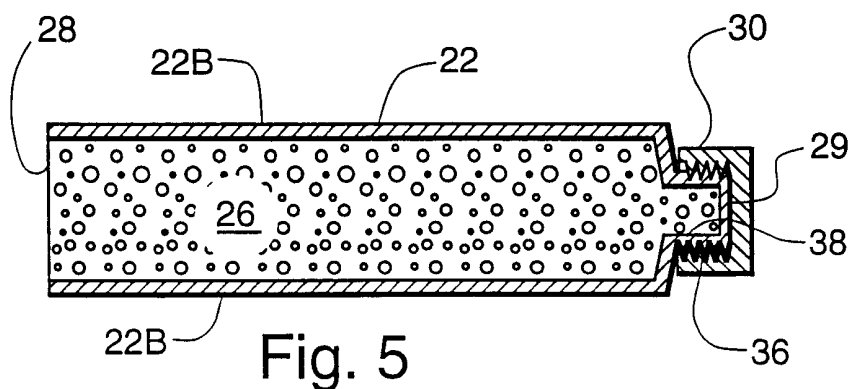


Fig. 4





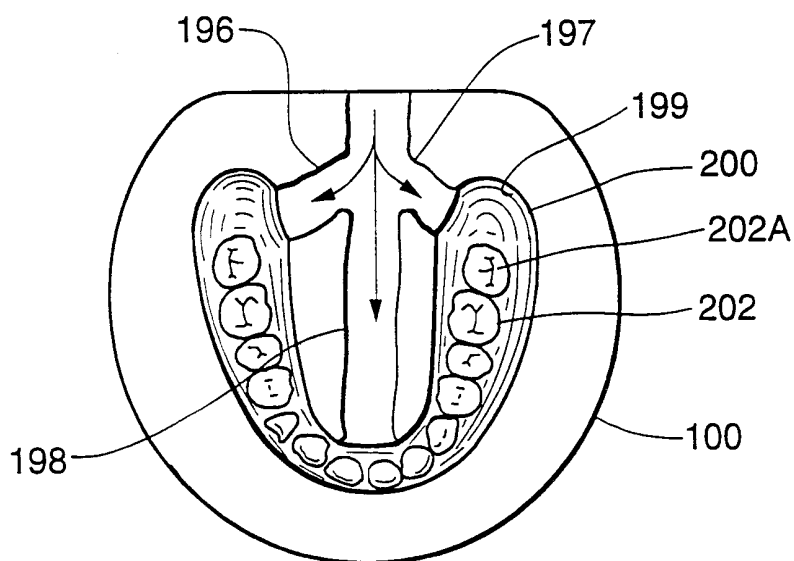


Fig. 9

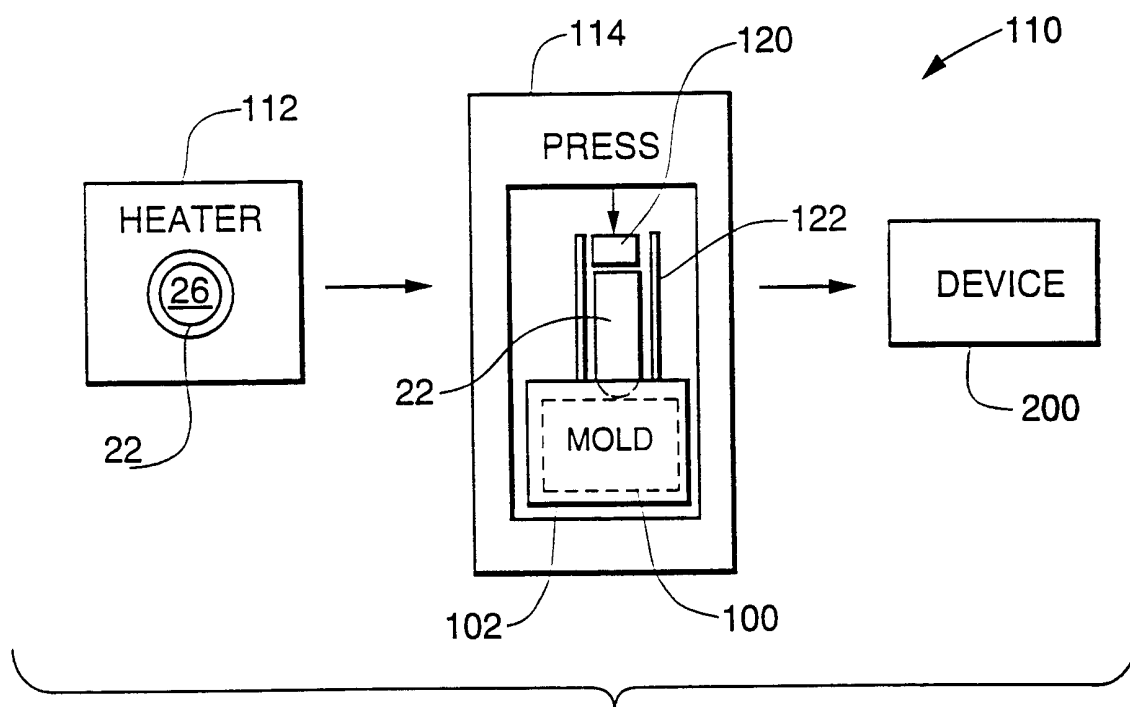


Fig. 10

# INTERNATIONAL SEARCH REPORT

Internatic Application No  
PCT/US 00/20248

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61K6/087 A61C13/267

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61K A61C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX, WPI Data, PAJ, CHEM ABS Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	STAFFORD, G. D. ET AL: "The use of nylon as a denture -base material" J. DENT. (1986), 14(1), 18-22 , 1986, XP000957697 page 18, right-hand column, paragraph 1 -page 20, right-hand column, last paragraph page 21, right-hand column, paragraph 3 ---	1,2,6
X	MACGREGOR, A. R. ET AL: "Recent experiences with denture polymers" J. DENT. (1984), 12(2), 146-57 , 1984, XP000957702 page 147, last paragraph -page 148, paragraph 2 figure 1; table 5 --- -/--	1,2,6, 18,20



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 October 2000

Date of mailing of the international search report

09/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Cousins-Van Steen, G

# INTERNATIONAL SEARCH REPORT

Internatic Application No  
PCT/US 00/20248

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 196 18 364 A (FOERSTER BERNHARD GMBH) 13 November 1997 (1997-11-13) column 2, line 31 - line 37 ----	1-13
A	US 5 607 300 A (TEPPER HARRY W) 4 March 1997 (1997-03-04) column 5, line 28 - line 52 column 5, line 53 - line 65 ----	14-21
A	US 3 628 248 A (KRODER ERNEST A ET AL) 21 December 1971 (1971-12-21) column 7, line 25 - line 48 column 9, line 40 - line 49 column 10, line 19 - line 58 -----	14-21

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/20248

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19618364 A	13-11-1997	NONE	
US 5607300 A	04-03-1997	NONE	
US 3628248 A	21-12-1971	NONE	