



(86) **Date de dépôt PCT/PCT Filing Date:** 2014/07/07
(87) **Date publication PCT/PCT Publication Date:** 2016/01/14
(85) **Entrée phase nationale/National Entry:** 2016/12/07
(86) **N° demande PCT/PCT Application No.:** CN 2014/081724
(87) **N° publication PCT/PCT Publication No.:** 2016/004565

(51) **Cl.Int./Int.Cl.** **C08K 5/29** (2006.01),
B32B 27/18 (2006.01), **C08K 3/22** (2006.01),
C08K 5/25 (2006.01)

(71) **Demandeur/Applicant:**
HONEYWELL INTERNATIONAL INC., US

(72) **Inventeurs/Inventors:**
LIU, YA QUN, US;
ZENG, LIANG, US;
WANG, HUI, US;
ZHANG, BRIGHT, US;
HUANG, HONG MIN, US

(74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre :** MATERIAU D'INTERFACE THERMIQUE AVEC AGENT PIEGEUR D'IONS

(54) **Title:** THERMAL INTERFACE MATERIAL WITH ION SCAVENGER

10
↓

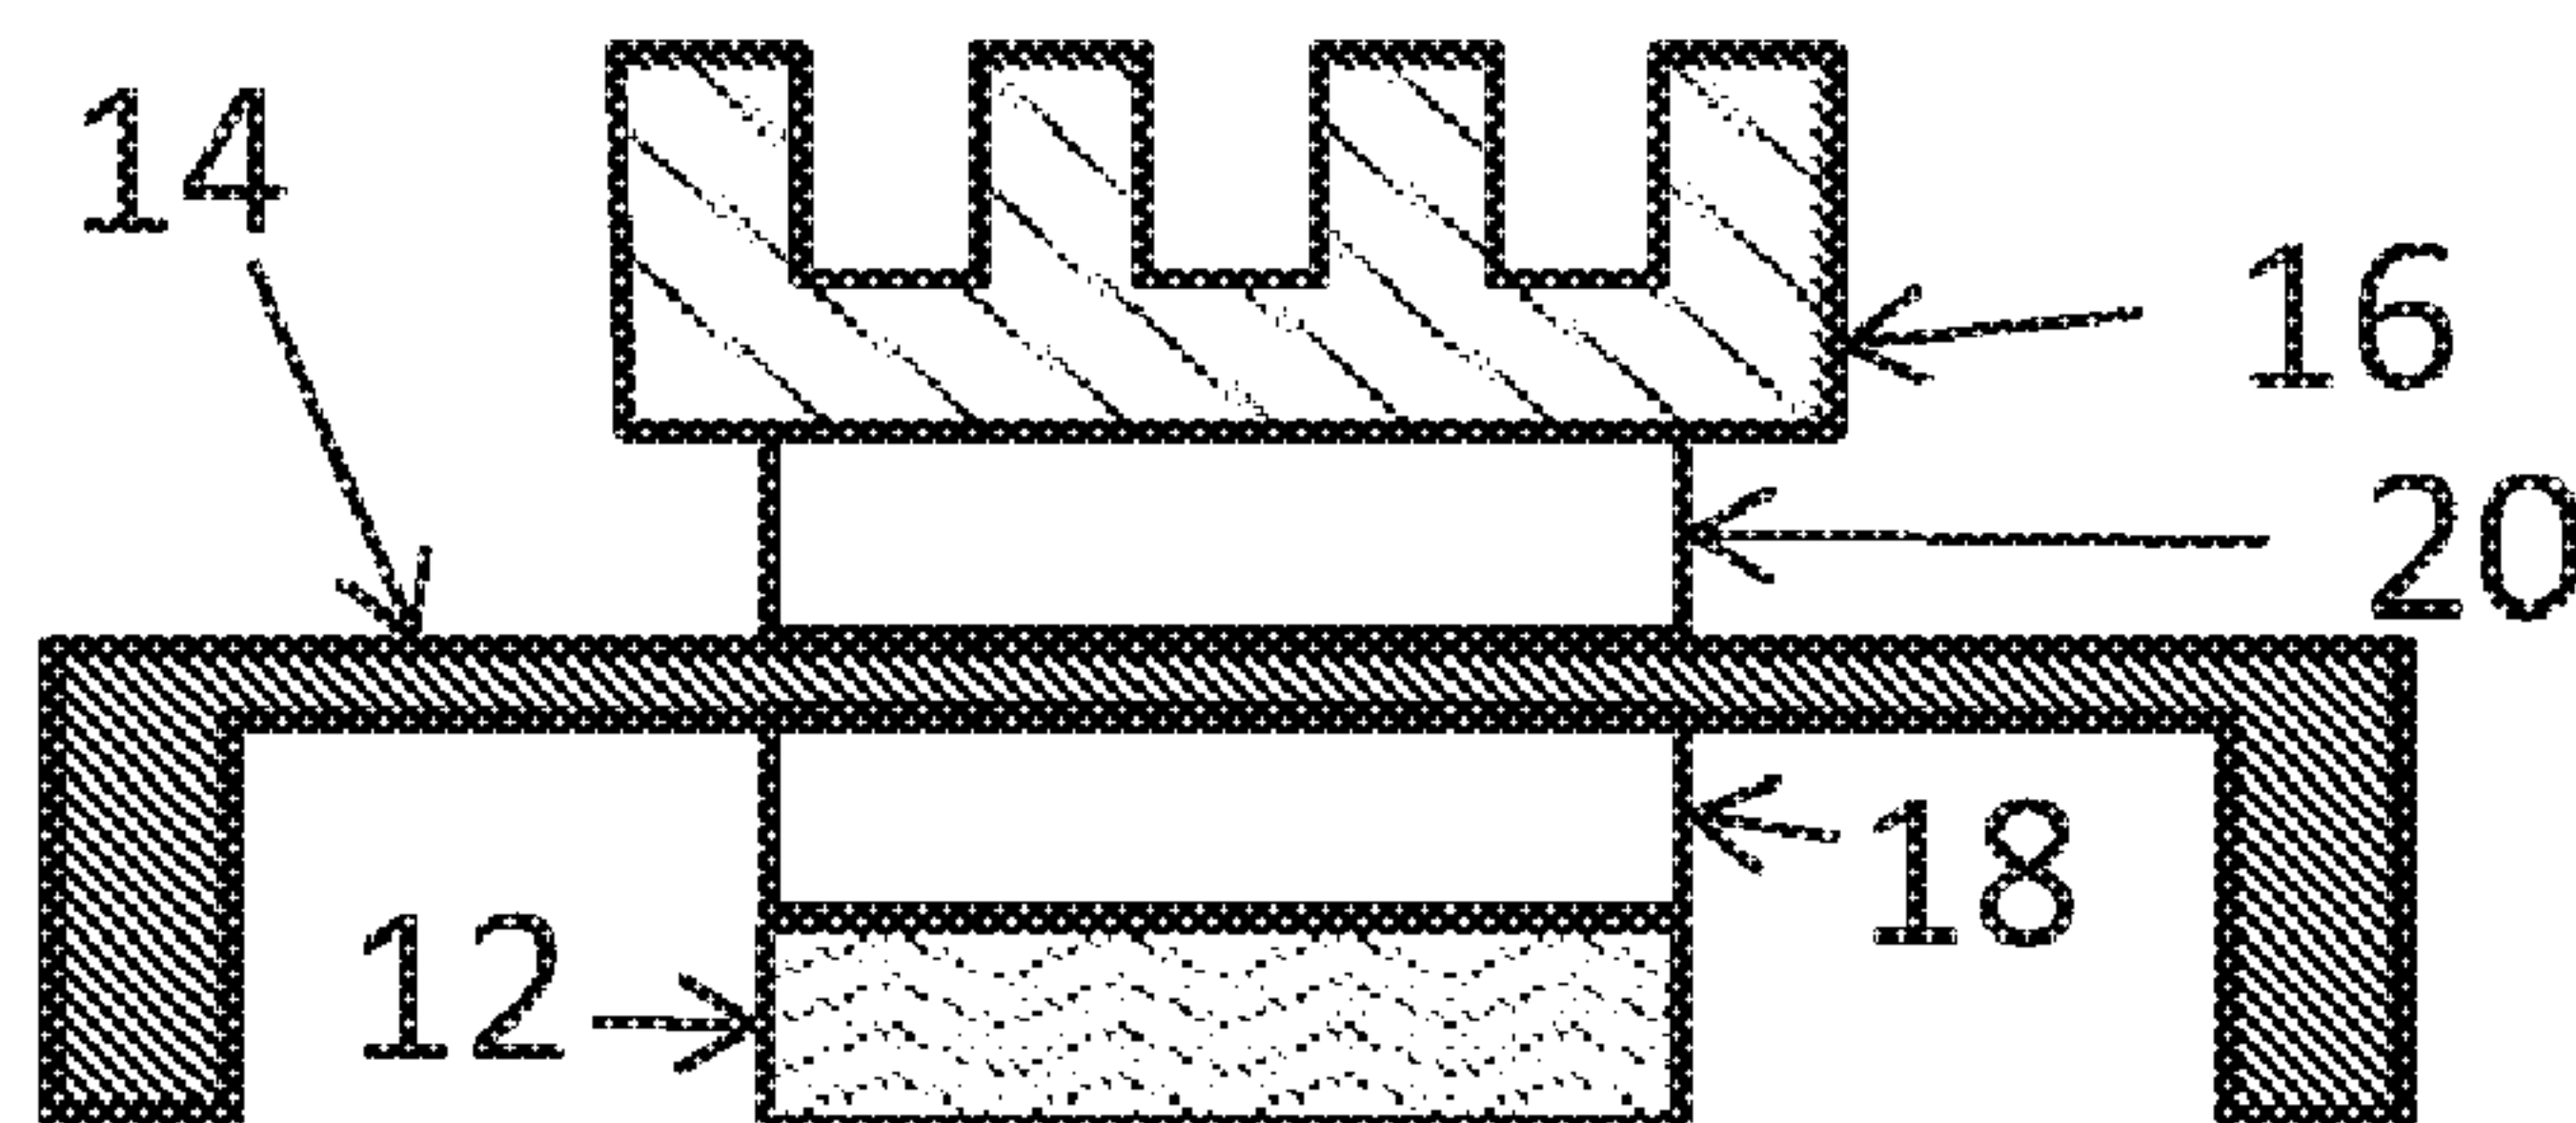


FIG. 1

(57) **Abrégé/Abstract:**

A thermal interface material includes at least one polymer, at least one thermally conductive filler; and at least one ion scavenger. In some embodiments, the ion scavenger is a complexing agent selected from the group consisting of : nitrogen containing




(57) **Abrégé(suite)/Abstract(continued):**

complexing agents,phosphorus containing complexing agents, and hydroxyl carboxylic acid based complexing agents.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

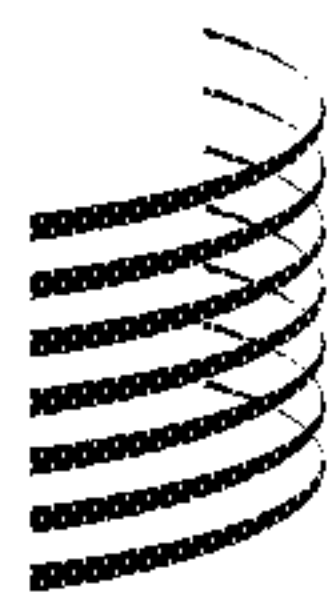

(43) International Publication Date
14 January 2016 (14.01.2016)

WIPO | PCT

(10) International Publication Number
WO 2016/004565 A1

(51) International Patent Classification:

C08K 5/29 (2006.01) *C08K 3/22* (2006.01)
C08K 5/25 (2006.01) *B32B 27/18* (2006.01)

(74) Agent: CHINA PATENT AGENT (H.K.) LTD.; 22/F.,
Great Eagle Center, 23 Harbour Road, Wanchai, Hong
Kong (CN).

(21) International Application Number:

PCT/CN2014/081724

(22) International Filing Date:

7 July 2014 (07.07.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: HONEYWELL INTERNATIONAL INC.
[US/US]; 101 Columbia Road, Morristown, New Jersey
07962-2245 (US).

(72) Inventors; and

(71) Applicants (for US only): LIU, Ya Qun [CN/US]; Honeywell International Inc., Patent Services M/S AB/2B, 101 Columbia Road, P.O. Box 2245, Morristown, New Jersey 07962-2245 (US). ZENG, Liang [CN/US]; Honeywell International Inc., Patent Services M/S AB/2B, 101 Columbia Road, P.O. Box 2245, Morristown, New Jersey 07962-2245 (US). WANG, Hui [CN/US]; Honeywell International Inc., Patent Services M/S AB/2B, 101 Columbia Road, P.O. Box 2245, Morristown, New Jersey 07962-2245 (US). ZHANG, Bright [CN/US]; Honeywell International Inc., Patent Services M/S AB/2B, 101 Columbia Road, P.O. Box 2245, Morristown, New Jersey 07962-2245 (US). HUANG, Hong Min [CN/US]; Honeywell International Inc., Patent Services M/S AB/2B, 101 Columbia Road, P.O. Box 2245, Morristown, New Jersey 07962-2245 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: THERMAL INTERFACE MATERIAL WITH ION SCAVENGER

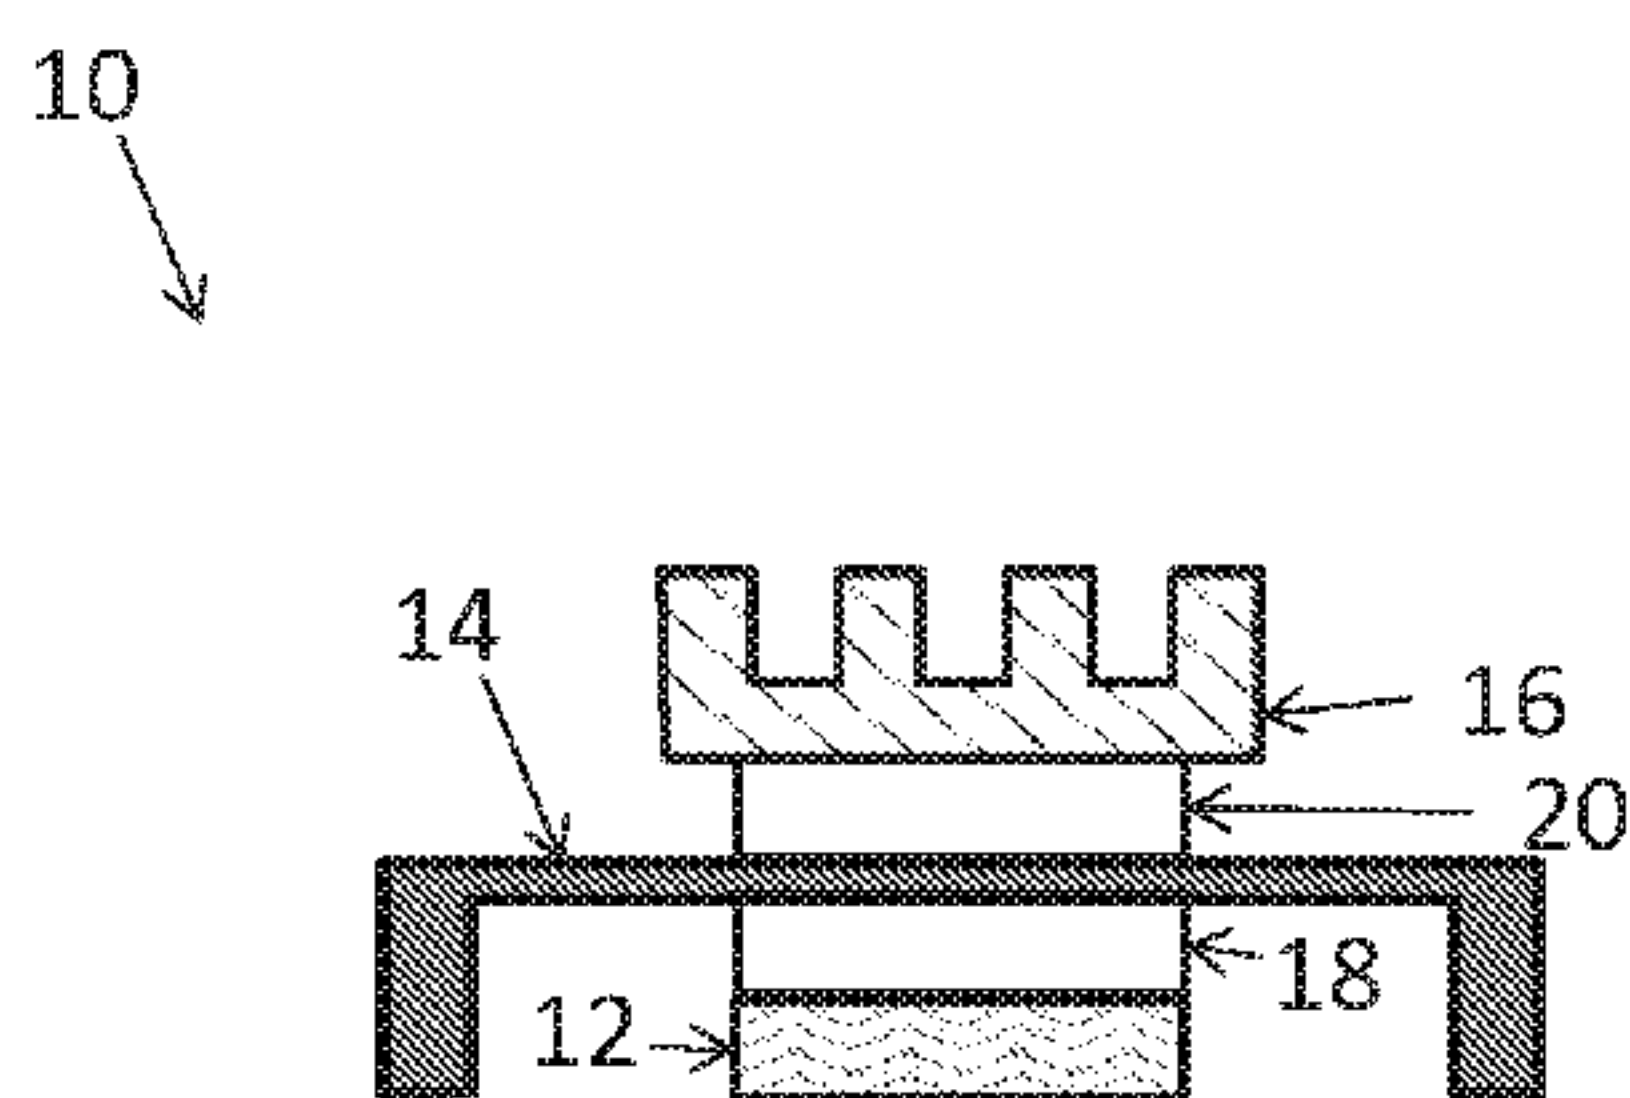


FIG. 1

(57) Abstract: A thermal interface material includes at least one polymer, at least one thermally conductive filler; and at least one ion scavenger. In some embodiments, the ion scavenger is a complexing agent selected from the group consisting of: nitrogen containing complexing agents, phosphorus containing complexing agents, and hydroxyl carboxylic acid based complexing agents.



WO 2016/004565 A1

THERMAL INTERFACE MATERIAL WITH ION SCAVENGER

FIELD OF THE INVENTION

[0001] The present disclosure relates generally to thermal interface materials, and more particularly to thermal interface materials that include an ion scavenger.

DESCRIPTION OF THE RELATED ART

[0002] Thermal interface materials (TIMs) are widely used to dissipate heat from electronic components, such as central processing units, video graphics arrays, servers, game consoles, smart phones, LED boards, and the like. Thermal interface materials are typically used to transfer excess heat from the electronic component to a heat spreader, such as a heat sink.

[0003] A typical electronics package structure 10 including thermal interface materials is illustrated in FIG. 1. The electronics package structure 10 illustratively includes a heat generating component, such as an electronic chip 12, and one or more heat dissipating components, such as a heat spreader 14, and a heat sink 16. Illustrative heat spreaders 14 and heat sinks comprise a metal, metal alloy, or metal-plated substrate, such as copper, copper alloy, aluminum, aluminum alloy, or nickel-plated copper. TIM materials, such as TIM 18 and TIM 20, provide a thermal connection between the heat generating component and the one or more heat dissipating components. Electronics package structure 10 includes a first TIM 18 connecting the electronic chip 12 and heat spreader 14. TIM 18 is typically referred to as a "TIM 1". Electronics package structure 10 includes a second TIM 20 connecting the heat spreader 14 and heat sink 16. TIM 18 is typically referred to as a "TIM 2". In another embodiment, electronics package structure 10 does not include a heat spreader 14, and a TIM (not shown) connects the electronic chip 12 directly to the heat sink 16. Such a TIM connecting the electronic chip 12 directly to the heat sink 16 is typically referred to as a TIM 1.5.

[0004] Thermal interface materials include thermal grease, grease-like materials, elastomer tapes, and phase change materials. Traditional thermal interface materials include components such as gap pads and thermal pads.

[0005] Exemplary thermal interface materials are disclosed in the following patents and applications, the disclosures of which are hereby incorporated by reference in their entirety: U.S. 6,238,596, U.S. 6,451,422, U.S. 6,605,238, U.S. 6,673,434, U.S. 6,706,219, U.S. 6,797,382, U.S. 6,811,725, U.S. 7,172,711, U.S. 7,244,491, U.S. 7,867,609, U.S. 2007/0051773, U.S. 2008/0044670, U.S. 2009/0111925, U.S. 2010/0129648, and U.S. 2011/0308782.

[0006] Degradation of thermal interface materials typically occurs through polymer chain scission, such as illustrated in FIG. 2A. As shown in FIG. 2A, the initiation energy produces the initiation reaction $RH \rightarrow R\cdot + H\cdot$ to form the radical $R\cdot$. This radical combines with an oxygen molecule to form the peroxide radical $ROO\cdot$. The peroxide radical can bond to a proton transferred from another R group to form the peroxide $ROOH$, as well as a new $R\cdot$ radical, which can combine with a new oxygen molecule. The branching reaction $ROOH \rightarrow RO\cdot + HO\cdot$ proceeds to form both a $RO\cdot$ radical and a $HO\cdot$ radical. The $RO\cdot$ and $HO\cdot$ are involved in scission of the remaining polymer chain, as well as embrittlement of the thermal interface material through unwanted crosslinking.

[0007] In a typical auto-oxidation cycle, the radical initiation reaction speed depends on provision of the initiation energy to produce the $R\cdot$ radical, as well as contaminants in the material. However, both the initiation reaction and the branching reaction are relatively slow due to relatively high activation energies involved in each reaction.

[0008] As shown in FIG. 2B, each of the initiation reaction and the branching reaction can be catalyzed by a metal ion. These metal ion catalyzed reactions have relatively low activation energies compared to the uncatalyzed reactions illustrated in FIG. 2A. This results in the generation of more radicals than the uncatalyzed cycle of FIG. 2A, which leads to faster degradation of the thermal interface material.

[0009] As illustrated in FIG. 1, at least one surface of a TIM material, such as TIM 18 or TIM 20, may be in direct contact with a metal surface, such as heat spreader 14 or heat sink 16. Such metal surfaces may provide metal ions to catalyze the initiation and branching reactions, such as from metal oxides that may form on the surface. For example, copper ions may interact with a polymer

comprising the TIM, particularly in the presence of heat, to form free radicals in the polymer that initiation chain scission that degrades the polymer during service.

[0010] Improvements in the foregoing are desired.


SUMMARY OF THE INVENTION

[0011] The present disclosure provides thermal interface materials that are useful in transferring heat from heat generating electronic devices, such as computer chips, to heat dissipating structures, such as heat spreaders and heat sinks.


[0012] According to an embodiment of the present disclosure, the thermal interface material includes at least one polymer, at least one thermally conductive filler, and at least one ion scavenger.

[0013] In a more particular embodiment, the ion scavenger is a complexing agent selected from the group consisting of: nitrogen containing complexing agents, phosphorus containing complexing agents, hydroxyl carboxylic acid based complexing agents, and combinations of the foregoing. In another more particular embodiment, the ion scavenger is selected from the group consisting of: an acid amide compound, a triazole compound, a tetrazole compound, a triazene compound, an oxamide compounds, a malonamide compound, and combinations of the foregoing. In another more particular embodiment, the ion scavenger is an acid amide compound. In another more particular embodiment, the ion scavenger is selected from the group consisting of: decamethylenedicarboxylic acid disalicyloylhydrazide; 3-(N-salicyloyl)amino-1,2,4-triazole; 2', 3-bis [[3-[3, 5-di-tert-butyl-4-hydroxyphenyl] propionic]]propionyl hydrazide, and combinations of the foregoing.


[0014] In another more particular embodiment, the ion scavenger is a compound according to any of Formula I to Formula XI or combinations thereof:

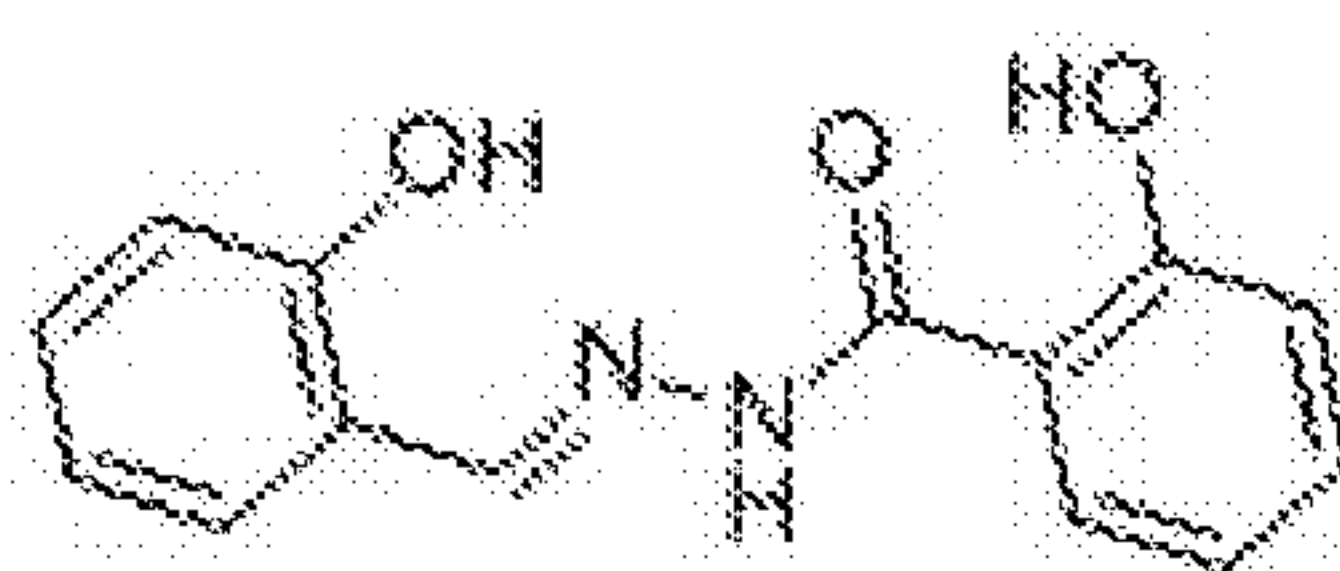


Formula I—N-salicylidene-N'salicyloyl hydrazide

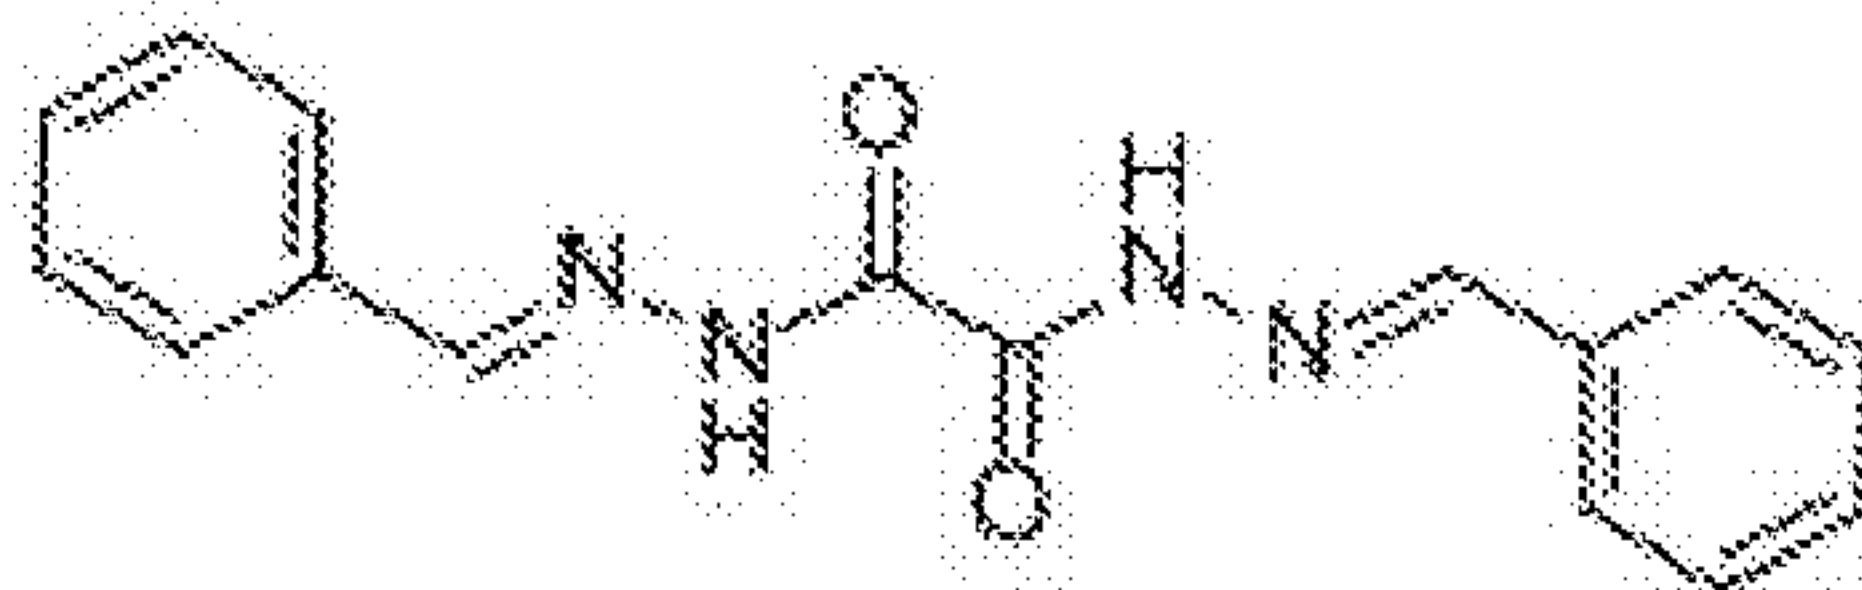


Formula II - oxalyl bis(benzylidenehydrazide)

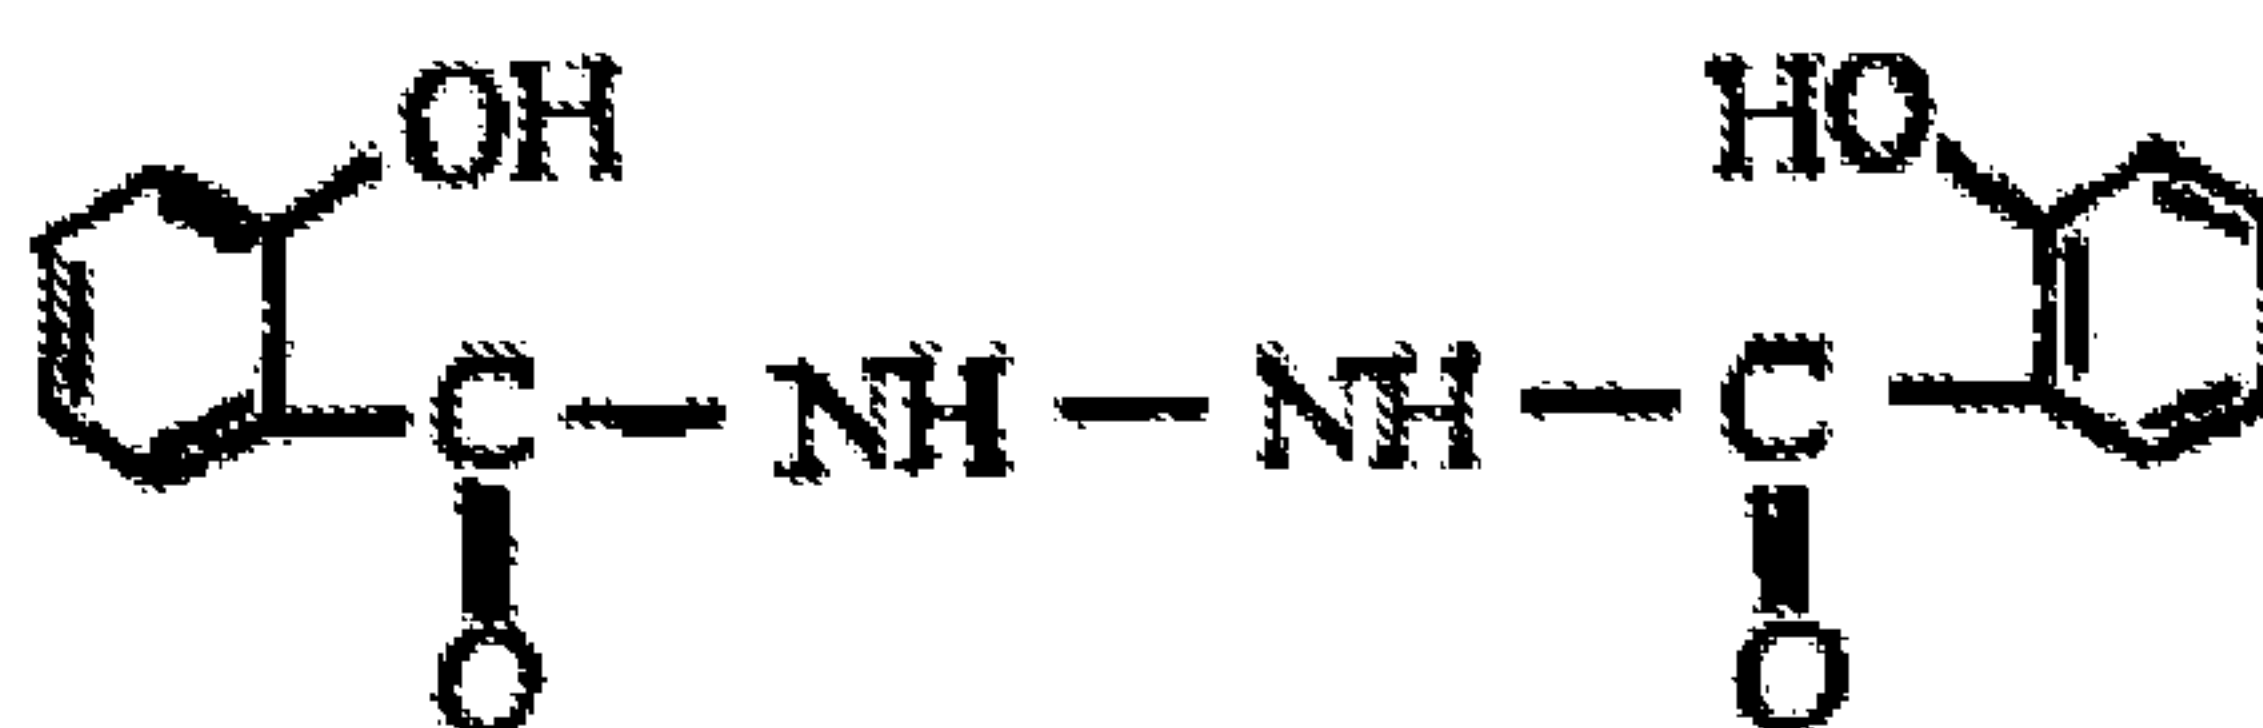


Formula III - N,N'-bis(salicyloyl)hydrazine

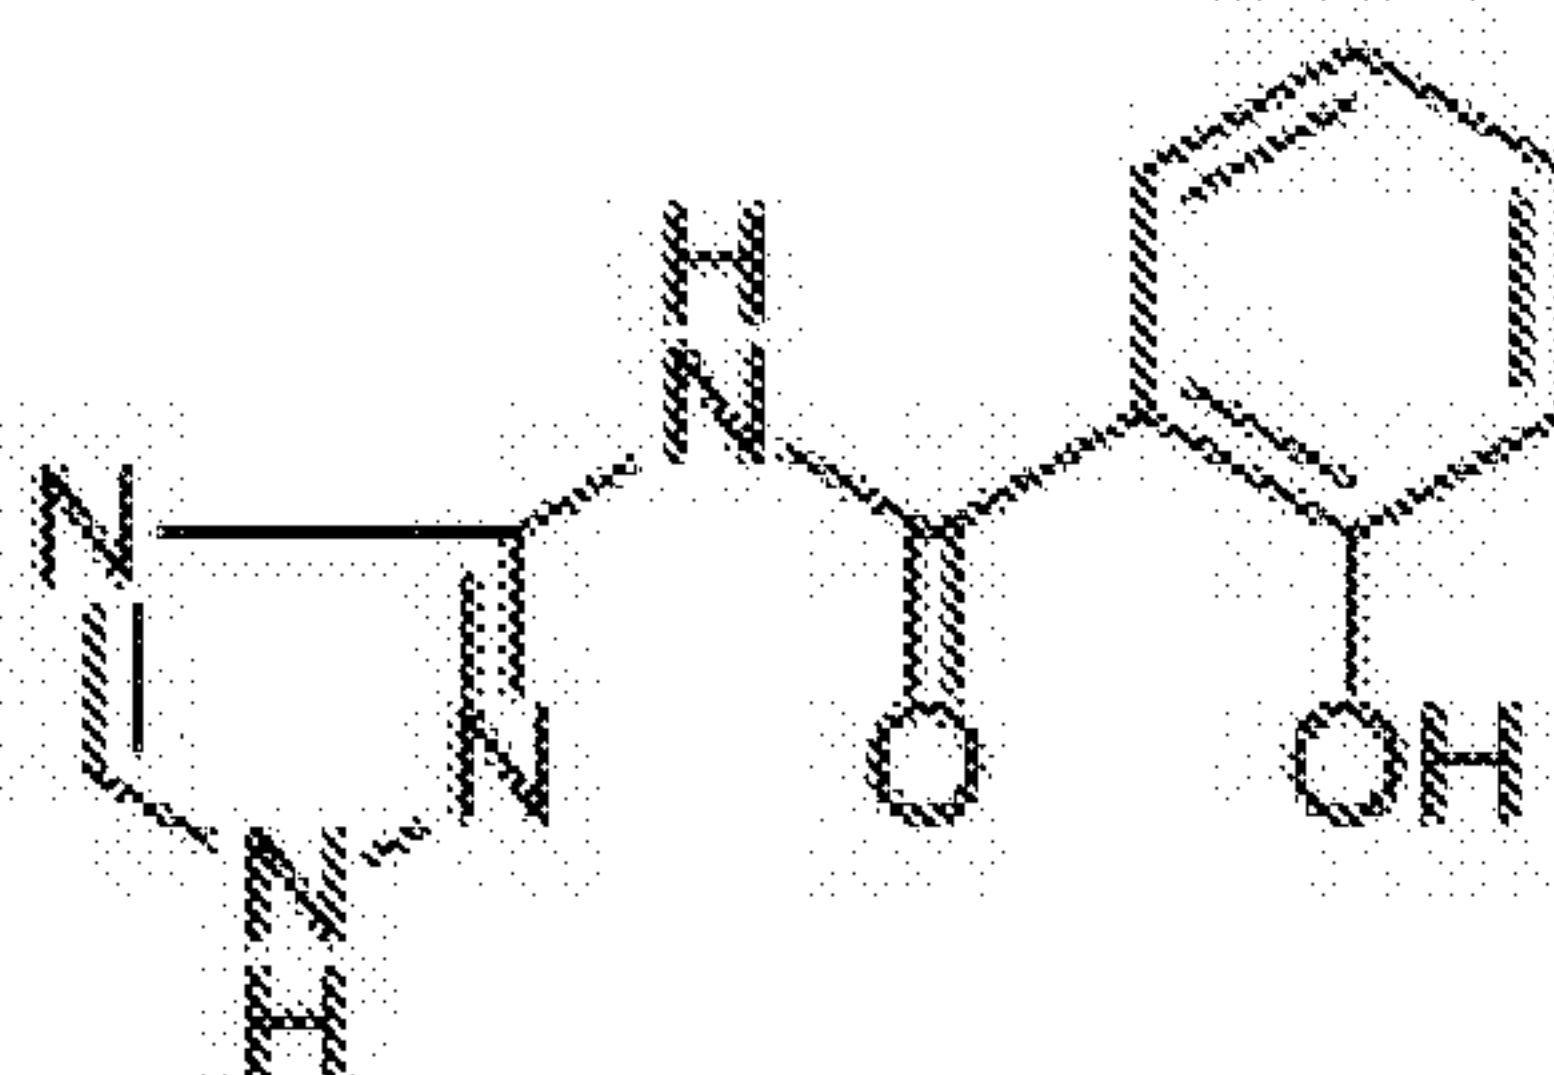


Formula IV - 3-(N-salicyloyl)amino-1,2,4-triazole

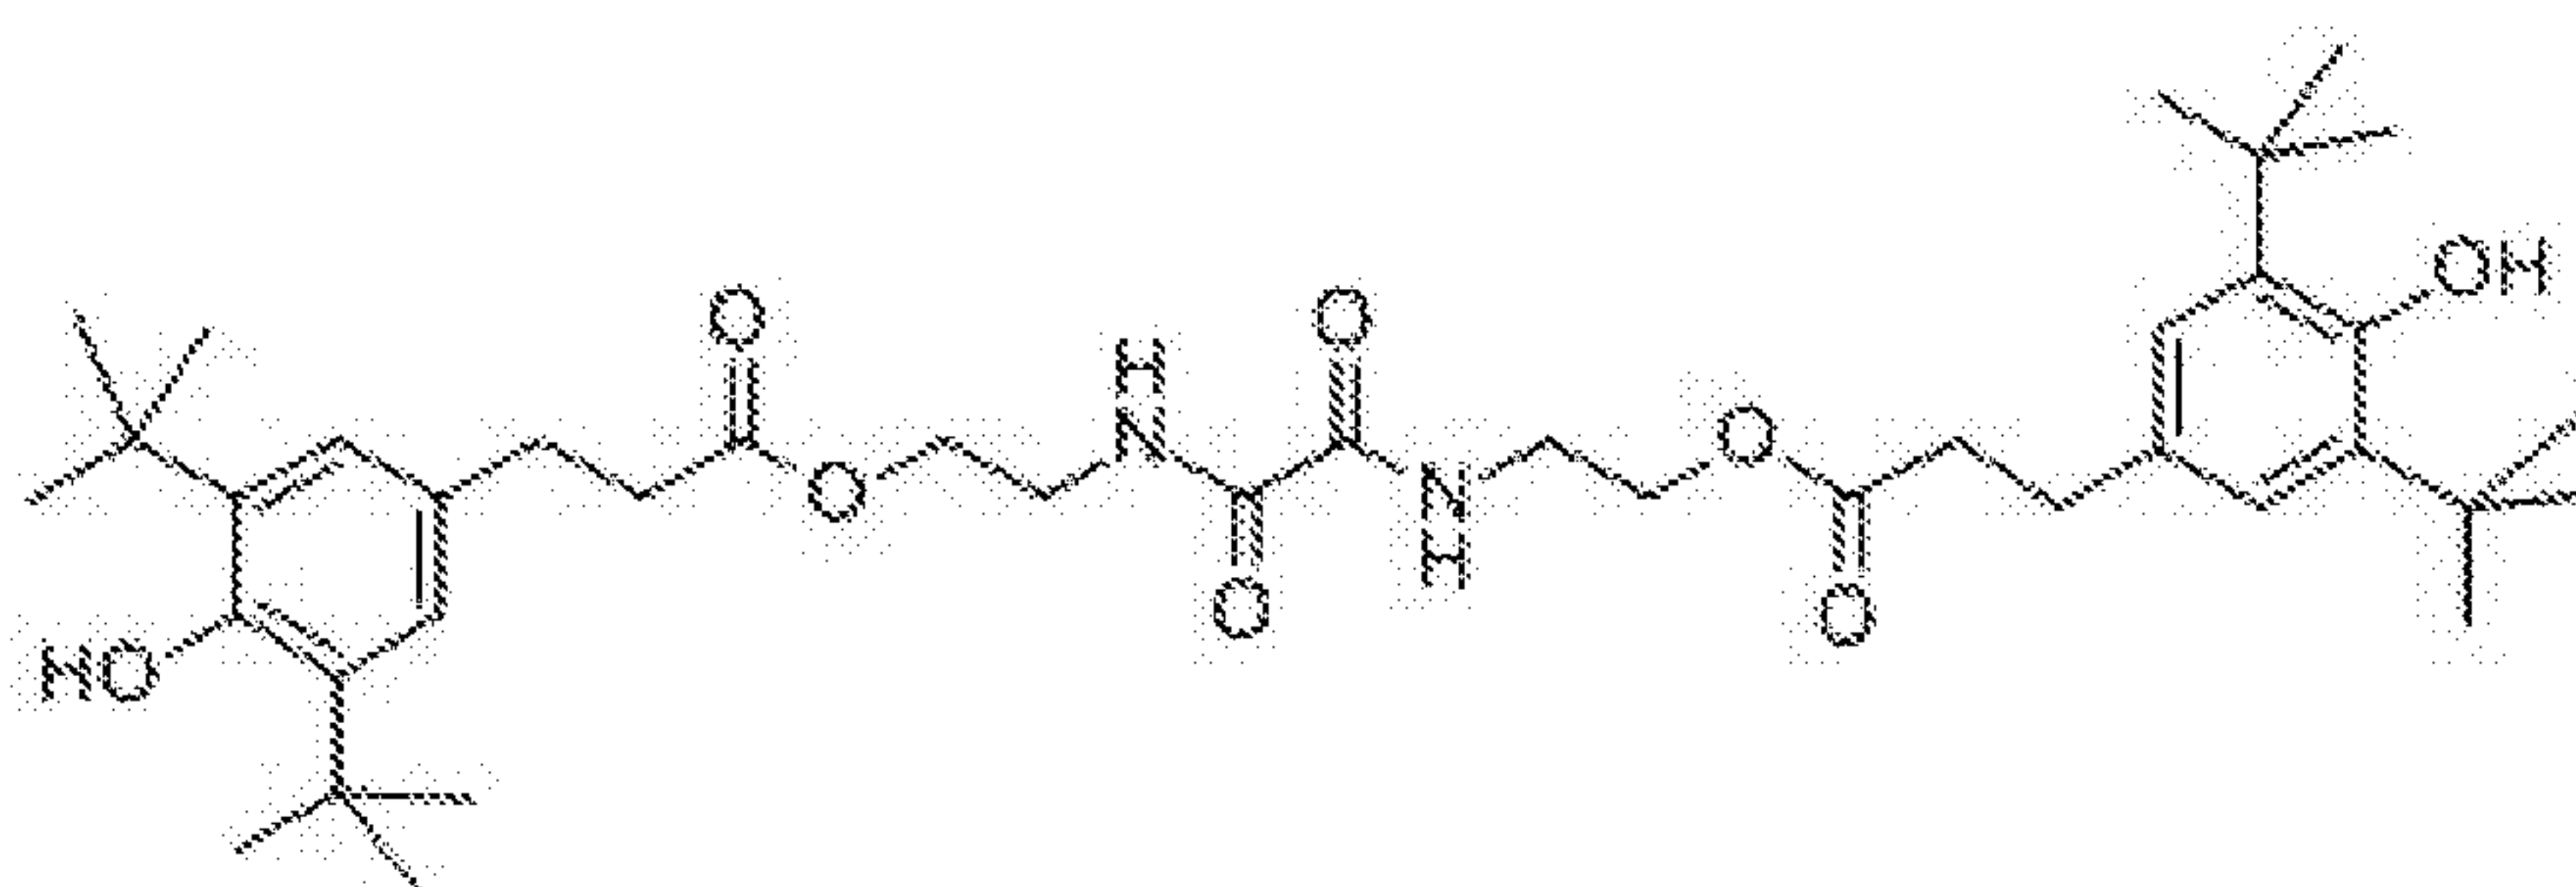


Formula V - 2,2'-oxamido bis[ethyl 3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate]

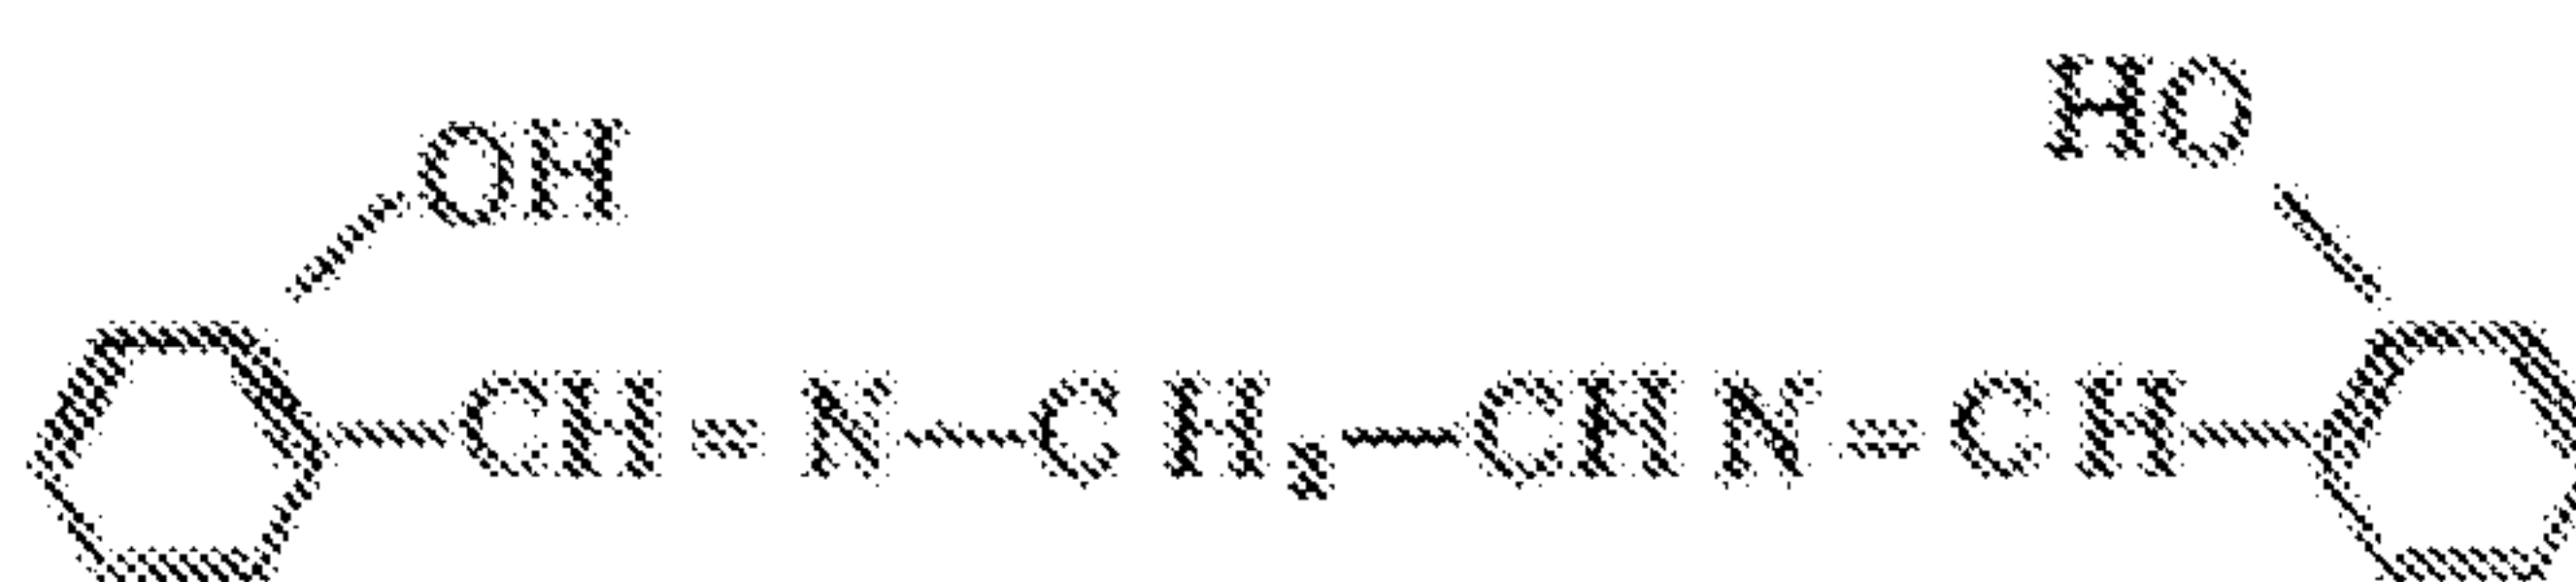


Formula VI - N,N'-bis(salicylidene) ethylenediamine

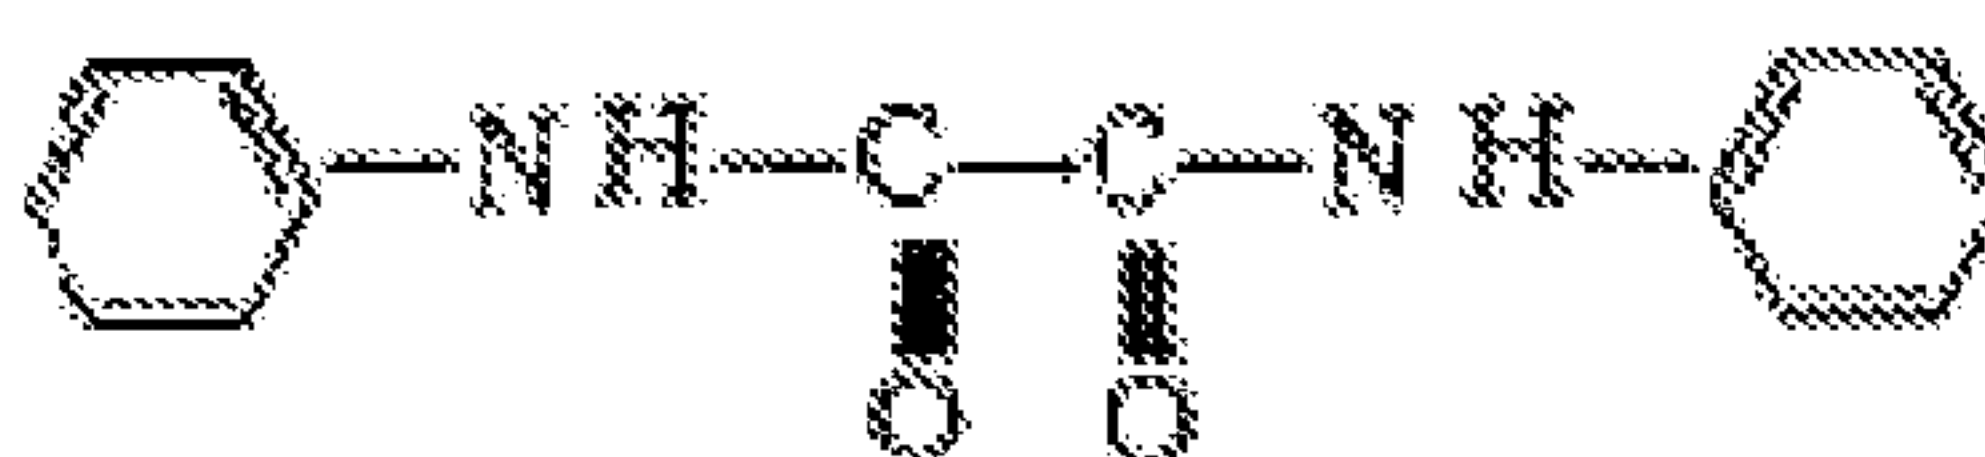


Formula VII—Oxanilide

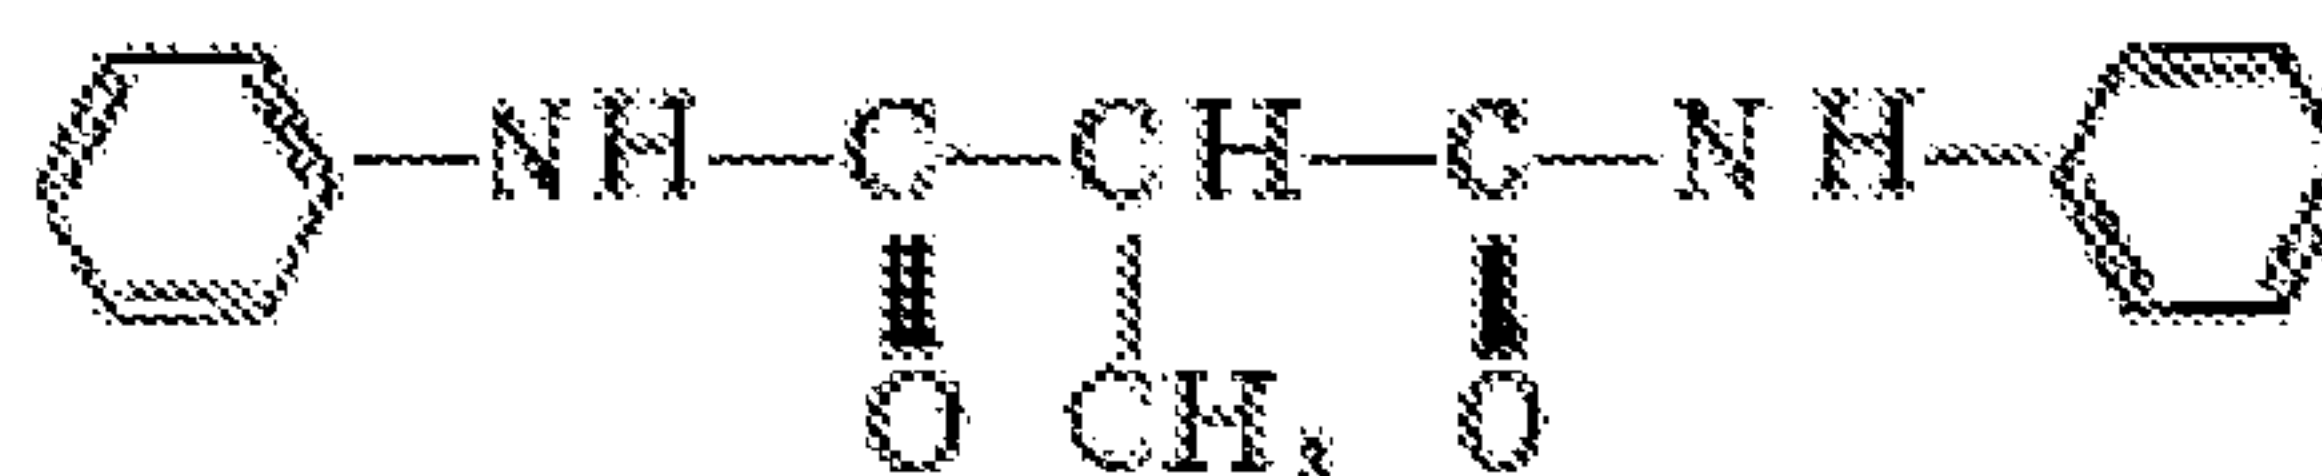


Formula VIII - Methylmalonic acid dianilide

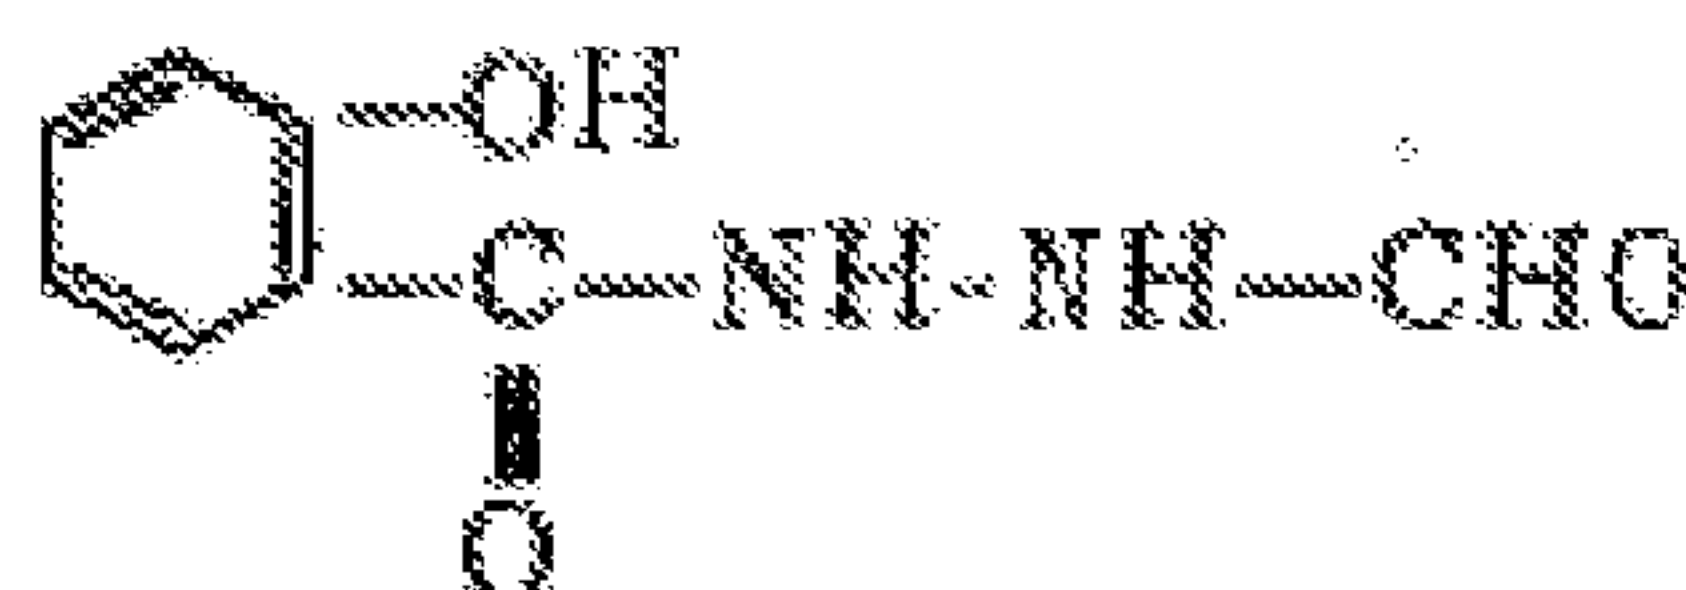

Formula IX - N-formyl-N'-salicyloyl hydrazine

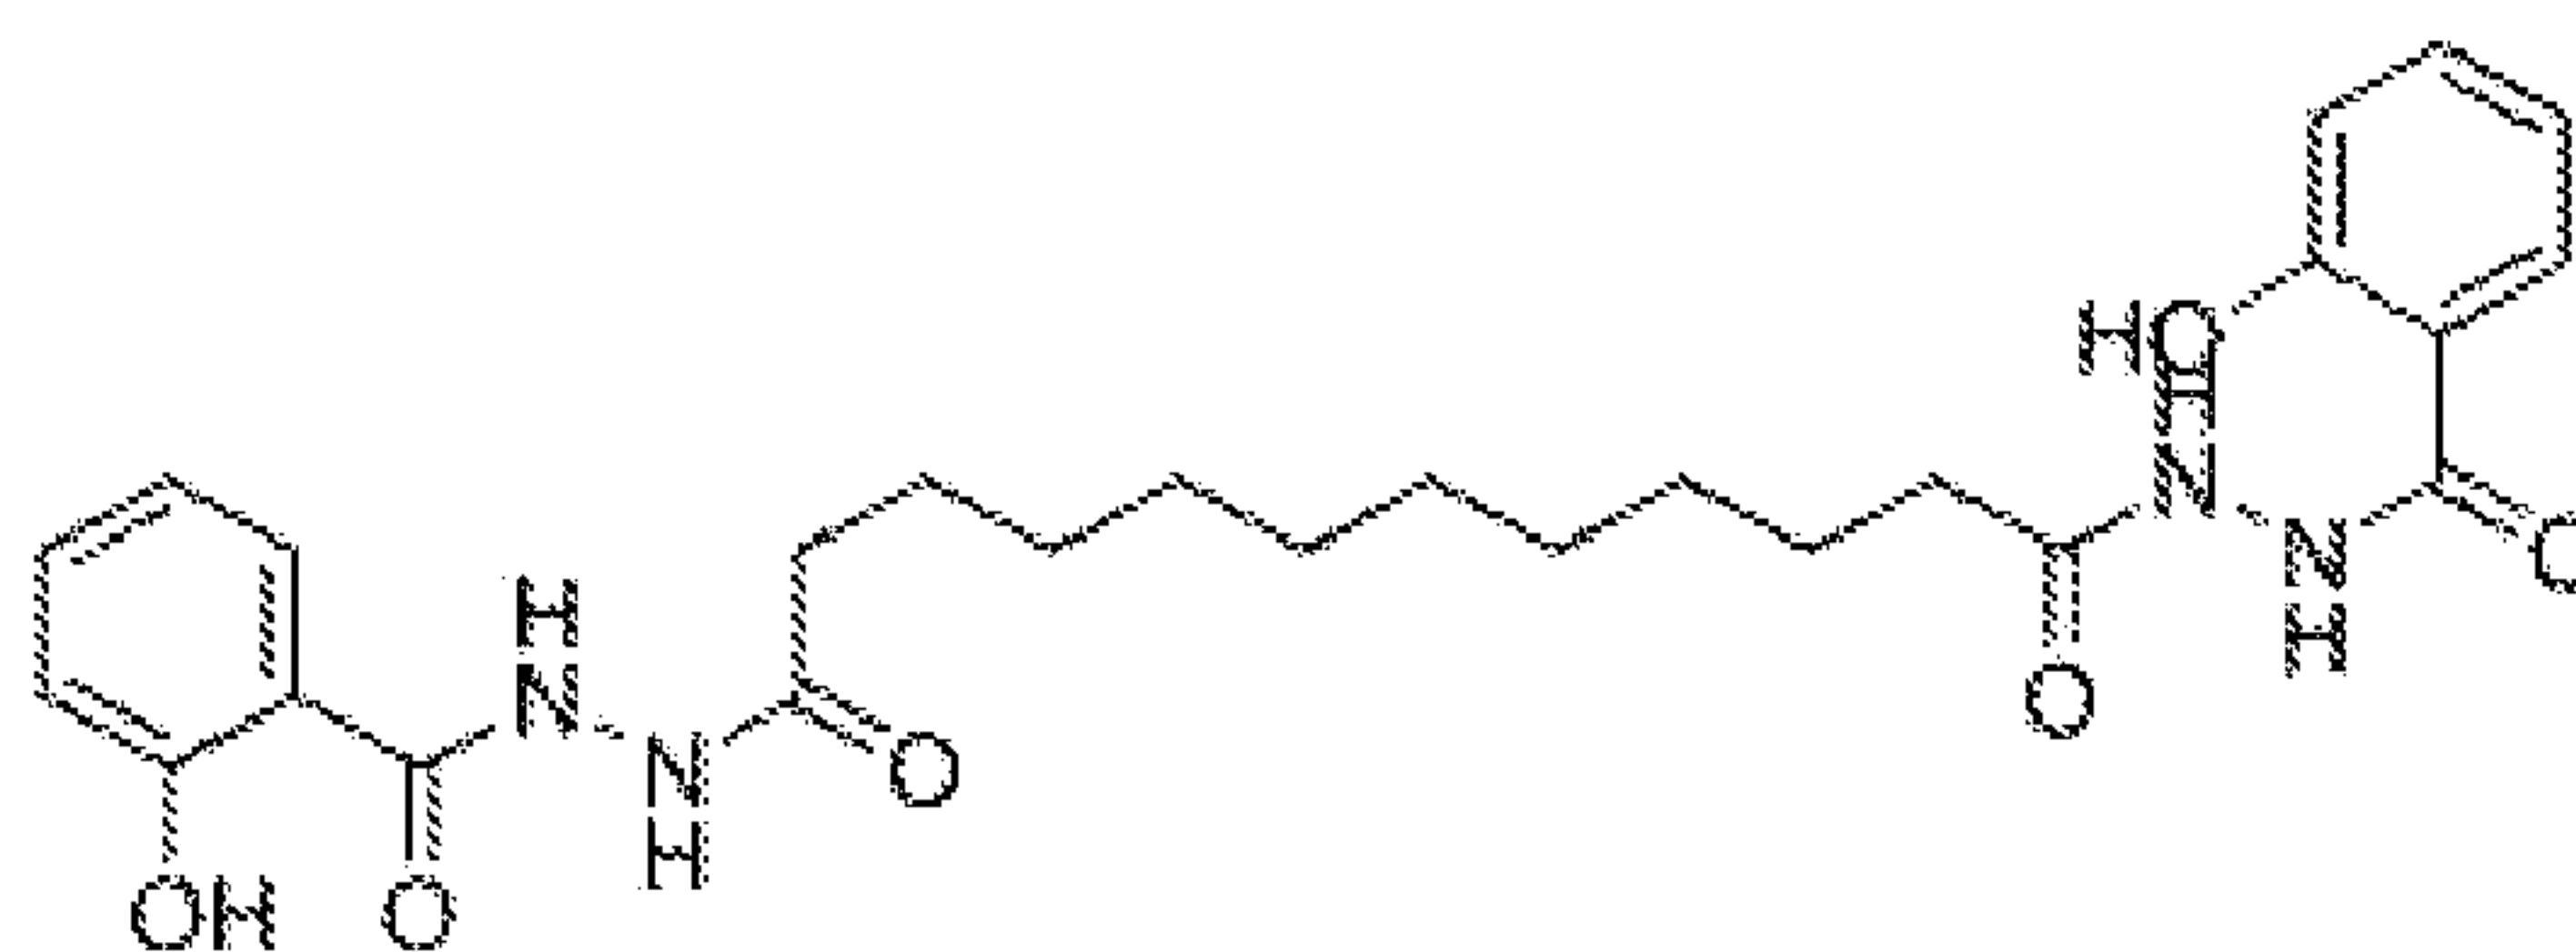

Formula X - Decamethylenedicarboxylic acid disalicyloylhydrazide

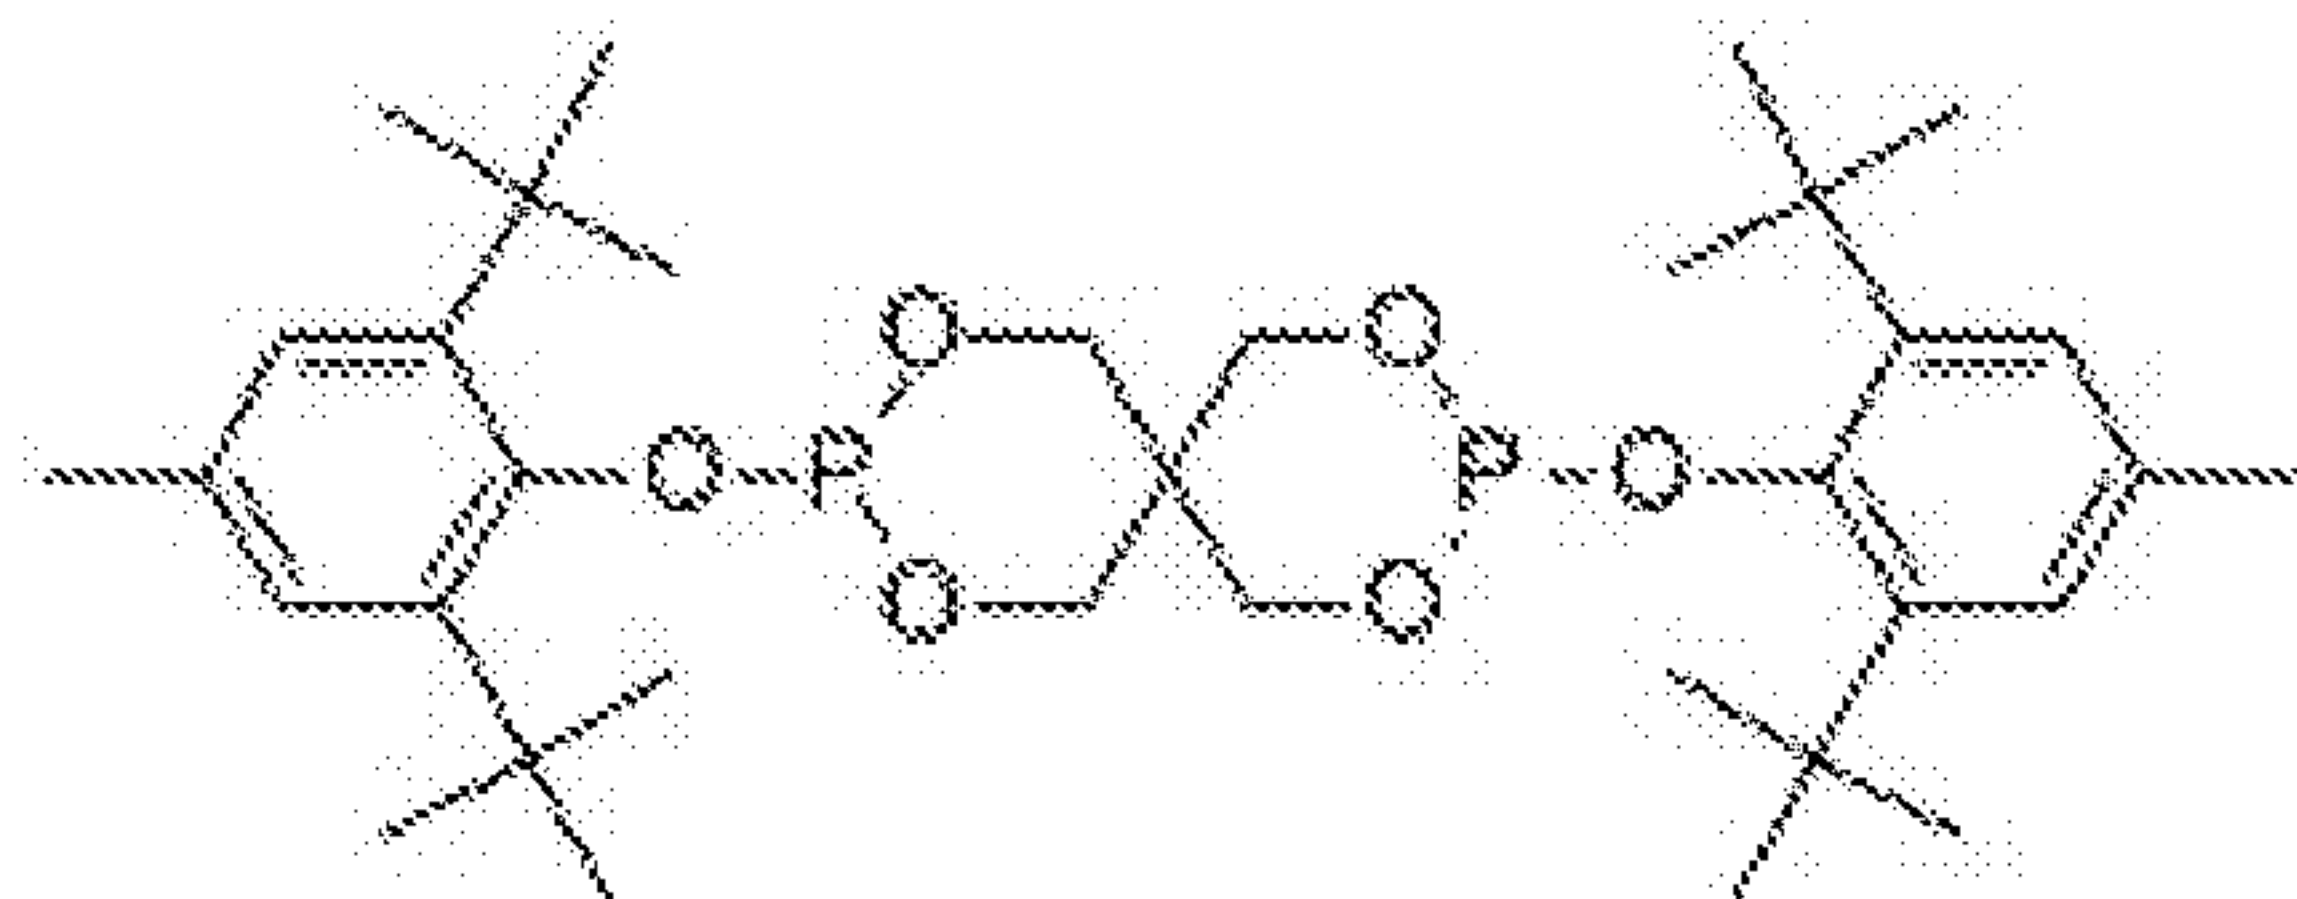

Formula XI - Bis(2,6-di-ter-butyl-4-methylphenyl)pentaerythritol-diphosphite

[0015] In a more particular embodiment of any of the above embodiments, the thermal interface material comprises 0.1 wt.% to 5 wt.% of the ion scavenger, based on the total weight of the thermal interface material. In a more particular embodiment, the thermal interface material comprises 0.5 wt.% to 1 wt.% of the ion scavenger, based on the total weight of the thermal interface material.

[0016] In a more particular embodiment of any of the above embodiments, the thermal interface material further comprises at least one phase change material. In an even more particular embodiment, the phase change material is a wax.

[0017] In a more particular embodiment of any of the above embodiments, the thermal interface material further comprises at least coupling agent. In an even more particular embodiment, the coupling agent material is selected from the group consisting of: a titanate coupling agent, a zirconate coupling agent, and a silane coupling agent, and combinations of the foregoing. In an even more particular embodiment, the coupling agent is a titanate coupling agent.

[0018] In a more particular embodiment of any of the above embodiments, the thermal interface material further comprises at least one crosslinker.

[0019] In a more particular embodiment of any of the above embodiments, the thermal interface material comprises: 5 wt.% to 10 wt.% of the at least one polymer; 50 wt.% to 95 wt.% of the at least one thermally conductive filler; and 0.1 wt.% to 5 wt.% of the ion scavenger, based on the total weight of the thermal interface material. In a first even more particular embodiment, the thermal interface material

comprises: 2 wt.% to 5 wt.% of at least one wax; 0.1 to 0.5 wt.% of at least one antioxidant; 1 wt.% to 2 wt.% of at least one coupling agent; and 0.5 wt.% to 0.6 wt.% of at least one crosslinker based on the total weight of the thermal interface material; wherein the thermal interface material comprises 75 wt.% to 90 wt.% of the at least one thermally conductive filler, based on the total weight of the thermal interface material. In a second even more particular embodiment, the thermal interface material comprises: 2 wt.% to 5 wt.% of at least one wax; 0.1 to 0.5 wt.% of at least one antioxidant; 1 wt.% to 2 wt.% of at least one coupling agent; and 0.5 wt.% to 0.6 wt.% of at least one crosslinker based on the total weight of the thermal interface material; wherein the thermal interface material comprises 75 wt.% to 90 wt.% of the at least one thermally conductive filler, based on the total weight of the thermal interface material. In an even more particular embodiment, the thermal interface material comprises: 1.5 wt.% to 2 wt.% of at least one wax; 0.1 to 1 wt.% of at least one antioxidant; and 0.5 wt.% to 1 wt.% of at least one coupling agent; wherein the thermal interface material comprises 85 wt.% to 95 wt.% of the at least one thermally conductive filler, based on the total weight of the thermal interface material. In another even more particular embodiment, the thermal interface material further comprises 0.1 wt.% to 1 wt.% of at least one crosslinker.

[0020] According to an embodiment of the present disclosure, an electronic components includes a heat sink, an electronic chip, and a thermal interface material having a first surface layer and a second surface layer, the thermal interface material positioned between the heat sink and electronic chip, the thermal interface material including: at least one polymer; at least one thermally conductive filler; and at least one ion scavenger. In some embodiments, the thermal interface material is according to any of the above embodiments. In a first more particular embodiment, the first surface layer is in contact with a surface of the electronic chip and the second surface layer is in contact with the heat sink. In a second more particular embodiment, the electronic component further comprises a heat spreader positioned between the heat sink and the electronic chip, wherein the first surface layer is in contact with a surface of the electronic chip and the second surface layer is in contact with the heat spreader. In a third more particular embodiment, the electronic component further comprises a heat spreader positioned between the heat sink and

the electronic chip, wherein the first surface layer is in contact with a surface of the heat spreader and the second surface layer is in contact with the heat sink.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The above-mentioned and other features and advantages of this disclosure, and the manner of attaining them, will become more apparent and the invention itself will be better understood by reference to the following description of embodiments of the invention taken in conjunction with the accompanying drawings, wherein:

[0022] FIG. 1 schematically illustrates atypical electronics package structure;

[0023] FIG. 2A illustrates a typical degradation mechanism for a TIM;

[0024] FIG. 2B illustrates a metal-catalyzed degradation mechanism; and

[0025] FIG. 3 illustrates an exemplary complexing reaction with an ion scavenger.

[0026] Corresponding reference characters indicate corresponding parts throughout the several views. The exemplifications set out herein illustrate exemplary embodiments of the invention and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

DETAILED DESCRIPTION

A. Thermal Interface Material

[0027] The present invention relates to thermal interface materials (TIMs) useful in transferring heat away from electronic components. In one exemplary embodiment, the TIM comprises a polymer matrix, at least one thermally conductive filler, and at least one ion scavenger.

[0028] In some embodiments, the TIM may optionally include one or more of the following components: coupling agent, antioxidant, phase change material, and other additives.

[0029] Without wishing to be bound by any theory, it is believed that the addition of an ion scavenger inhibits metal ion-induced free radical formation. The ion scavenger is believed to capture and bind metal ions in a complex such that the metal ions no longer have an empty electron orbit and are effectively disabled from initiating the formation of free radicals in the polymer.

[0030] An exemplary complexing reaction is illustrated in FIG. 3. In figure 3, the ion scavenger, illustratively a dihydrazide, reacts with a metal ion, illustratively copper oxide. Without wishing to be bound by any particular theory, it is believed that the metal ion is attracted to one or more lone pairs of electrons on the ion scavenger. The attraction between the metal ion and lone pairs of electrons forms a complex, in which the metal ion no longer has an empty electron orbit and does not participate in the metal-catalyzed reactions of FIG. 2B.

[0031] As illustrated in the Examples presented below, the inclusion of an ion scavenger in the thermal interface material inhibited degradation of the polymer to a surprising extent.

1. *Polymer*

[0032] The TIM includes a polymer, such as an elastomer. In some embodiments, the polymer comprises a silicone rubber, a siloxane rubber, a siloxane copolymer, or other suitable silicone-containing rubber. In some embodiments, the polymer comprises one or more hydrocarbon rubber compounds, including saturated or unsaturated hydrocarbon rubber compounds.

[0033] Exemplary saturated rubbers include ethylene-propylene rubbers (EPR, EPDM), polyethylene/butylene, polyethylene-butylene-styrene, polyethylene-propylene-styrene, hydrogenated polyalkyldiene “mono-ols” (such as hydrogenated polybutadiene mono-ol, hydrogenated polypropadiene mono-ol, hydrogenated polypentadiene mono-ol), hydrogenated polyalkyldiene “diols” (such as hydrogenated polybutadiene diol, hydrogenated polypropadiene diol, hydrogenated polypentadiene diol) and hydrogenated polyisoprene, polyolefin elastomer, and blends thereof. In some embodiments, the polymer is a hydrogenated polybutadiene mono-ol.

[0034] Exemplary unsaturated rubbers include polybutadiene, polyisoprene, polystyrene-butadiene and blends thereof, or blends of saturated and unsaturated rubber compounds.

[0035] The TIM may comprise the one or more polymers in an amount as little as 1wt.%, 2 wt.%, 5 wt. %, 6 wt. %, 7 wt. %, 8 wt. %, as great as 10 wt.%, 20 wt.%, 25 wt.%, 50 wt.%, or greater, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.

2. *Thermally conductive filler*


[0036] The TIM includes one or more thermally conductive fillers. Exemplary thermally conductive fillers include metals, alloys, nonmetals, metal oxides and ceramics, and combinations thereof. The metals include, but are not limited to, aluminum, copper, silver, zinc, nickel, tin, indium, and lead. The nonmetal include, but are not limited to, carbon, graphite, carbon nanotubes, carbon fibers, graphenes, and silicon nitride. The metal oxide or ceramics include but not limited to alumina, aluminum nitride, boron nitride, zinc oxide, and tin oxide.

[0037] The TIM may comprise the one or more thermally conductive fillers in an amount as little as 10 wt.%, 20 wt.%, 25 wt.%, 50 wt.%, as great as 75 wt.%, 80 wt.%, 85 wt.%, 90 wt.%, 95 wt.%, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.


3. *Ion scavenger*

[0038] The TIM includes one or more ion scavengers. Exemplary ion scavengers include nitrogen containing complexing agents, phosphorous containing complexing agents, and hydroxyl carboxylic acid based complexing agents. In some exemplary embodiments, the ion scavenger is selected from acid amide compounds, such as hydrazide or dihydrazide. In some exemplary embodiments, the ion scavenger is selected from triazole compounds, tetrazole compounds, triazene compounds, oxamide compounds, or malonamide compounds. In some exemplary embodiments, the ion scavenger is selected from decamethylenedicarboxylic acid disalicyloylhydrazide; 3-(N-salicyloyl)amino-1,2,4-triazole; and 2', 3-bis [[3-[3, 5-di-tert-butyl-4-hydroxyphenyl] propionic]]propionyl hydrazide.


[0039] In another more particular embodiment, the ion scavenger is a compound according to any of Formula I to Formula XI or combinations thereof:

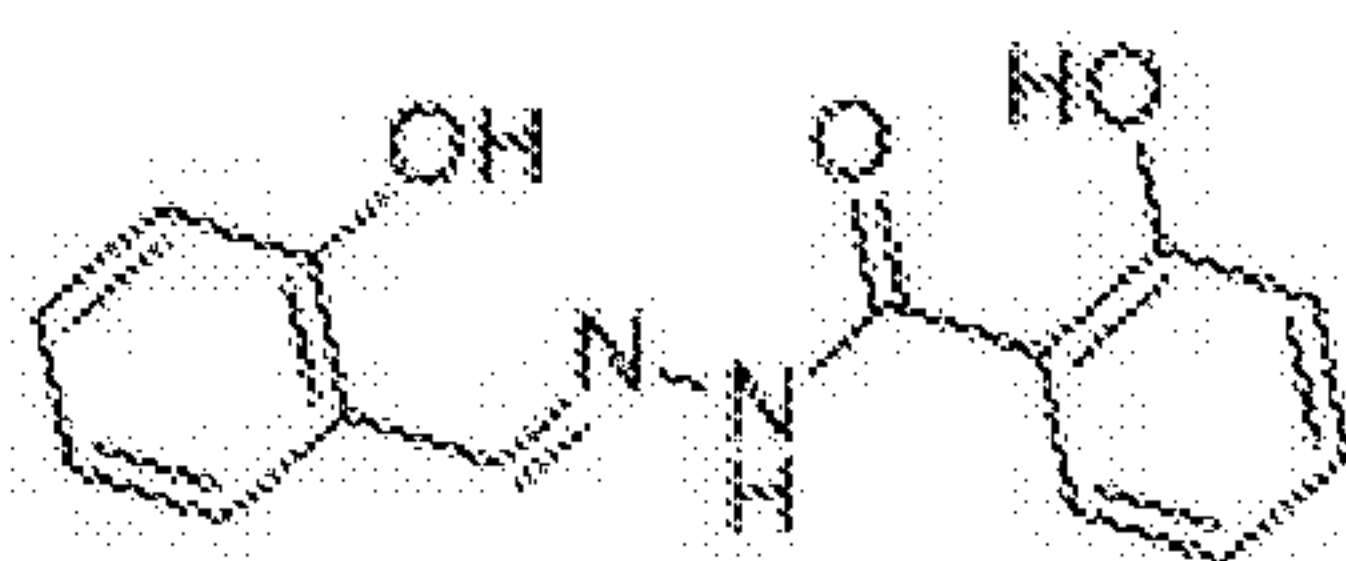


Formula I – N-salicylidene-N'salicyloyl hydrazide

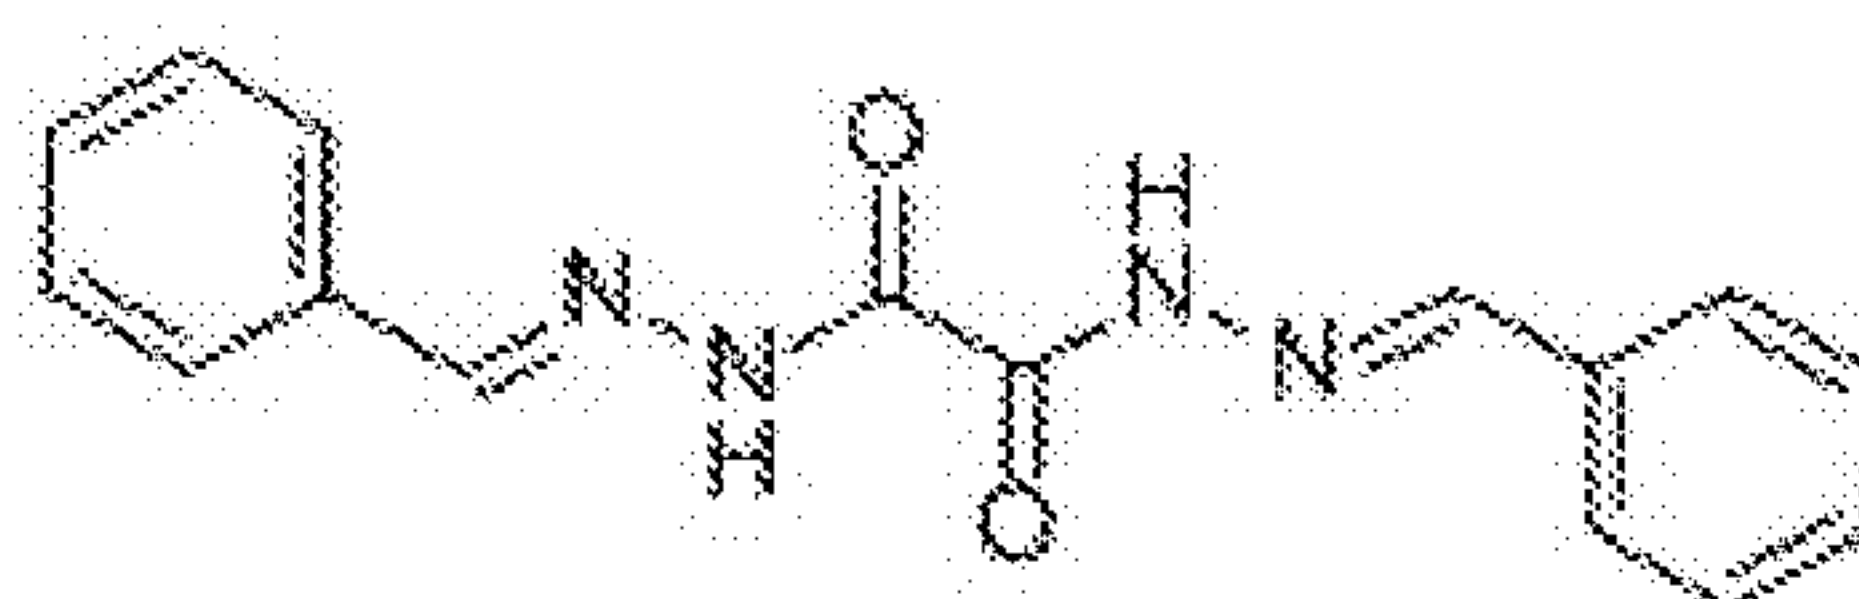


Formula II - oxalyl bis(benzylidenehydrazide)

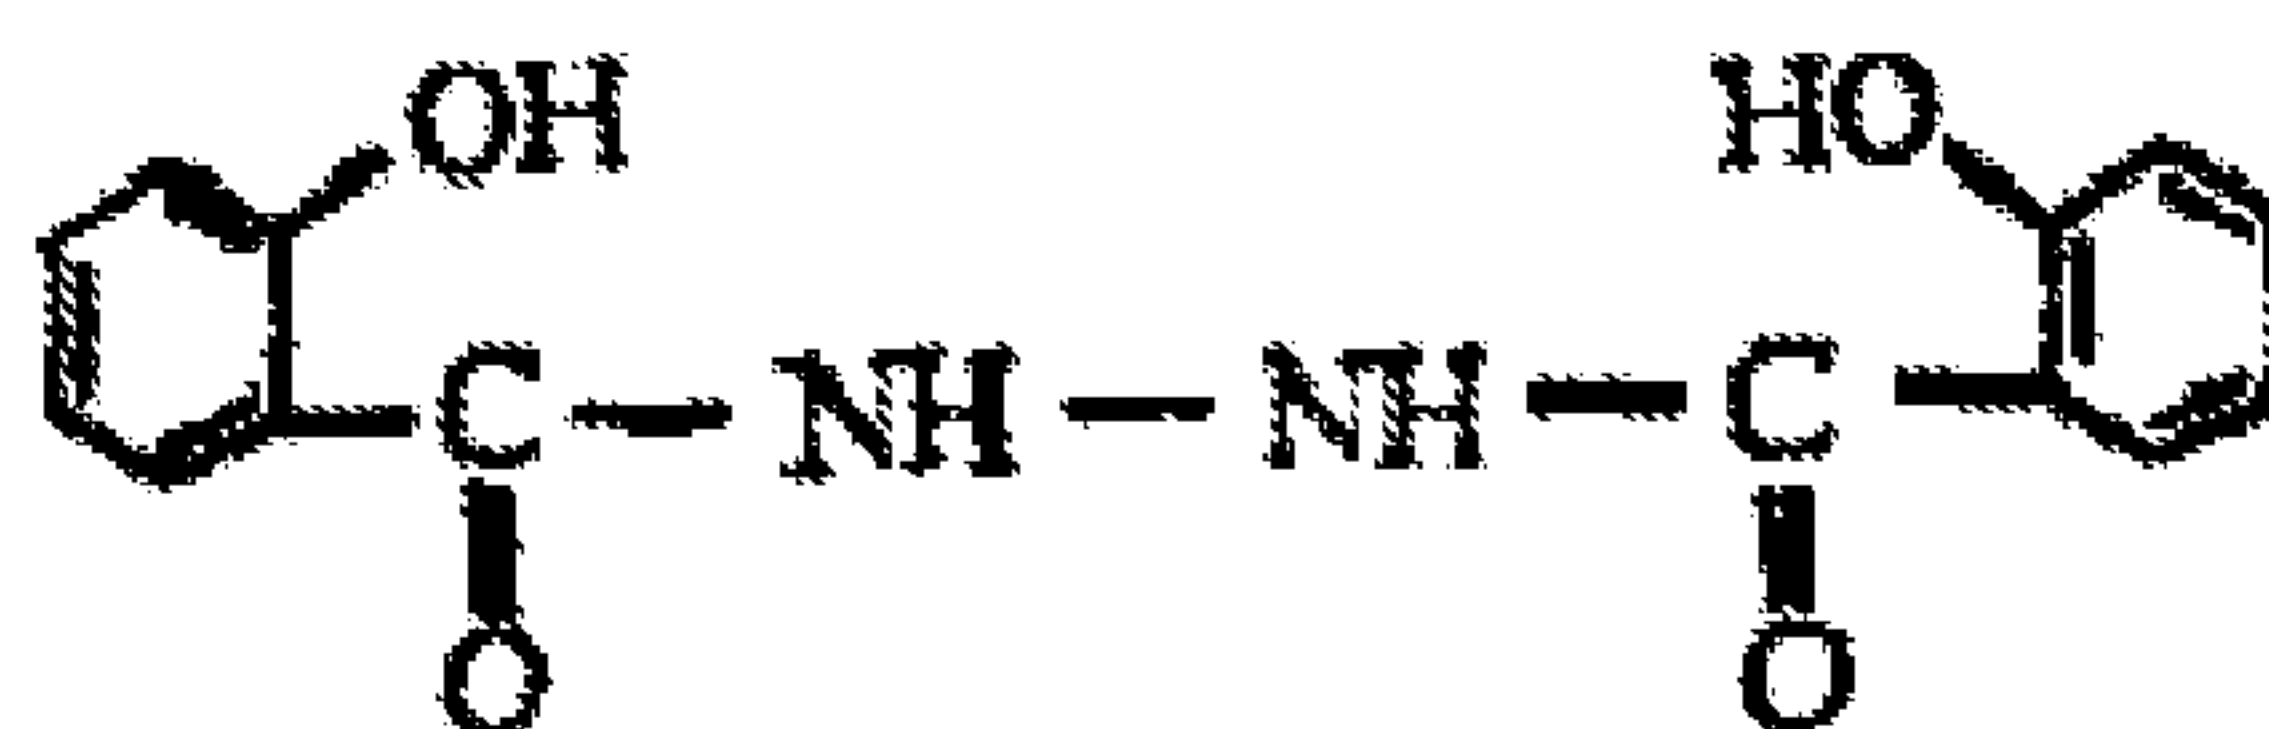


Formula III - N,N'-bis(salicyloyl)hydrazine

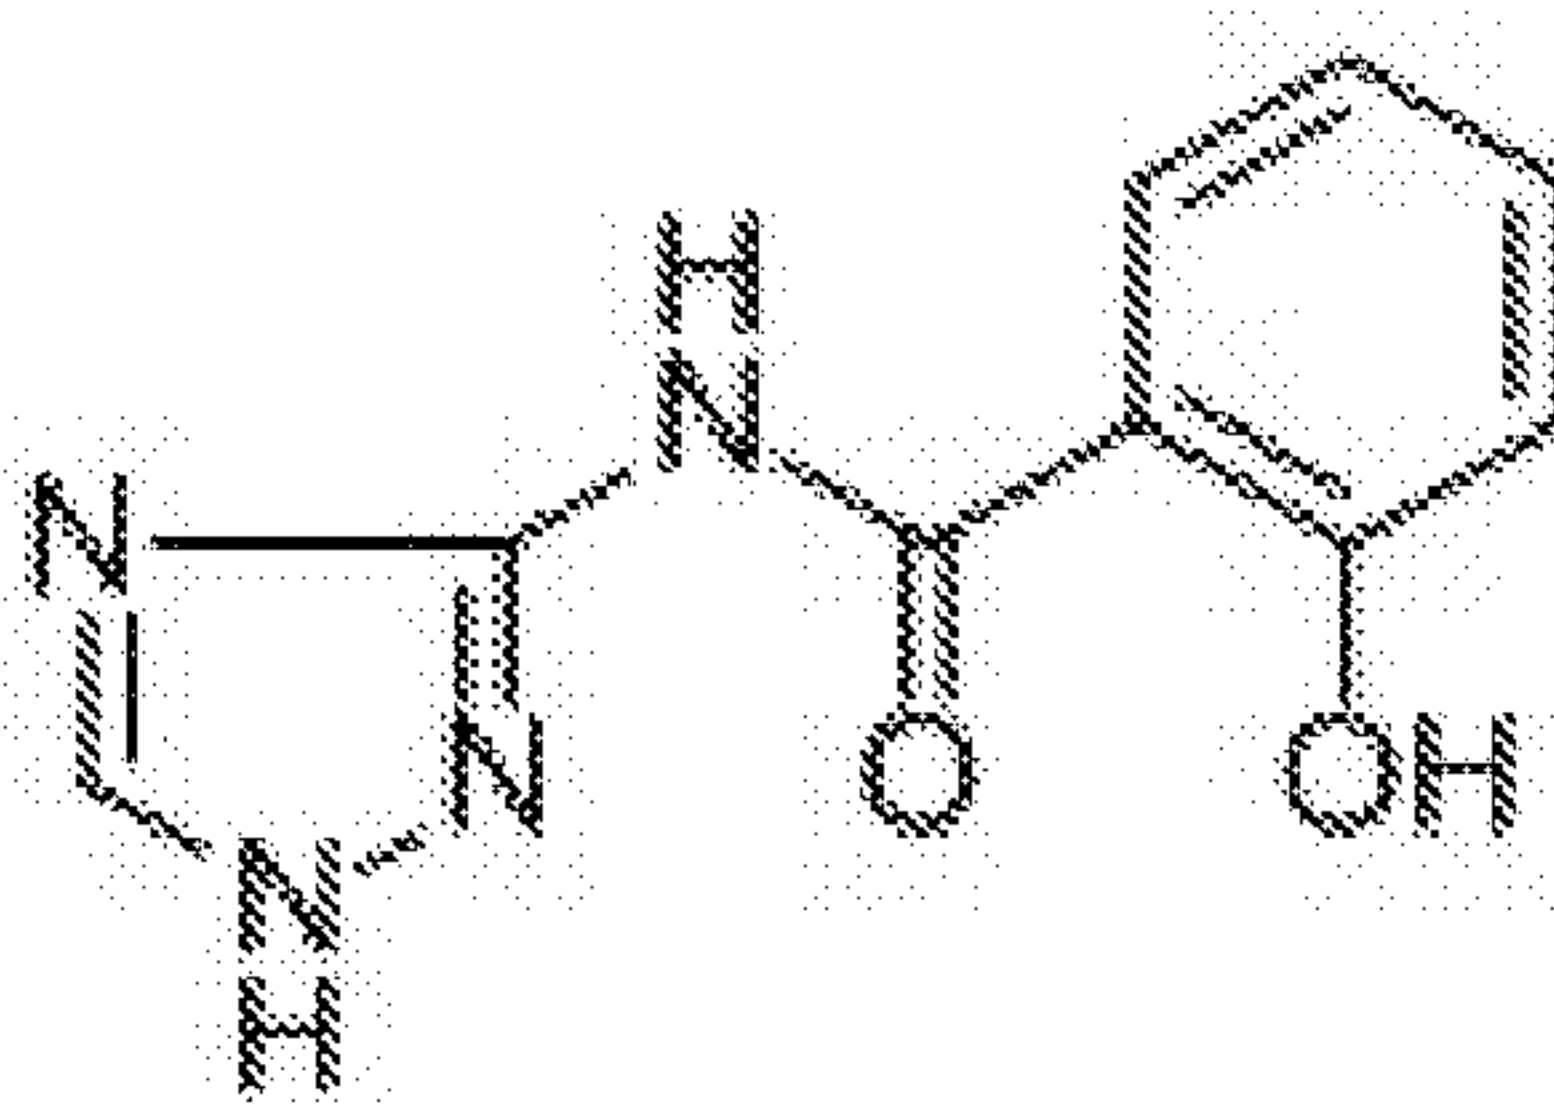


Formula IV - 3-(N-salicyloyl)amino-1,2,4-triazole

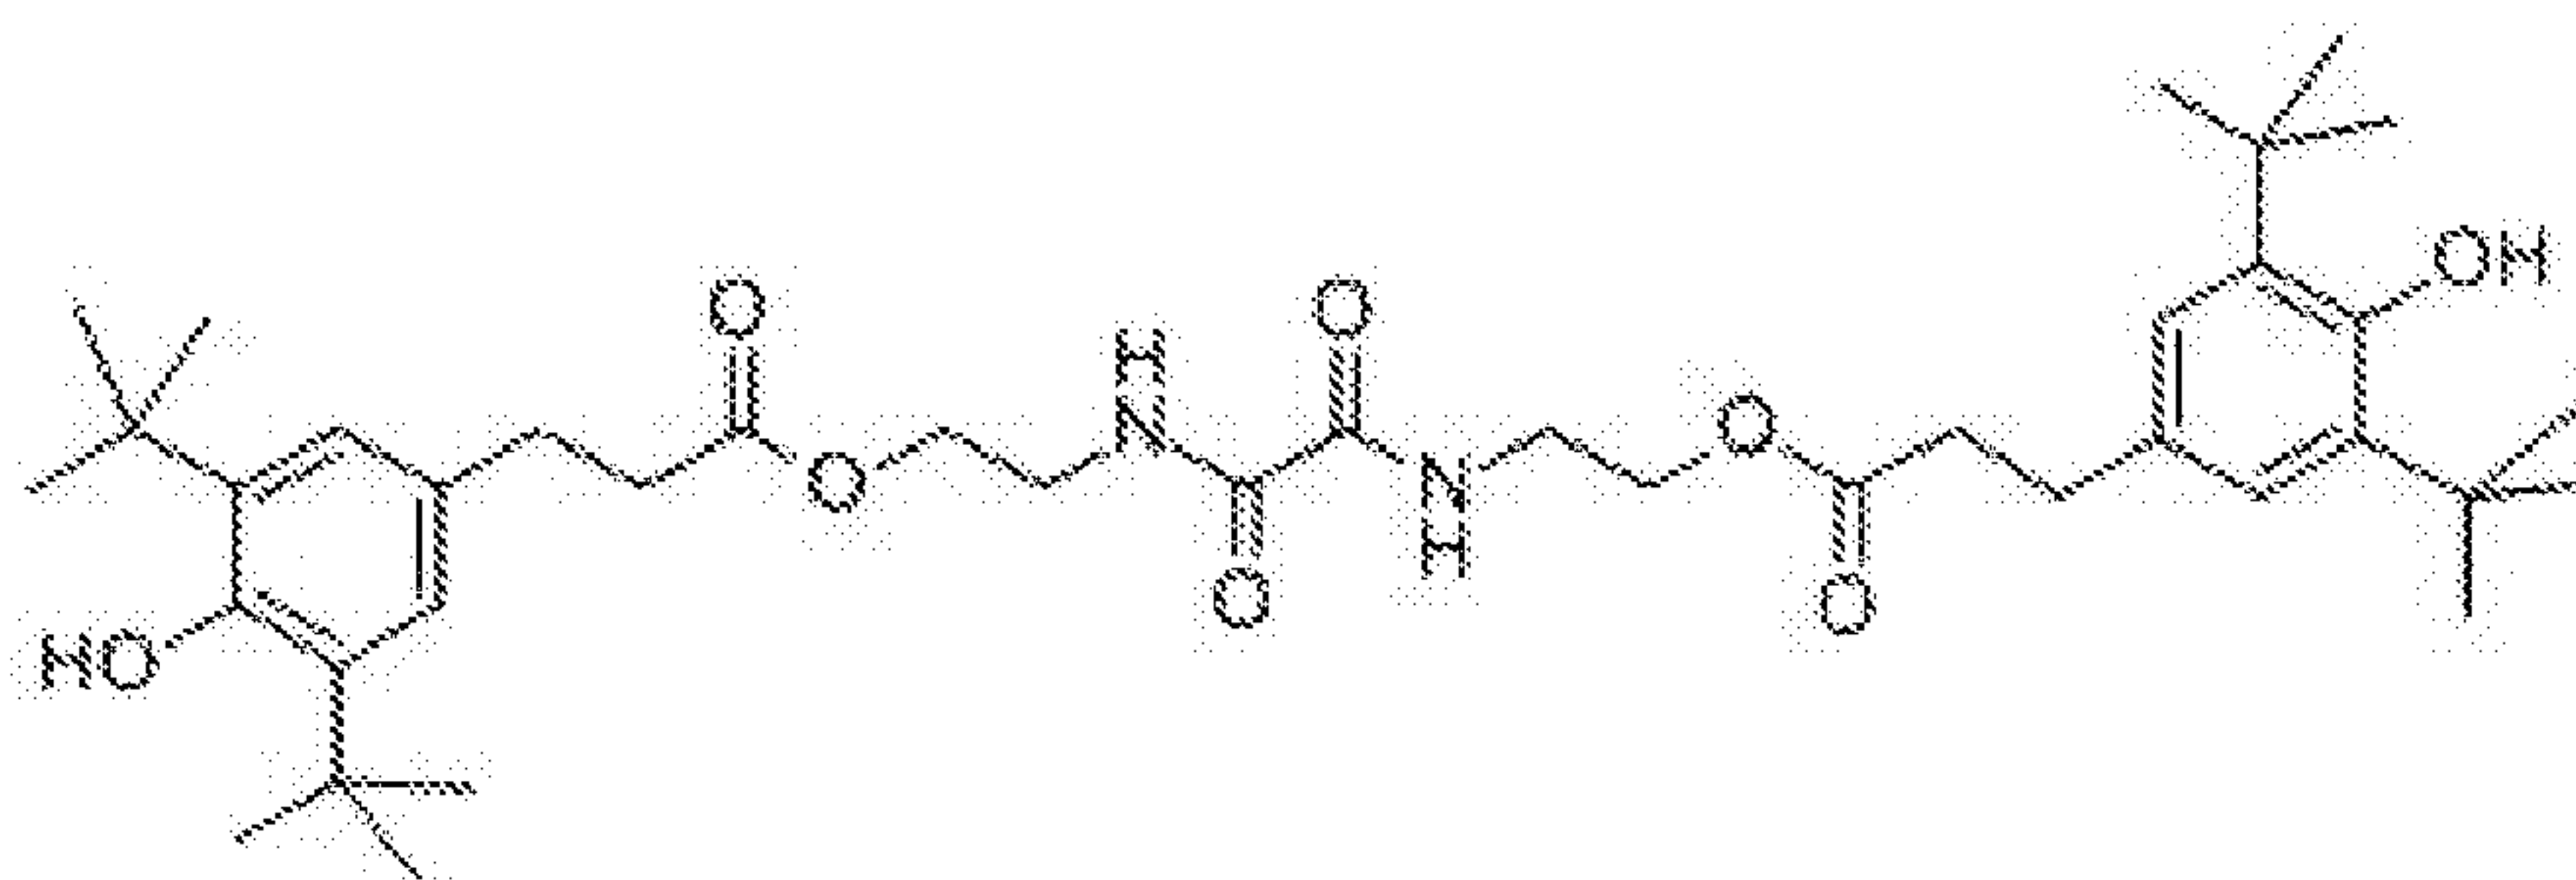


Formula V - 2,2'-oxamido bis[ethyl 3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate]

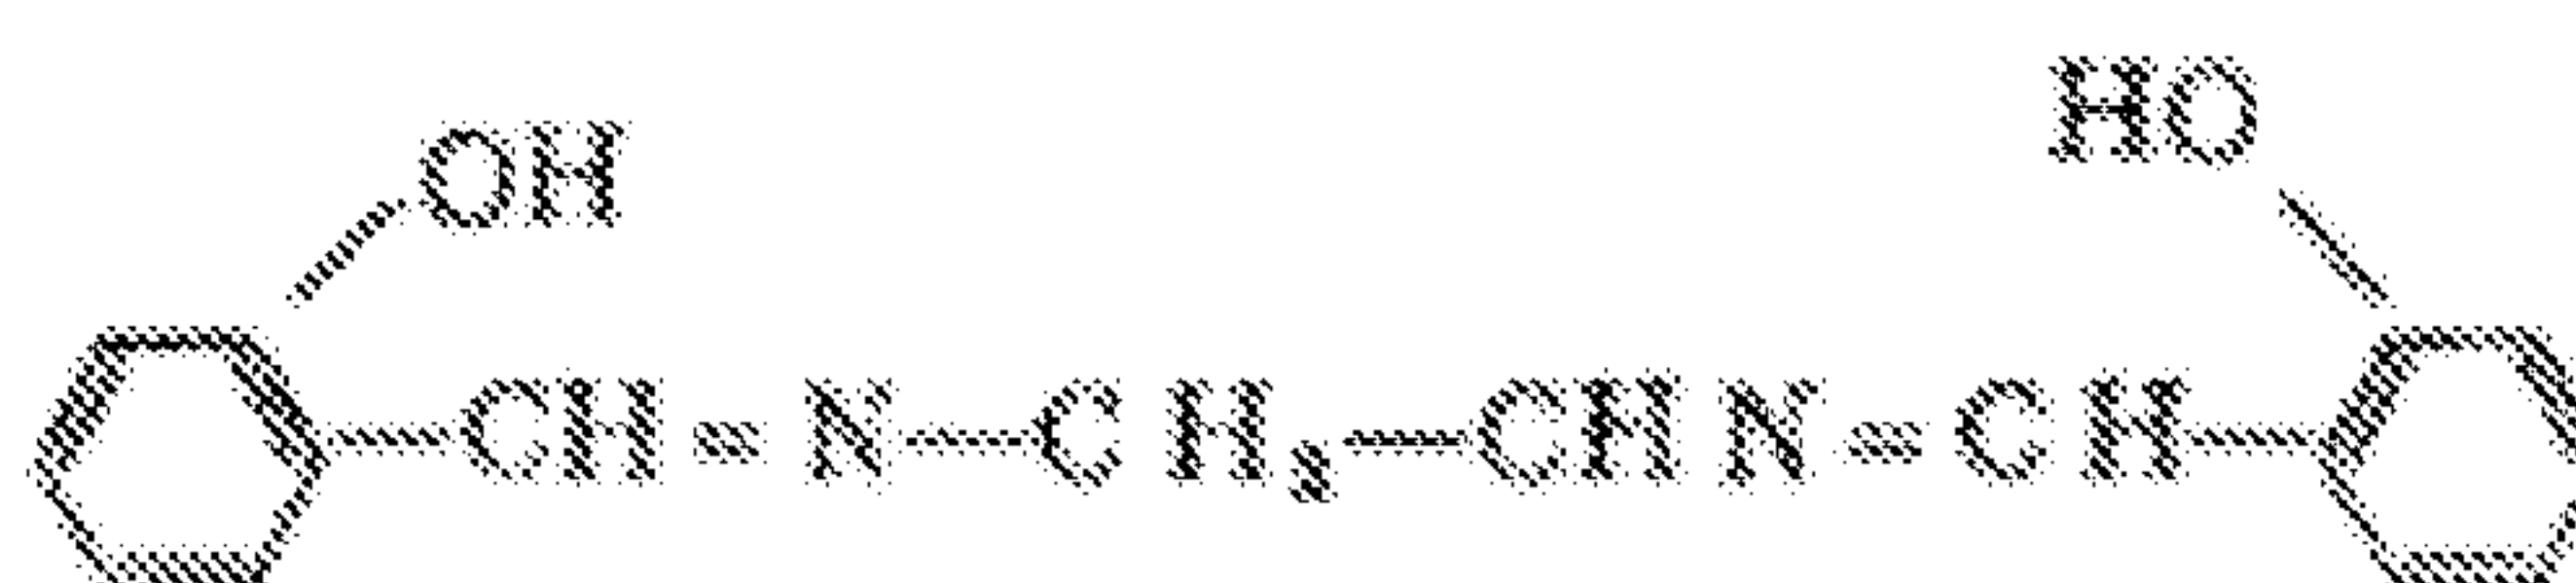


Formula VI - N,N'-bis(salicylidene) ethylenediamine

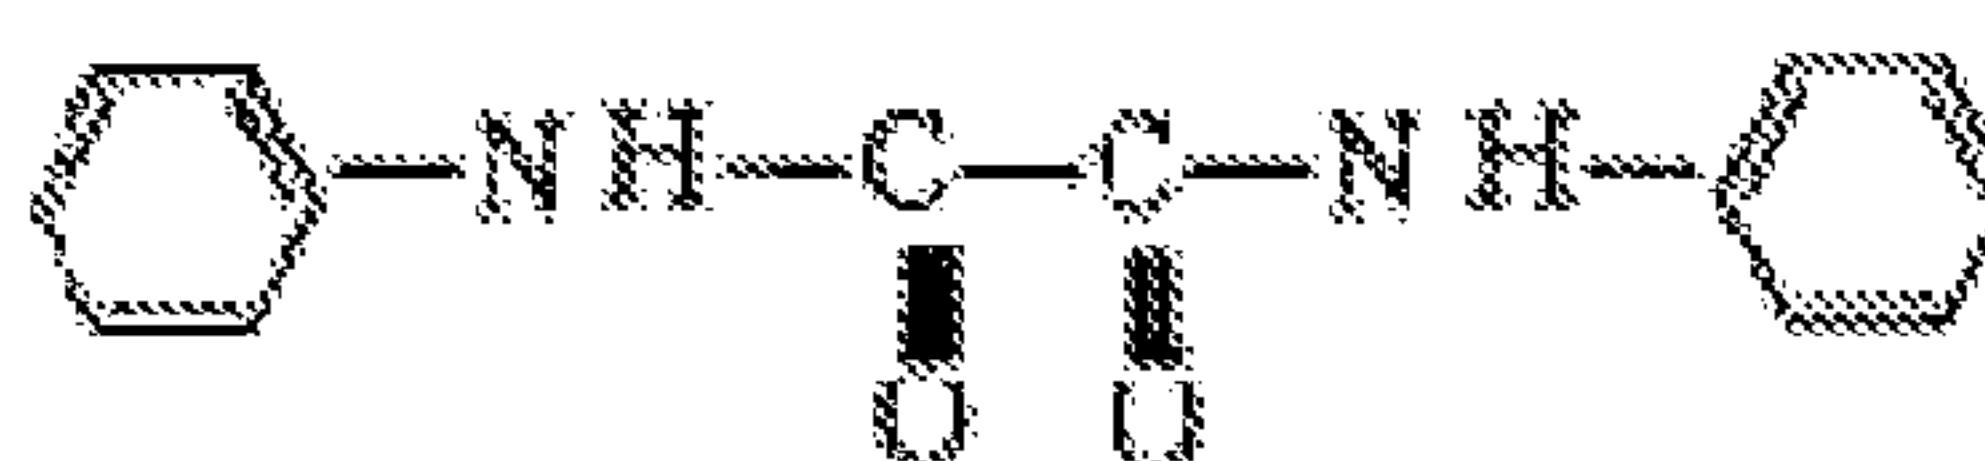


Formula VII – Oxanilide

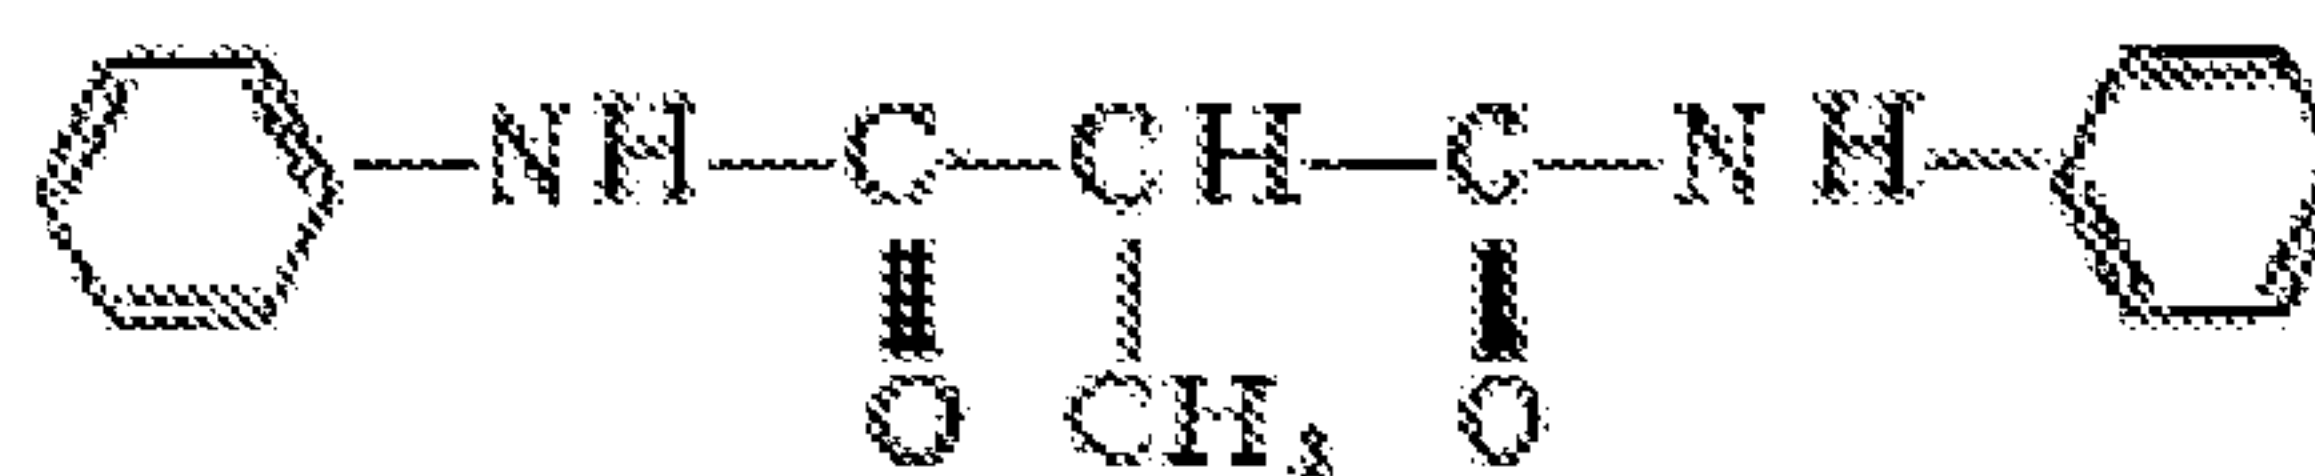


Formula VIII - Methylmalonic acid dianilide

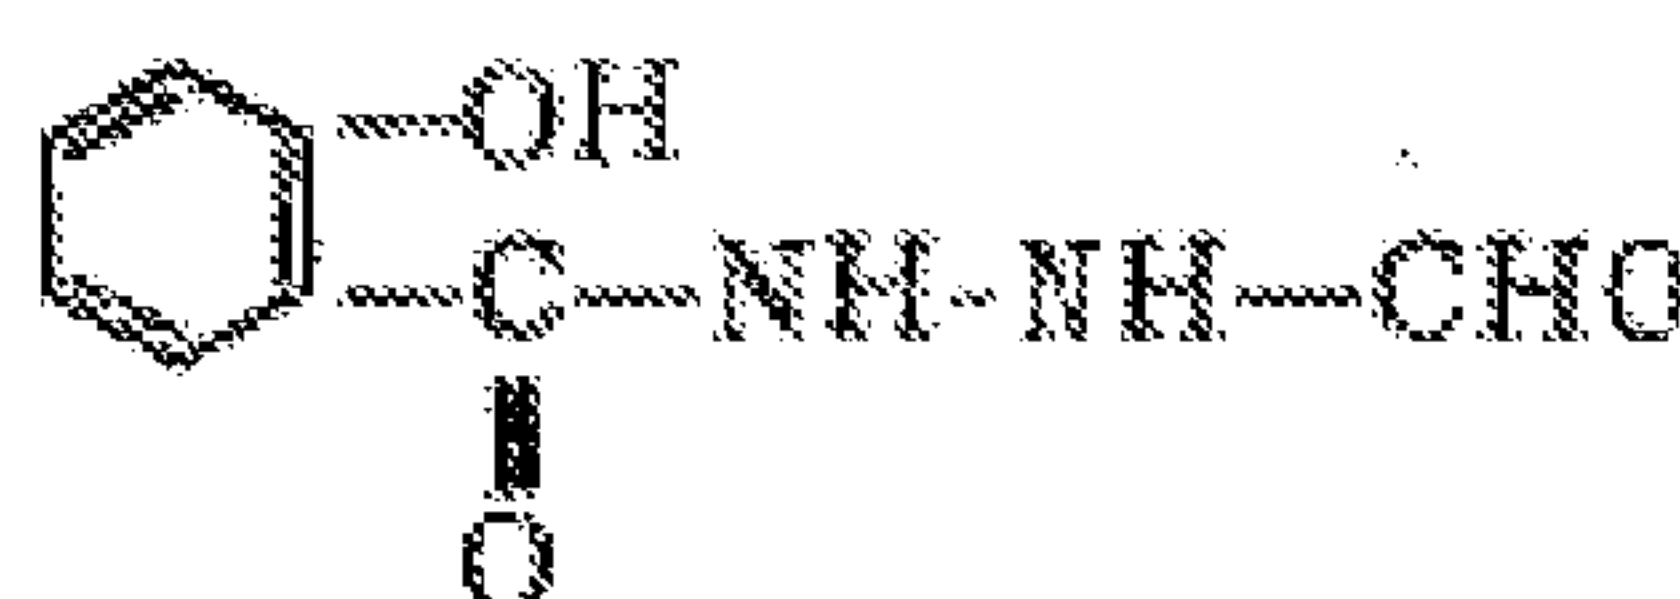

Formula IX - N-formyl-N'-salicyloyl hydrazine

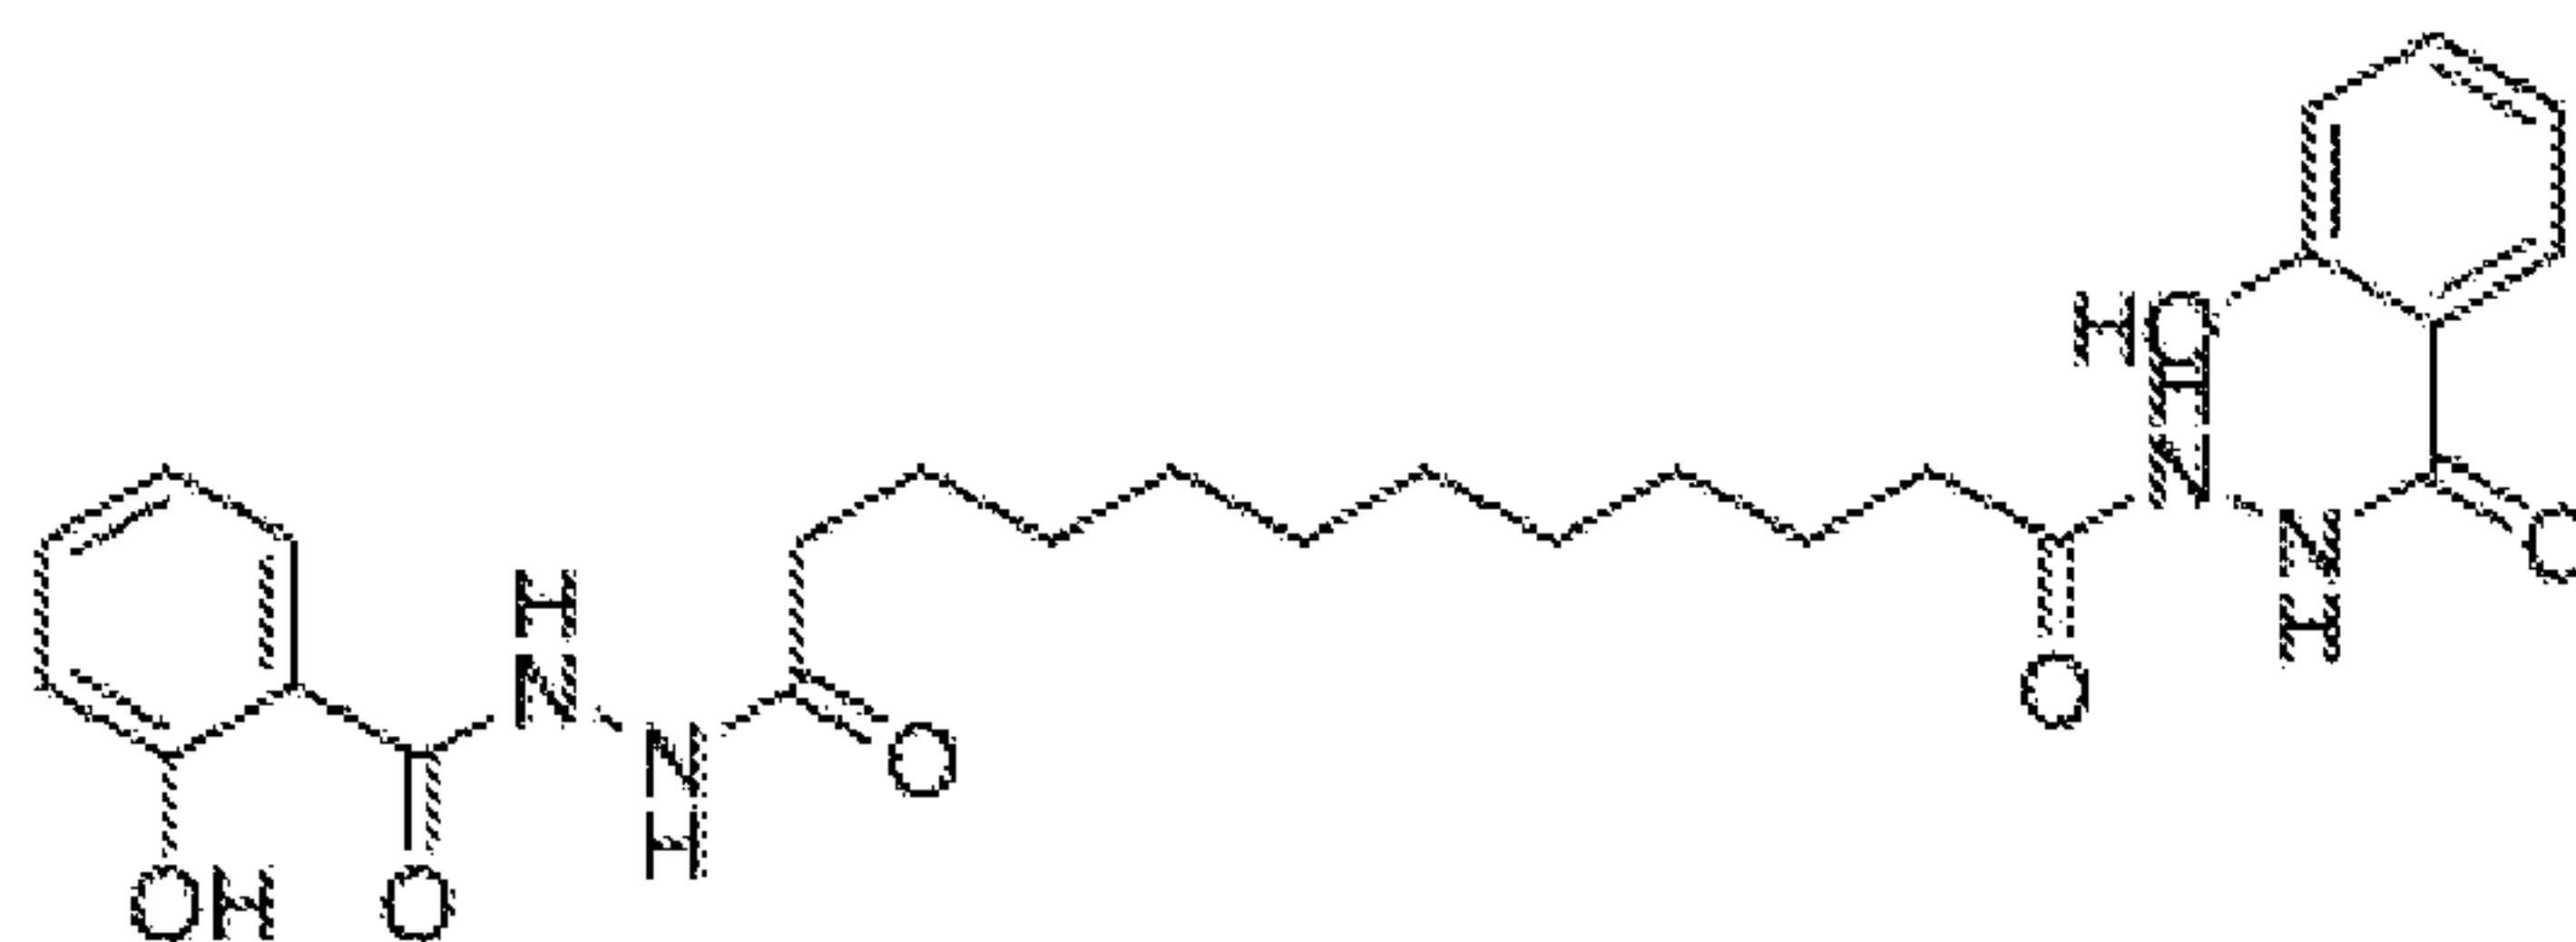

Formula X - Decamethylenedicarboxylic acid disalicyloylhydrazide

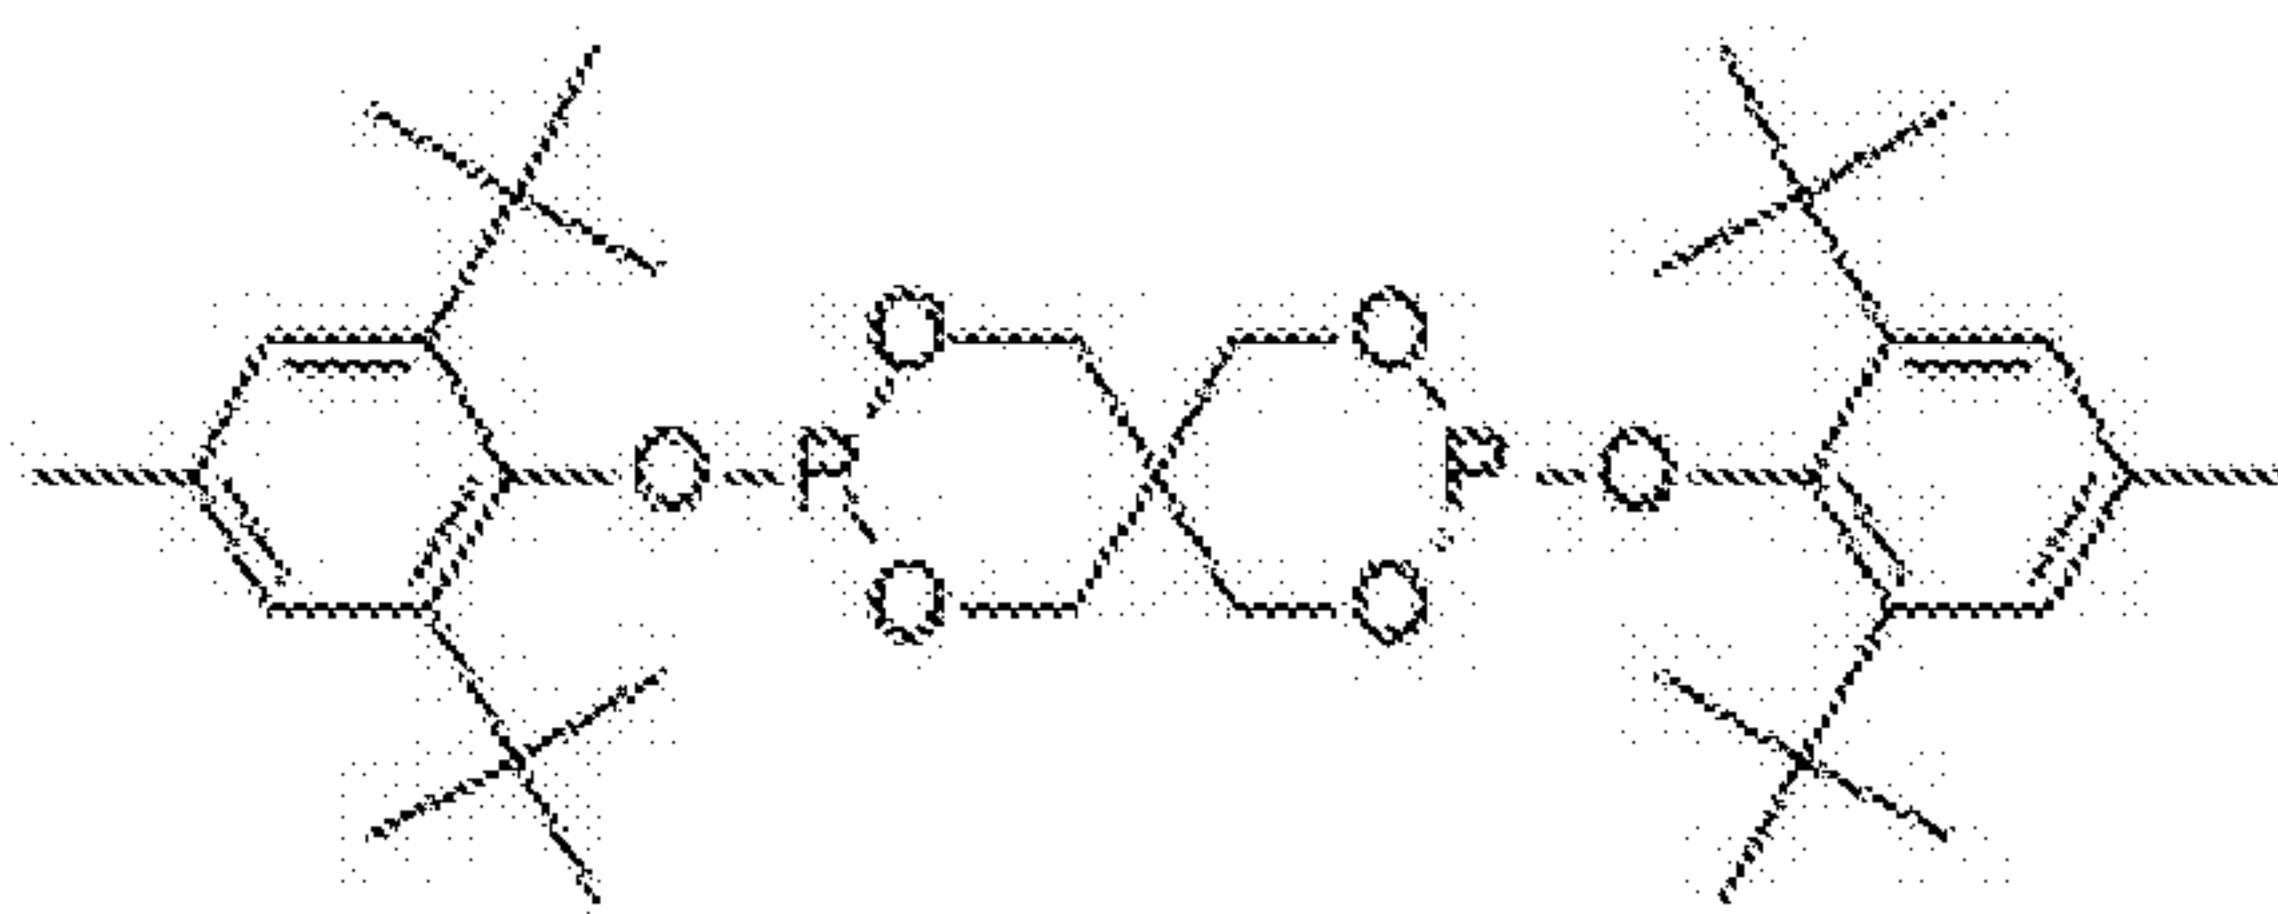

Formula XI - Bis(2,6-di-ter-butyl-4-methylphenyl)pentaerythritol-diphosphite

[0040] The TIM may comprise the one or more ion scavengers in an amount as little as 0.1 wt.%, 0.2 wt.%, 0.5 wt.%, 1 wt.% as great as 1.5 wt.%, 2 wt.%, 5 wt.%, 10 wt.%, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.

4. *Coupling agent*

[0041] In some exemplary embodiments, the TIM comprises one or more coupling agents. Exemplary coupling agents include organometallic compounds, such as titanate coupling agents or zirconate coupling agents, and organic compounds, such as silane coupling agents. Exemplary coupling agents include titanium IV 2,2 (bis 2-propenolatomethyl)butanolato, tris(dioctyl)pyrophosphato-O; zirconium IV 2,2 (bis 2-propenolatomethyl)butanolato, tris(diisooctyl)pyrophosphato-O; titanium IV 2-propanolato, tris(dioctyl)-pyrophosphato-O) adduct with 1 mole of diisooctyl phosphite; titanium IV bis(dioctyl)pyrophosphato-O, oxoethylenediolato, (Adduct), bis(dioctyl) (hydrogen)phosphite-O; titanium IV bis(dioctyl)pyrophosphato-

O, ethylenediolato (adduct), bis(dioctyl)hydrogen phosphite; and zirconium IV 2,2-bis(2-propenolatomethyl) butanolato, cyclo di[2,2-(bis 2-propenolatomethyl) butanolato], pyrophosphato-O,O.

[0042] In some exemplary embodiments, the TIM may comprise the one or more coupling agents in an amount as little as 0.1 wt.%, 0.5 wt.%, 0.67 wt.%, 0.75 wt.%, as great as 1 wt.%, 1.5 wt.%, 2 wt.%, 5 wt.%, 10 wt.%, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.

5. *Antioxidant*

[0043] In some exemplary embodiments, the TIM comprises one or more antioxidants. Exemplary antioxidants include phenol type, amine type antioxidants, or any other suitable type of antioxidant, or a combination thereof. The phenol or amine type antioxidant may also be a sterically hindered phenol or amine type antioxidant. Exemplary phenol type antioxidants include octadecyl 3-(3,5-di-(tert)-butyl-4-hydroxyphenyl) propionate. Exemplary amine type antioxidants include 2,6-di-tert-butyl-4-(4,6-bis(octylthio)-1,3,5-triazin-2-ylamino) phenol. Exemplary sterically hindered antioxidants include sterically hindered sulfur containing phenolic antioxidants. Exemplary antioxidants include the Irganox ® antioxidants available from BASF.

[0044] Although ion scavengers and antioxidants both reduce oxidative degradation of the TIM, ion scavengers are believed to function by capturing and binding metal ions in a complex such that the metal ions no longer have a net charge and are effectively disabled from participating in the metal-catalyzed reactions of FIG. 2B. In contrast, antioxidants are generally believed to function by transferring electrons to an oxidizing agent, such as the radicals of FIG. 2A.

[0045] In some exemplary embodiments, the TIM may comprise the one or more antioxidants in an amount as little as 0.05 wt.%, 0.1 wt.%, 0.5 wt.%, 1 wt.% as great as 1.5 wt.%, 2 wt.%, 5 wt.%, 10 wt.%, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.

6. *Phase change material*

[0046] In some exemplary embodiments, the TIM comprises one or more phase change materials. A phase change material is a material having a melting point or melting point range at or below the operating temperature of a portion of an electronic device in which the TIM is to be used. An exemplary phase change material is a wax. Other exemplary phase change materials include low melting alloys, such as Wood's metal, Field's metal, or a metal or alloy having a melting point between about 20°C and 90°C.

[0047] In some embodiments, the phase change material has a phase change temperature as low as 20°C, 30°C, 40°C, 45°C, 50°C, as high as 60°C, 70°C, 80°C, 90°C, 100°C, 110°C, or within any range defined between any two of the foregoing values. In some more particular embodiments, the phase change material has a phase change temperature as low as 30°C, 40°C, 45°C as high as 50°C, 60°C, 70°C, or within any range defined between any two of the foregoing values.

[0048] Exemplary waxes include polyethylene (PE) wax, paraffin wax, AC-1702, a polyethylene wax, AC-430, a copolymer of ethylene-vinyl acetate wax, and AC-6702, an oxidized polyethylene wax, each available from Honeywell International Inc., a polyethylene wax blended with polytetrafluoroethylene such as PEW-0602F wax available from Nanjing Tianshi New Material Technologies, TAC wax, available from The International Group, Inc., and RT44HC, available from Hangzhou Ruhr Tech.

[0049] The TIM may comprise the one or more phase change materials in an amount as little as 0.5 wt.%, 1 wt.%, 2 wt.%, 3 wt.%, 5 wt.%, 10 wt.%, as great as 20 wt.%, 25 wt.%, 50 wt.%, or greater, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.

7. *Other additives*

[0050] In some exemplary embodiments, the TIM comprises one or more additional additives. Exemplary additives include crosslinkers, such as alkylated melamine formaldehyde resin, pigments, and solvents, such as iosparaffinic fluids. In some exemplary embodiments, the TIM may comprise the one or more additives

in an amount as little as 0.1 wt.%, 0.5 wt.%, 1 wt.% as great as 1.5 wt.%, 2 wt.%, 5 wt.%, 10 wt.%, or within any range defined between any two of the foregoing values, based on the total weight of the TIM.

8. *Exemplary formulations of the Thermal Interface Material*

[0051] In a first non-limiting illustrative embodiment, the TIM includes about 1 wt.% to about 25 wt.% polymer, about 50 wt.% to about 95 wt.% thermally conductive filler, and about 0.1 wt.% to about 5 wt.% ion scavenger. In a more particular embodiment, the ion scavenger is an acid amide compounds, such as hydrazide or dihydrazide. In an even more particular embodiment, the ion scavenger is selected from decanedicarboxylic acid diethylthyl oyl hydrazide; 3-(N-salicyloyl)amino-1,2,4-triazole; and 2', 3-bis [[3-[3, 5-di-tert-butyl-4-hydroxyphenyl] propionic]]propionyl hydrazide

[0052] In a second illustrative embodiment, which is a more particular embodiment of the first illustrative embodiment, the TIM further includes about 1 wt.% to about 5 wt.% of at least one phase change material.

[0053] In a third illustrative embodiment, which is a more particular embodiment of either the first or the second illustrative embodiments, the TIM includes about 0.1 wt.% to about 5 wt.% of at least one crosslinker.

[0054] In a fourth illustrative embodiment, which is a more particular embodiment of any of the first to third illustrative embodiments, the TIM includes about 0.1 wt.% to about 5 wt.% of at least one coupling agent.

[0055] In a fifth illustrative embodiment, which is a more particular embodiment of any of the first to fourth illustrative embodiments, the TIM includes about 0.1 wt.% to about 5 wt.% of at least one phase change material.

9. *Exemplary properties of the Thermal Interface Material*

[0056] In some exemplary embodiments, a material thermal interface material including an ion scavenger has a resistance to degradation greater than a similarly formulated thermal interface material not including an ion scavenger. The resistance to degradation may be characterized by an Oxygen Induced Time (OIT) test, such as determined by ASTM D3859-07, the disclosures of which are hereby

incorporated by reference in their entirety. Longer OIT times indicate better thermal stability.

[0057] In some exemplary embodiments, the OIT of a TIM including an ion scavenger is as little as 20% greater, 25% greater, 30% greater, 50% greater, 75% greater, 100% greater, as great as 150% greater, 200% greater, 300% greater, 375% greater, 400% greater, 500% greater, or more than the OIT of a similarly formulated TIM not including an ion scavenger, or within any range defined between any two of the foregoing values.

[0058] In some exemplary embodiments, the OIT of a TIM including an ion scavenger is as little as 30 minutes, 45 minutes, 60 minutes, as great as 75 minutes, 90 minutes, 120 minutes, 150 minutes, or greater or within any range defined between any two of the foregoing values.

[0059] In some exemplary embodiments, the OIT of a TIM in contact with a metal surface is as little as 15 minutes, 20 minutes, 30 minutes, 45 minutes, as great as 60 minutes, 75 minutes, 90 minutes, 120 minutes, 150 minutes, or greater or within any range defined between any two of the foregoing values.

[0060] In some exemplary embodiments, the thermal interface material has a thermal impedance as little as $0.05^{\circ}\text{Ccm}^2/\text{W}$, $0.08^{\circ}\text{Ccm}^2/\text{W}$, $0.09^{\circ}\text{Ccm}^2/\text{W}$, as high as $0.1^{\circ}\text{Ccm}^2/\text{W}$, $0.5^{\circ}\text{C cm}^2/\text{W}$, $1^{\circ}\text{C cm}^2/\text{W}$, $2^{\circ}\text{C cm}^2/\text{W}$, or within any range defined between any two of the foregoing values.

[0061] In some exemplary embodiments, the thermal interface material has an unchanged thermal impedance and no visible degradation of the TIM after undergoing a Highly Accelerated Stress Test (HAST) conditioning at a temperature of 120°C , a pressure of 2 atmospheres, and a relative humidity of 85%. The thermal impedance may be unchanged for as short as 90 hours, 120 hours, 150 hours, as long as 180 hours, 190 hours, 200 hours, or longer, or within any range defined between any two of the foregoing values.

[0062] In some exemplary embodiments, the thermal interface material has an unchanged thermal impedance and no visible degradation of the TIM after undergoing a baking test conditioning at a temperature of 150°C . The thermal

impedance may be unchanged for as short as 1000 hours, 1500 hours, 2000 hours, as long as 2200 hours, 2500 hours, 2800 hours, or longer, or within any range defined between any two of the foregoing values.

B. Methods of forming a Thermal Interface Material

[0063] In some exemplary embodiments, the TIM is prepared by combining the individual components in a heated mixer and blending the composition together. The blended composition may then be baked.

[0064] In some exemplary embodiments, the TIM is baked at a temperature as low as 25°C, 50°C, 75°C, 80°C, as high as 100°C, 125°C, 150°C, 170°C, or within any range defined between any two of the foregoing values. In some exemplary embodiments, the TIM is baked for as little as 0.5 minutes, 1 minute, 30 minutes, 1 hour, 2 hours, as long as 8 hours, 12 hours, 24 hours, 36, hours, 48 hours, or within any range defined between any two of the foregoing values. An exemplary baking condition is 80°C for 30 minutes.

C. Applications utilizing the Thermal Interface Material

[0065] Referring again to FIG. 1, in some exemplary embodiments, the thermal interface material including an ion scavenger is positioned as a TIM 1 between an electronic component 12 and a heat spreader 14, as indicated by TIM 18. In some exemplary embodiments, the thermal interface material including an ion scavenger is positioned as a TIM 2 between an a heat spreader 14 and a heat sink 16, as indicated by TIM 20. In some exemplary embodiments, the thermal interface material including an ion scavenger is positioned as a TIM 1.5 (not shown) between an electronic component 12 and a heat sink 16.

EXAMPLES

[0066] TIMs were prepared according to the formulations provided in Table 1.

TABLE 1

Formulations(wt.%) for Example 1 and Comparative Examples 1 and 2

	<i>Ex. 1</i>	<i>Comp. Ex. 1</i>	<i>Comp. Ex. 2</i>
--	---------------------	---------------------------	---------------------------

Elastomer	6.22	6.22	6.22
Wax	1.78	1.78	1.78
Total antioxidant	0.5	0.5	0.5
Titanium coupling agent	0.67	0.67	0.67
Aluminum powder thermally conductive filler	90.83	90.83	90.83
Crosslinker	0.6	-	0.6
Ion scavenger	0.5	-	-

[0067] To prepare example 1, 6.22 parts (weight) Kraton elastomer (a hydroxyl-terminated ethylene butylene copolymer, specialty mono-ol), 1.78 parts of a microcrystalline wax with a melting point of about 45°C, 0.5 total parts of an antioxidant mixture were combined and blended in a heated mixer until the combination had melted and had a substantially homogeneous appearance. 0.67 parts Titanium IV 2, 2 (bis 2-propenolatomethyl) butanolato, tris(dioctyl)pyrophosphato-O coupling agent was added, and the combination was blended, again until the combination had a substantially homogeneous appearance. 90.83parts of Aluminum powder, a thermally conductive filler, was added, and the combination was again blended until it had a substantially homogeneous appearance. Finally 0.6 parts of a Cymel crosslinker resin(alkylated melamine formaldehyde resin) and 0.5 parts of an ion scavenger Songnox® 1024 were added. The final combination had a homogeneous appearance.

[0068] To prepare comparative example 1, 6.22 parts Kraton elastomer (a hydroxyl-terminated ethylene butylene copolymer, specialty mono-ol), 1.78 parts of a microcrystalline wax with a melting point of about 45°C, and 0.50wt % antioxidant were combined and blended in a heated mixer until the combination had melted and had a substantially homogeneous appearance. 0.67 parts Titanium IV 2, 2 (bis 2-propenolatomethyl) butanolato, tris(dioctyl)pyrophosphato-O was added, and the combination was blended, again until the combination had a substantially homogeneous appearance. 90.83 parts of Aluminum powder was added, and the combination was again blended until it had a substantially homogeneous appearance.

[0069] To prepare comparative example 2, 6.22 parts Kraton elastomer (a hydroxyl-terminated ethylene butylene copolymer, specialty mono-ol), 1.78 parts of a microcrystalline wax with a melting point of about 45°C, and 0.50wt % antioxidant were combined and blended in a heated mixer until the combination had melted and had a substantially homogeneous appearance. 0.67 parts Titanium IV 2, 2 (bis 2-propenolatomethyl) butanolato, tris(dioctyl)pyrophosphato-O was added, and the combination was blended, again until the combination had a substantially homogeneous appearance. 90.83 parts of Aluminum powder was added, and the combination was again blended until it had a substantially homogeneous appearance. Finally 0.60 parts Cymel resin(alkylated melamine formaldehyde resin) was added. The final combination had a homogeneous appearance.

[0070] For each TIM, a Highly Accelerated Stress Test (HAST) was performed. The TIM was taped between liner films at 90°C for 15 minutes, and cut to a 10mm square. The liners were removed and the square sample placed between a nickel-coated copper spreader and a silicon die, creating a "test sandwich." The sample was conditioned at a temperature of a temperature of 130°C, a pressure of 2 atmospheres, and a relative humidity of 85% for 96-192 hours using an environmental chamber supplied by ESPEC. The thermal impedance of the sample was determined before and after the sample conditioning using flash diffusivity of the test sandwich. Flash diffusivity was determined using a Netzsch LFA 447 equipment with a Xenon light source.

[0071] The material was periodically checked, and the HAST time was recorded as the final time in which the material met the following criteria: (1) There was no significant visible degradation of the TIM, and no delamination between the TIM and the nickel-coated copper spreader or between the TIM and the silicon die. (2) In addition, the thermal performance did not significantly degrade (testing for thermal performance is further described below). Specifically, the thermal impedance of the test sandwich was the same after HAST testing compared to before (both values were 0.08-0.09°C.cm/W).

[0072] For each TIM, a baking test was performed. The TIM was taped between liner films at 90°C for 15 minutes, and cut to a 10mm square. The liners

were removed and the square sample placed between a nickel-coated copper spreader and a silicon die, creating a "test sandwich." The sample was subjected to a 150°C baking oven, for 200 to 3000 hours using an Oven D2F-6050, supplied by Shanghai JINGHONG. The thermal impedance of the sample was determined before and after the sample conditioning using flash diffusivity of the test sandwich. Flash diffusivity was determined using a Netzsch LFA 447 equipment with a Xenon light source.

[0073] The material was periodically checked, and the baking time was recorded as the final time in which the material met the following criteria: (1) There was no significant visible degradation of the TIM, and no delamination between the TIM and the nickel-coated copper spreader or between the TIM and the silicon die. (2) In addition, the thermal performance did not significantly degrade (testing for thermal performance is further described below). Specifically, the thermal impedance of the test sandwich was the same after baking test compared to before (both values were 0.08-0.09°C.cm/W).

[0074] For each TIM, an Oxygen Induced Time (OIT) test was conducted following by ASTM D3859-07 standard. OIT is a standardized test performed in a DSC(Differential Scanning Calorimeter) which measures the level of thermal stabilization of the material tested. Longer time indicates better thermal stability. 10-30mg mixed samples described above, will go OIT test through DSC Q100, supplied by TA instrument. The test condition is under 50ml/min O₂ flow rate and 210°C peak temperature (with 20°C/min ramp up).

[0075] The OIT, HAST and baking test results are presented in Table 2:

TABLE 2

Performance Test Results

<i>Performance</i>	<i>Comp. Ex. 1</i>	<i>Comp. Ex. 2</i>	<i>Ex. 1</i>
Average TI at time zero (°C.cm ² /W)	0.08-0.09	0.08-0.09	0.08-0.09
Oxidative Induction Time - 210°C (min)	35.85	42.15	77.54
HAST - 130°C, 85%RH, 2atm (hours)	96	192	> 192
150°C baking test (hours)	1000	1500	>= 2800

[0076] As shown in Table 2, Example I had similar initial thermal impedance

as Comparative Example I and Comparative Example II, and similar or better performance in the HAST test. In addition, Example I had significantly longer OIT and baking test results times than either Comparative Example I or Comparative Example II.

[0077] A second set of TIMs were prepared according to the formulations provided in Table 3.

TABLE 3

Formulations (wt.%) for Examples 2-4 and Comparative Examples 4-5

	<i>Ex. 2</i>	<i>Comp. Ex. 3</i>	<i>Ex. 3</i>	<i>Ex. 4</i>	<i>Comp. Ex. 4</i>
PCM45F	100	100	-	-	-
Elastomer	-	-	12.5	12.5	12.5
Titanium coupling agent	-	-	1.5	1.5	1.5
Aluminum powder thermally conductive filler	-	-	71.66	71.66	71.66
Zinc oxide powder thermally conductive filler	-	-	14.34	14.34	14.34
Ion scavenger	0.6	-	0.6	1.8	-

[0078] To prepare example 2, 100parts PCM45F (supplied by Honeywell International, Inc.), a TIM material including a phase change material, and 0.6 parts Songnox® 1024 (supplied by SONGWON) were combined and blended in a heated mixer until the combination had melted and had a substantially homogeneous appearance.

[0079] Comparative example 3 was PCM45F without the ion scavenger.

[0080] To prepare example 3, 12.5 parts of Kraton elastomer (a hydroxyl-terminated ethylene butylene copolymer, specialty mono-ol) , 1.5 parts of Titanium IV 2-propanolato, tris isooctadecanoato-O ,and 0.6 parts ion scavenger Songnox® 1024 were combined and blended until the combination had a substantially homogeneous appearance. 71.66 parts of Aluminum powder, and 14.34 parts of Zinc oxide powder were added, and the combination was again blended until it had a substantially homogeneous appearance.

[0081] To prepare example 4, 12.5 parts of Kraton elastomer (a hydroxyl-terminated ethylene butylene copolymer, specialty mono-ol) , 1.5 parts of Titanium IV 2-propanolato, tris isooctadecanoato-O, and 1.8 parts ion scavenger Songnox® 1024 were combined and blended until the combination had a substantially homogeneous appearance. 71.66 parts of Aluminum powder, and 14.34 parts of Zinc oxide powder were added, and the combination was again blended until it had a substantially homogeneous appearance.

[0082] To prepare comparative example 4, 12.5 parts of Kraton elastomer (a hydroxyl-terminated ethylene butylene copolymer, specialty mono-ol) , and 1.5 parts of Titanium IV 2-propanolato, tris isooctadecanoato-O were combined and blended until the combination had a substantially homogeneous appearance. 71.66 parts of Aluminum powder, and 14.34 parts of Zinc oxide powder were added, and the combination was again blended until it had a substantially homogeneous appearance.

[0083] For each TIM, an Oxygen Induced Time (OIT) test was conducted following by ASTM D3859-07 standard as discussed above. OIT test results of above materials are presented in Table 4:

TABLE 4
OIT Test Results


Samples	OIT Result (min)
Ex. 2	57.92
Comp. Ex. 3	24.56
Ex. 3	92.58
Ex. 4	145.50
Comp. Ex. 4	23.28

[0084] As shown in Table 4, Example 2 had significantly longer OIT times than Comparative Example 3, and Examples 3 and 4 had significantly longer OIT times than Comparative Example 4. In addition, Example 4, which had twice the ion scavenger as Example 3, had significantly longer OIT times than Example 3.


[0085] While this invention has been described as having exemplary designs, the present invention can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains and which fall within the limits of the appended claims.

CLAIMS


1. A thermal interface material comprising:
at least one polymer;
at least one thermally conductive filler; and
at least one ion scavenger.
2. The thermal interface material of claim 1, wherein the ion scavenger is a complexing agent selected from the group consisting of: nitrogen containing complexing agents, phosphorus containing complexing agents, and hydroxyl carboxylic acid based complexing agents, and combinations of the foregoing.
3. The thermal interface material of claim 1, wherein the ion scavenger is selected from the group consisting of: an acid amide compound, a triazole compound, a tetrazole compound, a triazene compound, an oxamide compounds, a malonamide compound, and combinations of the foregoing.
4. The thermal interface material of claim 1, wherein the ion scavenger is an acid amide compound.
5. The thermal interface material of claim 1, wherein the ion scavenger is a selected from the group consisting of hydrazide, dihydrazide and combinations of the foregoing.
6. The thermal interface material of claim 1, wherein the ion scavenger is selected from the group consisting of: decamethylenedicarboxylic acid disalicyloylhydrazide; 3-(N-salicyloyl)amino-1,2,4-triazole; and 2', 3-bis [[3-[3, 5-di-tert-butyl-4-hydroxyphenyl] propionic]]propionyl hydrazide.
- [0086]** 7. The thermal interface material of claim 1, wherein the ion scavenger a compound according to a formula selected from the group consisting of Formula I to Formula XI or combinations thereof:

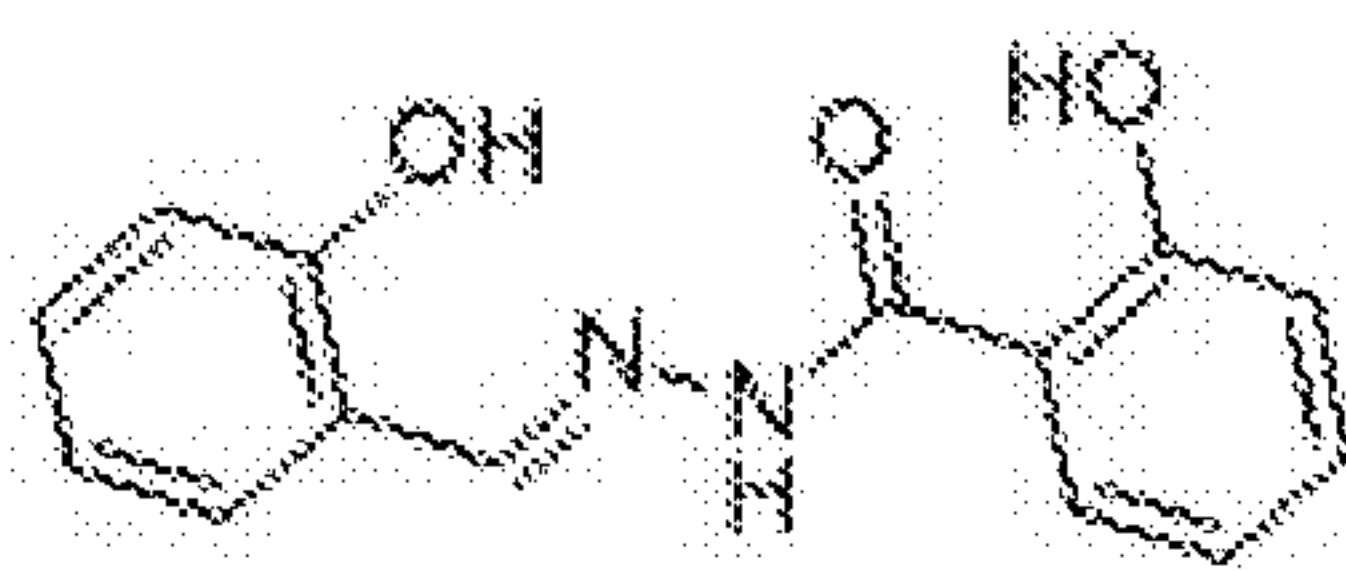


Formula I – N-salicylidene-N'salicyloyl hydrazide

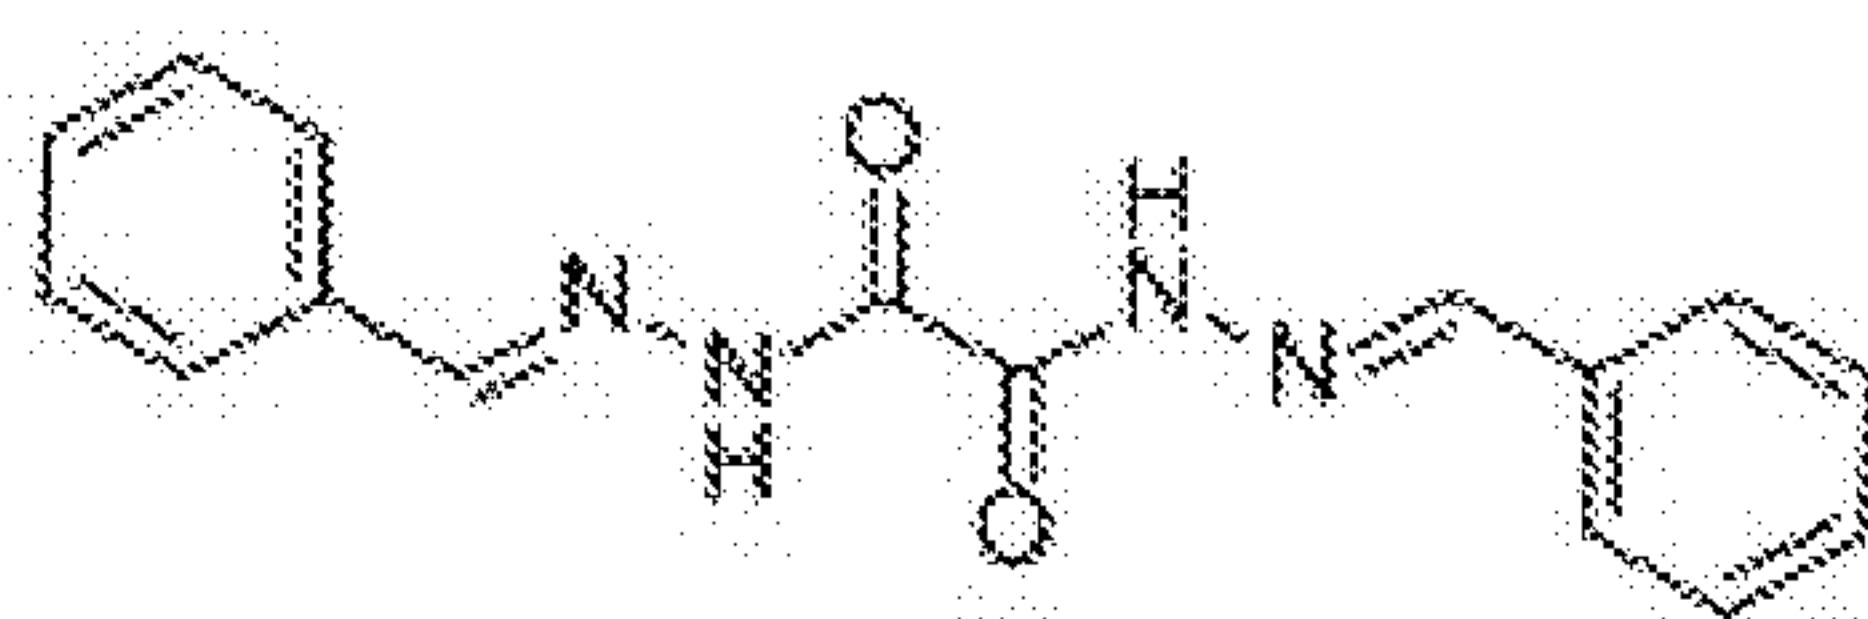


Formula II - oxalyl bis(benzylidenehydrazide)

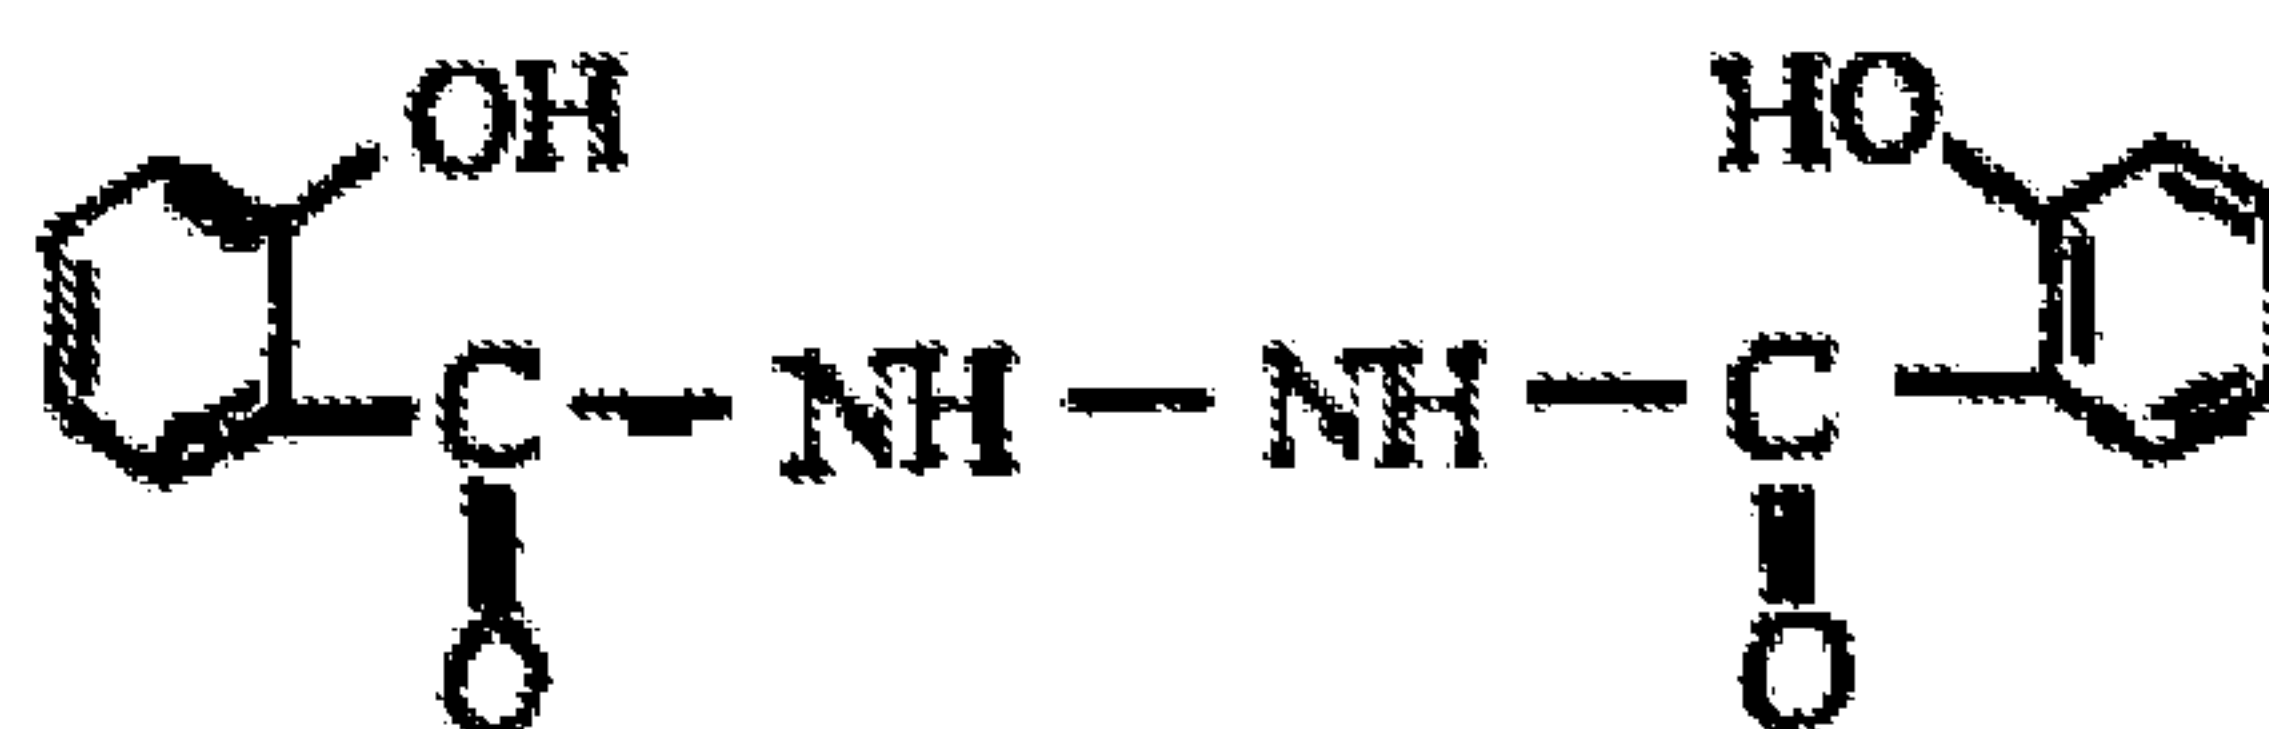


Formula III - N,N'-bis(salicyloyl)hydrazine

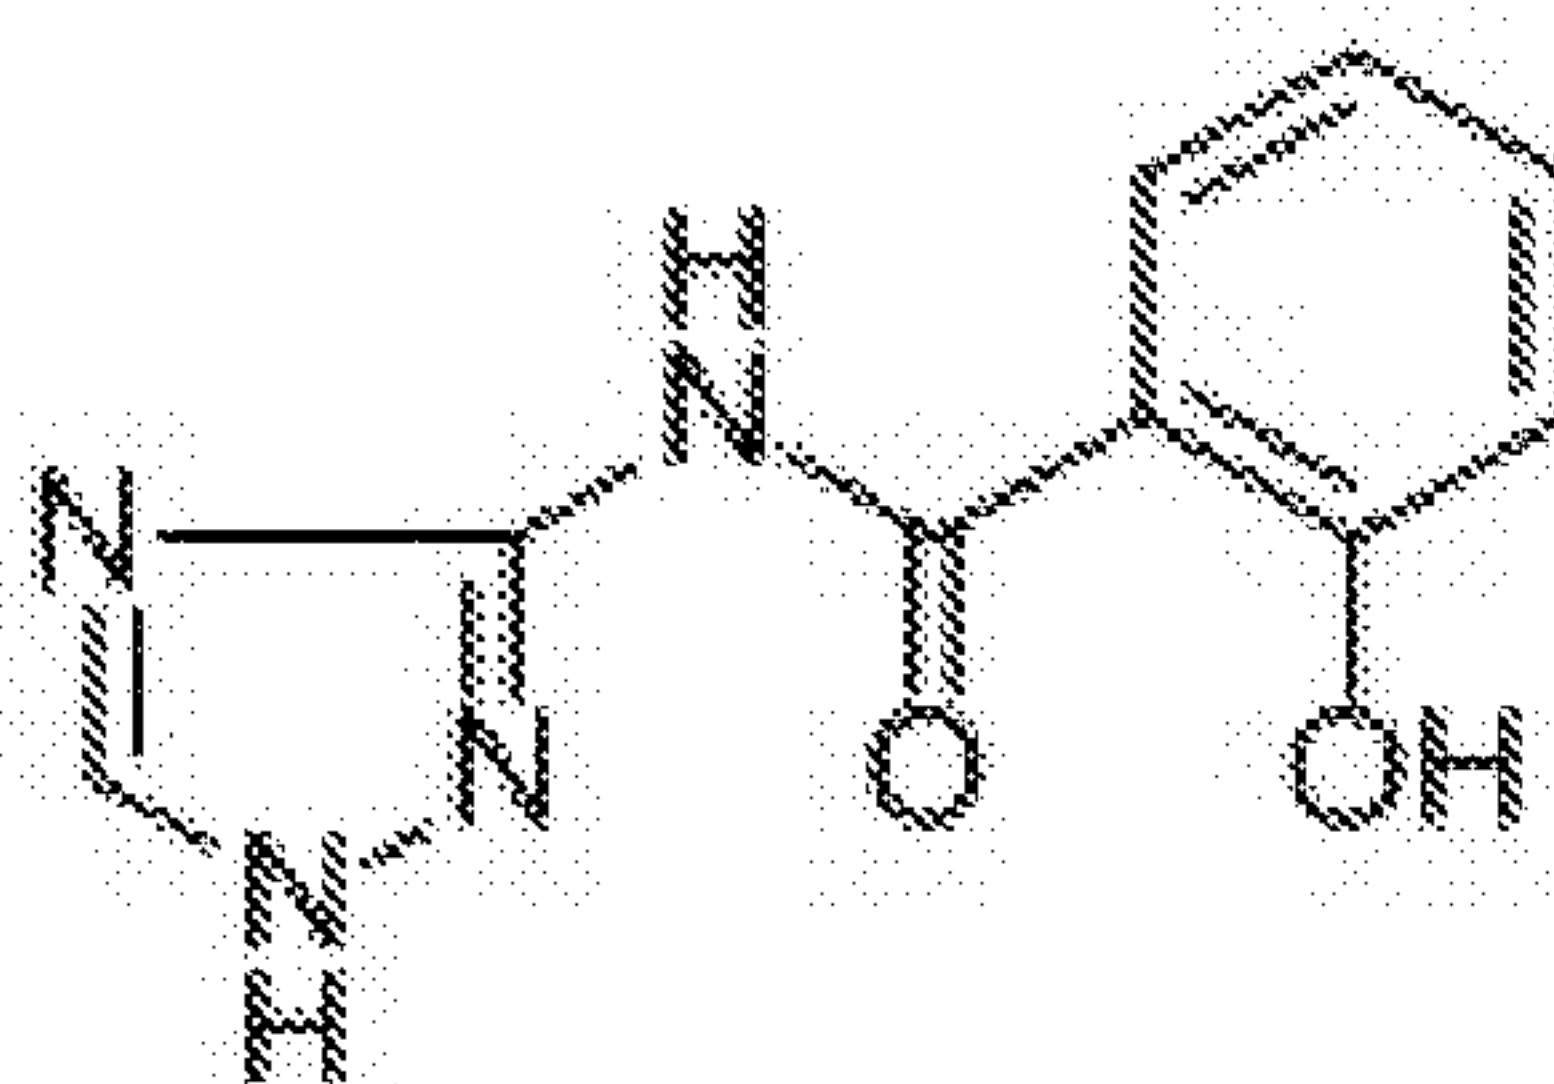


Formula IV - 3-(N-salicyloyl)amino-1,2,4-triazole

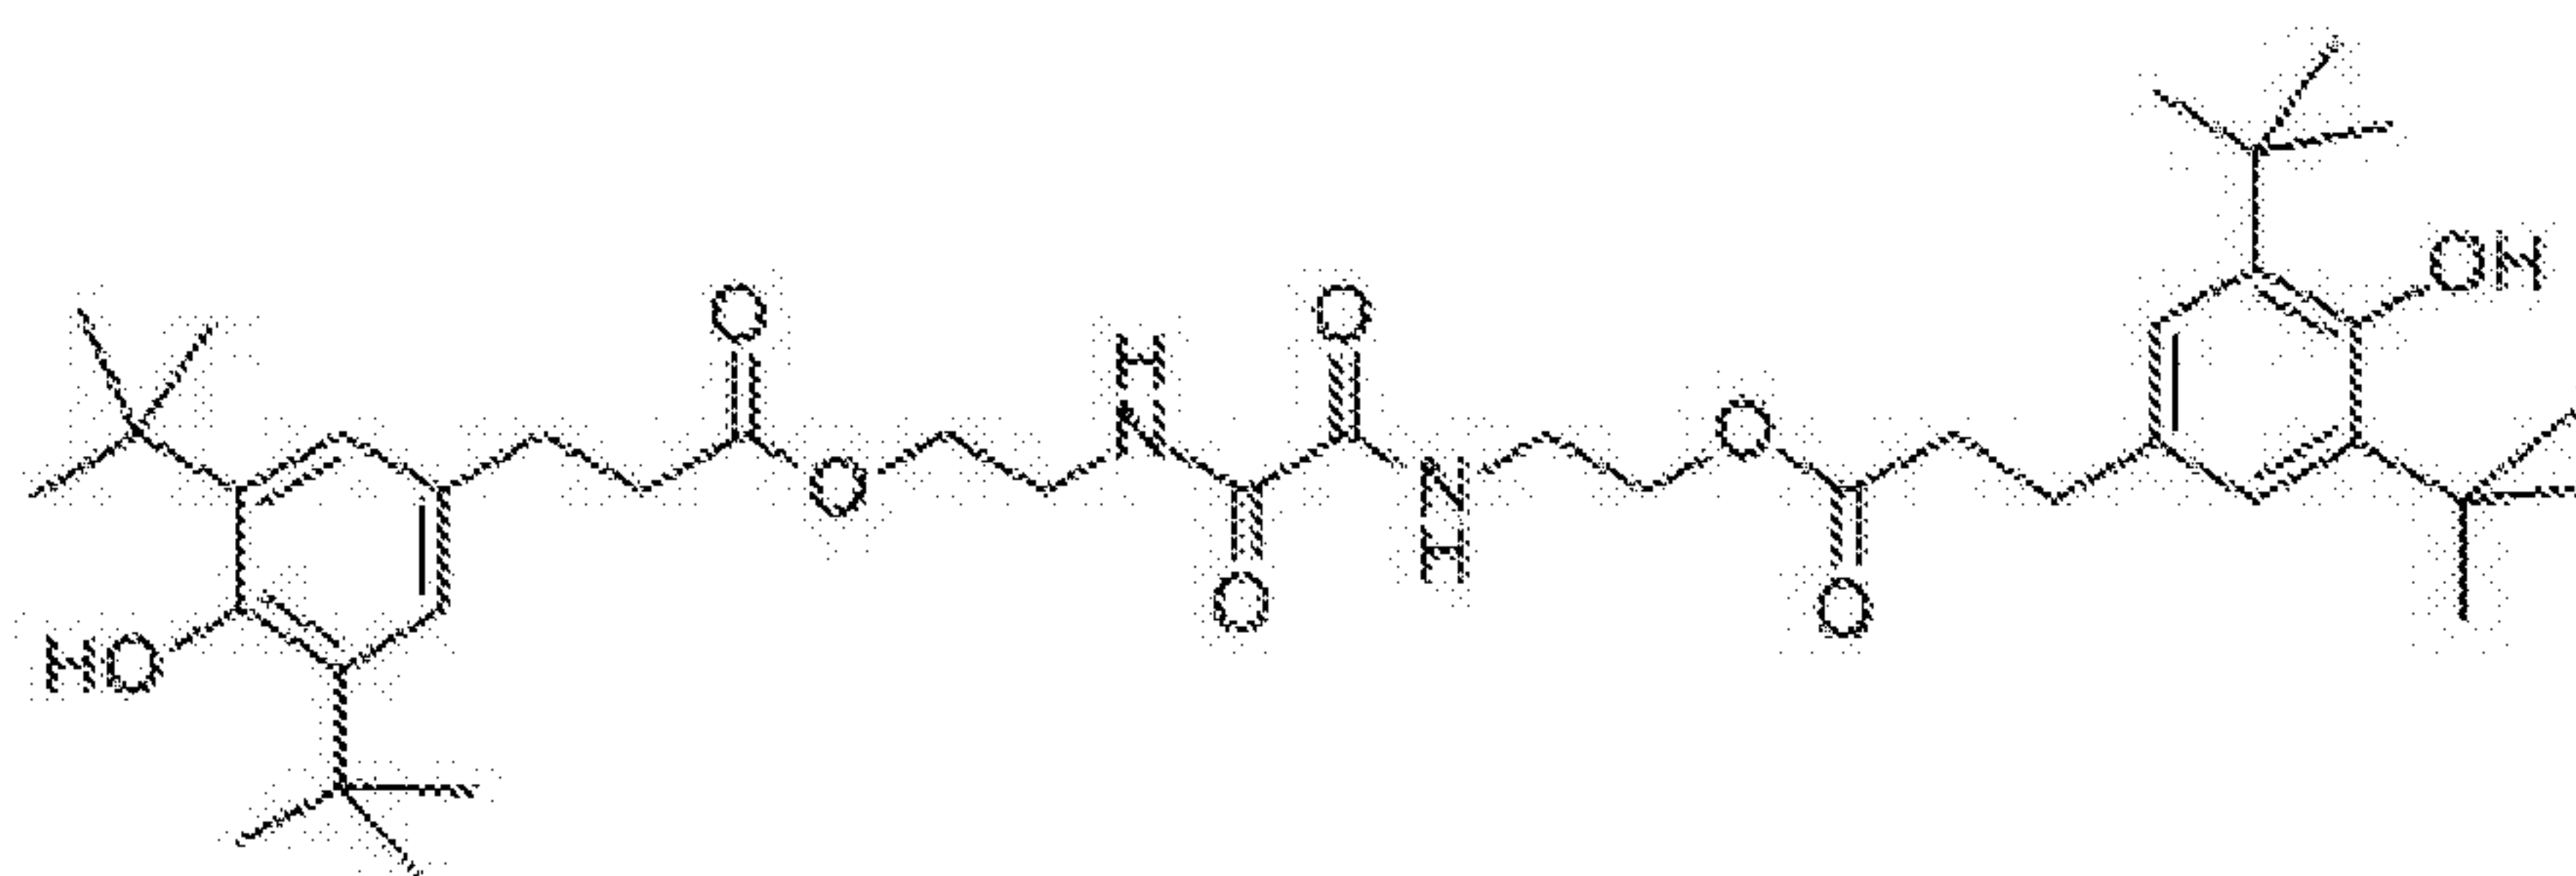


Formula V - 2,2'-oxamido bis[ethyl 3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate]

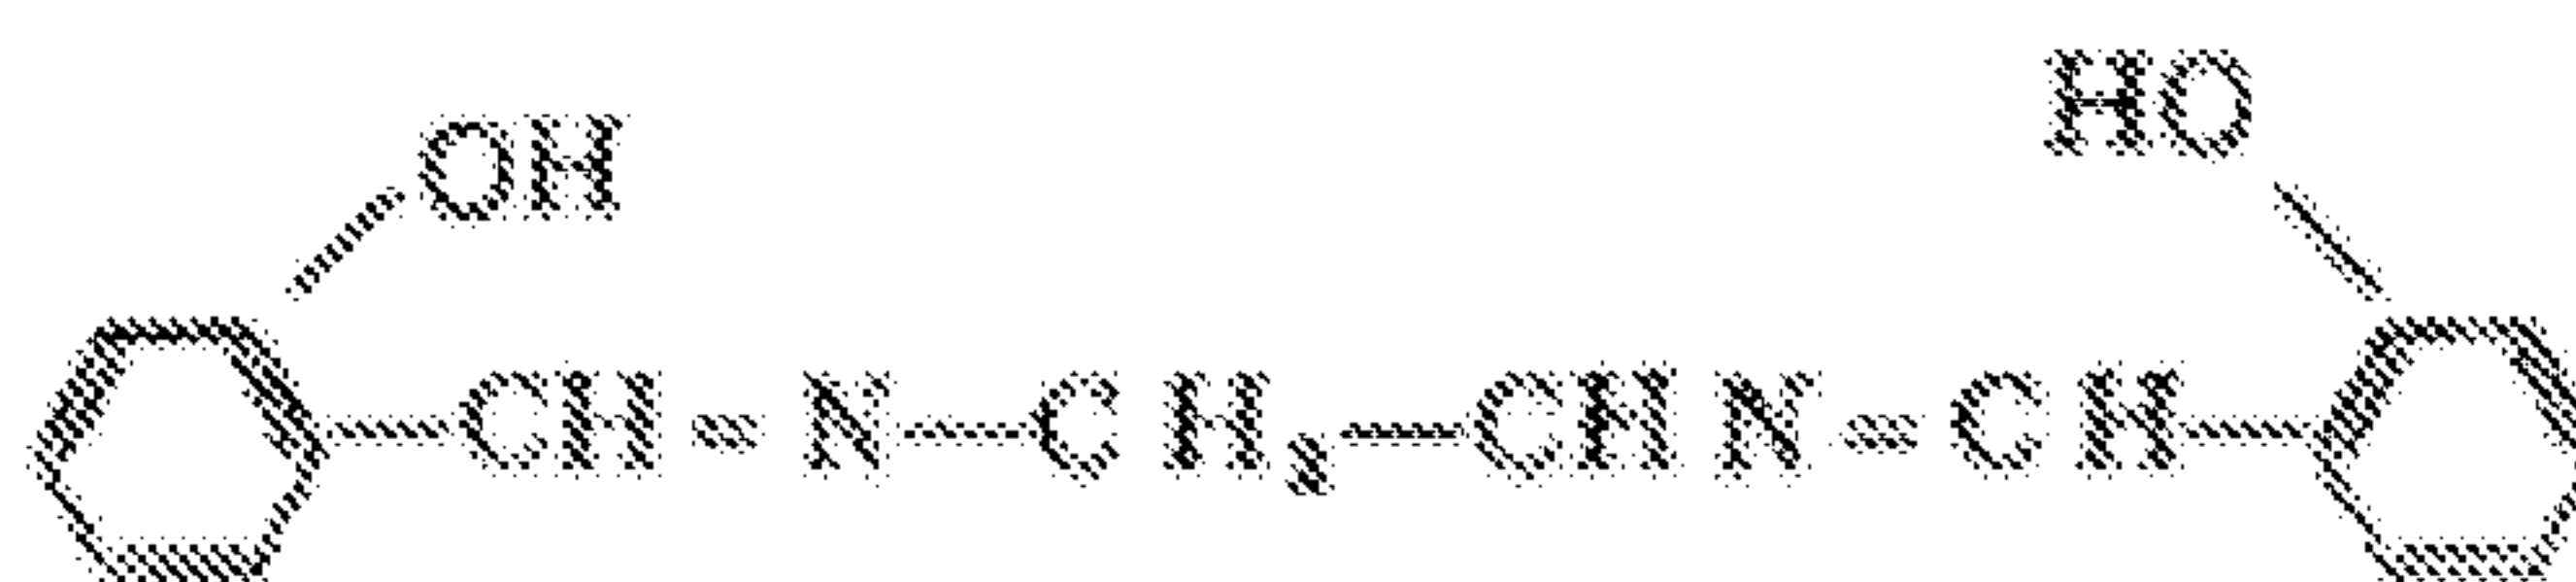


Formula VI - N,N'-bis(salicylidene) ethylenediamine

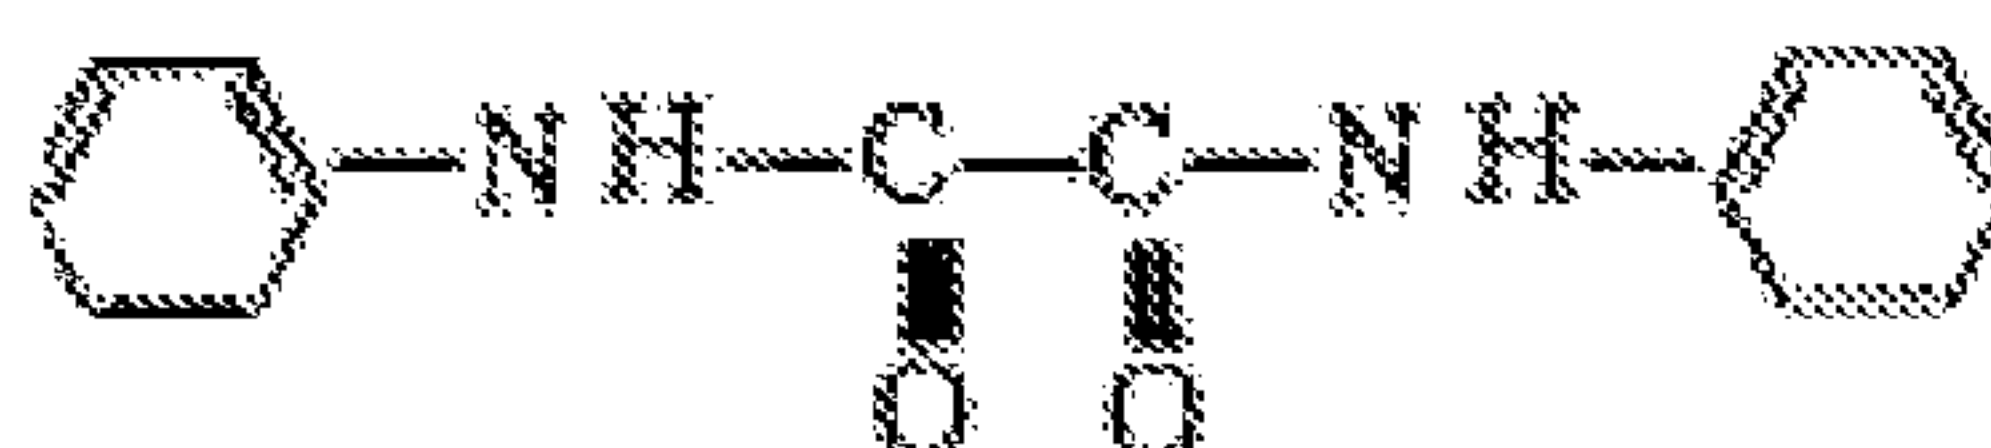


Formula VII – Oxanilide

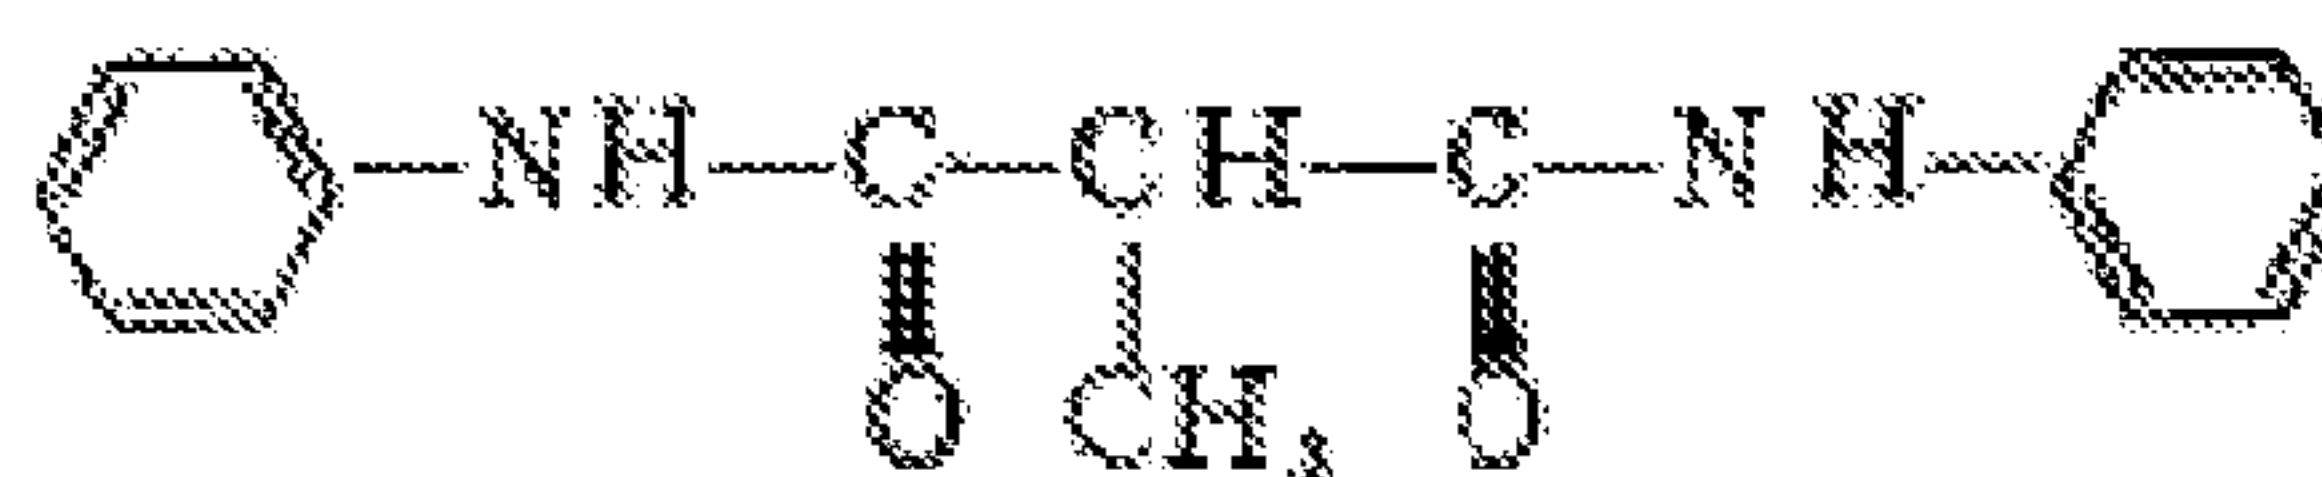


Formula VIII - Methylmalonic acid dianilide

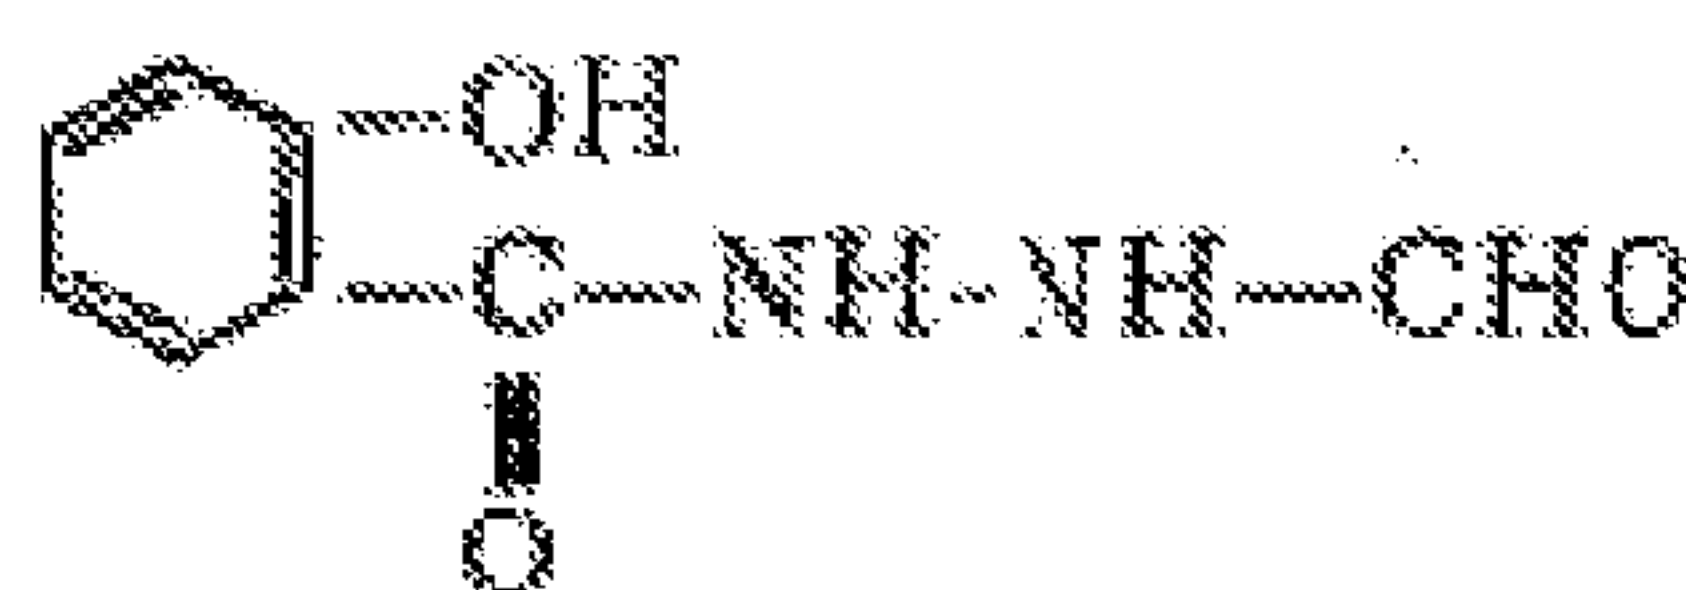

Formula IX - N-formyl-N'-salicyloyl hydrazine

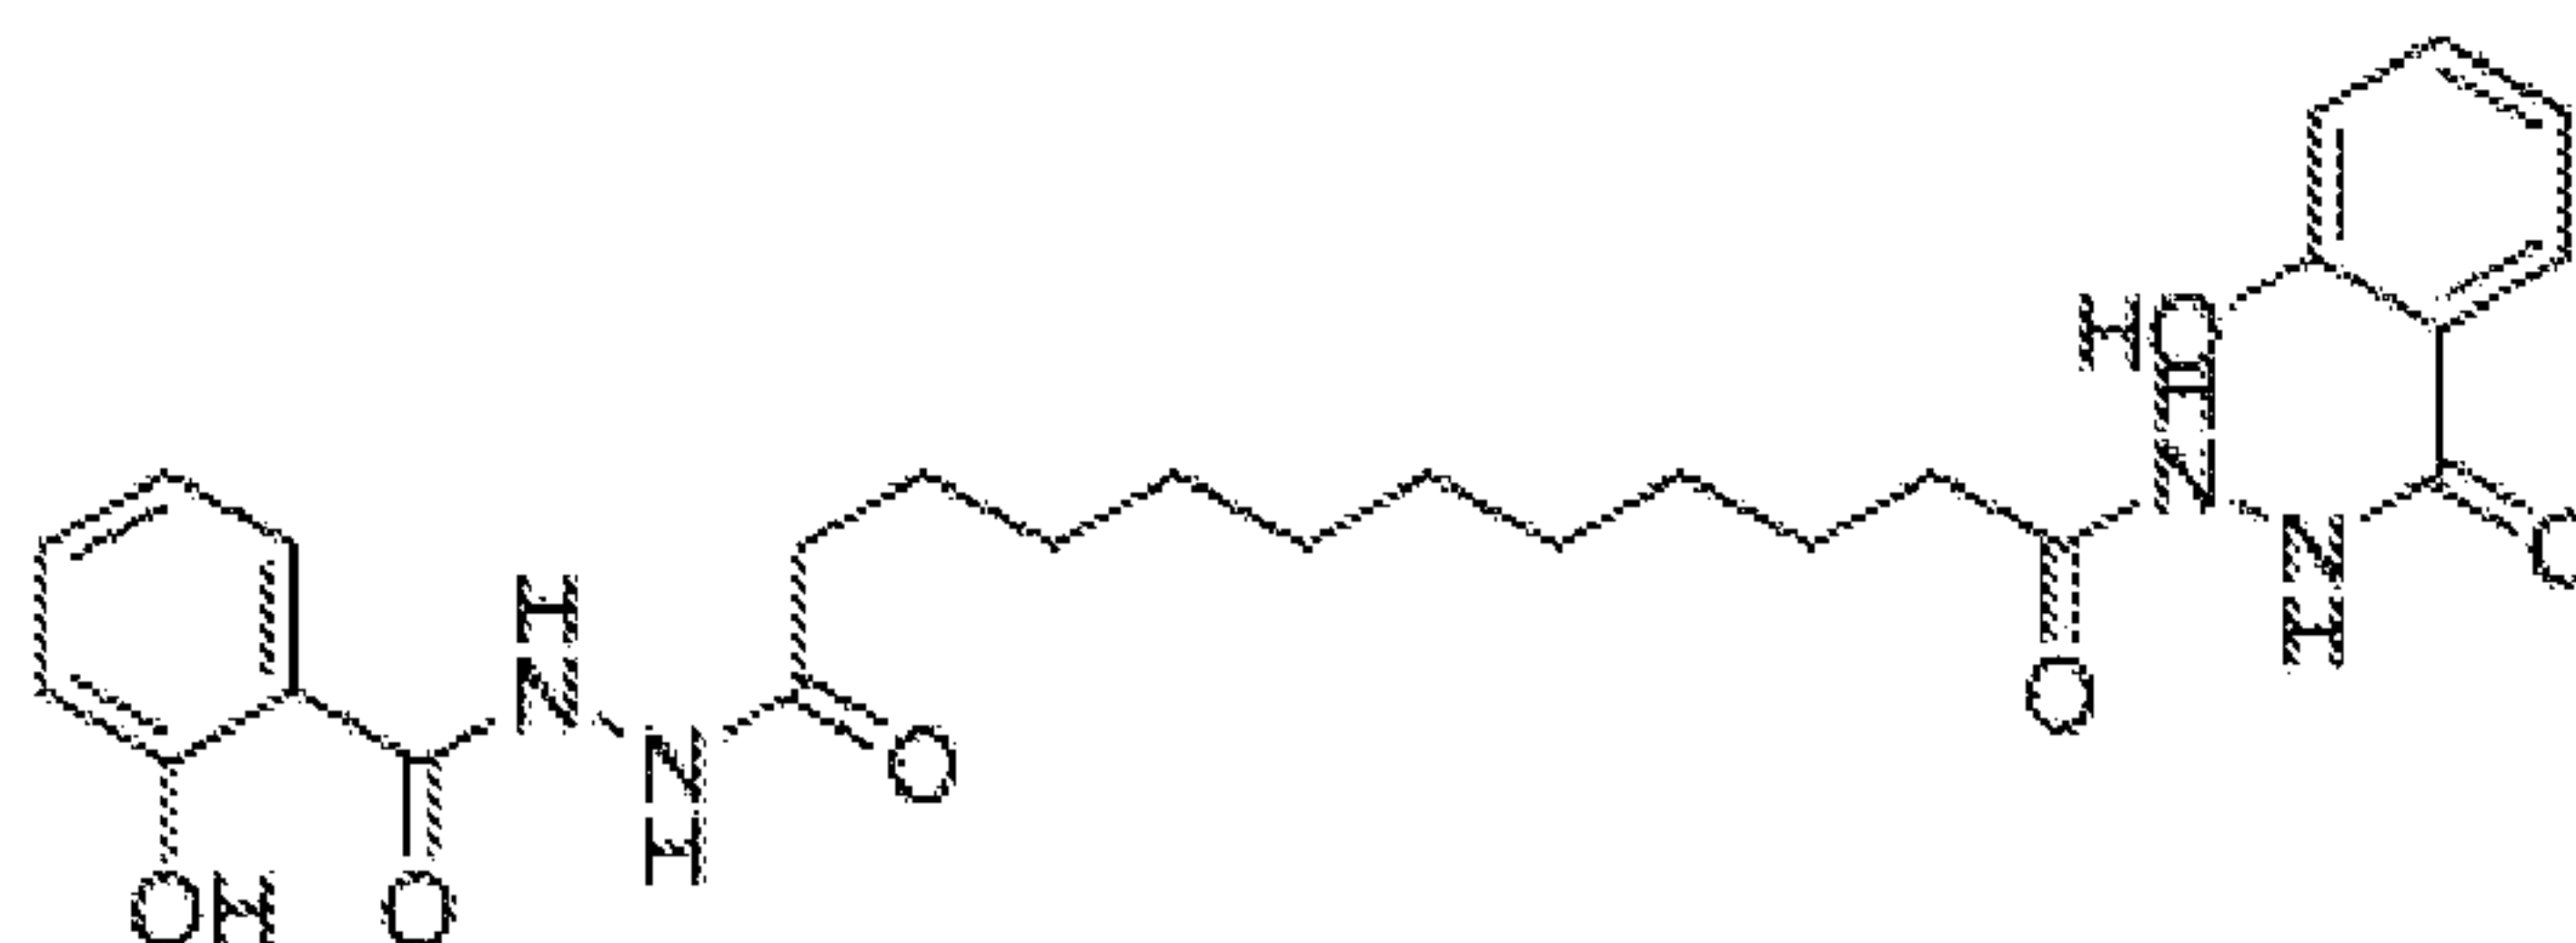

Formula X - Decamethylenedicarboxylic acid disalicyloylhydrazide

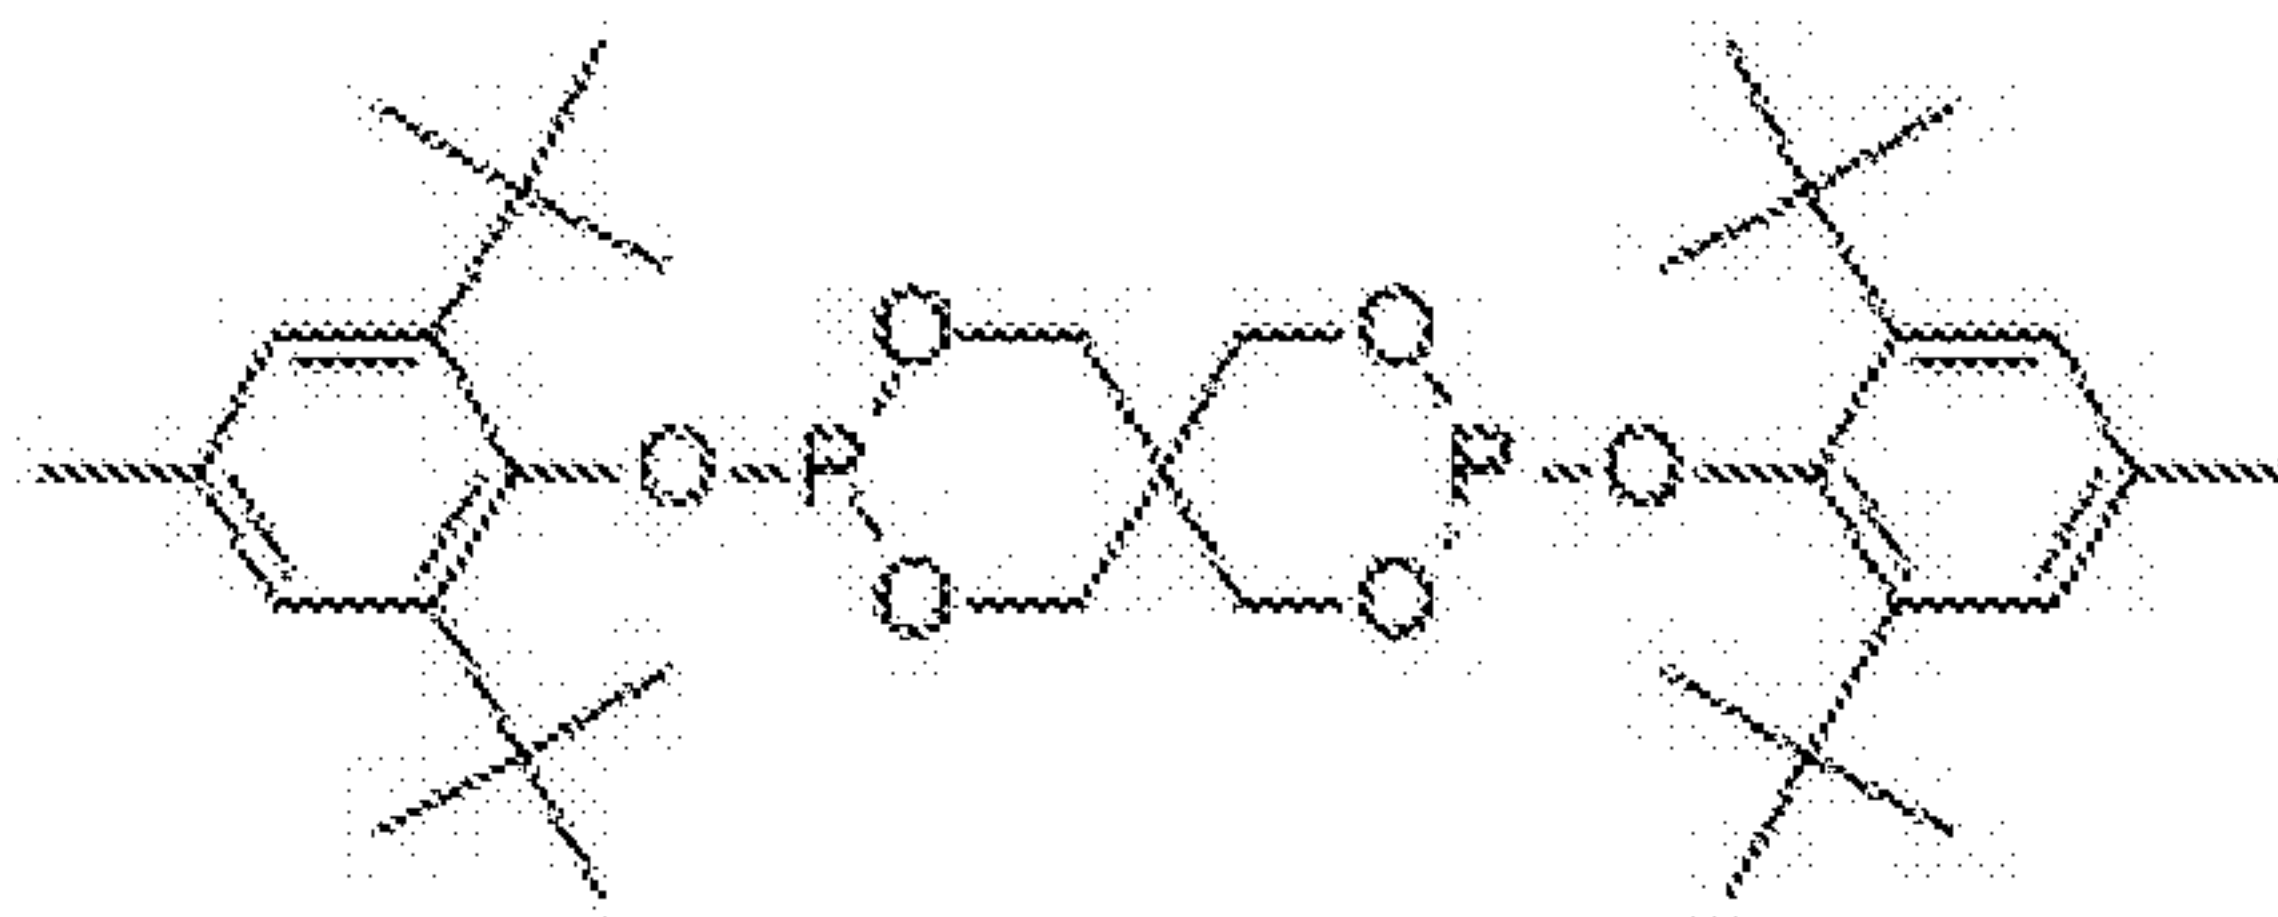

Formula XI - Bis(2,6-di-ter-butyl-4-methylphenyl)pentaerythritol-diphosphite

8. The thermal interface material of claim 1, wherein the thermal interface material comprises 0.1 wt.% to 5 wt.% of the ion scavenger, based on the total weight of the thermal interface material.
9. The thermal interface material of claim 1, wherein the thermal interface material comprises 0.5 wt.% to 1 wt.% of the ion scavenger, based on the total weight of the thermal interface material.
10. The thermal interface material of claim 1, further comprising at least one phase change material.
11. The thermal interface material of claim 10, wherein the at least one phase change material is a wax.
12. The thermal interface material of claim 1, further comprising at least one coupling agent.
13. The thermal interface material of claim 12, wherein the at least one coupling agent is selected from the group consisting of: a titanate coupling agent, a zirconate coupling agent, a silane coupling agent, and combinations of the foregoing.
14. The thermal interface material of claim 1, further comprising at least one crosslinker.
15. The thermal interface material of claim 1, further comprising at least one wax, at least one antioxidant, at least one coupling agent, and at least one crosslinker.
16. The thermal interface material of claim 1, wherein the thermal interface material comprises:
 - 5 wt.% to 10 wt.% of the at least one polymer;
 - 50 wt.% to 95 wt.% of the at least one thermally conductive filler; and
 - 0.1 wt.% to 5 wt.% of the ion scavenger, based on the total weight of the thermal interface material.

17. The thermal interface material of claim 16, further comprising:

2 wt.% to 5 wt.% of at least one wax;

0.1 to 0.5 wt.% of at least one antioxidant;

1 wt.% to 2 wt.% of at least one coupling agent; and

0.5 wt.% to 0.6 wt.% of at least one crosslinker based on the total weight of the thermal interface material;

wherein the thermal interface material comprises 75 wt.% to 90 wt.% of the at least one thermally conductive filler, based on the total weight of the thermal interface material.

18. The thermal interface material of claim 16, further comprising:

1.5 wt.% to 2 wt.% of at least one wax;

0.1 to 1 wt.% of at least one antioxidant; and

0.5 wt.% to 1 wt.% of at least one coupling agent;

wherein the thermal interface material comprises 85 wt.% to 95 wt.% of the at least one thermally conductive filler, based on the total weight of the thermal interface material.

19. The thermal interface material of claim 18, further comprising 0.1 wt.% to 1 wt.% of at least one crosslinker.

20. An electronic component comprising:

a heat sink;

an electronic chip;

a thermal interface material having a first surface layer and a second surface layer, the thermal interface material positioned between the heat sink and electronic chip, the thermal interface material including:

at least one polymer;

at least one thermally conductive filler; and

at least one ion scavenger.

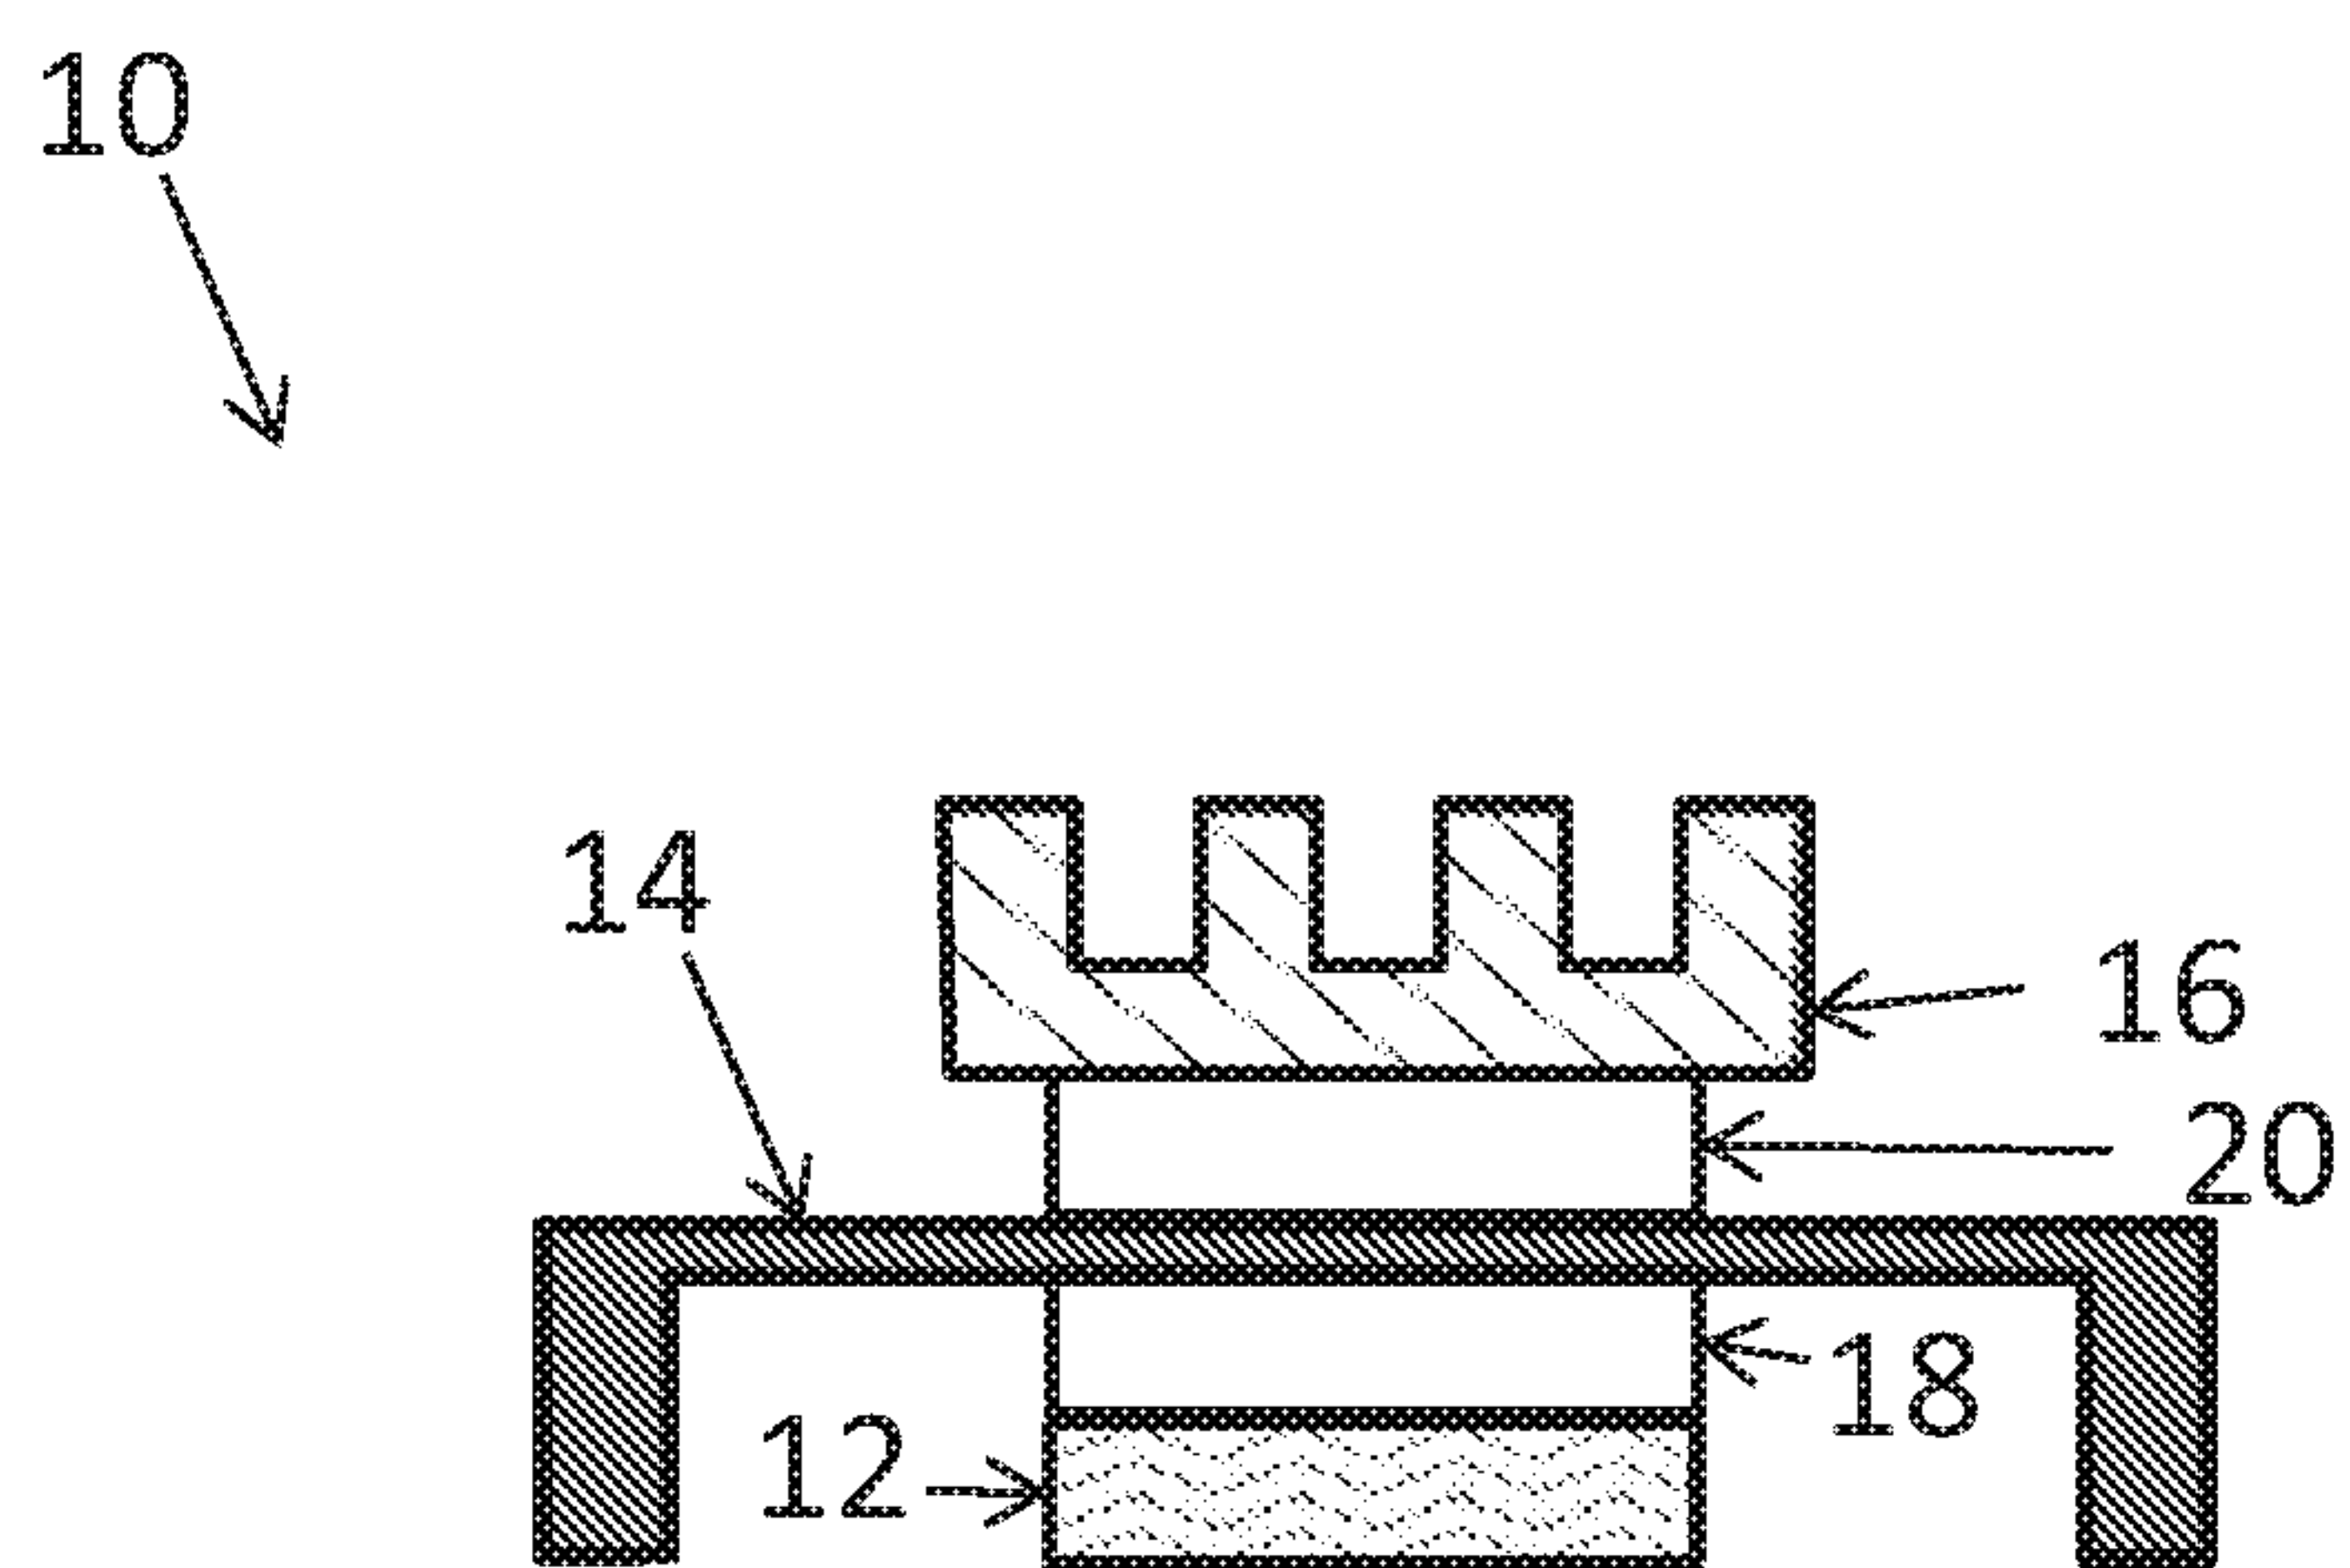


FIG. 1




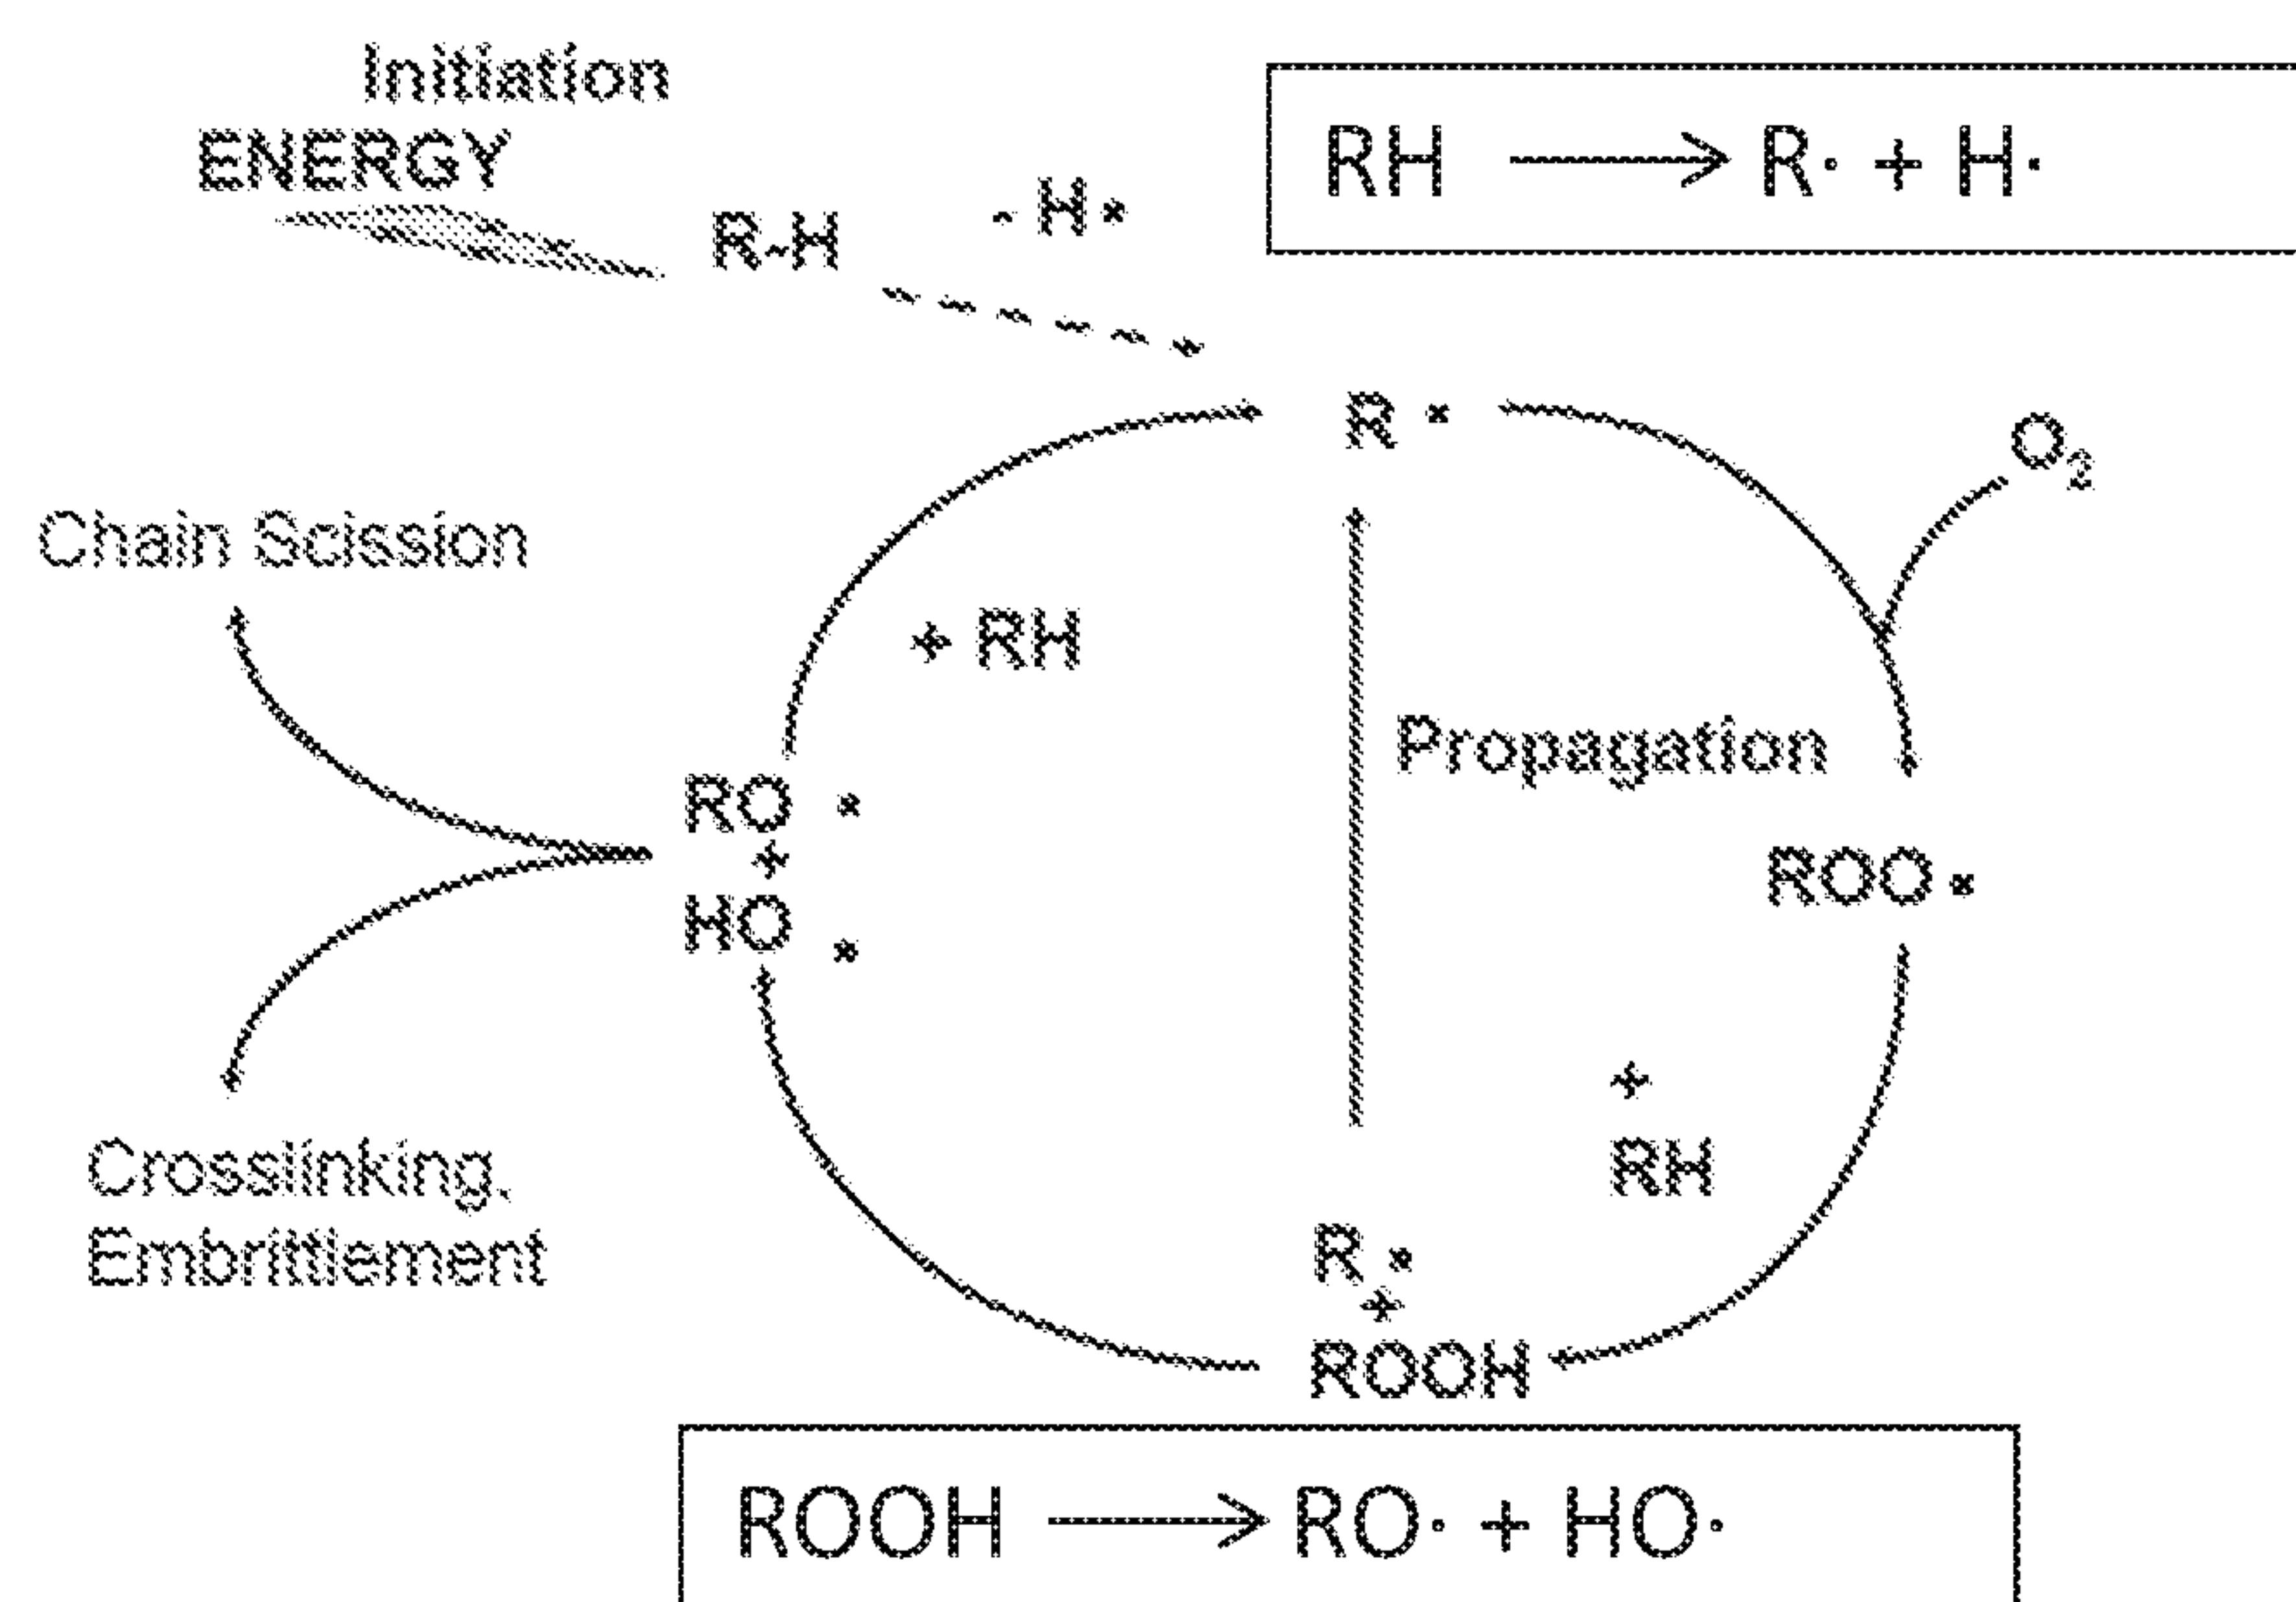


FIG. 2A

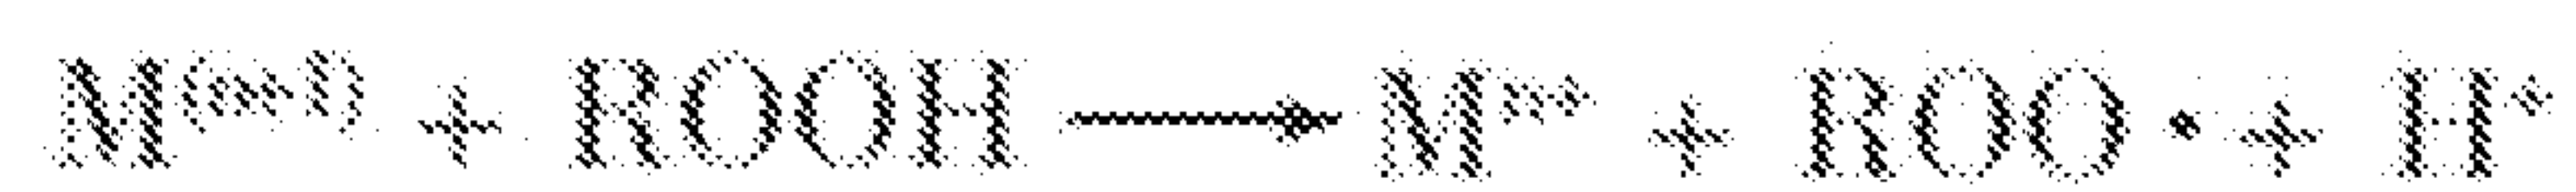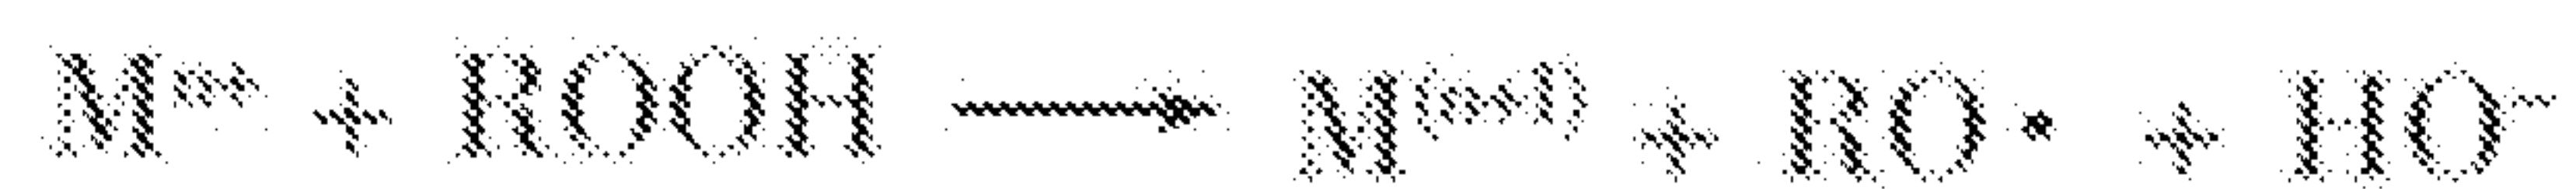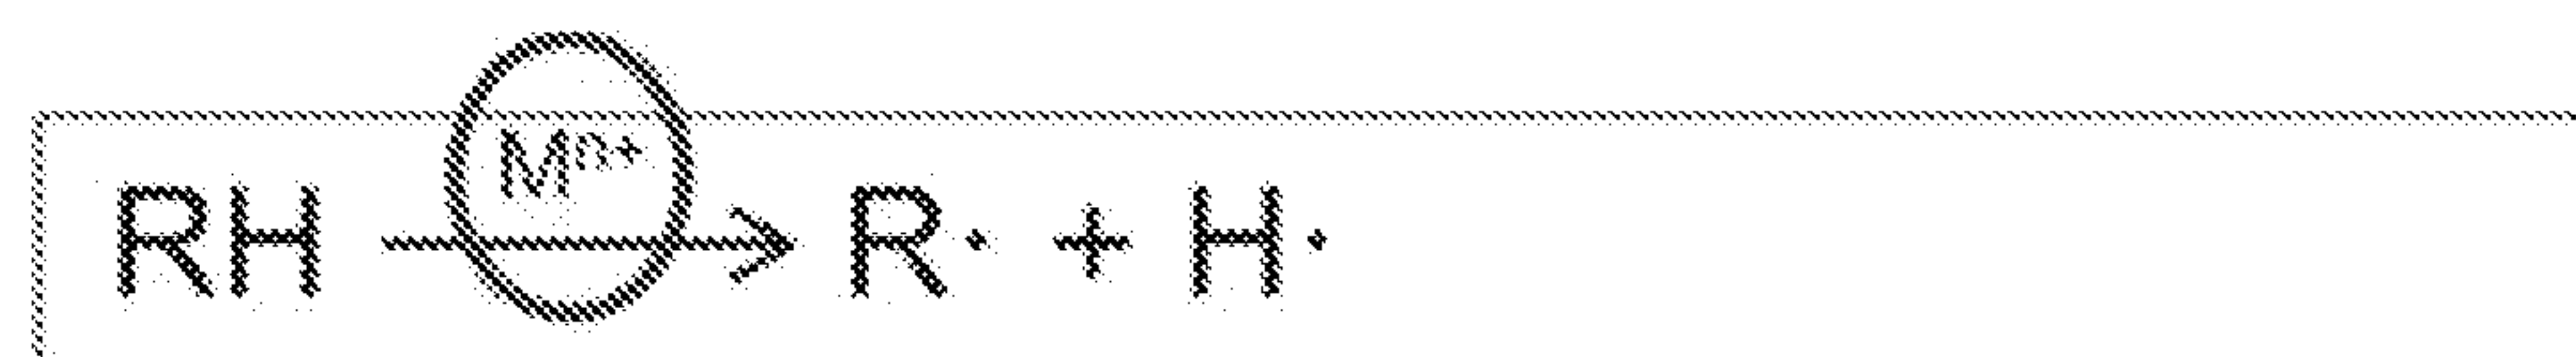

Combine the two above, as below

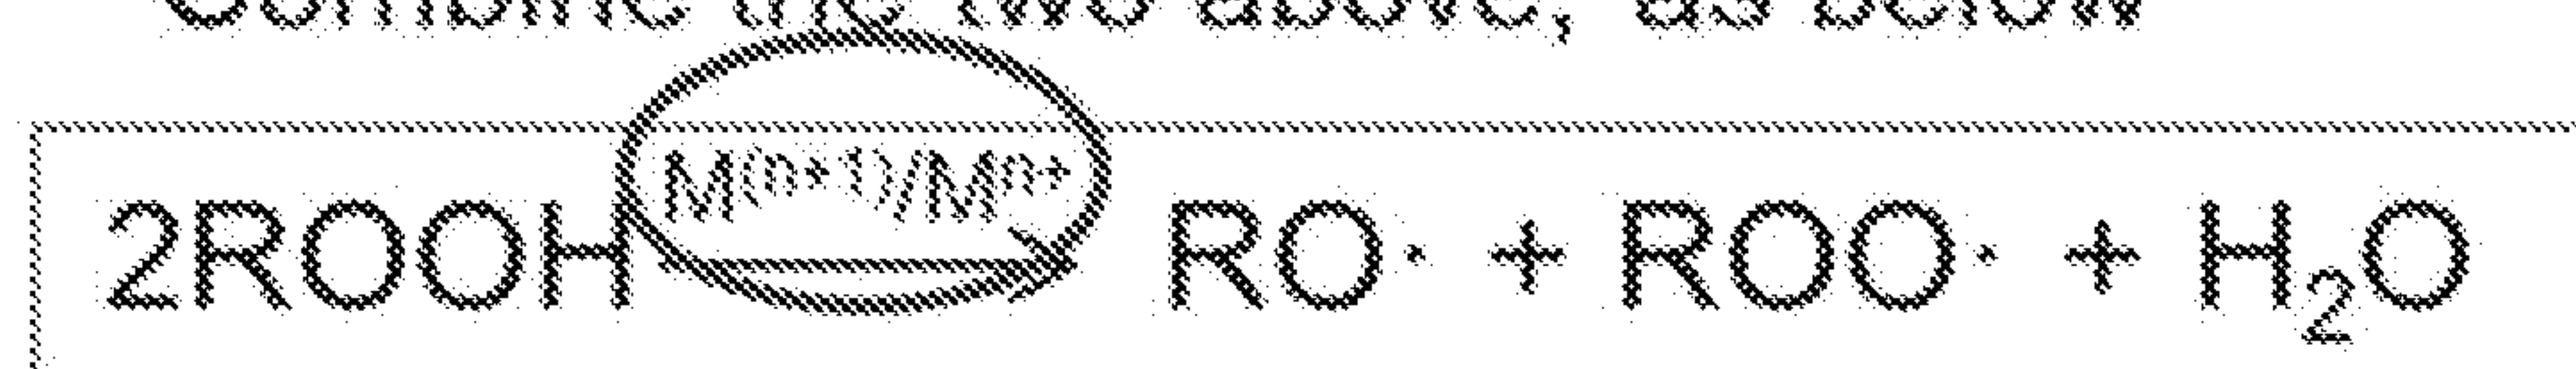


FIG. 2B

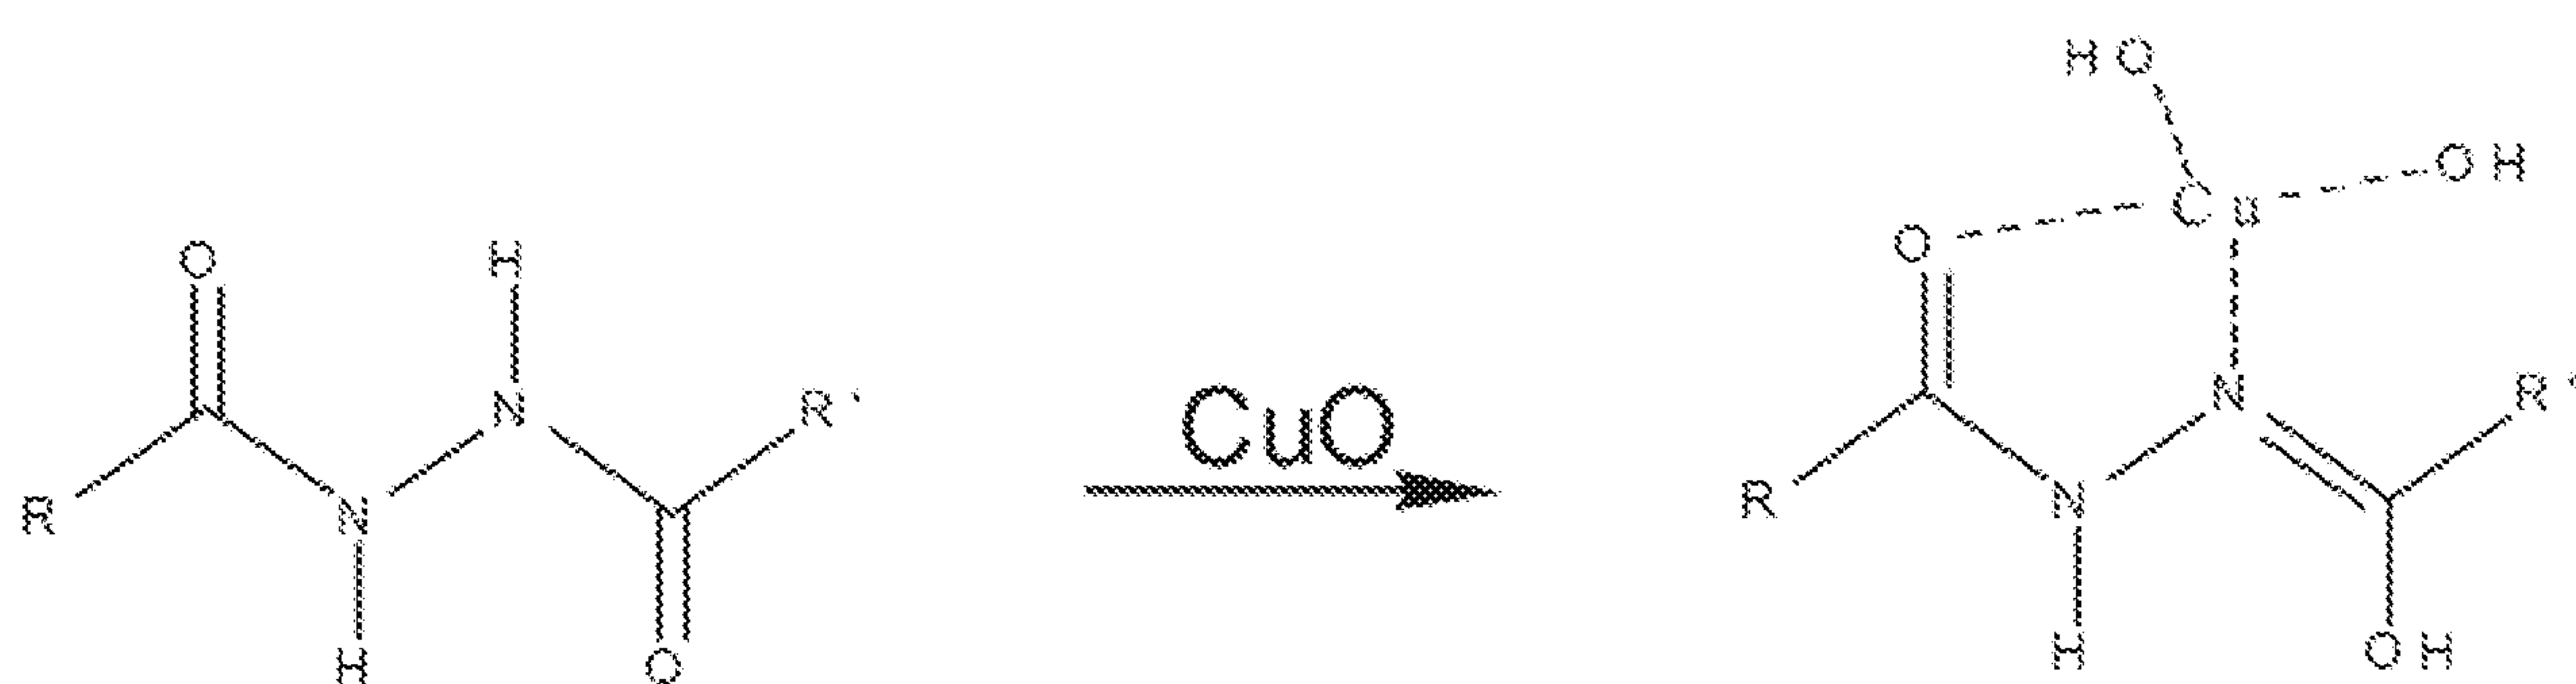


FIG. 3

10

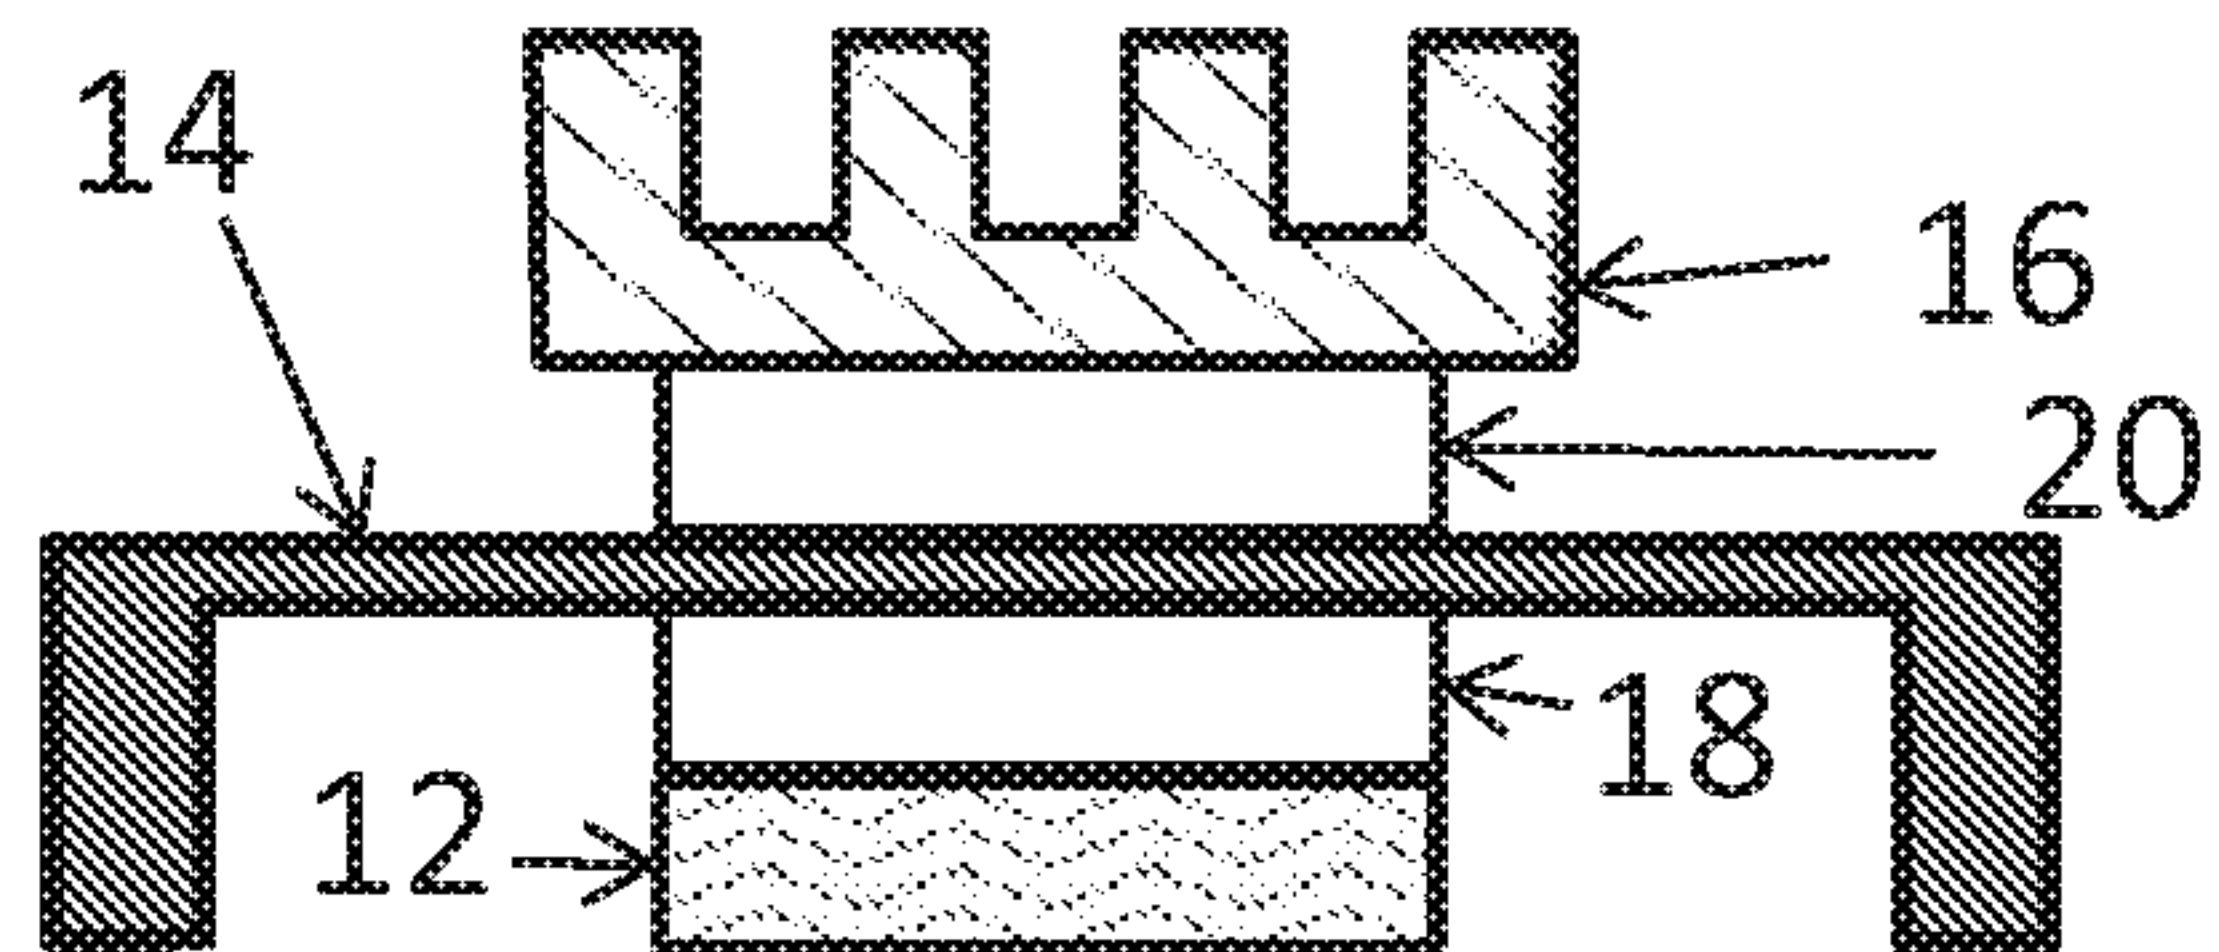


FIG. 1