



(86) Date de dépôt PCT/PCT Filing Date: 2006/06/08
 (87) Date publication PCT/PCT Publication Date: 2007/01/11
 (45) Date de délivrance/Issue Date: 2015/12/01
 (85) Entrée phase nationale/National Entry: 2007/11/20
 (86) N° demande PCT/PCT Application No.: US 2006/022296
 (87) N° publication PCT/PCT Publication No.: 2007/005192
 (30) Priorité/Priority: 2005/06/30 (US11/172,604)

(51) Cl.Int./Int.Cl. *H04W 72/08* (2009.01),
H04W 52/04 (2009.01), *H04W 24/10* (2009.01)
 (72) Inventeur/Inventor:
REUDINK, DOUGLAS O., US
 (73) Propriétaire/Owner:
MICROSOFT TECHNOLOGY LICENSING, LLC, US
 (74) Agent: SMART & BIGGAR

(54) Titre : SYSTEMES ET PROCEDES D'ASSIGNATION DE CANAUX POUR REDUIRE L'INTERFERENCE ET AUGMENTER LA CAPACITE DE RESEAUX SANS FIL
 (54) Title: SYSTEMS AND METHODS FOR MAKING CHANNEL ASSIGNMENTS TO REDUCE INTERFERENCE AND INCREASE CAPACITY OF WIRELESS NETWORKS

(57) **Abrégé/Abstract:**

There is disclosed a system and method for improving wireless system capacity by reducing collisions where the Signal to Interference Ratio (SIR) is high in systems having a channel reuse of 1. By ordering the channel assignment in each of the interfering cells according to a pattern, for example, according to the distance from a base station (determined by power levels), the mobile stations will become paired on the same channel in a manner to reduce interference between them. In one embodiment, this intelligent assignment is accomplished by assigning mobile stations in one cell such that the mobile station having the strongest signal is assigned channel A while in the interfering cell the mobile station with the weakest signal is assigned to channel A. In another embodiment, certain preferred mobile stations are assigned either interference-free channels or channels paired with weak interference mobile stations.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 January 2007 (11.01.2007)

PCT

(10) International Publication Number
WO 2007/005192 A2

(51) International Patent Classification:
H04Q 7/20 (2006.01)

(21) International Application Number:

PCT/US2006/022296

(22) International Filing Date: 8 June 2006 (08.06.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/172,604 30 June 2005 (30.06.2005) US

(71) Applicant (for all designated States except US): **ADAP-TIX, INC.** [US/US]; 605 - 5th Avenue S., Suite 800, Seattle, WA 98104 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **REUDINK, Douglas, O.** [US/US]; P. O. BOX 217, 394 Haada Laas Road, Port Townsend, WA 98368 (US).

(74) Agent: **TANNENBAUM, David, H.**; Fulbright & Jaworski L.L.P., 2200 Ross Avenue, Suite 2800, Dallas, TX 75201-2784 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEMS AND METHODS FOR MAKING CHANNEL ASSIGNMENTS TO REDUCE INTERFERENCE AND INCREASE CAPACITY OF WIRELESS NETWORKS

(57) Abstract: There is disclosed a system and method for improving wireless system capacity by reducing collisions where the Signal to Interference Ratio (SIR) is high in systems having a channel reuse of 1. By ordering the channel assignment in each of the interfering cells according to a pattern, for example, according to the distance from a base station (determined by power levels), the mobile stations will become paired on the same channel in a manner to reduce interference between them. In one embodiment, this intelligent assignment is accomplished by assigning mobile stations in one cell such that the mobile station having the strongest signal is assigned channel A while in the interfering cell the mobile station with the weakest signal is assigned to channel A. In another embodiment, certain preferred mobile stations are assigned either interference-free channels or channels paired with weak interference mobile stations.



WO 2007/005192 A2

**SYSTEMS AND METHODS FOR MAKING CHANNEL ASSIGNMENTS TO
REDUCE INTERFERENCE AND INCREASE CAPACITY OF WIRELESS
NETWORKS**

TECHNICAL FIELD

[0001] This invention relates to wireless network channel assignments and more particularly to systems and methods for making such assignments in a manner to reduce interference and increase capacity in wireless networks.

BACKGROUND OF THE INVENTION

[0002] In wireless systems it is often desired to use all channels (or all of the allocated spectrums) in every cell. These systems are called N=1 reuse systems. In such systems it is possible for a mobile station (MS) to receive signals of equal power on the same channel from two base stations (BS).

[0003] Current methods of solving this problem include CDMA where different codes are transmitted by different BSs and, depending on the spreading factors, a signal can be extracted from the interference with greater reliability. Unfortunately, in such systems spreading reduces the overall through-put in direct proportion.

[0004] Another solution involves frequency hopping. In this case the BSs randomly select channels to send to the MS and if only a few mobiles are in use the chances of collisions can be made small because each channel is used only a small fraction of the time. However, as loading (increased MSs) increases, collision possibility increases until with 100% of possible users on at each BS collisions occur in every instance. The damage due to interference done at each instant depends upon the instantaneous transmitter power of the interfering BSs and the relative distances the MSs are from their respective BSs.

BRIEF SUMMARY OF THE INVENTION

[0005] There is disclosed a system and method for improving wireless system capacity by reducing collisions where the Signal to Interference Ratio (SIR) is high in systems having a channel reuse of 1. By intelligently assigning (ordering) the channel assignment in each of the interfering cells according to a pattern, for example, according to the distance from a BS, the MSs will become paired on the same channel in a manner to reduce interference between them. A second step is to optionally control the power of the BS and MS transmitter to further optimize user capacity or reduce interference.

[0006] In one embodiment, this intelligent assignment is accomplished by assigning MSs in one cell such that the MS having the strongest signal is assigned channel A while in the interfering cell, the MS with the weakest signal, is assigned to channel A. In another embodiment, certain preferred MSs are assigned either interference-free channels or channels paired with weak interference MSs.

[0007] The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter which form the subject of the claims of the invention. It should be appreciated by those skilled in the art that the conception and specific embodiment disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims. The novel features which are believed to be characteristic of the invention, both as to its organization and method of operation, together with further objects and advantages will be better understood from the following description when considered in connection with the accompanying figures. It is to be expressly understood, however, that each of the figures is provided for the purpose of illustration and description only and is not intended as a definition of the limits of the present invention.

51331-1591

[0007a] According to one aspect of the present invention, there is provided a method for assigning channels in a wireless system, said method comprising: determining at a given point in time in interfering cells which mobile stations (MSs) in each said cell are communicating with a highest signal strength; and assigning channels to said MSs based on
5 said determined signal strength; wherein said assigning comprises: in one of said cells making channel assignments such that a MS with the highest signal strength is assigned a particular channel and in an interfering cell the assignment is that a MS with a lowest signal strength is assigned said particular channel.

[0007b] According to another aspect of the present invention, there is
10 provided a method of assigning channels to MSs, said method comprising: in a pair of potentially interfering cells, establishing an assignment order of channels such that with respect to an ordered series of channels in each cell a first cell in the pair of potentially interfering cells includes mobile stations MSs assigned to channels according to a particular assignment pattern while a second cell in the pair of potentially interfering cells includes a
15 channel assignment order in a mirror image of the particular assignment pattern in said first cell, wherein said particular pattern is in an order of strongest to weakest signal strength with respect to said first cell and said channel assignment order is in an order of weakest to strongest with respect to a same ordered series of channels in said second cell as the ordered series of channels in said first cell.

[0007c] According to still another aspect of the present invention, there is
20 provided a wireless system comprising: at least two base stations (BSs) each defining a cell, said BSs using an $N=1$ repeat pattern; means for determining relative signal strength among mobile stations (MSs) communicating with each said BS; and means for assigning MSs according to a pattern designed to minimize interference between MSs in each of said cells
25 using the same channels; and means for assigning said channels in each said cell to a channel order such that in one cell weakest signal strength MSs are assigned from one end of said channel order and strongest signal strength MSs are assigned from the other end of said channel order.

51331-1591

[0007d] According to yet another aspect of the present invention, there is provided a computer-readable storage medium having computer-executable instructions stored thereon that, when executed by a computer, cause the computer to implement the method as described above or below.

5 [0007e] According to a further aspect of the present invention, there is provided a method for assigning channels in a wireless system, said method comprising: determining at a given point in time in interfering cells which mobile stations (MSs) in each said cell are communicating with highest signal strength and weakest signal strength; assigning channels to said MSs based on said determined signal strength; and in one of said
10 cells making the channel assignment such that said MSs communicating with the highest signal strength are assigned to a first set of channels and in the interfering cell said first set of channels is reserved wherein the determined MSs with the weakest signal strength are assigned to said reserved channels.

[0007f] According to yet a further aspect of the present invention, there is
15 provided a method for assigning channels in a wireless system, said method comprising: determining at a given point in time in interfering cells which mobile stations (MSs) in each said cell are communicating with highest signal strength and weakest signal strength; assigning channels to said MSs based on said determined signal strength; and in one of said cells making the channel assignment such that said MSs communicating with the highest
20 signal strength are assigned to a first set of channels and in the interfering cell said first set of channels is reserved where said MSs communicating with the highest signal strength are allocated additional transmit power.

[0007g] According to still a further aspect of the present invention, there is provided a method of assigning channels to mobile stations (MSs), said method comprising:
25 in a pair of potentially interfering cells, establishing an assignment order of channels such that with respect to an ordered series of channels in each cell a first cell will assign MSs to channels according to a particular assignment pattern while in the second of said cells the assignment will be in the mirror image of the assignment in said first cell; wherein said particular pattern is such that a first group of channels of said ordered channels in said first

51331-1591

cell is reserved for particular MSs and a last group of channels of said ordered channels in said second cell is reserved for said particular MSs; and wherein said first group of channels of said ordered channels in said second cell is reserved for the weakest signal strength receivers.

5 **[0007h]** According to another aspect of the present invention, there is provided a wireless system comprising: at least two base stations (BSs) each defining a cell; means for determining relative signal strength among mobile stations (MSs) communicating with each said BS; and means for assigning MSs according to a pattern designed to minimize interference between MSs in each of said cells using the same channels; wherein said
10 assigning means comprises means for in a first of said at least two BSs making the MS assignment such that MSs determined to have high strength are assigned to a first set of channels, and in a second of said at least two BSs said first set of channels is reserved, wherein the MSs determined to have weak strength are assigned to said reserved channels.

[0007i] According to yet another aspect of the present invention, there is
15 provided a base station (BS) comprising: means for determining relative signal strengths of a plurality of mobile stations (MSs) when said MSs communicate with said BS, said BS capable of using an N=1 repeat pattern; and means for assigning channels to said MSs according to a pattern designed to minimize interference between said MSs; wherein said assigning means comprises means for determining MSs having strong power and assigning said MSs having
20 strong power to a first set of channels, and means for determining MSs with weak power and assigning said MSs having weak power to reserved channels.

[0007j] According to another aspect of the present invention, there is provided a method comprising: determining a strength of a signal at a base station, the signal being received wirelessly from a mobile station; determining whether the mobile station has a
25 preferred status that allows the mobile station to be assigned to a reserved wireless channel in a first subset of wireless channels based on a preference assignment; responsive to a determination that the mobile station does not have the preferred status: determining a position in an ordering of the wireless channels based on signal strength; and assigning a wireless channel that corresponds to the determined position to the mobile station, the

51331-1591

wireless channel being formed by a set of OFDMA subcarriers for a predetermined period of time; reserving the first subset of the wireless channels for a first set of mobile stations in a first cell that have preferred statuses, the first subset of the wireless channels having a restricted assignment status in a second cell; causing a second subset of the wireless channels to remain vacant by restricting an assignment status of the second subset of the wireless channels in the first cell; and assigning a third subset of the wireless channels to a second set of mobile stations in the first cell based on signal strength.

[0007k] According to still another aspect of the present invention, there is provided a base station comprising hardware configured to; determine whether a mobile station has a preferred status that allows utilization of a preference assignment to assign the mobile station to a reserved wireless channel in a first subset of wireless channels; responsive to a determination that the mobile station does not have the preferred status, assign a wireless channel to the mobile station based on an ordering of the wireless channels and corresponding signal strength, the wireless channel being formed by a set of OFDMA subcarriers for a predetermined period of time; reserve the first subset of the wireless channels for a first set of mobile stations in a first cell that have preferred statuses, the first subset of the wireless channels having a restricted assignment status in a second cell that potentially interferes with the base station; restrict an assignment status of a second subset of the wireless channels in the first cell to cause the second subset of the wireless channels to remain vacant; and assign a third subset of the wireless channels to a second set of mobile stations in the first cell based on signal strength.

[0007l] According to yet another aspect of the present invention, there is provided a mobile station comprising hardware configured to: form a request for communication to a base station; and receive a response from the base station indicating a wireless subchannel assigned to the mobile station for wireless communication with the base station, the wireless subchannel assigned by the base station using an ordering of wireless subchannels and corresponding signal strength, the wireless subchannel having a set of OFDMA subcarriers that form the wireless subchannel for a predetermined period of time, the wireless subchannel being drawn from a first subset of subchannels assigned by the base station to a set of mobile stations having preferred status in a first cell, the preferred status of

51331-1591

the set of mobile stations allowing the first set of mobile stations to be assigned to reserved subchannels having substantially no interference from a second cell based on a restricted assignment status in the second cell, the ordering of the wireless subchannels comprising a second subset of subchannels assigned by the base station to remain vacant in the first cell and
5 a third subset of subchannels assigned by the base station to an additional set of mobile stations in the first cell.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying
10 drawings, in which:

[0009] FIGURE 1 shows one embodiment of wireless cells ordered according to a pattern;

[0010] FIGURE 2 shows one assignment pattern;

[0011] FIGURE 3 shows a simulation of theoretical capacity distributions for
15 random and intelligent channel assignment; and

[0012] FIGURE 4 shows one embodiment of an algorithm for assigning channels.

DETAILED DESCRIPTION OF THE INVENTION

[0013] FIGURE 1 shows one embodiment 10 in which BS1 makes channel assignments for MSs from the nearest (strongest power levels) to the farthest (weakest power levels), while BS2 makes channel assignments to MSs from the farthest (weakest power levels) to the nearest (strongest power levels). This assignment pattern is shown in FIGURE 2.

[0014] Using this channel assignment, pattern MS1-A(1) having a strong signal, is assigned channel A in cell 1. MS7 which is at the edge of cell 2, and has a relatively weak signal from BS2 is assigned the channel A in cell 2. This assignment avoids the situation where MS3 and MS7 are paired on the same channel. Were that to occur, $S \approx I$ for transmission in each direction from BS to MS and from MS to BS yielding high interference.

[0015] Each BS can make new channel assignments from time to time so that for the most part the MSs remain assigned according to their relative strength even though they are moving.

[0016] Intelligent assignments can be done in other ways to achieve different objectives. For example, some MSs can be designated as preferred users so that the preferred user will always be paired with the weakest interferer in every instance. For example, if MS4 was a preferred user it would be paired with MS7 in the example of FIGURE 1.

[0017] Another objective may be to provide maximum capacity to a particular user. In such a case a clear channel could be guaranteed to the user or the user could be paired with the weakest user in the other cell.

[0018] Another objective may be to reduce interference in a cell by having a BS and/or selected MS transmit at a slower rate at reduced power.

[0019] The strategies discussed herein can be implemented at each BS without prior knowledge of the signals and interferences at the interfering BS. An alternative would be a centralized controller that has access to the signal levels and the interference levels of all MSs, and which then implements a centralized strategy, say to

maximize the capacity of the entire network. In principle, a computer could evaluate every possible pairing combination and select from that a desired result such as maximum network capacity or minimizing high interference conditions.

[0020] FIGURE 3 shows simulation 30 of high to low ordering paired with the low to high (graph 303) at the interfering BS as shown in FIGURE 2. Graphs 301, 302 and 303 represent the capacity distributions of the three strategies. For example, at the 25% point, this means 75% of all users enjoy capacities exceeding 4, 3 and 2.5 BPH respectively. Or looking the other way 25% of all users have capacity less than 4, 3 and 2.5 BPH. The results using 16 sub-carriers show increased bandwidth (theoretical capacity), i.e., a significant reduction in high interference events for a greater number of users over either the preference channel assignment method (graph 301) or random assignment (graph 302), all using 100% of the channels in both of the interfering cells. Note that using preference pairing (which can be a premium service available to select number of MSs) a higher capacity (graph 301) can be achieved, but for a lower number of MSs.

[0021] Graph 302 shows, for example, a typical OFDMA system where individual MS are assigned a subset of all the available sub-carriers. In a typical transmission slot the BS may have available 16, 32 or more sub-channels. A sub-channel usually has several sub-carriers, each carrying independent information. Normally, the sub-channels are assigned on a first come first serve basis to the mobile users who normally are randomly distributed within their respective cells.

[0022] Pairing using graph 303 can be changed, for example, as discussed above, every 5 MS, to be sure that in cell 1 the strongest station remains on channel A, while the weakest station is on channel D, while in cell 2 the weakest station is on channel A, while the strongest is on channel D. Strongest can be defined using any convenient metric so long as the potentially interfering cells agree on the metric. One example would be using high signal to interference ratios (SIR) as a measure of strength.

[0023] Using the preference assignment cell 1 would leave, say the first 5-10% of channels open for assignment to preferred customers, and would leave the last 5-10% of channels vacant. Cell 2 would do the reverse, i.e., leave its first 5-10% of

channels vacant and assign its preferred customers to the last 5-10% of channels. Also, it could be established that preferred users would always get the weakest interferences from the other cell, as discussed above. Graph 301 was simulated for the case of the preferred user being paired with the weakest interferer (weakest one out of 16 at random locations).

[0024] FIGURE 4 shows one embodiment 40 of a process for assigning channels in a wireless system. Process 401 controls requests for service from a MS (user) and process 402 optionally determines if the requesting user is a preferred user. If it is then process 403 assigns a channel according to a class of service or other identifying characteristic of the MS depending upon contractual arrangements with the user.

[0025] If the requesting user is not a preferred user then process 404 determines relative signal strength, as discussed above, and process 405, following an assignment pattern as shown in FIGURE 2, assigns a proper channel in conjunction with processes 406, 407, 408 and 409 which check to be sure there is no prohibition on the use of certain channels (such as, for example, would occur if certain channels were to be maintained vacant).

[0026] Process 410 controls the reassignment from time to time of the channel assignments to insure that the pattern established by FIGURE 2 is maintained, at least on the average.

[0027] In one embodiment the allocated spectrum is divided into channels. A channel is defined as a portion (may be all) of the allocated spectrum being used for a specified period of time. The inventive concepts apply to FDMA, TDMA, TD-CDMA, OFDMA or combinations there of.

[0028] Note that the capacity of a BS or the capacities of certain MSs can be raised or lowered by trading power for throughput (capacity). A simple example: If a user needs less capacity, then lower the power and change the modulation rate.

$C = \log_2 (1 + S/N + I)$. Reduce S to $\frac{1}{4} S$ and the new $C = \frac{1}{2}$ the old C .

Increase S to $4 S$ and the new C is doubled.

[0029] This is a tradeoff. Every time the BS lowers power it helps the neighbor cell, but if it increases power to certain MS it causes more interference. However, if the channels that are increased in power are part of the reserved set, then it may not matter.

[0030] Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the invention as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

CLAIMS

1. A method for assigning channels in a wireless system, said method comprising:
determining at a given point in time in interfering cells which mobile stations (MSs) in each said cell are communicating with a highest signal strength; and
assigning channels to said MSs based on said determined signal strength;
wherein said assigning comprises:
in one of said cells making channel assignments such that a MS with the highest signal strength is assigned a particular channel and in an interfering cell the assignment is that a MS with a lowest signal strength is assigned said particular channel.
2. The method of claim 1 wherein said assigning comprises in one of said cells making channel assignments such that preferred MSs are assigned to certain channels and in the interfering cell said certain channels are reserved.
3. The method of claim 2 wherein said reserved channels are maintained in at least one cell without any MS assignments.
4. The method of claim 3 wherein said reserved channels are limited to a certain power level.
5. The method of claim 2 wherein the determined MSs with a weakest received power are assigned to said reserved channels.
6. The method of claim 2 where preferred MSs are allocated additional transmit power.

51331-1591

7. A method of assigning channels to Mobile Stations (MSs), said method comprising:
in a pair of potentially interfering cells, establishing an assignment order of channels such that with respect to an ordered series of channels in each cell a first cell in the pair of potentially interfering cells includes mobile stations MSs assigned to channels according to a particular assignment pattern while a second cell in the pair of potentially interfering cells includes a channel assignment order in a mirror image of the particular assignment pattern in said first cell, wherein said particular pattern is in an order of strongest to weakest signal strength with respect to said first cell and said channel assignment order is in an order of weakest to strongest with respect to a same ordered series of channels in said second cell as the ordered series of channels in said first cell.
8. The method of claim 7 further comprising:
in each cell making a determination of MS signal strength on a periodic basis; and
making said assignment of said MS signal according to each said determination.
9. The method of claim 8 wherein said periodic basis is on the order of 5 MS.
10. The method of claim 8 wherein said periodic basis is on the order of 10 MS.
11. The method of claim 7 wherein said particular pattern is such that a first group of channels of said ordered channels in said first cell is reserved for particular MSs and a last group of channels of said ordered channels in said second cell is reserved for said particular MSs.
12. The method of claim 11 wherein said first group of channels of said ordered channels in said second cell is reserved for the weakest signal strength receivers.

13. The method of claim 12 further comprising:
 - in each cell making a determination of MS signal received signal strength on a periodic basis; and
 - making said assignment of said MSs according to each said determination.
14. The method of claim 7 further comprising: changing from time to time the power levels of the base station (BS) with respect to certain MSs.
15. A wireless system comprising:
 - at least two base stations (BSs) each defining a cell, said BSs using an N=1 repeat pattern;
 - means for determining relative signal strength among mobile stations (MSs) communicating with each said BS; and
 - means for assigning MSs according to a pattern designed to minimize interference between MSs in each of said cells using the same channels; and
 - means for assigning said channels in each said cell to a channel order such that in one cell weakest signal strength MSs are assigned from one end of said channel order and strongest signal strength MSs are assigned from the other end of said channel order.
16. The system of claim 15 further comprising:
 - means for designating certain of said MSs as preferred MSs; and
 - means for pairing preferred MSs in one of said cells with weak signal strength MSs, in the other of said cells.
17. The system of claim 16 further comprising:
 - means operative from time to time for modifying a power level between a BS and one or more MSs, in order to optimize capacity across both of said cells.

51331-1591

18. A computer-readable storage medium having computer-executable instructions stored thereon that, when executed by a computer, cause the computer to implement the method of any one of claims 1 to 14.

19. A method for assigning channels in a wireless system, said method comprising:

5 determining at a given point in time in interfering cells which mobile stations (MSs) in each said cell are communicating with highest signal strength and weakest signal strength;

assigning channels to said MSs based on said determined signal strength; and

in one of said cells making the channel assignment such that said MSs

10 communicating with the highest signal strength are assigned to a first set of channels and in the interfering cell said first set of channels is reserved

wherein the determined MSs with the weakest signal strength are assigned to said reserved channels.

20. The method of claim 19 wherein said assigning comprises:

15 in one of said cells making the channel assignment such that the MS strongest signal strength is assigned a particular channel and in the interfering cell the assignment is that the MS with weakest received power signal strength is assigned said particular channel.

21. The method of claim 19 wherein said reserved channels are maintained in at least one cell without any MS assignments.

20 22. The method of claim 21 wherein said reserved channels are limited to a certain power level.

23. A method for assigning channels in a wireless system, said method comprising:

51331-1591

determining at a given point in time in interfering cells which mobile stations (MSs) in each said cell are communicating with highest signal strength and weakest signal strength;

assigning channels to said MSs based on said determined signal strength; and

5 in one of said cells making the channel assignment such that said MSs communicating with the highest signal strength are assigned to a first set of channels and in the interfering cell said first set of channels is reserved

where said MSs communicating with the highest signal strength are allocated additional transmit power.

10 24. A method of assigning channels to mobile stations (MSs), said method comprising:

in a pair of potentially interfering cells, establishing an assignment order of channels such that with respect to an ordered series of channels in each cell a first cell will assign MSs to channels according to a particular assignment pattern while in the second of
15 said cells the assignment will be in the mirror image of the assignment in said first cell;

wherein said particular pattern is such that a first group of channels of said ordered channels in said first cell is reserved for particular MSs and a last group of channels of said ordered channels in said second cell is reserved for said particular MSs; and

20 wherein said first group of channels of said ordered channels in said second cell is reserved for the weakest signal strength receivers.

25. The method of claim 24 wherein said particular pattern is in the order of strongest to weakest signal strength with respect to said first cell and said channel assignment is in the order of weakest to strongest with respect to the same ordered series of channels in said second cell.

25 26. The method of claim 25 further comprising:

51331-1591

in each cell making a determination of MS signal strength on a periodic basis;
and

making said assignment of said MS signal according to each said
determination.

5 27. The method of claim 26 wherein said periodic basis is on the order of 5 MS.

28. The method of claim 24 further comprising:

in each cell making a determination of MS signal received signal strength on a
periodic basis; and

making said assignment of said MSs according to each said determination.

10 29. The method of claim 24 further comprising:

changing from time to time the power levels of a base station (BS) with respect
to certain MSs.

30. A wireless system comprising:

at least two base stations (BSs) each defining a cell;

15 means for determining relative signal strength among mobile stations (MSs)
communicating with each said BS; and

means for assigning MSs according to a pattern designed to minimize
interference between MSs in each of said cells using the same channels;

20 wherein said assigning means comprises means for in a first of said at least two
BSs making the MS assignment such that MSs determined to have high strength are assigned
to a first set of channels, and in a second of said at least two BSs said first set of channels is
reserved,

51331-1591

wherein the MSs determined to have weak strength are assigned to said reserved channels.

31. The system of claim 28 wherein said assigning means further comprises:

5 means for assigning a channel order to said channels in each said cells such that in one cell the weakest signal strength MSs are assigned from one end of said channel order and the strongest signal strength MSs are assigned from the other end of said channel order.

32. The system of claim 31 further comprising:

means for designating certain of said MSs as preferred MSs; and

10 means for pairing preferred MSs in one of said cells with weak signal strength MSs in the other of said cells.

33. The system of claim 32 further comprising:

means operative from time to time for modifying the power level between one of said at least two BSs and one or more MS to optimize capacity across both of said cells.

15 34. A base station (BS) comprising:

means for determining relative signal strengths of a plurality of mobile stations (MSs) when said MSs communicate with said BS, said BS capable of using an N=1 repeat pattern; and

20 means for assigning channels to said MSs according to a pattern designed to minimize interference between said MSs;

wherein said assigning means comprises means for determining MSs having strong power and assigning said MSs having strong power to a first set of channels, and means for determining MSs with weak power and assigning said MSs having weak power to reserved channels.

51331-1591

35. The BS of claim 34 wherein by said assigning means comprises:

means for assigning an order to said channels such that the weakest signal strength MSs are assigned from one end of said channel order and the strongest signal strength MSs are assigned from the other end of said channel order.

5 36. The BS of claim 35 further comprising:

means for designating certain of said MSs as preferred MSs; and

means for pairing preferred MSs with weak signal strength MSs.

37. The BS of claim 36 further comprising:

10 means operative from time to time for modifying the power level between said BS and one or more MS in order to optimize capacity.

38. A computer-readable storage medium having computer-executable instructions stored thereon that, when executed by a computer, cause the computer to implement the method of any one of claims 19 to 29.

39. A method comprising:

15 determining a strength of a signal at a base station, the signal being received wirelessly from a mobile station;

determining whether the mobile station has a preferred status that allows the mobile station to be assigned to a reserved wireless channel in a first subset of wireless channels based on a preference assignment;

20 responsive to a determination that the mobile station does not have the preferred status:

determining a position in an ordering of the wireless channels based on signal strength; and

51331-1591

assigning a wireless channel that corresponds to the determined position to the mobile station, the wireless channel being formed by a set of OFDMA subcarriers for a predetermined period of time;

5 reserving the first subset of the wireless channels for a first set of mobile stations in a first cell that have preferred statuses, the first subset of the wireless channels having a restricted assignment status in a second cell;

causing a second subset of the wireless channels to remain vacant by restricting an assignment status of the second subset of the wireless channels in the first cell; and

10 assigning a third subset of the wireless channels to a second set of mobile stations in the first cell based on signal strength.

40. A method as described in claim 39, wherein the determining of the strength of the signal is performed responsive to receipt of a request from the mobile device at the base station for service.

15 41. A method as described in claim 39, wherein the determining of the signal strength is based at least in part on a signal to interference ratio (SIR).

42. A method as described in claim 39, wherein the ordering is arranged such that a relatively strong signal strength is assigned a respective said channel.

20 43. A method as described in claim 39, wherein the restricted assignment status of the first subset of the wireless channels comprises a prohibition of assignment of the first subset of the wireless channels to a third set of mobile stations in the second cell.

44. A method as described in claim 39, further comprising repeating the determining of the signal strength, the determining of the position in the ordering, and the assigning of the wireless channel at predefined intervals of time for the mobile station.

25 45. A method as described in claim 44, wherein the repeating results in the mobile station being reassigned to a different said wireless channel.

51331-1591

46. A method as described in claim 39, wherein the restricted assignment status of the first subset of the wireless channels comprises a restricted power level for a third set of mobile stations in the second cell.

47. A base station comprising hardware configured to;

5 determine whether a mobile station has a preferred status that allows utilization of a preference assignment to assign the mobile station to a reserved wireless channel in a first subset of wireless channels;

responsive to a determination that the mobile station does not have the preferred status, assign a wireless channel to the mobile station based on an ordering of the
10 wireless channels and corresponding signal strength, the wireless channel being formed by a set of OFDMA subcarriers for a predetermined period of time;

reserve the first subset of the wireless channels for a first set of mobile stations in a first cell that have preferred statuses, the first subset of the wireless channels having a restricted assignment status in a second cell that potentially interferes with the base station;

15 restrict an assignment status of a second subset of the wireless channels in the first cell to cause the second subset of the wireless channels to remain vacant; and

assign a third subset of the wireless channels to a second set of mobile stations in the first cell based on signal strength.

48. A base station as described in claim 47, wherein the signal strength is based at
20 least in part on a signal to interference ratio (SIR).

49. A base station as described in claim 47, wherein the ordering of wireless channels is arranged such that a relatively strong signal strength is assigned a respective said channel.

51331-1591

50. A base station as described in claim 47, wherein the restricted assignment status of the first subset of mobile stations comprises a prohibition of assignment of the first subset of the wireless channels to a third set of mobile stations in the second cell.

51. A base station as described in claim 47, wherein the hardware is configured to
5 repeat the assignment of the wireless channel at predefined intervals of time.

52. A base station as described in claim 51, wherein the repeating of the assignment results in the mobile station being reassigned to a different said wireless channel.

53. A base station as described in claim 47, wherein the restricted assignment status of the first subset of the wireless channels comprises a restricted power level for a third
10 set of mobile stations in the second cell.

54. A mobile station comprising hardware configured to:

form a request for communication to a base station; and

receive a response from the base station indicating a wireless subchannel assigned to the mobile station for wireless communication with the base station, the wireless
15 subchannel assigned by the base station using an ordering of wireless subchannels and corresponding signal strength, the wireless subchannel having a set of OFDMA subcarriers that form the wireless subchannel for a predetermined period of time, the wireless subchannel being drawn from a first subset of subchannels assigned by the base station to a set of mobile stations having preferred status in a first cell, the preferred status of the set of mobile stations
20 allowing the first set of mobile stations to be assigned to reserved subchannels having substantially no interference from a second cell based on a restricted assignment status in the second cell, the ordering of the wireless subchannels comprising a second subset of subchannels assigned by the base station to remain vacant in the first cell and a third subset of subchannels assigned by the base station to an additional set of mobile stations in the first cell.

25 55. A mobile station as described in claim 54, wherein the signal strength is based at least in part on a signal to interference ratio (SIR).

51331-1591

56. A mobile station as described in claim 54, wherein the ordering of the wireless subchannels is arranged such that a relatively strong signal strength is assigned a respective said subchannel.

57. A mobile station as described in claim 54, wherein the restricted assignment
5 status comprises a prohibition of assignment for the first subset of subchannels to a second set of mobile stations in the second cell.

58. A mobile station as described in claim 54, wherein the restricted assignment status comprises a restricted power level for a second set of mobile stations in the second cell.

59. A computer-readable storage medium having computer-executable instructions
10 stored thereon that, when executed by a computer, cause the computer to implement the method of any one of claims 39 to 46.


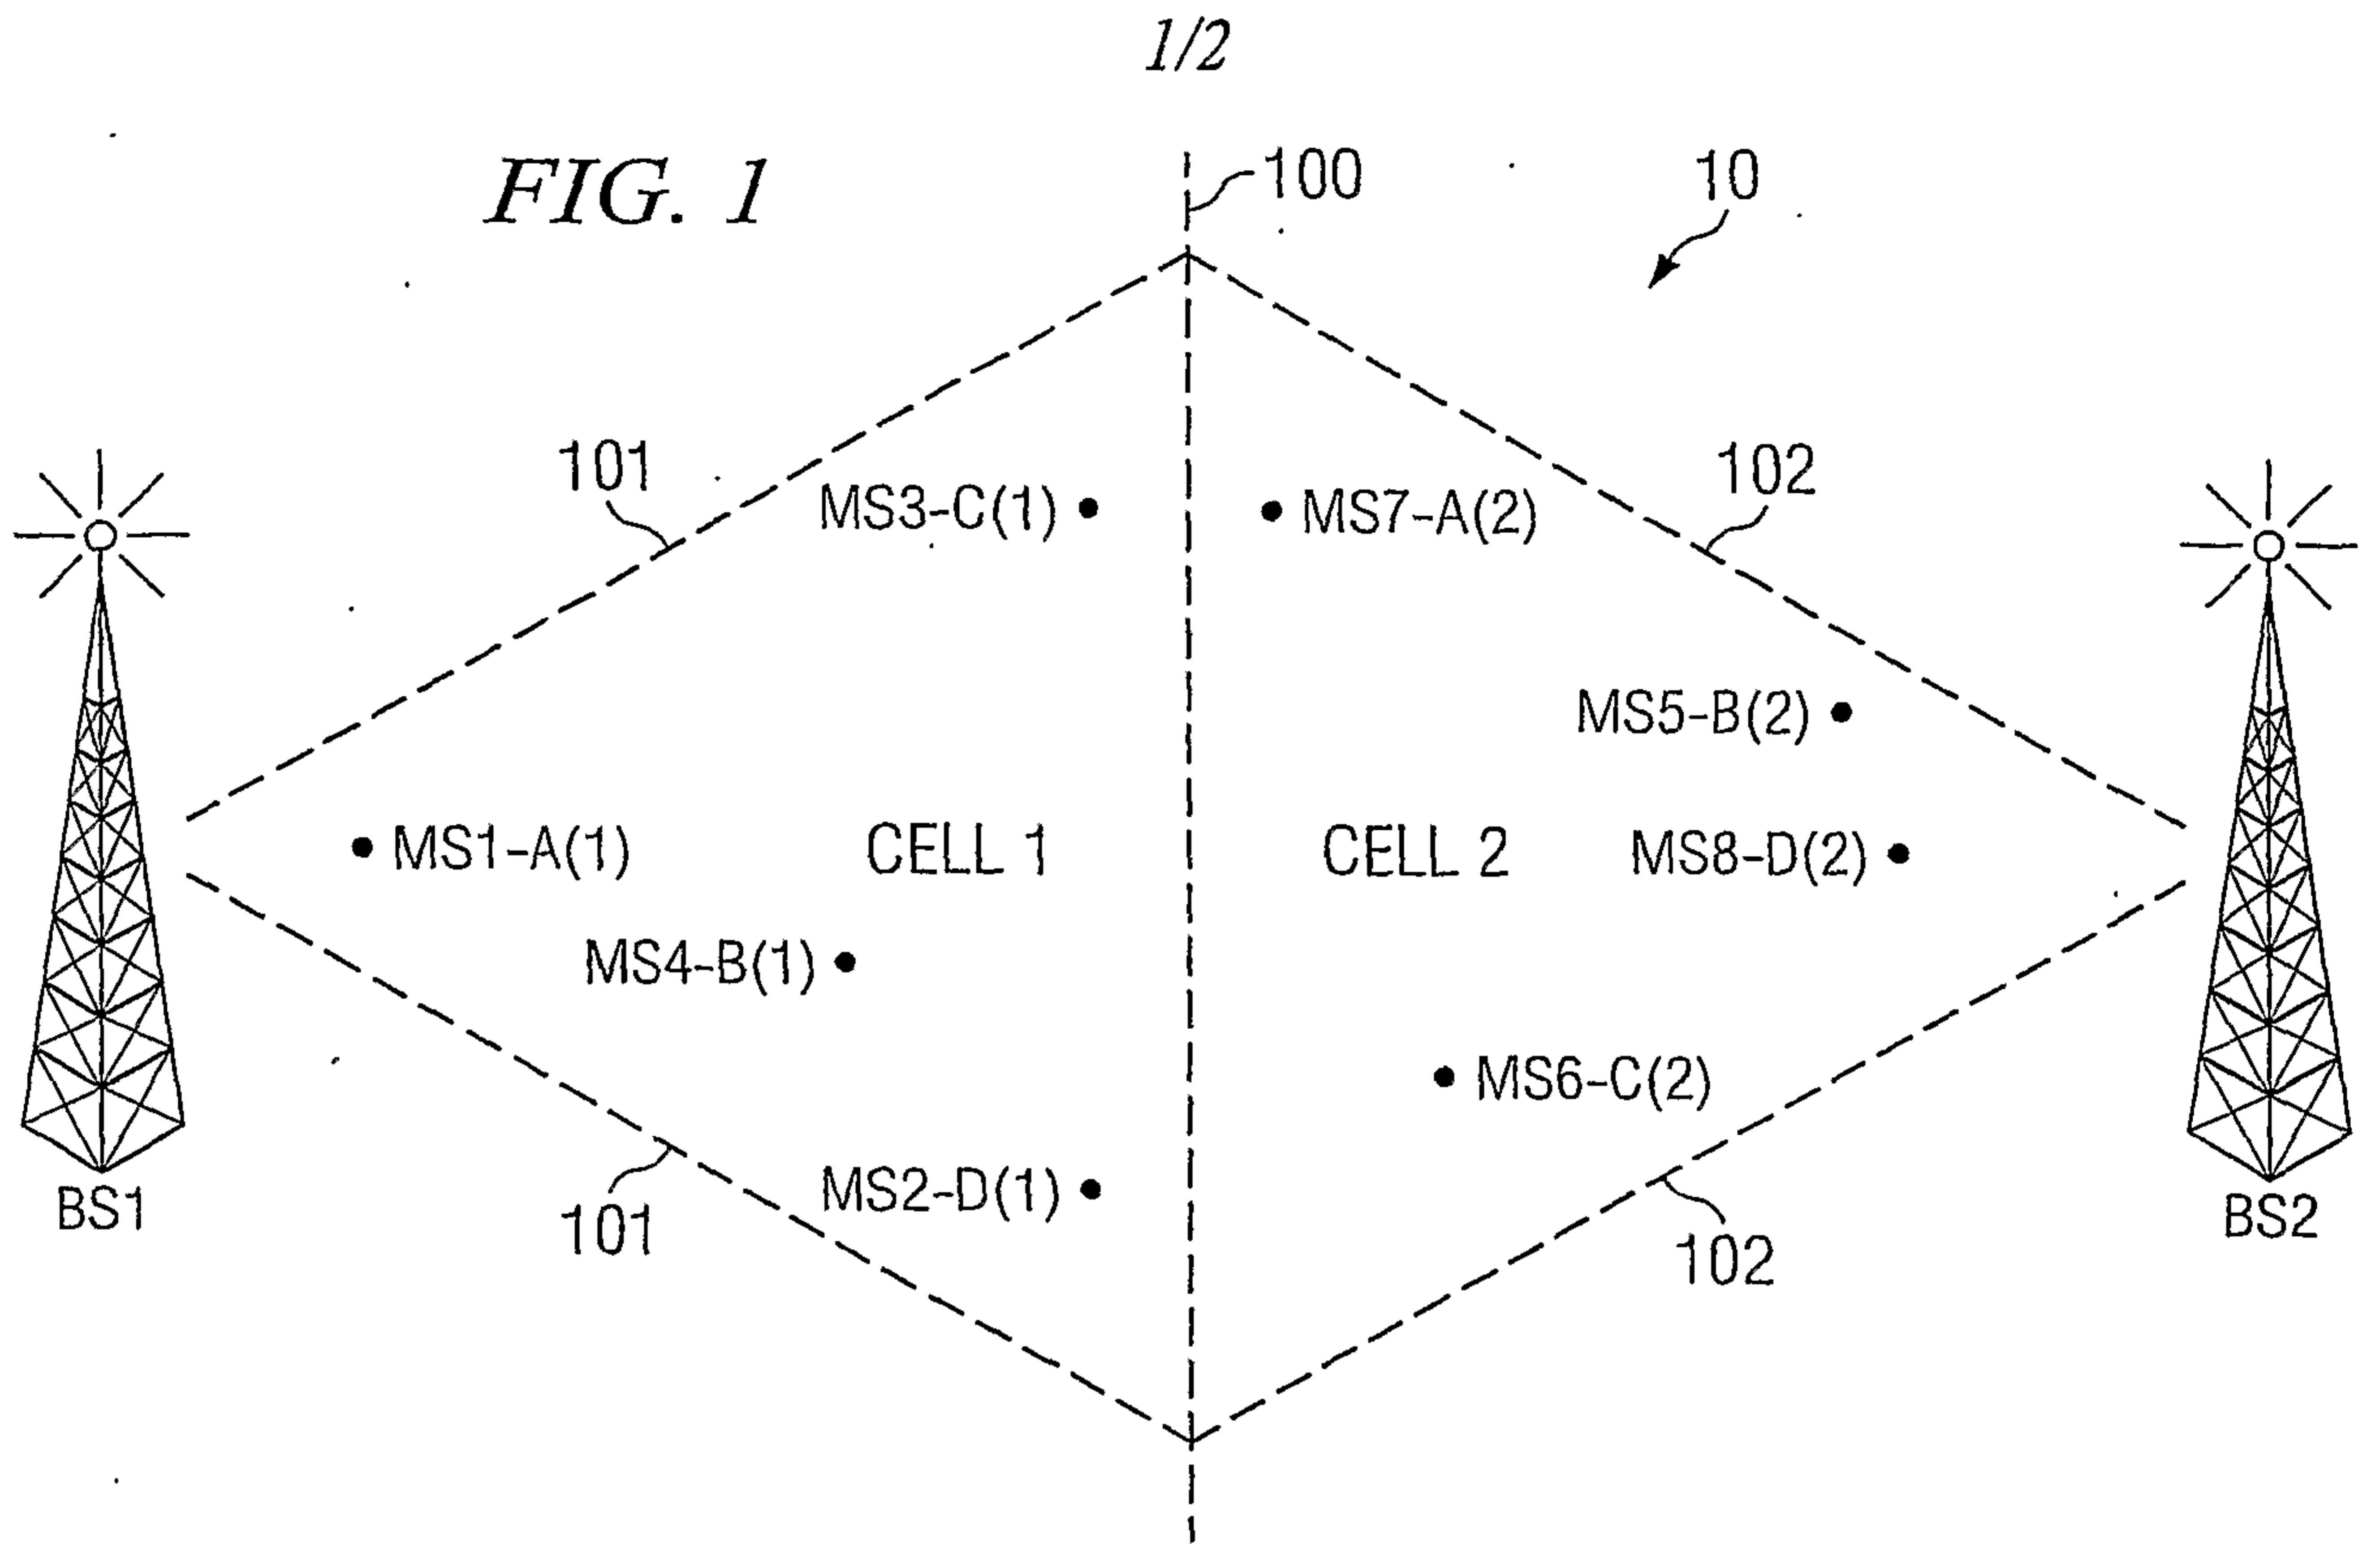


FIG. 3

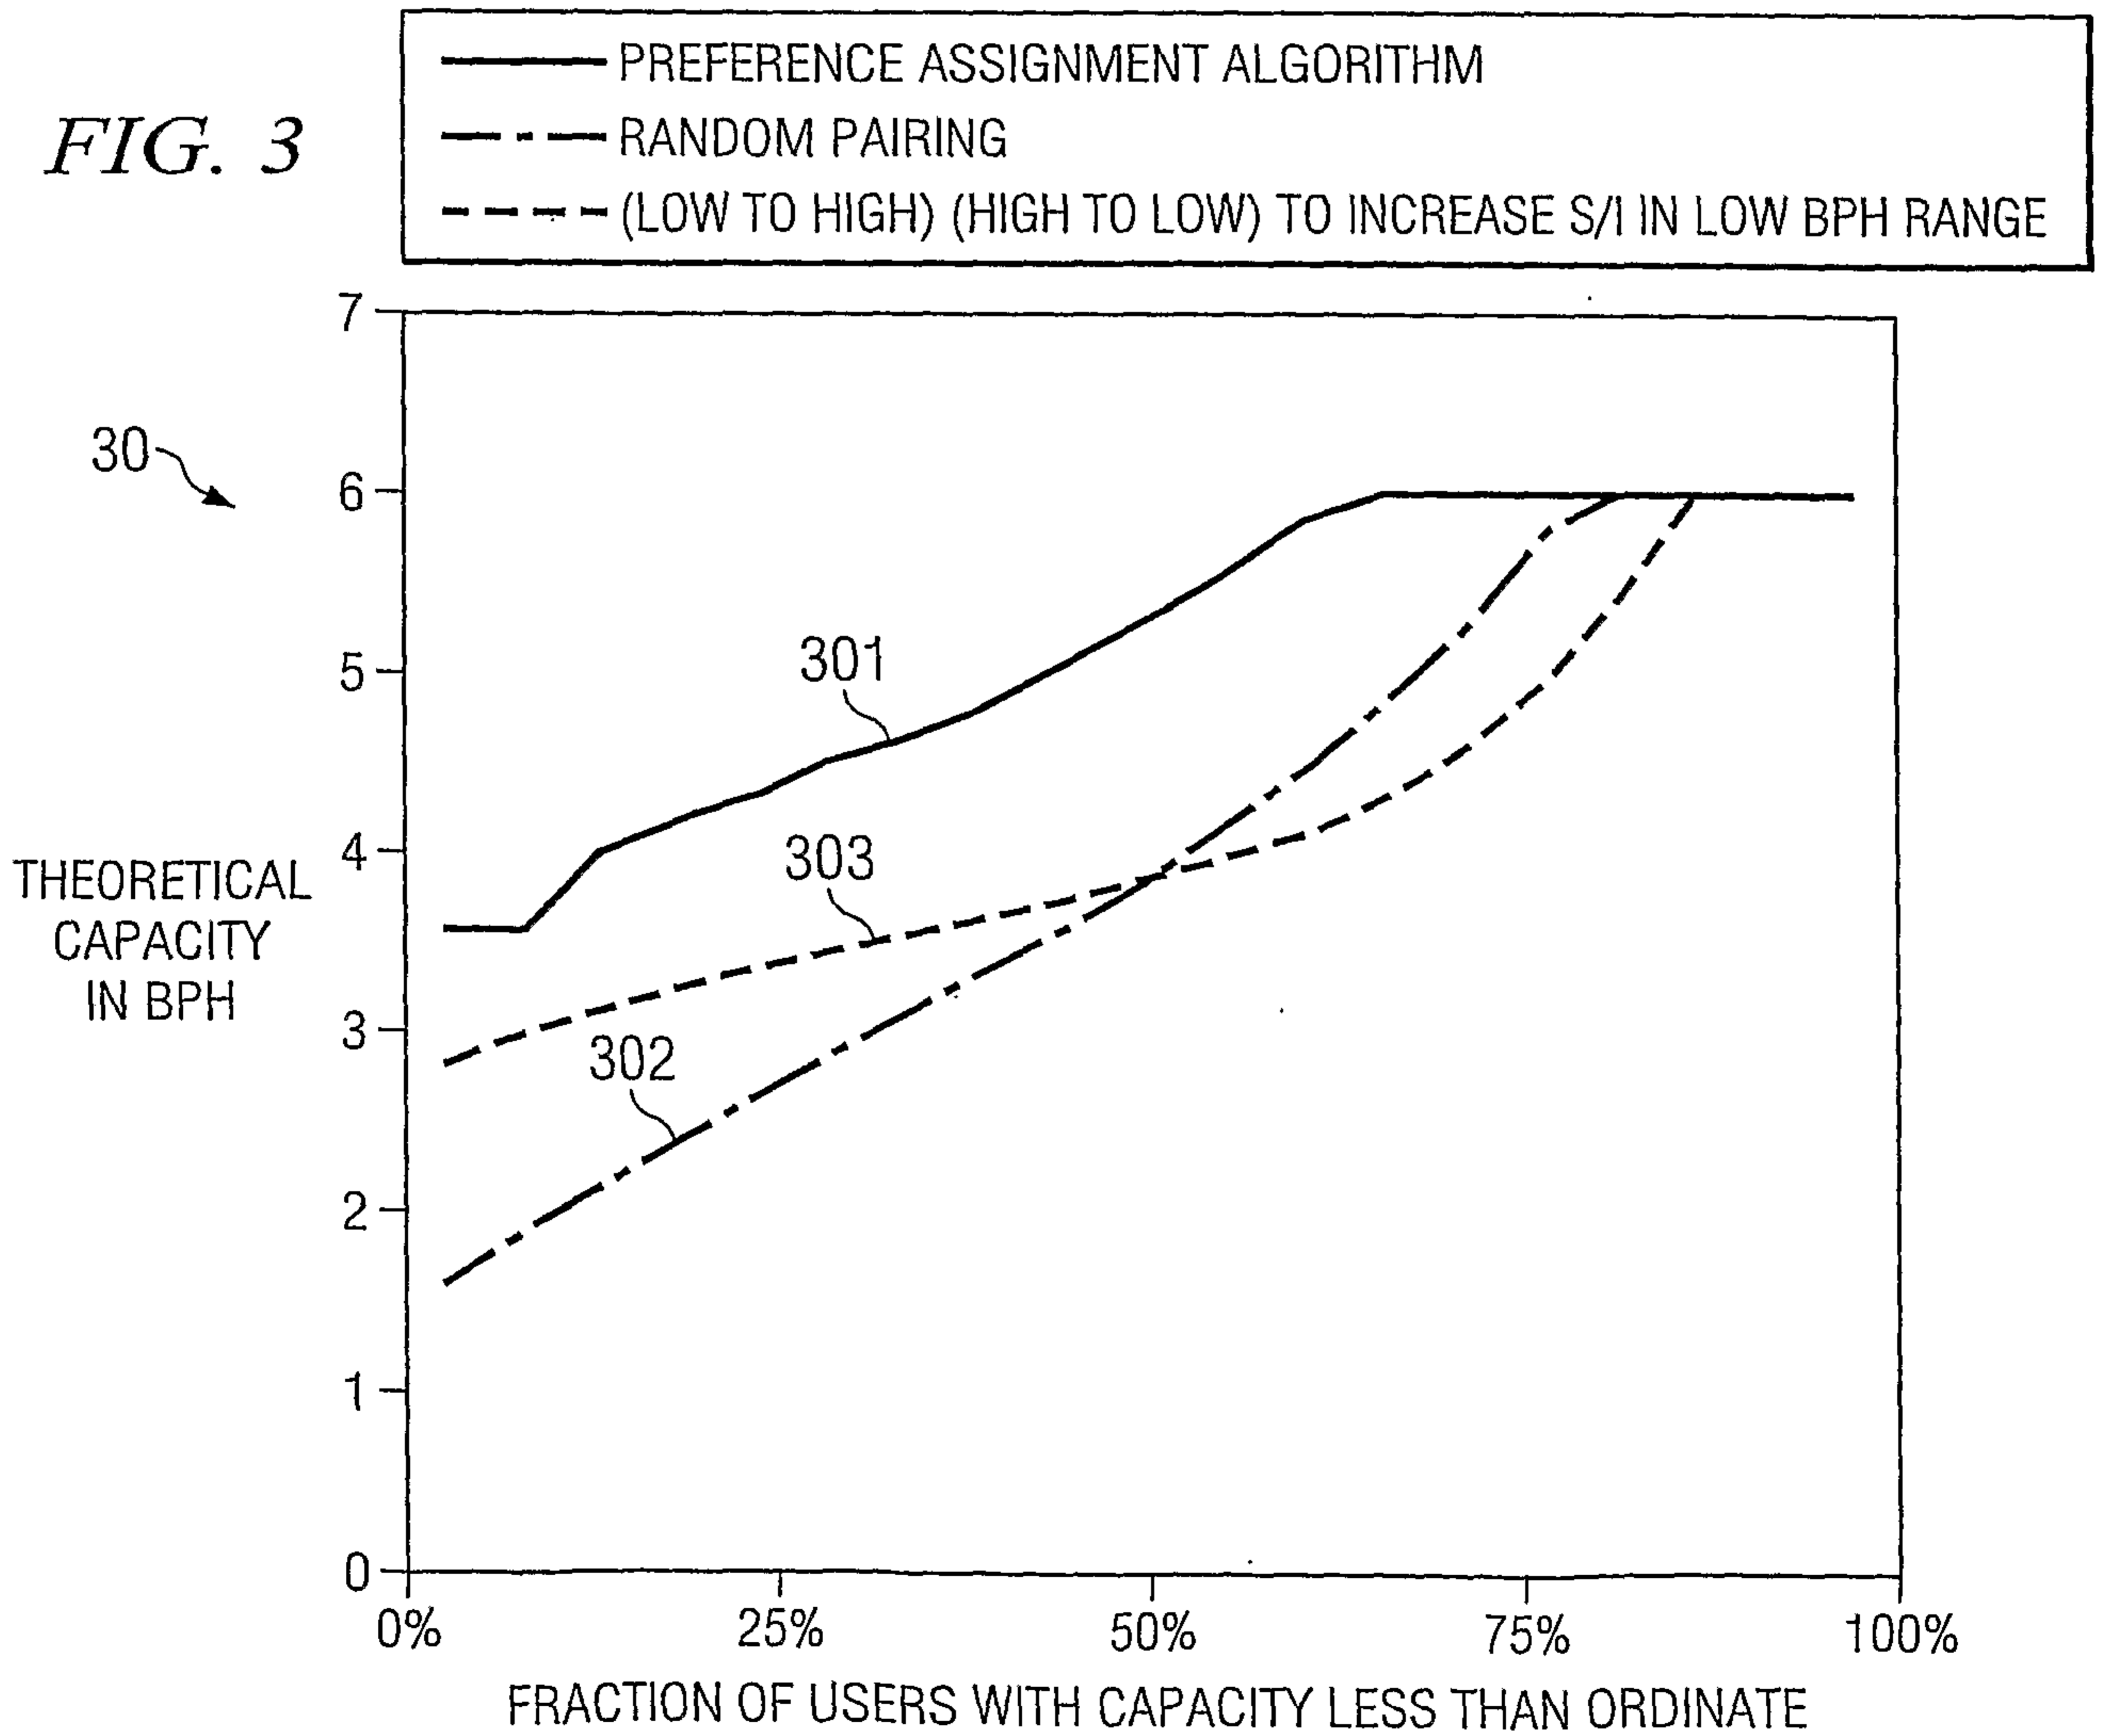

2/2

FIG. 2

BASE STATION	CHANNELS			
	A	B	C	D
BS1 (STRONG TO WEAK)	MS 1	MS 4	MS 3	MS 2
BS2 (WEAK TO STRONG)	MS 7	MS 5	MS 6	MS 8

FIG. 4

