



(22) Date de dépôt/Filing Date: 2015/03/11  
(41) Mise à la disp. pub./Open to Public Insp.: 2015/09/17  
(45) Date de délivrance/Issue Date: 2020/07/28  
(62) Demande originale/Original Application: 2 936 557  
(30) Priorités/Priorities: 2014/03/11 (US14/204,075);  
2014/11/07 (US14/535,667)

(51) Cl.Int./Int.Cl. B65D 30/18 (2006.01)

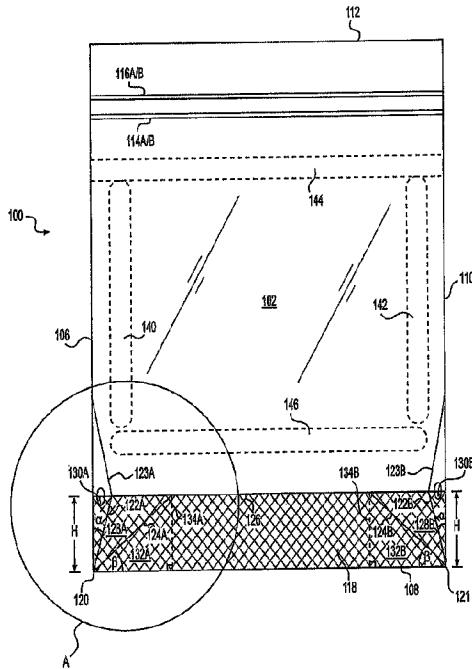
(72) Inventeurs/Inventors:  
DAIS, BRIAN C., US;  
PORCHIA, JOSE, US;  
WEISS, ANDREW S., US;  
QURESHI, SALEEM, US;  
DHALL, SANJAY, US;  
BURGGREN, KEEGAN E., US

(73) Propriétaire/Owner:  
S.C. JOHNSON & SON, INC., US

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : SAC TENANT DEBOUT

(54) Title: STAND-UP BAG



(57) Abrégé/Abstract:

A storage bag includes first and second sidewalls that are directly connected, and a plurality of shift regions at bottom portions of the sidewalls. The bag can be moved about the shift regions such that the bag is shiftable between a flat configuration with the first and second sidewalls positioned adjacent to each other and a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, the bag is shifted about the shift regions such that a substantially flat base is formed for the bag. The stand-up configuration is thereby achieved without a pleat being provided between the sidewalls at a bottom of the bag.

## **ABSTRACT**

A storage bag includes first and second sidewalls that are directly connected, and a plurality of shift regions at bottom portions of the sidewalls. The bag can be moved about the shift regions such that the bag is shiftable between a flat configuration with the first and second sidewalls positioned adjacent to each other and a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, the bag is shifted about the shift regions such that a substantially flat base is formed for the bag. The stand-up configuration is thereby achieved without a pleat being provided between the sidewalls at a bottom of the bag.

## STAND-UP BAG

## BACKGROUND

### **Field of the Invention**

[0001] Our invention relates to a storage bag. More specifically, our invention relates to a plastic storage bag that can be shifted between a flat configuration and a stand-up configuration wherein the bag can be easily filled.

### **Related Art**

[0002] Storage bags made from flexible plastic materials are well known. Such plastic storage bags are offered in a variety of sizes and can be used to contain a variety of items, including food, utensils, clothing, tools, etc. These storage bags often include a zipperlike closure mechanism to releasably seal the interior of the bag. Different types of plastic storage bags with closure mechanisms are sold by the assignee of the present application under the ZIPLOC® trademark.

[0003] It is desirable to configure a plastic storage bag such that a user can set the bag in an opened position with the bag standing upright and without the user having to hold onto the bag. That is, it is desirable for a plastic storage bag to stand upright, with its closure mechanism unsealed, without the user grasping the bag. In such an upright and opened position, the user's hands are free to fill the bag with items.

[0004] At other times, however, it is desirable for the plastic storage bag to lie as flat as possible. For example, when the bag is not being used, a flat bag may be more compactly stored.

**[0005]** In order to provide a plastic storage bag that can stand upright without the user holding onto the bag, a pleat or gusset is sometimes added to the bottom of the bag. By “pleat” or “gusset” we mean additional material provided between other portions of the bag, for example, a fold formed by doubling back the material forming the bag on itself. An example of such a pleat/gusset arrangement in a bag can be seen in U.S. Patent No. 3,738,565. In addition to a pleat, a storage bag may be made thicker throughout its sides and bottom to more firmly support itself in an upright position. Both a pleat and a thicker bag, however, require the use of additional material to form the bag, thereby increasing the costs associated with manufacturing the bag. Moreover, a pleat and additional material reduce the ability of the bag to be made flat, for example, when not being used and being stored.

#### **SUMMARY OF THE INVENTION**

**[0006]** In one aspect, our invention is directed to a storage bag including a first sidewall that includes at least one shift region that extends from near a corner of the first sidewall and a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto. The second sidewall includes at least one shift region that extends from near a corner of the second sidewall. The bag is shiftable about the at least one shift region of the first sidewall and shiftable about the at least one shift region of the second sidewall such that the bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, a substantially flat base is formed for the bag.

**[0007]** In another aspect, our invention is directed to a storage bag including a first sidewall that includes (i) a first shift region that extends from a first corner of the first sidewall, (ii) a second shift region that extends from the first corner of the first sidewall, (iii) a third shift region that extends from a second corner of the first sidewall, and (iv) a fourth shift region that extends from the second corner of the first sidewall, and a second sidewall connected to the first sidewall so as to form an interior of the bag with an opening thereto. The second sidewall includes (i) a first shift region that extends from near a first corner of the second sidewall, (ii) a second shift region that extends from near the first corner of the second sidewall, (iii) a third shift region that extends from near a second corner of the second sidewall, and (iv) a fourth shift region that extends from near the second corner of the second sidewall. The bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other and (ii) a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, the bag is shifted about the first, second, third, and fourth shift regions of the first sidewall and about the first, second, third, and fourth shift regions of the second sidewall such that a substantially flat base is formed for the bag.

**[0008]** In another aspect, our invention is directed to a storage bag including a first sidewall that includes (i) shift regions that extend from near a first corner of the first sidewall and (ii) shift regions that extend from near a second corner of the first sidewall, and a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto. The second sidewall includes (i) shift regions that extend from near a first corner of the second sidewall and (ii) shift regions that extend from near a second corner of the second sidewall. The bag is shifted about the shift regions of the first sidewall and shifted about the shift regions of the second

sidewall such that the bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, a substantially flat base is formed for the bag.

[0009] In yet another aspect, our invention is directed to a storage bag including a first sidewall and a second sidewall connected to the first sidewall so as to form an interior of the bag with an opening thereto. The first and second sidewalls each include (i) a first shift region that extends from near a first corner of the bag, (ii) a second shift region that extends from the first corner of the bag, (iii) a third shift region that extends from near a second corner of the bag, and (iv) a fourth shift region that extends from the second corner of the bag. When  $\alpha$  is an angle between the first and third shift regions of the first and second sidewalls and adjacent edges of the bag, and when  $\beta$  is an angle between the second and fourth shift regions of the first and second sidewalls and a bottom edge of the bag, then angles  $\alpha$  and  $\beta$  are generally defined

$$\beta = -\frac{4}{7}\alpha + 45$$

[0010] In a further aspect, our invention is directed to a storage bag including a first sidewall that includes a plurality of shift regions that extend from near a corner of the first sidewall, wherein at least one of the plurality of shift regions crosses another of the plurality of shift regions, and a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto, the second sidewall including a plurality of shift regions that extend from near a corner of the second sidewall, wherein at least one of the plurality of shift regions crosses another of the plurality of shift regions. The bag is shiftable about the plurality of shift regions of the first sidewall and shiftable about the plurality of shift regions of the second sidewall such

that the bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, a substantially flat base is formed for the bag.

**[0011]** In still another aspect, our invention is directed to a storage bag including a first sidewall that includes a shift region that extends from near a first side of the first sidewall to near a second side of the first sidewall, wherein the shift region has a beaded shape, and a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto, the second sidewall including a shift region that extends from near a first side of the second sidewall to near a second side of the second sidewall, wherein the shift region has a beaded shape. The bag is shiftable about the shift regions of the first and second sidewalls such that the bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, a substantially flat base is formed for the bag.

**[0012]** In yet another aspect, our invention provides a storage bag including a first sidewall, a first closure structure extending from a first side of the first sidewall to a second side of the first sidewall, a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto, and a second closure structure extending from a first side of the second sidewall to a second side of the second sidewall. The second closure structure is configured to interlock with the first closure structure and thereby seal the opening of the bag. The storage bag further includes a first lip formed on the same side of the bag as the first sidewall, the lip

extending above the first closure structure and provided adjacent to the opening, and a second lip formed on the same side of the bag as the second sidewall, the lip extending above the second closure structure and provided adjacent to the opening. The first and second lips are stiffer than the first and second sidewalls. The bag is shiftable between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other. In the stand-up configuration, a substantially flat base is formed for the bag.

[0013] In still another aspect, our invention is directed to a storage bag including a first sidewall that includes a plurality of shift regions, wherein at least one of the plurality of shift regions is provided on a lower portion of the first sidewall, and wherein at least one of the plurality of shift regions is provided on an upper portion of the first sidewall, and a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto, the second sidewall including a plurality of shift regions, wherein at least one of the plurality of shift regions is provided on a lower portion of the second sidewall, and wherein at least one of the plurality of shift regions is provided on an upper portion of the second sidewall. The bag is shiftable about the plurality of shift regions of the first sidewall and shiftable about the plurality of shift regions of the second sidewall such that the bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other and the opening of the bag is opened. In the stand-up configuration, a substantially flat base is formed for the bag.

[0014] These and other advantages and features will become more apparent from the following description taken in conjunction with the drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0015] FIG. 1A is a side view of a bag according to our invention in a flat configuration.

[0016] FIG. 1B is a detailed view of the section A of the bag shown in FIG. 1A.

[0017] FIG. 2 is an end view of a bag according to our invention in the flat configuration.

[0018] FIG. 3 is a perspective side view of a bag according to our invention in a stand-up configuration.

[0019] FIG. 4 is a perspective side view of a bag according to our invention in the stand-up configuration.

[0020] FIG. 5 is a side view of a bag according to another embodiment of our invention.

[0021] FIGS. 6A to 6G are cross-sectional views of portions of bags according to embodiments of our invention.

[0022] FIG. 7 is a side view of a bag according to yet another embodiment of our invention.

[0023] FIG. 8 is a side view of a bag according to a still further embodiment of our invention.

**DETAILED DESCRIPTION OF THE INVENTION**

[0024] Our invention relates to a plastic storage bag that includes features for shifting the bag between a flat configuration and a stand-up configuration. In the stand-up configuration, the bag stands on a substantially flat base without being grasped by a user such that the bag can easily be filled.

**[0025]** As will be apparent from the description herein, the terms “bag” and “storage bag” encompass a broad range of structures designed to contain items. Such bag structures might also be termed pouches, envelopes, packets, and the like. In general, the terms “bag” and “storage bag,” as used herein, simply mean a somewhat flexible container with an opening, such that the bag is capable of carrying any number of items. The storage bags may be tailored for particular uses, for example, the bags may be used to store food in a refrigerator in some embodiments, or the bags may be used to store food in a freezer in other embodiments.

**[0026]** Figures 1A, 1B, and 2 to 4 are views of a storage bag 100 according to embodiments of our invention. The bag 100 includes a first sidewall 102 and a second sidewall 104 that are connected along side edges 106 and 110 and along a bottom edge 108. An opening 112 is formed at the top of the bag 100 through which items may be placed into the interior of the bag 100. Notably, the bag 100 does not include a pleat or gusset at the bottom portion 118 between the first and second sidewalls 102 and 104. That is, the first and second sidewalls 102 and 104 are directly connected to each other along the bottom edge 108 of the bag 100 without any sort of folding or expandable structure provided between the sidewalls 102 and 104. The first and second sidewalls 102 and 104 are also directly connected along side edges 106 and 110 without any pleat or gusset connecting the two sidewalls 102 and 104.

**[0027]** The opening 112 may be sealed by the interlocking closure structures 114A, 114B, 116A, and 116B. Interlocking closure structures for plastic storage bags are well known in the art, and examples of different shapes and configurations of interlocking members that can be used with our storage bag 100 can be seen in U.S. Patent Nos. 5,070,584; 7,784,160; 7,886,412; 7,946,766; and 8,061,898, and in U.S. Patent

Application Publication No. 2009/0324141. As an alternative to the closure structures 114A, 114B, 116A, and 116B, in other embodiments, a slider-type closure structure could be used to seal the opening 112 of the bag 100 along the top edge of the first and second sidewalls 102 and 104. Examples of slider-type closure structures can be seen in U.S. Patent Nos. 5,664,299; 5,836,056; and 7,052,181.

[0028] Illustrative plastic materials that can be used to form the bag 100 include, for example, polypropylene (PP), polyethylene (PE), metallocene-polyethylene (mPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE), ultra low density polyethylene (ULDPE), biaxially-oriented polyethylene terephthalate (BPET), high density polyethylene (HDPE), polyethylene terephthalate (PET), among other polyolefin plastomers and combinations and blends thereof. Still other materials that may be used include styrenic block copolymers, polyolefin blends, elastomeric alloys, thermoplastic polyurethanes, thermoplastic copolymers, thermoplastic polyamides, polymers and copolymers of polyvinyl chloride (PVC), polyvinylidene chloride (PVDC), saran polymers, ethylene/vinyl acetate copolymers, cellulose acetates, polyethylene terephthalate (PET), ionomer, polystyrene, polycarbonates, styrene acryloacrylonitrile, aromatic polyesters, linear polyesters, and thermoplastic polyvinyl alcohols. Those skilled in the art will recognize that a wide variety of other materials may also be used to form the storage bag 100. Those skilled in the art will also recognize that by using the plastic materials described above, the storage bag 100 can be made in a range of colors and transparencies.

**[0029]** A variety of manufacturing techniques may be used to form the plastic storage bag 100. As one specific example, the sidewalls 102 and 104 of the bag 100 can be extruded together as one sheet, with a portion of the first sidewall 102 and a portion of the second sidewall 104 being joined together to form the bag structure using, for example, thermoplastic welding techniques. As another example, the first and second sidewalls 102 and 104 can be formed as separate structures that are joined together along the three edges 106, 108, and 110. Along these lines, when referring herein to the sidewalls 102 and 104 as being “connected” together, the sidewalls may be integrally formed, or, alternatively, the sidewalls 102 and 104 may be separate structures that have been joined together at the connection. The formation of specific additional features of the bag 100 will be described below.

**[0030]** The storage bag 100 according to our invention can be shifted between a flat configuration, as shown in Figures 1A, 1B, and 2, and a stand-up configuration, as shown in Figures 3 and 4. The bag 100 maintains the stand-up position even though it does not include a pleat or gusset adjacent to its bottom edge 126. Instead, the bag 100 is made to stand upright through unique configurations at the bottom portions 118 of the sidewalls 102 and 104, which will now be described.

**[0031]** As shown in Figures 1A and 3, a plurality of shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 126, and 128 is formed in the bottom portion 118 of the first sidewall 102. Figure 1B shows the details of the region A in Figure 1A, including the additional shift regions 125A, 125B, and 125C. The shift regions are configured to allow the bag to be easily shifted between flat and stand-up configurations, as will be described in detail below. In some embodiments, the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128 are slight indentations, scores, or

crimps formed in the sidewalls 102 and 104 of the bag 100 that are made to a depth such that the bag 100 can easily shift about the regions. However, the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128 are not made to a depth that substantially weakens the integrity of the bag 100. Those skilled in the art will recognize that a variety of techniques can be used to form the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128, such as deforming the bag 100 with a mechanical structure or, as another example, by using ultrasonic deforming. As yet another example, the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128 can be formed by deforming the sidewalls 102 and 104 of the storage bag 100 by squeezing portions of the sidewalls 102 and 104 so as to permanently deform the portions in the shapes of the shift regions.

[0032] With the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128, the bag 100 is shiftable between a flat configuration, as shown in Figures 1A, 1B, and 2, and a stand-up configuration, as shown in Figures 3 and 4. In the flat configuration, the first and second sidewalls 102 and 104 are positioned adjacent to each other. In the stand-up configuration, the first and second sidewalls 102 and 104 are separated from each other. To separate the first and second sidewalls 102 and 104, the bottom portion 118 of the bag is moved about the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128 such that the bottom portion 118 forms a substantially flat base for the upright bag 100. By being shifted in this manner, the ends of the bottom portion 118 that are adjacent to the corners 120 and 121 extend outward in a triangular-shaped configuration. The bottom portion 118 of the bag 100 is thereby outlined by the shift regions 124A, 124B, 124C, 124D, 126, and

128. When shifting from the flat configuration to the stand-up configuration, the bag 100 is also moved about shift regions 122A and 122B, such that the portions 130A and 130B of the first sidewall 102 are shifted over other portions 128A and 128B of the first sidewall 102. Shifting to the stand-up configuration is facilitated by grasping the bag 100 at the portions 130A and 130B, which, in effect, act as hinges that naturally effect shifting of the bag 100 to the stand-up configuration.

[0033] In the embodiment shown in Figures 1A to 4, the shift regions are provided on both of the bottom corners of both sidewalls 102 and 104 of the bag 100. Specifically, a plurality of shift regions 124C, 124D, and 128 is provided on the second sidewall 104 corresponding to the shift regions 124A, 124B, and 126 that are provided on the first sidewall 104, as can be seen in Figures 3 and 4. Note that by "corresponding," we mean that the shift regions are in the same relative positions on the first and second sidewalls 102 and 104. In other embodiments, however, fewer shift regions may be provided. For example, the shift regions may only be provided in one corner of one of the sidewalls 102 and 104. In still other embodiments, shift regions may be provided on the two bottom corners of one of the sidewalls 102 and 104, but not provided on the other of the sidewalls 102 and 104. In yet other embodiments, the shift regions may be provided on the bottom corner of one of the sidewalls 102 and 104 and other shift regions may be provided on the bottom corner on the other side of the other sidewall 102 or 104, such that the shift regions on one side of the bag 100 do not correspond to shift regions on the other side of the bag 100.

[0034] Similarly, the bag 100 may only include some, but not all, of the depicted shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128. For example, in one embodiment, the bag 100 might include the shift regions 122A,

122B, 124A, and 124B, but not include any of the other depicted shift regions 123A, 123B, 124C, 124D, 125A, 125B, 125C, 126, and 128. In such an embodiment, the shift regions 122A, 122B, 124A, and 124B facilitate shifting of the bag 100 from the flat configuration to the stand-up configuration. Also, in the depicted embodiments, the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128 are shown to extend in continuous lines. In other embodiments, however, the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128 can be discontinuous. For example, any one of the shift regions can be formed as a plurality of distinct line segments, dots, etc. As will be appreciated by those skilled in the art, the number and continuity of the shift regions provided to a bag according to our invention can be adjusted in order to make the shifting of the bag more or less easy, or the number and continuity of the shift regions can be adjusted based on other factors such as aesthetics and cost of manufacturing of the bag. Along these lines, in some embodiments, the bag may only be provided with one of the shift regions 122A, 122B, 123A, 123B, 124A, 124B, 124C, 124D, 125A, 125B, 125C, 126, and 128.

**[0035]** As can be seen in Figures 1A and 1B, there are two angles  $\alpha$  and  $\beta$  formed by the shift regions 122A, 122B, 124A, 124B, 124C, 124D, 126, and 128 relative to the side edge 106, side edge 110, and bottom edge 108. Further, with the reference lines 134A and 134B, areas 128A, 128B, 132A, and 132B are defined. Note that reference lines 134A and 134B are provided in Figures 1A and 1B for purposes of understanding our invention, but are not actually a structure in the bag 100. As is apparent from the figures, the size of angles  $\alpha$  and  $\beta$  determines the relative sizes of the areas 128A, 128B, 132A, and 132B. Generally speaking, we have found that, to facilitate the shifting movement from the flat configuration to the stand-up configuration, the areas 128A and 128B should be

approximately equal to the areas 132A and 132B. Further, we have found that shifting is greatly facilitated when the angles  $\alpha$  and  $\beta$  satisfy the following Equation (1):

$$\beta = -\frac{4}{7}\alpha + 45 \quad (1)$$

When angles  $\alpha$  and  $\beta$  are generally defined by the relation of Equation (1), the bag 100 can be easily shifted from the flat configuration to the stand-up configuration. Note, however, that Equation (1) does not have to be exactly satisfied, but rather, both  $\alpha$  and  $\beta$  can vary slightly from the relation while still allowing for the bag 100 to be easily moved from the flat configuration to the stand-up configuration. For example, given a specific angle  $\alpha$ , then angle  $\beta$  may vary by less than about  $\pm 2$  degrees from the value for angle  $\beta$  calculated from Equation (1). Given a specific angle  $\beta$ , then angle  $\alpha$  may vary less than about  $\pm 4$  degrees from the value for angle  $\alpha$  calculated from Equation (1). For example, in specific embodiments, angle  $\alpha$  is about 14 degrees to about 16 degrees and angle  $\beta$  is about 37 degrees to about 39 degrees. It should again be noted, however, that the bag 100 is not necessarily limited to any particular angle  $\alpha$  and angle  $\beta$ .

**[0036]** The horizontal shift regions 126 and 128 extend a height  $H$  above the bottom edge 108 of the bag 100. This height  $H$  will, in effect, determine the width of the flat base of the bag 100 when the bag 100 is in the stand-up configuration. That is, as shown in Figure 4, the width of the bottom of the bag 100 is about  $2H$  at a center region of the bag. In embodiments of our invention, the height  $H$  is about 1 inch to about 3.5 inches, more specifically, about 1.5 inches to about 3 inches, and still more specifically, about 2 inches to about 2.5 inches. It follows that the width of the base of the bag is about twice these heights, i.e., about 2 inches to about 7 inches, more particularly, about 3 inches to about 6 inches, and still more particularly, about 4 inches to about 5 inches. In a specific embodiment, the height  $H$  is about 2 inches, and, thus, the width of the base of the bag is

about 4 inches. Generally speaking, with such ranges, storage bags of standard sizes, such as those for storing food, can be made to stand upright.

[0037] With the configuration of the bag 100 shown in Figures 1A to 4, the bag 100 may be made to stand upright without any additional structural features. For example, unlike other bags known in the art, the bag 100 does not need to include a pleat or gusset between the bottom portions of the first and second sidewalls 102 and 104. In addition, to not requiring a pleat or gusset, the sidewalls 102 and 104 of the bag 100 can be made with a relatively uniform thickness. Along these lines, in some embodiments, the sidewalls 102 and 104 may have a thickness of only about 1.6 mils to about 2.6 mils. As one of ordinary skill in the art will appreciate, a thickness of about 1.6 mils is substantially thinner than the thickness of many types of stand-up plastic storage bags.

[0038] While the bag 100 will remain in the stand-up configuration when provided with uniformly slightly thick sidewalls 102 and 104, in other embodiments, specific portions of the bag 100 are made slightly thicker in order to further facilitate the stand-up configuration. In one example, regions of the bottom portions 108 of the sidewalls 102 and 104 of the bag 100 are made thicker than the rest of the bag 100. Specifically, the bottom portions 108 are about twice as thick as the other portions of the sidewalls 102 and 104. In other embodiments, regions of the bottom portions 108 are made about one mil thicker than the other portions of the sidewalls 102 and 104. When an extruding technique is used to manufacture the bag 100, the bottom portions 108 can be made thicker by adjusting the amount of material used to form the bottom portions 108 in comparison with the other portions, e.g., by adjusting the extruding process such that the bottom portions 108 are about 1 mil thicker, while the other portions of the side walls 102 and 104 are reduced by about 0.1 mil of thickness.

[0039] In some embodiments, the bottom portions 108 of the first and second sidewalls 102 and 104 can be made visually distinct from the other portions of the first and second sidewalls 102 and 104. For example, a visually distinct texture could be formed in the bottom portions 108 between the horizontal shift regions 126 and 128 of the first and second sidewalls 102 and 104. Such a texture may aid the user in identifying the bottom portions 108 that are to be shifted. Further, the texture may increase the friction of the base when the bag 100 is in the stand-up configuration, thereby further stabilizing the bag 100.

[0040] In order to further facilitate the stand-up configuration of the bag 100, other portions of the sidewalls 102 and 104 above the bottom portions 108 can be made stiffer. Examples of such stiffer portions are the areas labeled as 140, 142, 144, and 146 on the first sidewall 102 in Figure 1A. Although not shown, corresponding stiffer areas can be formed on the second sidewall 104. The stiffer portions 140, 142, 144, and 146 provide structural support to the sidewalls 102 and 104 that helps to maintain the bag upright in the stand-up configuration. While the stiffer areas 140, 142, and 146 extend within the sidewall 102, the stiffer area 144 extends from the edge 106 to the edge 110 of the sidewall 102. By extending the full length of the sidewall 102 and being positioned adjacent to the opening 112 of the bag 100, the stiffer area 144, along with a corresponding stiffer area on the second sidewall 104, helps to maintain the opening 112 in an open position when the bag 100 is in the stand-up configuration and the closure structures 114A, 114B, 116A, and 116B are not sealed. At the same time, the vertical stiffer areas 140 and 142, and the corresponding stiffer areas on the sidewall 104 help to push out the sides of the bag in the stand-up configuration. The bag 100, therefore, can be maintained in an upright position so that it can be easily filled by a user.

[0041] The stiffer areas 140, 142, 144, and 146 can be formed by extruding the sidewalls 102 and 104 of the bag in a manner such that the areas 140, 142, 144, and 146 on the first sidewall 102, and the corresponding portions on the second sidewall 104, are made thicker than the other portions of the sidewalls 102 and 104. Alternatively, the stiffer areas 140, 142, 144, and 146 can be formed by applying additional material onto the sidewalls 102 and 104.

[0042] In still other embodiments of our invention, upper portions of the bag are made stiffer in order to help maintain the opening 112 in the open position. As will be appreciated by those skilled in the art, the lips are the region of the bag above the closure structures (*i.e.*, the area between the closure structures 116A/B and the top edge of the bag shown in Figure 1A). In some embodiments, one or both of the lips of the bag are made stiffer, thereby making the opening 112 more readily stay in the open position.

[0043] Those skilled in the art will recognize many different ways that the lips of the bag can be made stiffer. For example, additional material can be added to the lip areas in a manner analogous to the way that additional material is added to form the above-described areas 140, 142, 144, and 146. That is, the lips can be made stiffer by providing additional material in the lip areas such that the lips are thicker than other portions of the bag. In this regard, making the lips thicker has an additional benefit of making the lips easier to grasp, for example, when the bag is being opened. In a specific example, the lips are made 20% stiffer than other portions of the bag, thereby making the bag opening more readily stay in the open position and making the lips easier to grasp.

[0044] Additional material provided to make the lips stiffer can be the same material as the material that is used to form the rest of the bag. Alternatively, a different material can be used to stiffen the lips. For example, the bag can be made from PE, and HDPE can

be added to the lip areas in order to make the lips stiffer. In other embodiments, the lips themselves can be at least partially formed from a different, stiffer material than other portions of the bag. For example, when the bag is primarily formed from PE, the lips can be separately formed from HDPE, with the higher density HDPE making the lips stiffer than the rest of the bag. Of course, the material used to form the lips added to the lip areas, or the additional material added to the lips, can be any material that is compatible with the other materials used to form the bag.

**[0045]** As indicated above, the closure structure or closure structures of a bag are positioned near the opening. Thus, in addition to, or as an alternative to, making the lips stiffer, the closure structure or structures of the bag can be formed from a material that is stiffer than other portions of the bag, thereby making the bag more readily stay in the open position (when the closure structures are not functioning to close the opening). In an embodiment that includes stiffer closure structures, the closure structures are made from HDPE, whereas the rest of the bag is made from PE.

**[0046]** Figure 5 is a side view of a bag 200 according to another embodiment of our invention. The bag 200 includes some of the features that are provided in the embodiments described above, including sidewalls 202 and 204 and closure structures 224A, 224B, 226A, and 226B. In the bag 200, however, the shift regions 222A, 222B, 224A, and 224B do not extend all the way to corners 220 and 221. Instead, the shift regions 222A, 222B, 224A, and 224B extend from positions close to, but not directly adjacent to, the corners 220 and 221. In this regard, the shift regions in embodiments of our invention may extend from positions “near” the corners, in that the shift regions extend from positions directly adjacent to the corners, as shown in the bag 100 in Figure

1A, or from other positions “near” the corners, in that the shift regions extend from positions that are close to the corners, as shown in Figure 5 with respect to bag 200.

[0047] The shift regions 222A, 222B, 224A, and 224B of bag 500 are not straight, but instead, have a curved shape. The bag 200 is shiftable between a flat configuration and a stand-up configuration by being shifted about the curved shift regions 222A, 222B, 224A, 224B, and 226 in a manner similar to the way that the bag 100 shifts between configurations, as described above. With the curved shift regions 222B and 224B, the angle  $\alpha$  is measured between the side 210 and a line T1 that is tangent to a point in the middle portion of the shift region 222B, and the angle  $\beta$  is measured between the bottom 208 and a line T2 that is tangent to a point in the middle portion of the shift region 224B. Although not shown, similar angles  $\alpha$  and  $\beta$  can be measured between lines tangent to the shift regions 222A, 224A, the side edge 206, and the bottom edge 208. The angles  $\alpha$  and  $\beta$  may be in the relation of Equation (1), as described above.

[0048] In the embodiments described above, a bag according to our invention is described as being provided with shift regions that are formed as indentations in the bags. In other embodiments, however, the locations about which the bag is shifted between the flat and stand-up configurations could be formed in a different manner, such as by providing a slight amount of additional polymeric material to the sides of the bag. For example, small amount of polyethylene may be provided on the sides of the bag at the same positions as the above-described shift regions on the bag. Those skilled in the art will appreciate the variety of techniques that could be used to apply such additional material, for example, nozzles that turn on and off to rapidly deposit the material in the pattern of the shift regions. In other embodiments, the locations about which the bag can be shifted are provided as regions of varying thickness, elevation, etc., in the sides of the

bag. In this regard, Figures 6A to 6G are cross-sectional views of portions of bags according to embodiments of our invention, with the cross sections including different shift regions 600A to 600G. Any of the shift regions 600A to 600G may be provided at locations about which the bag can be shifted between the flat and stand-up configurations, such as the positions of the shift regions in the embodiments described above. Thus, the shift regions 600A to 600G provide for a bottom when the bag is in a stand-up configuration, and the bag need not include a pleat or gusset formed between the sidewalls at the bottom of the bag.

[0049] Figure 7 shows a specific example of how a shift region, as generally depicted in Figure 6B, can be used in a bag according to our invention. The bag 700 includes shift regions 727A, 727B, 724A, 724B, 726, and 728 (the region 728 being provided on the sidewall 704 that is opposite from the shown sidewall 702). In this embodiment, the shift regions 726 and 728 have a beaded-like configuration. Note that the beaded shift regions 726 and 728 correspond in their positions to the shift regions 126 and 128 of the bag 100 shown above. As such, the shift regions form the edges of the base of the bag 700 when the bag is shifted to the stand-up configuration.

[0050] The beaded shaped shift regions 726 and 728 can be formed from the same material as that of the bag, for example, by specifically extruding the material that forms the sidewalls 702 and 704 such that the shift regions 726 and 728 are formed with the beaded shape. Alternatively, the beaded shift regions 726 and 728 can be formed by using a different material to form the sidewalls of the bag, with the different material being used to form the shift regions 726 and 728 at the same time as the sidewalls 702 and 704 are formed, or by adding the different material to form the shift regions 726 and 728 after the sidewalls 702 and 704 are formed. In this regard, the shift regions 726 and 728 can be

formed from any of the plastic materials we discussed above. As other examples, the material used to form the beaded shift regions 726 and 728 could be an adhesive, an ink, or a wax material. In some cases, the additional material used to form the beaded shift regions 726 and 728 is not directly attached to the sidewalls 702 and 704 of the bag, but rather one or more intermediate layers are formed between the beaded shift regions 726 and 728 and the sidewalls 702 and 704. In still other embodiments, the beaded regions 726 and 728 themselves are formed from multiple layers of one or more materials.

[0051] The beaded shift regions 726 and 728 can be formed to any thickness such that the regions facilitate shifting of the bag, as described above. In some embodiments, however, the beaded shift regions 726 and 728 are about two to about twenty times thicker than the sidewalls 702 and 704 of the bag. In still more specific embodiments, the beaded shift regions 726 and 728 are about 2 to about ten times thicker than the sidewalls 702 and 704 of the bag. And, in a specific embodiment, the beaded shift regions 726 and 728 extend about 15 mils from the surface of the sidewalls 702 and 704.

[0052] It should be noted that while the beaded shift regions 726 and 728 are depicted on the outside surfaces of the sidewalls 702 and 704, as is the case with all of the shift regions described herein, one or both of the beaded shift regions 726 and 728 could be provided on the inside surfaces of the sidewalls 702 and 704 (*i.e.*, in the interior of the bag). It should also be noted that while the beaded shift regions 726 and 728 have a generally rounded shape as shown in Figure 6B, the beaded shift regions 726 and 728 may be more or less rounded than depicted. In fact, the beaded shift regions 726 and 728 need not be rounded, but rather may be formed in any shape, *e.g.*, square, rectangular, or triangular.

**[0053]** In the embodiment depicted in Figure 7, the beaded shift region 726 on sidewall 702 is slightly offset from the corresponding beaded shift region 728 on sidewall 704 such that the beaded shift regions 726 and 728 are not positioned immediately adjacent to each other when the bag 700 is in the flat configuration. This offset is not required, but the offset may minimize the formation of leaks wherein the shift regions 726 and 728 meet the sides 106 and 110 of the bag. Of course, as generally described above, in some embodiments, the beaded shift regions 726 and 728 do not extend to the sides 106 and 110, but rather only extend over a part of the length of the sidewalls 702 and 704 of the bag. Further, as also generally described above, the beaded shift regions 726 and 728 may be continuous or discontinuous.

**[0054]** A still further embodiment of the invention is shown in Figure 8. This embodiment includes additional shift regions in the lower and upper portions of the sidewalls 802 and 804 of the bag 800. With respect to the bottom portion, a pattern of seven shift regions 822A, 824A, 826A, 828A, 830A, 832A, and 834A is provided near one of the bottom corners of sidewall 802, and a similar pattern of seven shift regions 822B, 824B, 826B, 828B, 830B, 832B, and 834B is provided at the other corner of sidewall 802. These shift regions 822A, 824A, 826A, 828A, 830A, 832A, 834A, 822B, 824B, 826B, 828B, 830B, 832B, and 834B can take any of the forms described above, e.g., indentations, scores, beads, etc. Notably, the pattern of these shift regions is such that some of the shift regions cross one or more of the other shift regions. For example, shift region 828A crosses shift region 830A and shift region 832A. As another example, shift region 824A crosses shift regions 826A, 828A, and 830A. We have found that such a pattern, with at least one shift region crossing another shift region, facilitates the shifting function, thereby making it easier to move the bag between the flat and stand-up

configurations. And, having multiple shift regions cross more than one shift region still further enhances the shifting functionality. Note that, although not shown in Figure 8, a similar pattern of shift regions can be formed at the bottom two corners of the opposite sidewall 804 of the bag 800. Further, any combination of such shift regions can be formed at the corners of the bag, e.g., the shift regions are only provided at one corner on sidewall 802 and one corner of the sidewall 804. Also, the pattern shown may be altered such that one or more of the shift regions is omitted, or one or more additional shift regions are provided.

[0055] With respect to the upper portion of bag 800, shift regions 836A and 838A are provided on sidewall 802 below the closure structures 814A/B and 816A/B, with the shift regions 836A and 836B extending from the side 806 of the bag 800. Similarly, shift regions 836B and 838B are provided extending from the side 810. The additional shift regions 836A, 836B, 838A, and 838B help to maintain the opening 812 of the bag in the open position by causing portions of the bag 800 to deflect along the shift regions 836A, 836B, 838A, and 838B when the bag 800 is opened. These shift regions 836A, 836B, 838A, and 838B can take any of the shift region forms described above, e.g., indentations, scores, beads, etc. And, the shift regions 836A, 836B, 838A, and 838B can be provided anywhere in the general area of the upper portion near sides 806 and 808. In a specific embodiment, however, the shift regions 836A and 836B are about one inch below the closure structures 814A/B, as measured along sides 806 and 810, and the shift regions 838A and 838B are about one-half inch below the shift regions 836A and 836B (about one and one-half inches below the closure structures 814A/B), as measured along sides 806 and 810. In the specific embodiment, the shift regions 836A, 836B, 838A, and 838B

extend about one inch along sidewall 802, as measured in a line perpendicular from sides 806 and 810.

**[0056]** In some embodiments, shift regions corresponding to shift regions 836A, 836B, 838A, and 838B are provided on the second sidewall 804 of the bag 800. Those skilled in the art will recognize that more or less shift regions can be provided in a similar manner to the 836A, 836B, 838A, and 838B on either of the upper portions of the sidewalls 802 and 804.

**[0057]** Any of the shift regions provided on the bag 800 can be combined with any of the other embodiments of our bag as described herein. For example, the shift regions 836A, 836B, 838A, and 838B could be provided on the bags 100 and 200 described above. Further, features from the other embodiments described herein can also be provided with bag 800. For example, the visually distinct texture described above can be provided on the bottom portion of bag 800, if desired. More generally, as will be fully appreciated by those skilled in the art, any of the features described herein with respect to a specific embodiment may be combined with, or substituted for, features of another specific embodiment. For example, a bag according to our invention could be formed with the combination of (1) the stiffer portions 140, 142, 144, and 146, as described in conjunction with the bag 100, (2) the curved shift regions 222A, 222B, 224A, and 224B, as described in conjunction with the bag 200, (3) the beaded shift region, as described in conjunction with the bag 700, and (4) the shift regions 836A, 836B, 838A, and 838B, as described in conjunction with the bag 800.

**[0058]** A bag according to our invention is highly functional inasmuch as it can be made to stand upright without being held by a user. The bag can thereby be set on a surface, and easily filled by the user. This stand-up configuration is achieved without the

use of a pleat, gusset, or other additional structure at the bottom portion of the bag. Thus, the bag can be made to lay substantially flat when not in use, and thereby be compactly stored. Further, by not including an additional structure at the bottom portion, the bag can be made from substantially less material than other stand-up bags known in the art. Those skilled in the art will recognize numerous other advantageous of our bag based on the foregoing description.

**[0059]** Although this invention has been described in certain specific exemplary embodiments, many additional modifications and variations would be apparent to those skilled in the art in light of this disclosure. It is, therefore, to be understood that this invention may be practiced otherwise than as specifically described. Thus, the exemplary embodiments of the invention should be considered in all respects to be illustrative and not restrictive, and the scope of the invention to be determined by any claims supportable by this application and the equivalents thereof, rather than by the foregoing description.

#### **Industrial Applicability**

**[0060]** The invention described herein can be used in the commercial production of storage bags. Such storage bags have a wide variety of uses, such as being utilized to store food, chemicals, or other substances.

**What is claimed is:**

1. A storage bag comprising:

a first sidewall including a plurality of shift regions that extend from near a corner of the first sidewall, wherein at least one of the plurality of shift regions crosses another of the plurality of shift regions; and

a second sidewall directly connected to the first sidewall along three sides of the bag to form an interior of the bag with an opening thereto, the second sidewall including a plurality of shift regions that extend from near a corner of the second sidewall, wherein at least one of the plurality of shift regions of the second sidewall crosses another of the plurality of shift regions of the second sidewall, wherein the bag is shiftable about the plurality of shift regions of the first sidewall and shiftable about the plurality of shift regions of the second sidewall such that the bag can be shifted between (i) a flat configuration with the first and second sidewalls positioned adjacent to each other, and (ii) a stand-up configuration with the first and second sidewalls separated from each other, and

wherein, in the stand-up configuration, a substantially flat base is formed for the bag.

2. A storage bag according to claim 1, wherein the plurality of shift regions of the first sidewall includes at least three shift regions, with one of the at least three shift regions crossing two others of the at least three shift regions.

3. A storage bag according to claim 2, wherein the plurality of shift regions of the second sidewall includes at least three shift regions, with one of the at least three shift regions crossing two others of the at least three shift regions.

4. A storage bag according to claim 1, wherein the plurality of shift regions of the first sidewall includes at least four shift regions, with one of the at least four shift regions crossing three others of the at least four shift regions, and

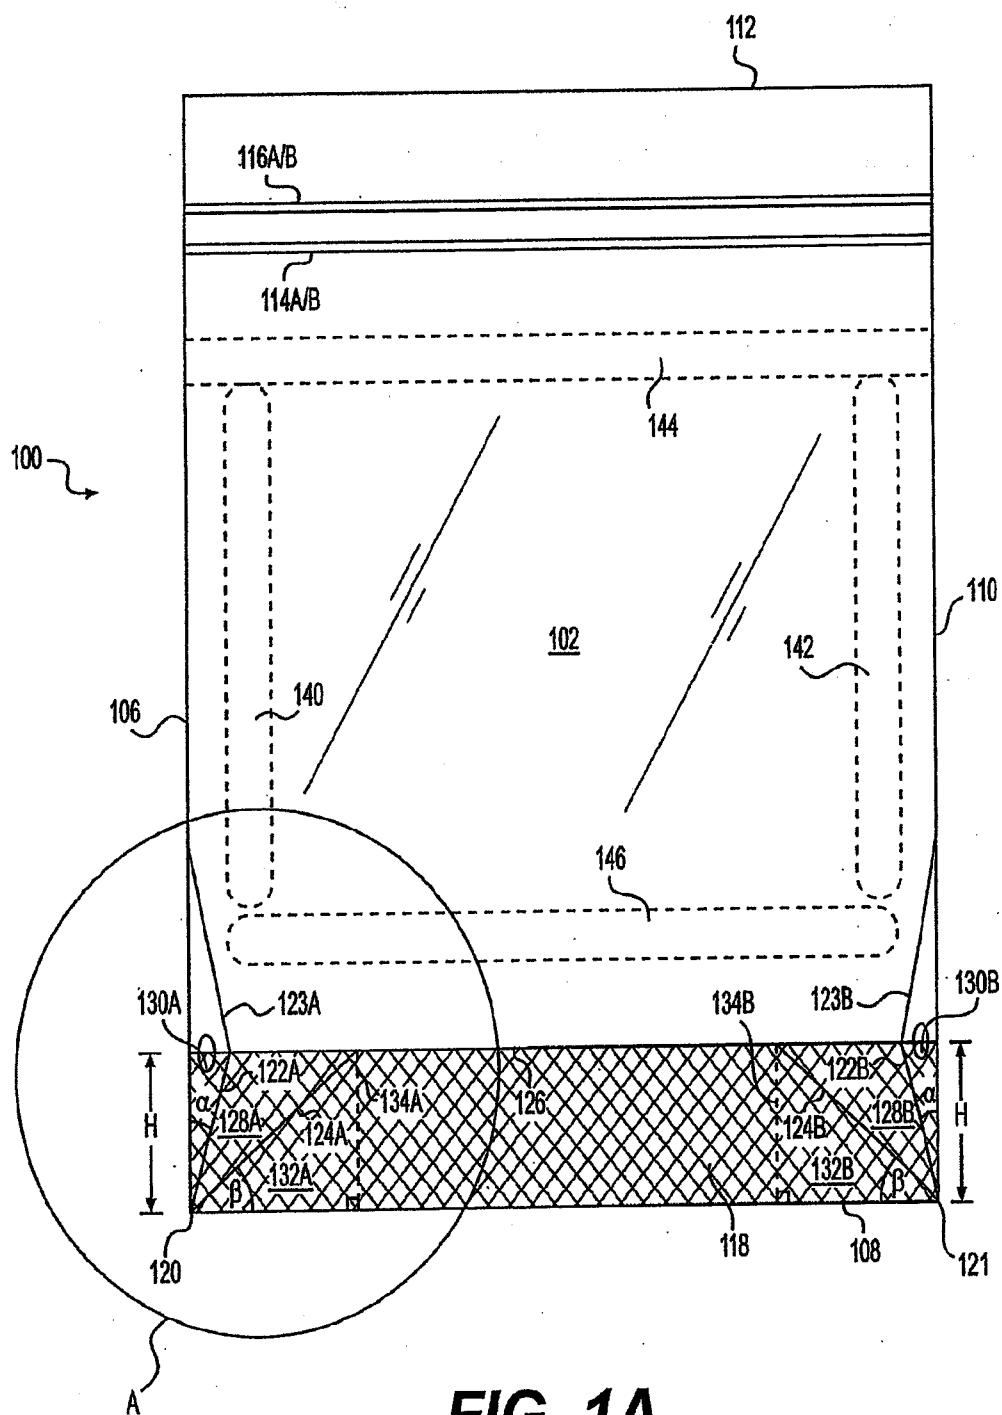
wherein the plurality of shift regions of the second sidewall includes at least four shift regions, with one of the at least four shift regions crossing three others of the at least four shift regions.

5. A storage bag according to claim 1, wherein the plurality of shift regions of the first sidewall includes at least four shift regions, with two of the at least four shift regions crossing two others of the at least four shift regions, and

wherein the plurality of shift regions of the second sidewall includes at least four shift regions, with two of the at least four shift regions crossing two others of the at least four shift regions.

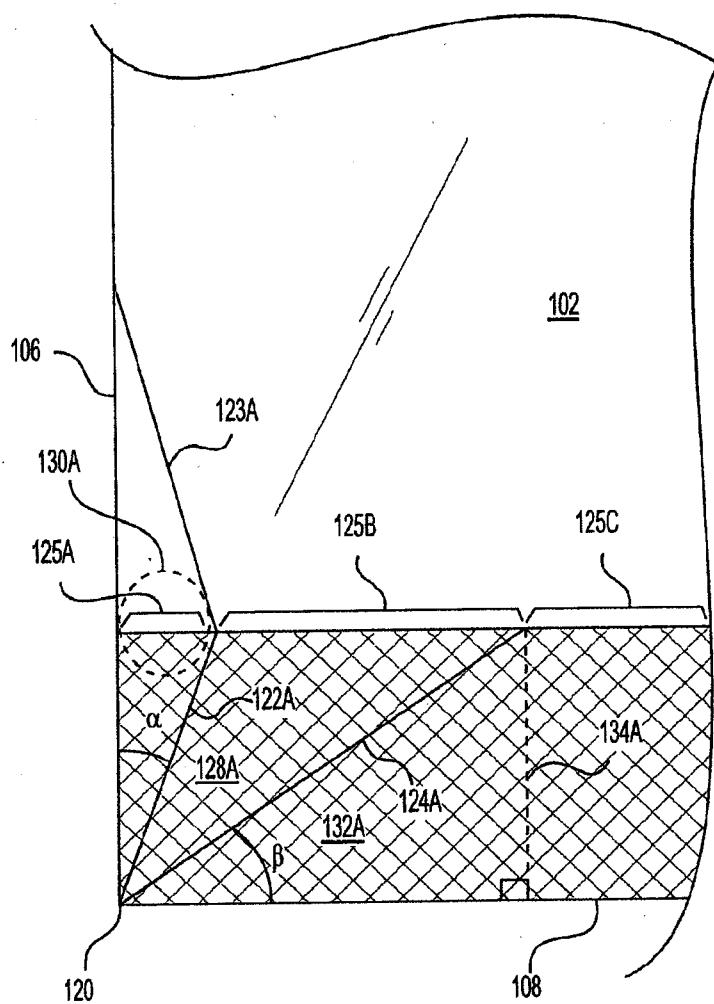
6. A storage bag according to claim 1, wherein the shift regions of the first sidewall and the second sidewall are one of changes in elevation and changes in thickness in portions of the first and second sidewalls of the bag.

1/10

**FIG. 1A**

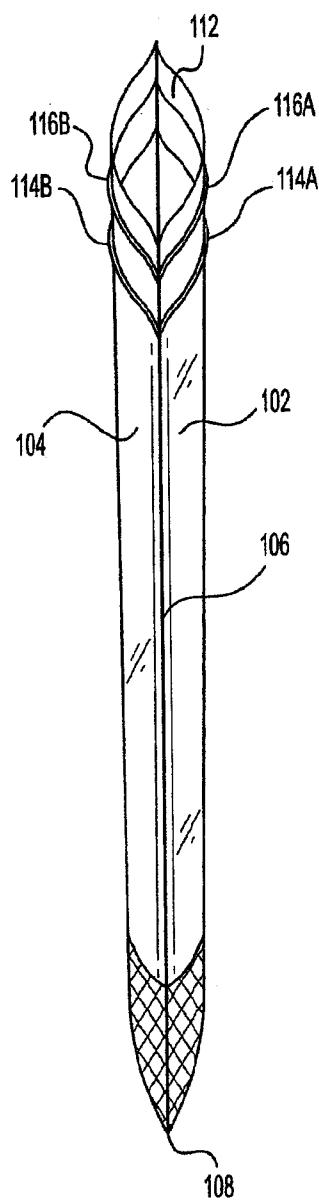
SUBSTITUTE SHEET (RULE 26)

2/10

**FIG. 1B**

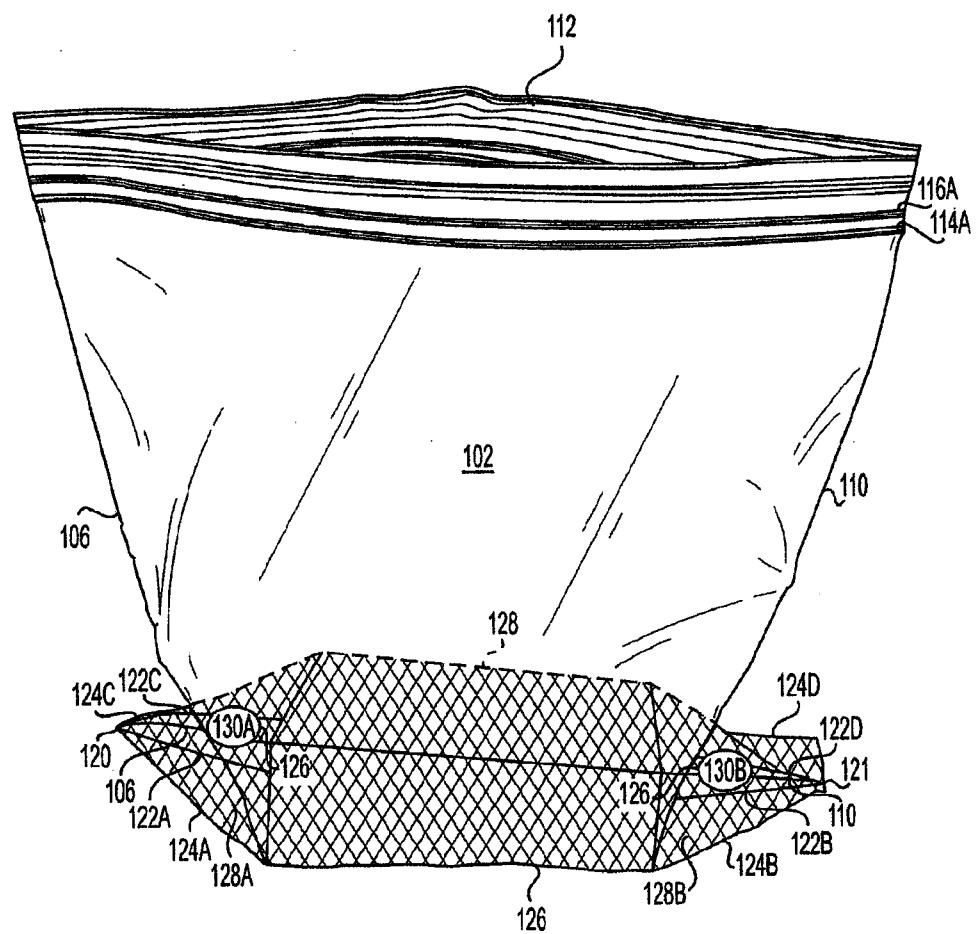
SUBSTITUTE SHEET (RULE 26)

3/10

**FIG. 2**

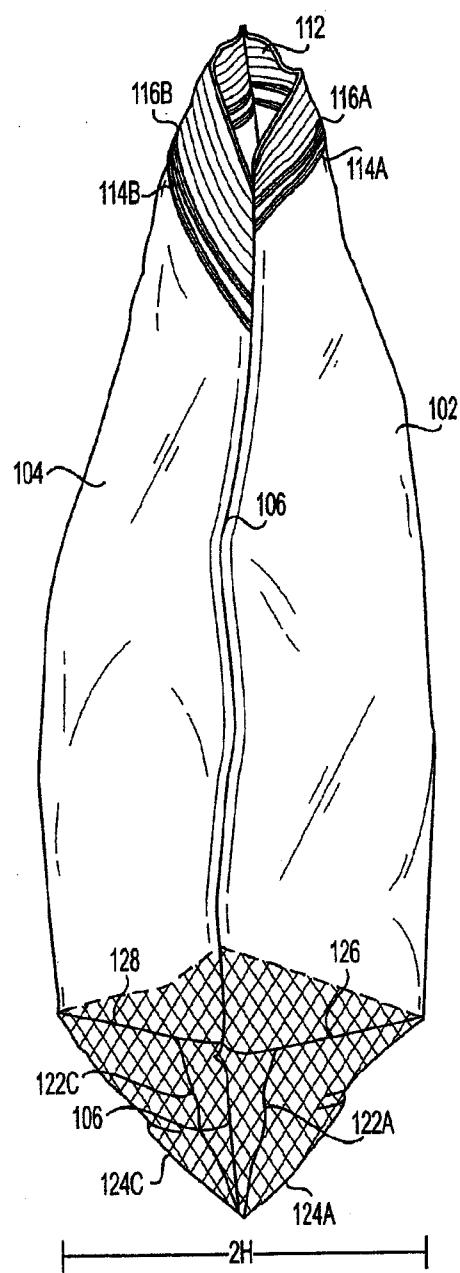
SUBSTITUTE SHEET (RULE 26)

4/10

**FIG. 3**

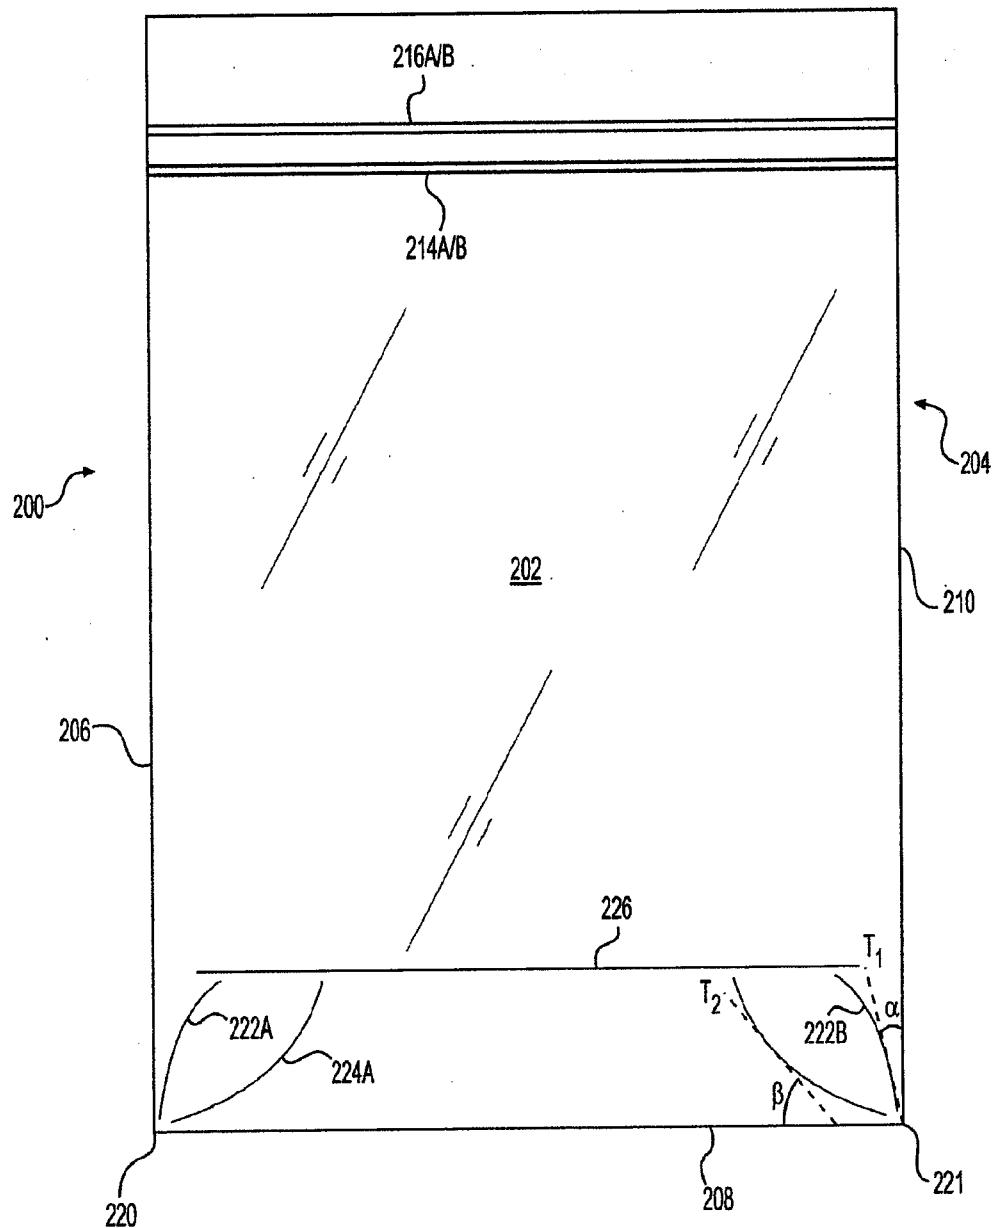
SUBSTITUTE SHEET (RULE 26)

5/10

**FIG. 4**

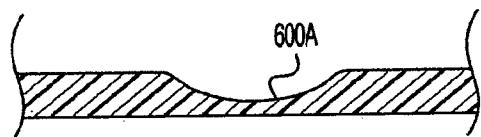
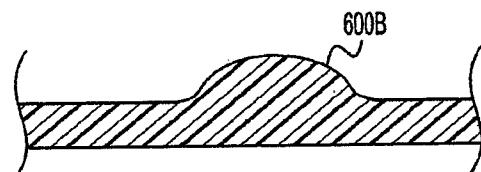
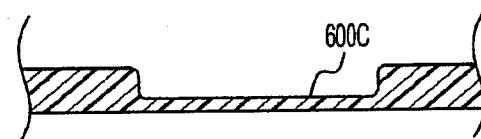
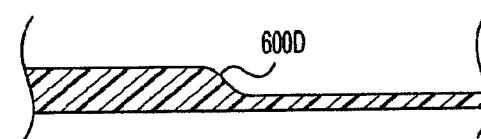
SUBSTITUTE SHEET (RULE 26)

6/10

**FIG. 5**

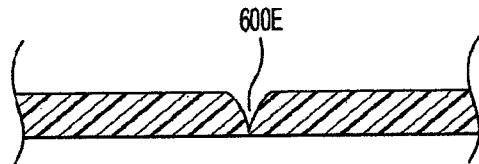
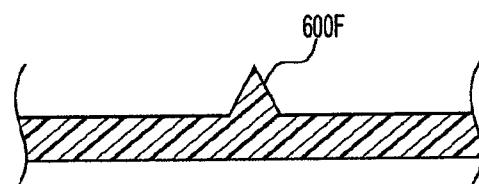
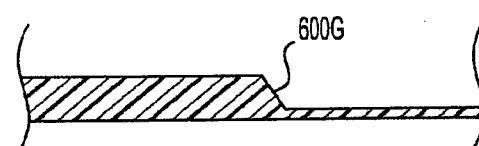
SUBSTITUTE SHEET (RULE 26)

7/10

**FIG. 6A****FIG. 6B****FIG. 6C****FIG. 6D**

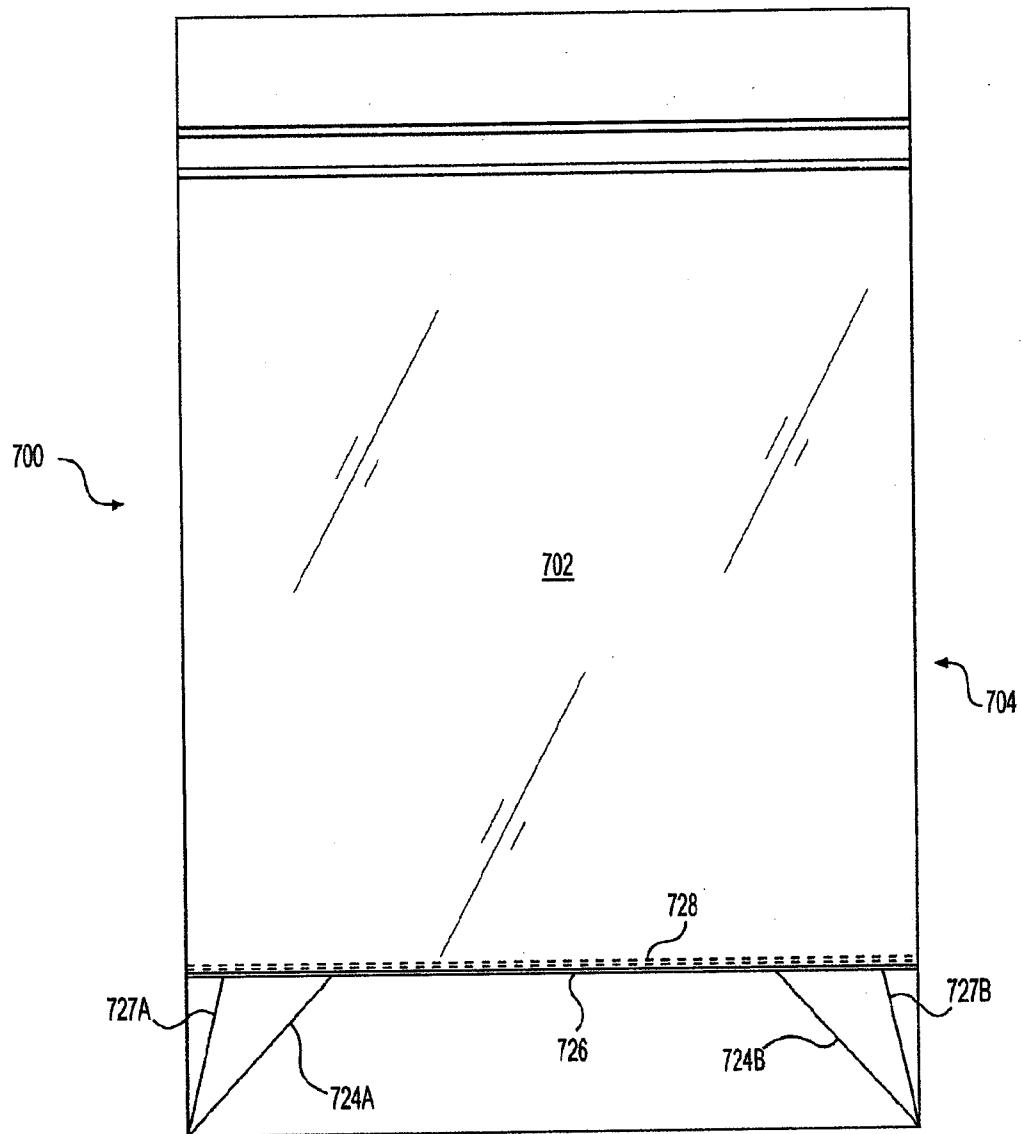
SUBSTITUTE SHEET (RULE 26)

8/10

**FIG. 6E****FIG. 6F****FIG. 6G**

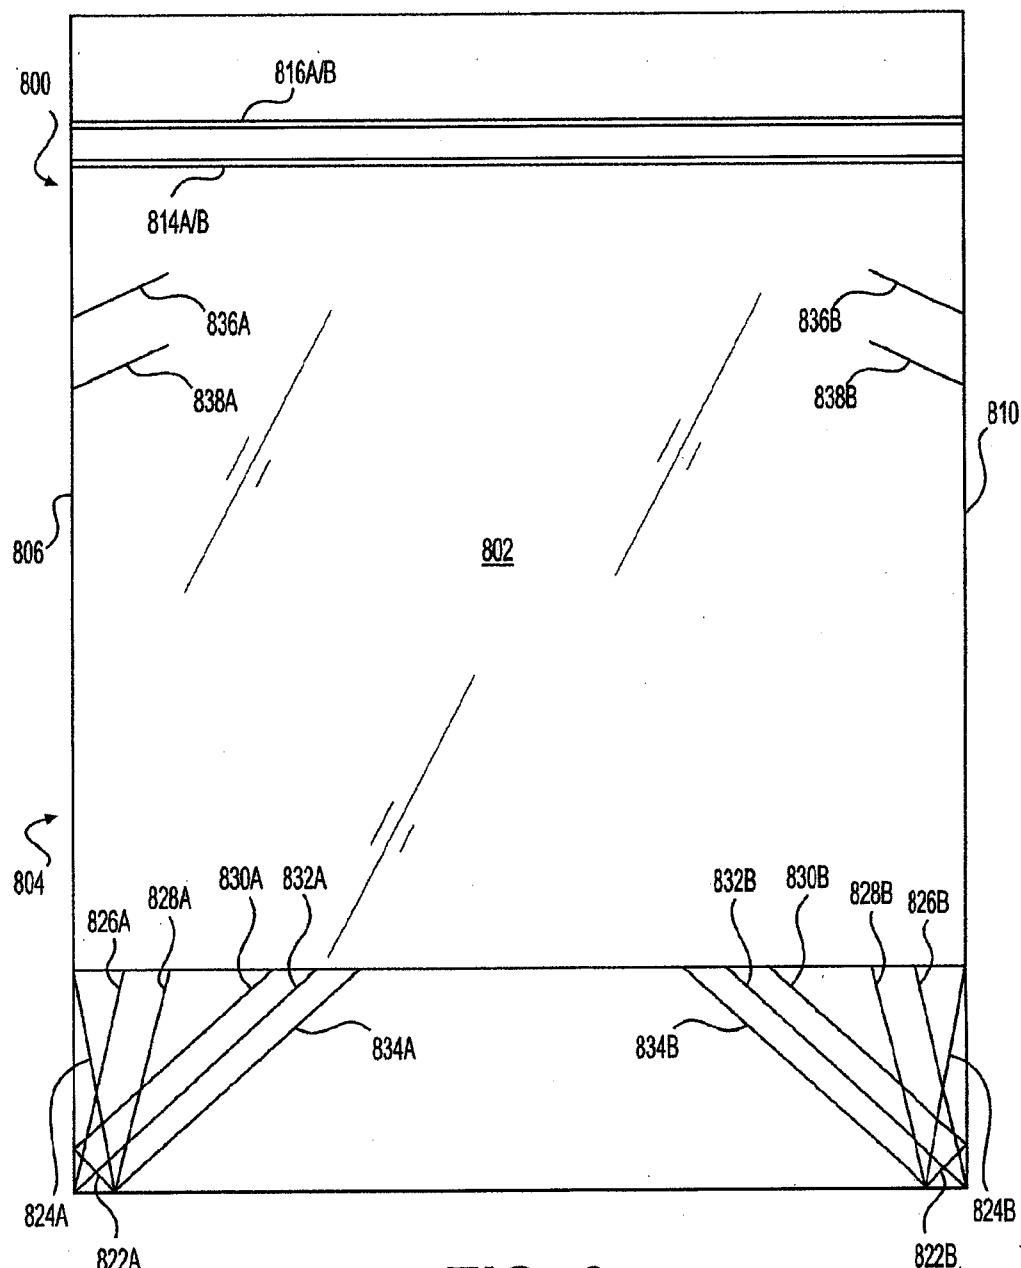
SUBSTITUTE SHEET (RULE 26)

9/10

**FIG. 7**

SUBSTITUTE SHEET (RULE 26)

10/10

**FIG. 8**

SUBSTITUTE SHEET (RULE 26)

