




(86) Date de dépôt PCT/PCT Filing Date: 2011/08/30
 (87) Date publication PCT/PCT Publication Date: 2012/03/22
 (45) Date de délivrance/Issue Date: 2019/05/07
 (85) Entrée phase nationale/National Entry: 2013/03/12
 (86) N° demande PCT/PCT Application No.: GB 2011/051623
 (87) N° publication PCT/PCT Publication No.: 2012/035313
 (30) Priorités/Priorities: 2010/09/15 (GB1015400.3);
 2010/09/15 (GB1015422.7); 2011/07/06 (GB1111524.3)

(51) Cl.Int./Int.Cl. *A61B 1/00* (2006.01),
A61B 1/015 (2006.01), *A61B 1/12* (2006.01),
A61L 2/20 (2006.01)
 (72) Inventeurs/Inventors:
 PARKER, GEORGE CHRISTOPHER, GB;
 LUKE, BARRY, GB;
 OXFORD, COLIN, GB
 (73) Propriétaire/Owner:
 CANTEL (UK) LIMITED, GB
 (74) Agent: ROBIC

(54) Titre : CONDITIONNEMENT D'EQUIPEMENT MEDICAL
 (54) Title: CONDITIONING MEDICAL EQUIPMENT

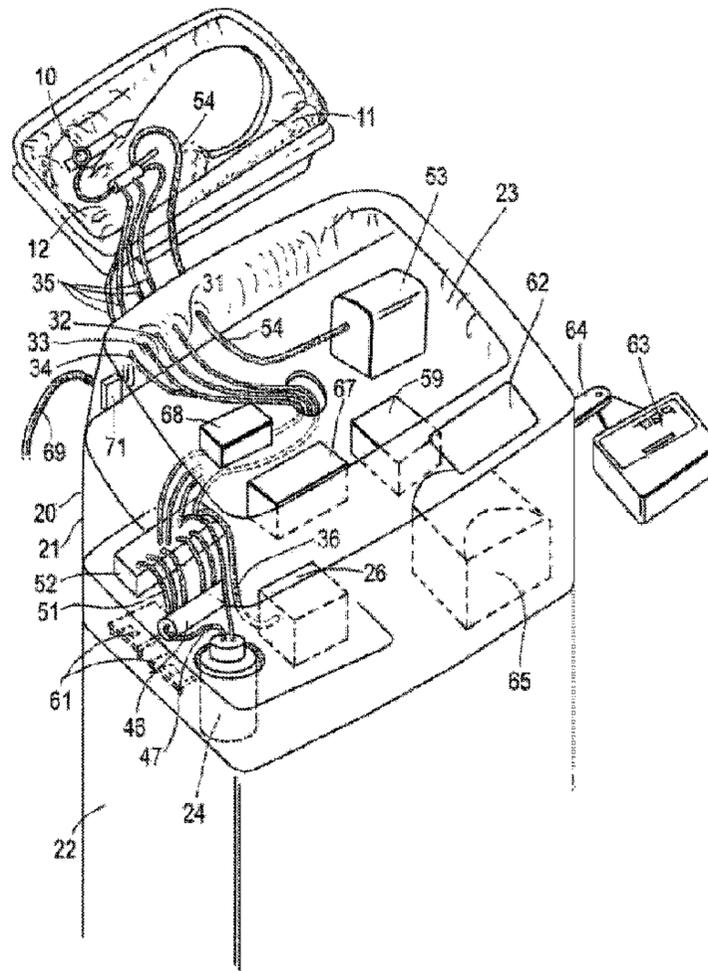

(57) **Abrégé/Abstract:**

A method for conditioning a flexible medical endoscope (10) having internal channels (12), so as to maintain disinfection of said endoscope (10) following processing to a state of high level disinfection, comprises the steps of: (a) connecting the internal channels (12) of the endoscope (10) to connectors (31-34) enabling fluid communication with a reservoir (24) of disinfectant fluid (25); (b) charging the internal channels (12) with disinfectant fluid (25) from the reservoir (24); (c) disconnecting the internal channels (12) from the connectors (31-34); (d) sealing the endoscope (10) in a pouch (56) having a substantially air-tight seal (57) and a valve (55) enabling connection to suction means (53); and (e) connecting and activating the suction means (53) so as substantially to reduce pressure within the pouch (56), thereby partially evacuating the pouch (56).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 March 2012 (22.03.2012)(10) International Publication Number
WO 2012/035313 A1

(51) International Patent Classification:

A61B 1/00 (2006.01) A61L 2/20 (2006.01)
A61B 19/02 (2006.01)

(21) International Application Number:

PCT/GB2011/051623

(22) International Filing Date:

30 August 2011 (30.08.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1015422.7 15 September 2010 (15.09.2010) GB
1015400.3 15 September 2010 (15.09.2010) GB
1111524.3 6 July 2011 (06.07.2011) GB(71) Applicant (for all designated States except US): **MEDICART INTERNATIONAL LIMITED** [GB/GB]; Birchwood House, 55 Vanguard Way, Shoeburyness, Southend-on-Sea Essex SS3 9QY (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **PARKER, George Christopher** [GB/GB]; 40 Henley Crescent, Westcliff-on-Sea Essex SS0 0NT (GB). **LUKE, Barry** [GB/GB]; 5 Heeswyk Road, Canvey Island Essex SS8 8ET (GB). **OXFORD, Colin** [GB/GB]; 4 Warwick Close, Canvey Island Essex SS8 9YB (GB).(74) Agents: **WALDER, Jeremy Thomas** et al.; Sanderson & Co., 34 East Stockwell Street, Colchester Essex CO1 1ST (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,

[Continued on next page]

(54) Title: **CONDITIONING MEDICAL EQUIPMENT**

Fig.1

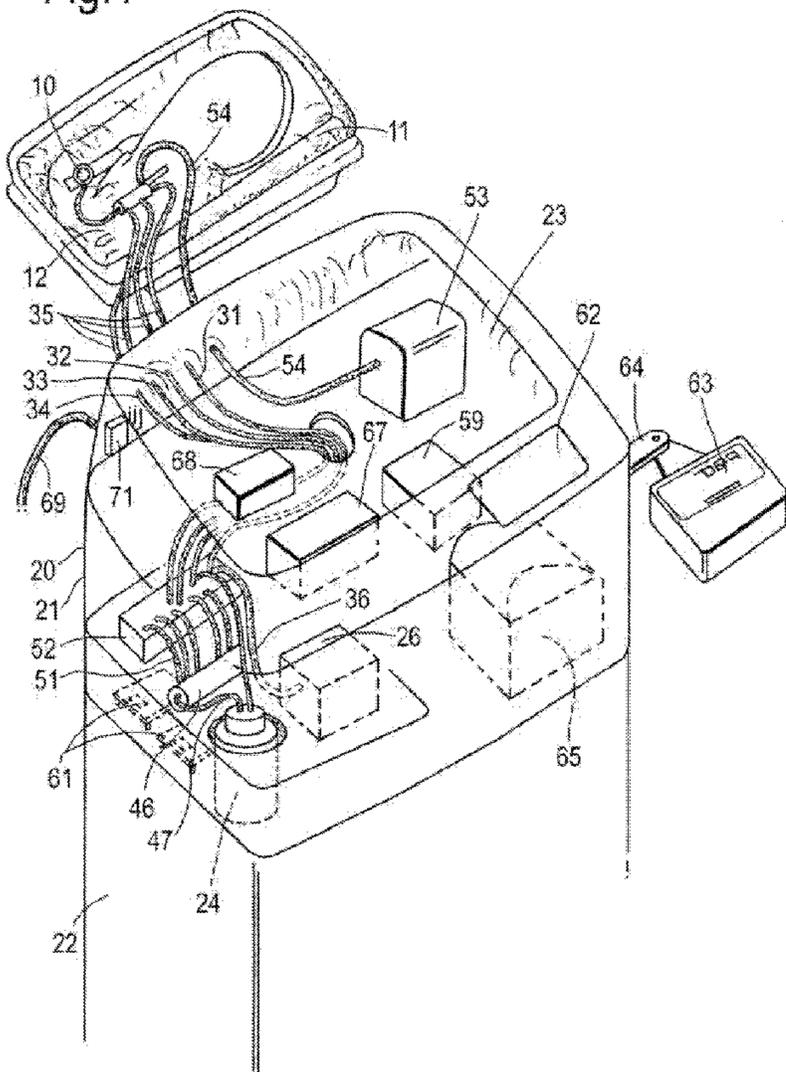

(57) Abstract: A method for conditioning a flexible medical endoscope (10) having internal channels (12), so as to maintain disinfection of said endoscope (10) following processing to a state of high level disinfection, comprises the steps of: (a) connecting the internal channels (12) of the endoscope (10) to connectors (31-34) enabling fluid communication with a reservoir (24) of disinfectant fluid (25); (b) charging the internal channels (12) with disinfectant fluid (25) from the reservoir (24); (c) disconnecting the internal channels (12) from the connectors (31-34); (d) sealing the endoscope (10) in a pouch (56) having a substantially air-tight seal (57) and a valve (55) enabling connection to suction means (53); and (e) connecting and activating the suction means (53) so as substantially to reduce pressure within the pouch (56), thereby partially evacuating the pouch (56).

WO 2012/035313 A1



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Conditioning Medical Equipment

This invention relates to a method for conditioning medical equipment following processing (cleaning and disinfection) of said equipment, and to apparatus for use in such a method. In particular, the invention relates to a method and apparatus for conditioning a flexible medical endoscope, following processing of said endoscope to a state of high level disinfection.

The term “disinfection” is used herein in preference to the term “sterility” since the latter implies the complete absence of pathogenic organisms, which in practice is rarely, if ever, achievable. It is to be appreciated however that the ultimate aim of disinfecting medical equipment is indeed to get as close to
5 absolute sterility as is practicable. The term “conditioning” is used herein to refer to a method of maintaining the disinfection of medical equipment following processing thereof to a state of high level disinfection

The present invention has been developed in connection with the processing and storage of flexible medical endoscopes, and therefore will be
10 described herein with particular emphasis on this application. It is envisaged however, that the method of the present invention may be applied to the processing and storage of substantially all types of medical, surgical, dental and veterinary equipment, apparatus, and instruments.

After use in an endoscopic procedure, flexible medical endoscopes are
15 usually subjected to “processing”, consisting of rigorous manual cleaning followed by placing the endoscope in an Automated Endoscope Re-processor (AER) which effects a further cleaning and disinfecting procedure to bring the endoscope to a High Level Disinfection Status (HLDS). The endoscope is then stored in a clean environment. Under normal storage conditions, the degree of
20 disinfection of the endoscope can only be maintained at an acceptable level for a relatively short period, usually about 3 hours. This is due to the multiplication of residual pathogens which may remain on the endoscope after disinfection, or which may be present in the atmosphere. If the endoscope is not used in a further endoscopic procedure within this time, then further processing will be
25 necessary prior to its next use. Frequent and repeated processing is undesirable, since it reduces the availability of the endoscope for endoscopic procedures,

whilst increasing the operating costs, due to the need for cleaning and disinfectant materials and the operation of cleaning equipment. Furthermore, repeated processing reduces the lifetime of the endoscope due to wear and tear.

The loss of HLDS over the 3 hour storage period is due to the inability of
5 the AER completely to dry the internal channels of the endoscope, due to the small internal diameter of these channels. The residual moisture within the channels provides an environment in which micro-organisms can quickly multiply.

Previous attempts to prolong the period for which processed endoscopes can be maintained at HLDS have therefore tended to focus on drying the internal
10 channels of the processed endoscope. Endoscope drying cabinets have therefore been developed, which involve the circulation of dry filtered air around the endoscope and through the internal channels to drive out residual moisture. However, these drying cabinets are very large, bulky – and expensive – articles, which do not lend themselves well to use in hospital departments where space is
15 likely to be at a premium. Consequently, such cabinets are likely to be located some distance away from the procedure room or operating theatre in which the endoscope is to be used, leading to a risk of loss of HLDS on the journey between the drying cabinet. Further drawbacks associated with the use of drying cabinets include the risk of cross-contamination as a result of multiple
20 endoscopes being stored together in the cabinets in close proximity, and the risk of contamination entering the cabinet from the external atmosphere each time the cabinet door is opened.

The genesis of the present invention stems from the realisation that all of the above shortcomings of drying cabinets can be avoided by developing a
25 method and apparatus which does not seek to remove the residual moisture from the internal channels of the endoscope, but rather seeks to replace this residual rinse water with an effective disinfectant within the internal channels.

Methods and apparatus for maintaining and prolonging the disinfection of flexible medical endoscopes are disclosed in the applicant's International
30 Publications Nos. WO 2007/049076 and WO 2010/046617. The present invention represents a further evolution and improvement of the methods and apparatus disclosed in those prior art references.

According to the present invention, there is provided a method for conditioning a flexible medical endoscope having internal channels, so as to maintain disinfection of said endoscope following processing to a state of high level disinfection, in this order, said method comprising the steps of:

- 5 (a) connecting the internal channels of the endoscope to connectors enabling fluid communication with a reservoir of disinfectant fluid;
- (b) charging the internal channels with disinfectant fluid from the reservoir;
- (c) disconnecting the internal channels from the connectors;
- (d) sealing the endoscope in a pouch having an air-tight seal and a valve
10 enabling connection to suction means; and
- (e) connecting and activating said suction means so as to reduce pressure within the pouch, thereby partially evacuating said pouch;

and wherein said method is carried out on or at a conditioning station housing said disinfectant fluid reservoir, said suction means, and a processor adapted to
15 control steps (b) and (e) according to a pre-programmed sequence.

Preferable embodiments of the method are described hereunder.

According to a first aspect of the present invention, there is provided a method for conditioning a flexible medical endoscope having internal channels, so as to maintain disinfection of said endoscope following processing to a state of high level
20 disinfection, said method comprising the steps of:

- (a) connecting the internal channels of the endoscope to connectors enabling fluid communication with a reservoir of disinfectant fluid;
- (b) charging the internal channels with disinfectant fluid from the reservoir;
- (c) disconnecting the internal channels from the connectors;
- 25 (d) sealing the endoscope in a pouch having a substantially air-tight seal and a valve enabling connection to suction means; and
- (e) connecting and activating said suction means so as substantially to reduce pressure within the pouch, thereby partially evacuating said pouch.

3a

Step (b) preferably further comprises the sub-step of:

(b)(i) following charging of the internal channels with disinfectant fluid, flushing the internal channels with pressurised filtered air so as to expel disinfectant fluid from said internal channels.


The pouch utilised in step (d) preferably has two substantially air-tight seals, which may utilise plastic zip fasteners and/or an adhesive closure strip.

The method of the present invention is preferably carried out on or at a conditioning station housing the disinfectant fluid reservoir and the suction means. The conditioning station preferably further comprises a processor adapted to control
10 steps (b) and (e) according to a pre-programmed sequence.

In preferred embodiments of the method of the present invention, a printed label is generated and applied to the pouch following step (e). The label may identify the endoscope, its disinfection status, and the estimated maximum disinfection maintenance period. The conditioning station preferably further houses a printer in communication with the processor, for generation of the printed label.

The disinfectant fluid is preferably a dilute aqueous solution of hydrogen peroxide. More preferably, the dilute aqueous solution of hydrogen peroxide has a concentration in the range of from 0.5% to 1.5% by weight; and most preferably

20

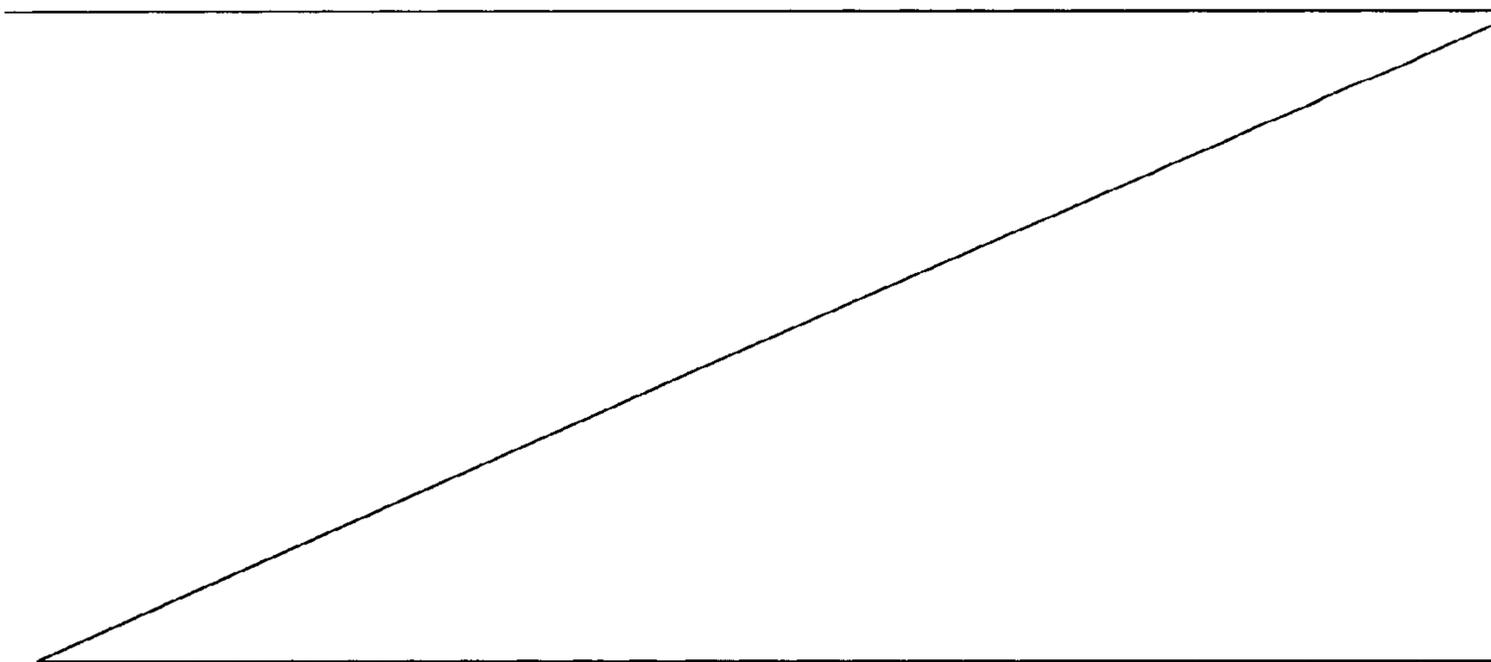

has a concentration of substantially 1.4% by weight. The disinfectant fluid preferably further comprises colloidal silver.

The endoscope is preferably housed within a moulded tray shaped to accommodate the endoscope, so as to protect against compression of the endoscope channels during step (e).

It should be noted that, although steps (a) to (c) may be carried out with the endoscope already located in an open pouch, it is generally preferred that the endoscope is placed into the pouch between steps (c) and (d). Similarly, where the moulded tray is utilised, the endoscope may be located in the tray during the performance of steps (a) to (c), or alternatively, the endoscope may be placed into the tray after step (c), with the endoscope and tray both then being placed into the pouch prior to step (d).

An absorbent pad may preferably be placed in the pouch together with the endoscope, said pad being arranged to collect disinfectant fluid expelled from the endoscope channels. The expulsion of disinfectant fluid from the endoscope channels may be effected by the air flushing sub-step (b)(i) if present, and/or may occur as a consequence of the pressure reduction step (e). The pressure reduction step (e) also causes evaporation of disinfectant fluid from the pad into the pouch, enabling coating of the external surfaces of the endoscope with the disinfectant fluid, thus providing a further disinfectant effect for the duration of the period for which the endoscope is stored within the partially evacuated pouch.

Following performance of step (e), the pouch is preferably housed within a rigid case to provide protection during transit.

The method of the present invention is intended primarily for use with flexible medical endoscopes having a plurality of internal channels, comprising an air channel, a water channel and an aspiration channel. It is therefore preferable that, in step (a), each of said channels is connected to an individual dedicated connector in communication with the fluid reservoir. In such embodiments of the method of the present invention, in step (b) each of said channels is preferably charged in turn with disinfectant fluid, according to a pre-determined sequence.

The scope of the present invention extends to encompass apparatus for use in the performance of the method according to the first aspect of the present invention.

According to the present invention, there is provided an apparatus for use in a method of conditioning a flexible medical endoscope having internal channels, so as to maintain disinfection of said endoscope following processing to a state of high level disinfection, said apparatus including a conditioning station, comprising:

a reservoir for disinfectant fluid; connectors, in communication at one end thereof with the reservoir and adapted at the other end thereof for connection to the internal channels of the endoscope;

10 a pump associated with the reservoir and adapted to deliver the disinfectant fluid from the reservoir, through the connectors, and into the endoscope channels;

suction means, adapted for connection to a valve of a pouch having an air-tight seal, and further adapted to enable reduction of pressure within the pouch, thereby effecting evacuation of said pouch; and

a processor adapted to control operation of the reservoir pump and suction means according to the pre-programmed sequence.

Preferable embodiments of the apparatus are described hereunder.

Therefore, according to a second aspect of the present invention there is provided an apparatus for use in a method for maintaining the disinfection of a flexible medical
20 endoscope having internal channels, as hereinbefore described, said apparatus including a conditioning station, comprising:

- a reservoir for disinfectant fluid;

- connectors, in communication at one end thereof with the reservoir and adapted at the other end thereof for connection to the internal channels of the endoscope;

- a pump associated with the reservoir and adapted to deliver the disinfectant fluid from the reservoir, through the connectors, and into the endoscope channels; and

- suction means, adapted for connection to a valve of a pouch having a substantially air-tight seal, and further adapted to enable substantial reduction of


5a

pressure within the pouch, thereby effecting partial evacuation of said pouch.

The conditioning station preferably further comprises means for flushing the internal endoscope channels with pressurised filtered air, thereby to expel disinfectant fluid from said channels.

As noted above, the present invention is intended primarily for use with flexible medical endoscopes having a plurality of internal channels, comprising an air channel, a water channel and an aspiration channel. The conditioning station therefore preferably comprises a plurality of connectors, each adapted for connection to a dedicated individual internal channel of an endoscope having a plurality of internal channels, comprising an air channel, a water channel and an aspiration channel. In such embodiments, the disinfectant fluid reservoir preferably communicates with the plurality of connectors via a manifold connection.

The conditioning station preferably further comprises a processor adapted to control operation of the reservoir pump and suction means according to a pre-

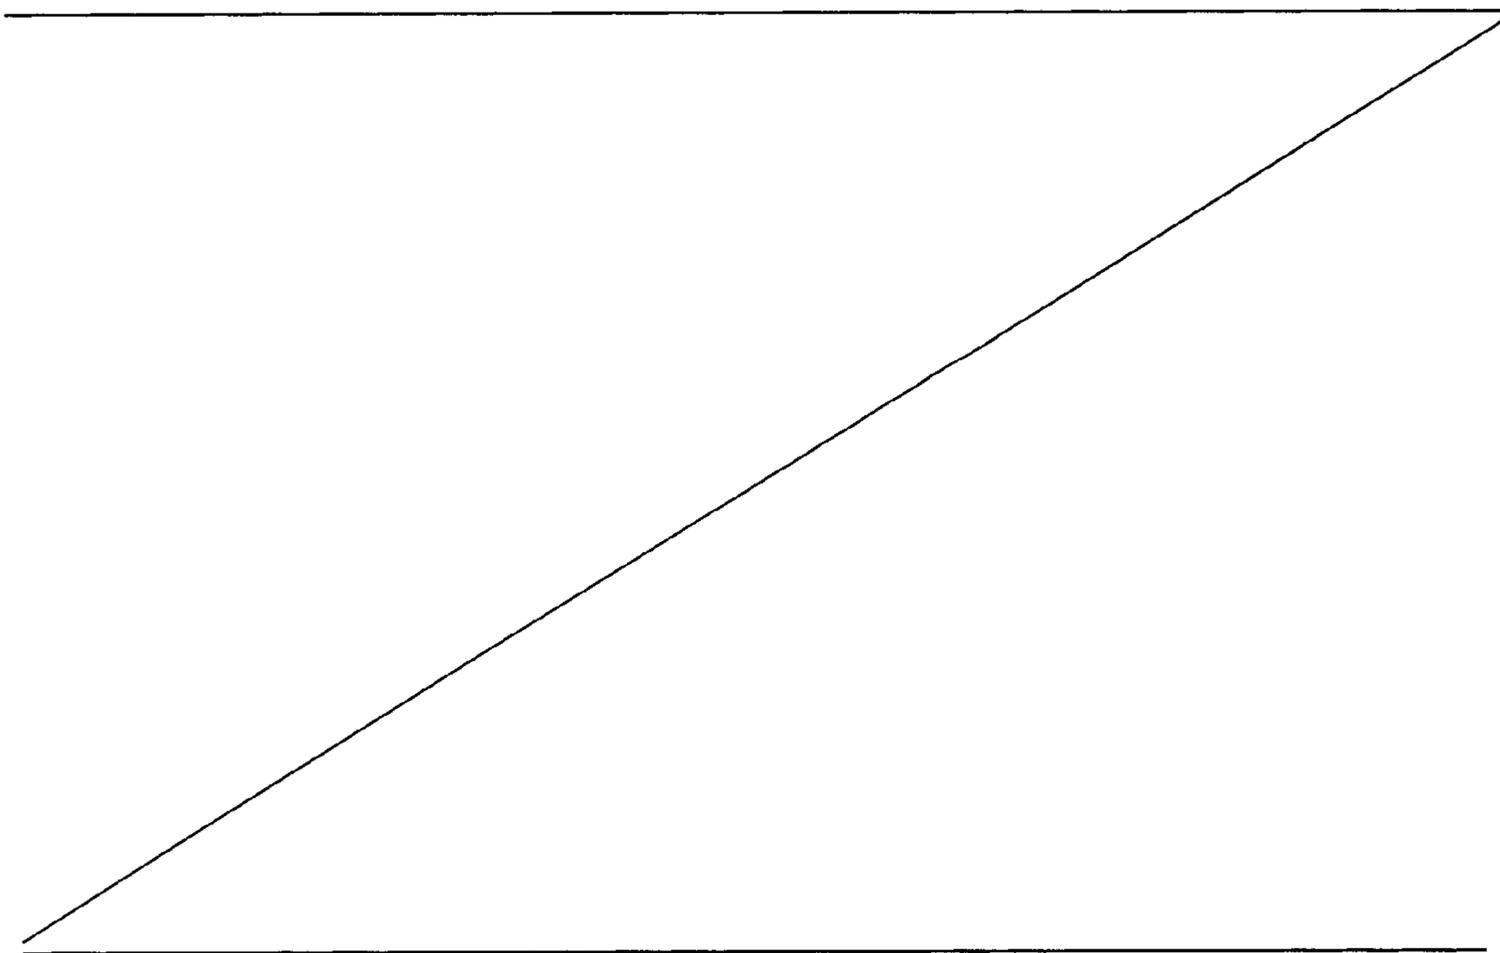

programmed sequence. The conditioning station may also further comprise a printer in communication with the processor.

In preferred embodiments, the apparatus of the invention also includes a pouch having a substantially air-tight seal, said pouch being adapted to house a flexible medical endoscope. The pouch preferably has two substantially air-tight seals, which may utilise plastic zip fasteners and/or an adhesive closure strip. The pouch preferably further comprises a valve adapted for connection to the suction means.

The apparatus may also preferably include a moulded tray shaped to accommodate a flexible medical endoscope, and optionally a liner for said tray.

An absorbent pad is preferably provided for collection of disinfectant fluid expelled from the endoscope channels.

The apparatus preferably further comprises a rigid case, adapted to house and protect the evacuated pouch containing said endoscope.

In order that the present invention may be more clearly understood, a preferred embodiment thereof will now be described in detail, though only by way of example, with reference to the accompanying drawings in which:

Figure 1 is a perspective, partially cut-away view of a conditioning station for use in a method for conditioning a flexible medical endoscope, according to the present invention;

Figure 2 is a schematic representation of the components of the conditioning station of Figure 1; and

Figures 3 to 5 are perspective views of a flexible medical endoscope at the conditioning station of Figures 1 to 2, being treated according to the method of the present invention.

Referring first to Figure 1, there is shown a flexible medical endoscope 10 having been processed to a state of high level disinfection, and ready for treatment by a method according to the first aspect of the present invention. The endoscope 10 is located in a moulded tray 11 shaped so as to protect the endoscope channels 12 and provided with a liner 13, as can be seen best from Figures 3 to 5. The lined tray 11 is used to transport the endoscope 10 from the

processing area to a conditioning station 20 constituting apparatus according to the second aspect of the present invention.

The conditioning station 20 comprises a housing 21 mounted on a base 22 which may conveniently be provided with wheels to enable the station 20 to be easily moved from one location to another. As can best be seen from Figures 3 and 4, the top of the conditioning station forms a working surface 23 adapted to receive the endoscope tray 11 for performance of the method of the present invention.

Within the housing 21 are located the operational components of the conditioning station 20, which are also shown in schematic form in Figure 2. A reservoir 24 is provided which, when the conditioning station 20 is in use, will contain a disinfectant fluid 25 comprising an aqueous solution of hydrogen peroxide, optionally having colloidal silver suspended therein. A reservoir pump 26 is associated with the reservoir 24 and is adapted to enable delivery of the disinfectant fluid 25 to connectors 31-34, each adapted for connection to a specific internal channel of the endoscope 10.

The connectors 31-34 comprise: an air channel connector 31 for connection to the air channel of the endoscope 10; a water channel connector 32 for connection to the water channel of the endoscope 10; an aspiration channel connector 33 for connection to the aspiration channel of the endoscope 10; and an auxiliary channel connector 34 for connection to the auxiliary channel of the endoscope 10. As can best be seen from Figure 3, delivery of the disinfectant fluid 25 from each of the connectors 31-34 to the corresponding internal channel of the endoscope 10 is achieved via flexible tubing 35.

As can best be seen from Figure 2, a first air conduit 36 connects the reservoir pump 26 to an air inlet valve 37 of a three-way valve system 38. A first air outlet valve 41 of the valve system 38 is connected to an air space 42 at the top of the reservoir 24, via a second air conduit 43. A second air outlet valve 44 of the valve system 38 is connected via a third air conduit 45 to a manifold connection 46. A first fluid conduit 47 also connects the reservoir 24 to the manifold 46, and as can be seen from Figure 2, has an open end 48 submerged

in the disinfectant fluid 25. Further fluid conduits 51 then lead from the manifold to fluid valves 52 associated with each of the connectors 31-34.

The housing 21 of the conditioning station 20 also houses suction means in the form of a vacuum pump 53, adapted to connect via vacuum tubing 54 to a valve 55 of a pouch 56, within which the endoscope 10 and tray 11 are stored during later stages of the method of the present invention, as is best shown in Figure 5. The pouch 56 is provided with an air-tight seal 57 in order that the endoscope 10 can be isolated within the pouch 56. As can also be seen in Figure 5, an absorbent pad 58 is provided within the tray 11 within the pouch 56 to collect fluid 25 expelled from the endoscope 10 during the method of the present invention.

The operation of the reservoir pump 26, the vacuum pump 53, the three-way valve system 38 and the fluid valves 52 is controlled by a microprocessor 59 according to a pre-programmed sequence, the microprocessor 59 being housed internally within the housing 21. The circuitry by which the microprocessor 59 is connection to each of the aforementioned components, via printed circuit boards 61 is illustrated in Figure 2. Operation of the microprocessor 59 is effected and monitored via a touch screen 62, located on the outside of the housing 21, as illustrated in Figure 4, and a keyboard 63. The keyboard 63 is usually stored within the housing 21 but can be mounted on a folding arm 64 to be brought out of the housing 21 as required, as illustrated in Figure 1. The microprocessor 59 is also connected to a printer 65 for generation of a printed label 66 to be attached to the pouch 56 at the end of the method of the present invention, as shown in Figure 5. The printer 65 is powered by a 24V power supply 67, as illustrated in Figure 2, whilst the remainder of the electrical components within the housing 21 are powered by a 12V power supply 68. Both the 24V power supply 67 and the 12V power supply 68 are supplied by a mains feed 69 via a power switch 71, as shown in Figure 1.

A method, according to the present invention, of conditioning a flexible medical endoscope 10 so as to maintain disinfection thereof will now be described, with reference simultaneously to all of Figures 1 to 5.

Following processing to a state of high level disinfection, the endoscope is placed in the tray 11, which has been fitted with the liner 13. An absorbent pad 58 is placed with the endoscope 10 in the lined tray 11 to collect disinfectant fluid 25 during the condition process. The tray is then brought to the conditioning station 20 and placed on the working surface 23. Next, the internal channels 12 of the endoscope 10 are connected to their respective connector 31-34 on the disinfection maintenance station 20 via flexible tubing 35, as is best shown in Figure 3. Thus, the air channel of the endoscope 10 is connected to the air channel connector 31; the water channel of the endoscope 10 is connected to the water channel connector 32; the aspiration channel of the endoscope 10 is connected to the aspiration channel connector 33; and the auxiliary channel of the endoscope 10 is (optionally) connected to the auxiliary channel connector.

The microprocessor 59 of the conditioning station 20 is then activated via the touch screen 62, by means of which the user can select one of a number of pre-programmed sequences for conditioning the endoscope 10. The microprocessor 59 then controls operation of the reservoir pump 26, the inlet 37 and first outlet 41 of the three-way valve system 38, so as to force air into the air space 42 at the top of the reservoir 24. This pressurises the air space 42, thus causing the disinfectant fluid 25 to flow through the manifold connection 46 to the fluid valves 52 associated with each of the channel connectors 31-34. Operation of each of the fluid valves 52 is also controlled by the microprocessor 59 so as to flush each of the endoscope channels 12 in turn with disinfectant fluid 25 according to the selected pre-programmed sequence.

Once all of the channels 12 have been flushed with disinfectant fluid 25, or after an optional time delay depending on the selected sequence, the microprocessor 59 then operates the reservoir pump 26 again, this time in combination with the inlet 37 and second outlet 44 of the three-way valve system 38, so as to force air through the manifold connection 46 to the fluid valves 52. Operation of each of the fluid valves 52 is again controlled by the microprocessor 59 so as to flush each of the endoscope channels 12 in turn with dry filtered air (the filter being incorporated within the reservoir pump 26) according to the selected pre-programmed sequence, so as to expel the disinfectant fluid 25 from

the channels 12. The disinfectant fluid 25 expelled from the endoscope channels 12 is collected on the absorbent pad 58. The flexible tubing 35 connecting the endoscope channels 12 to the channel connectors 31-34 is then disconnected.

Next, the lined tray 11 containing the endoscope is placed into the pouch 56, which is then sealed by means of the air tight seal 57. The vacuum tubing 54 is then connected to the valve 55 of the pouch 56, and the vacuum pump 53 is activated, via the touch screen 62 and microprocessor 59, in order partially to evacuate the pouch 56. This provides a substantially sterile atmosphere by removing air from the pouch, thus significantly reducing, or ideally preventing, the multiplication of aerobic bacteria within the pouch 56. In addition, the reduction of air pressure within the pouch 56 has the effect of drawing any residual disinfectant fluid 25 out of the endoscope channels 12 onto the absorbent pad 58. Maintaining the reduced pressure over an extended time period then also causes the disinfectant fluid 25 to evaporate from the pad 58 into the pouch 56, thus enabling coating of the external surfaces of the endoscope 10 with the disinfectant fluid 25, thus providing a further disinfectant effect.

Once the partial evacuation of the pouch 56 has been effected, for a pre-determined time period or to a pre-determined air pressure, according to the selected sequence, the vacuum pump 53 is deactivated and the vacuum tubing 54 disconnected from the pouch valve 55. The microprocessor 59, via the printer 65, then generates a printed label 66, identifying the serial number of the endoscope 10, its disinfection status, and the estimated maximum disinfection maintenance period. The label 66 is then applied to the partially evacuated pouch 56, as shown in Figure 5, and the isolated endoscope 10 within the lined tray 11, within the pouch 56, is ready for prolonged storage.

CLAIMS

1. A method for conditioning a flexible medical endoscope having internal channels, so as to maintain disinfection of said endoscope following processing to a state of high level disinfection, in this order, said method comprising the steps of:

(a) connecting the internal channels of the endoscope to connectors enabling fluid communication with a reservoir of disinfectant fluid;

(b) charging the internal channels with disinfectant fluid from the reservoir;

(c) disconnecting the internal channels from the connectors;

(d) sealing the endoscope in a pouch having an air-tight seal and a valve enabling connection to suction means; and

(e) connecting and activating said suction means so as to reduce pressure within the pouch, thereby partially evacuating said pouch;

and wherein said method is carried out on or at a conditioning station housing said disinfectant fluid reservoir, said suction means, and a processor adapted to control steps (b) and (e) according to a pre-programmed sequence.

2. The method as claimed in claim 1, wherein step (b) further comprises the sub-step of: (b)(i) following charging of the internal channels with disinfectant fluid, flushing said channels with pressurised filtered air so as to expel disinfectant fluid from said channels.

3. The method as claimed in claim 1 or claim 2, wherein the pouch utilised in step (d) has two air-tight seals.

4. The method as claimed in claim 1, wherein the reduction of pressure within the pouch in step (e) causes disinfectant fluid to be expelled from said channels.

5. The method as claimed in claim 1, wherein said method is carried out on or at a conditioning station housing the disinfectant fluid reservoir and the suction means.

6. The method as claimed in claim 5, wherein the conditioning station further comprises a processor adapted to control the operation of steps (b) and (e) according to a pre-programmed sequence.
7. The method as claimed in claim 5 or claim 6 wherein, following step (e), a printed label is generated and applied to the pouch, said label identifying the endoscope, its disinfection status, and the estimated maximum disinfection maintenance period.
8. The method as claimed in claim 7, wherein the conditioning station further houses a printer in communication with the processor, for generation of the printed label.
9. The method as claimed in claim 1, wherein the disinfectant fluid is a dilute aqueous solution of hydrogen peroxide.
10. The method as claimed in claim 9, wherein the dilute aqueous solution of hydrogen peroxide has a concentration in the range of from 0.5% to 1.5% by weight.
11. The method as claimed in claim 10, wherein the dilute aqueous solution of hydrogen peroxide has a concentration of 1.5% by weight.
12. The method as claimed in any one of claims 9 to 11, wherein the disinfectant fluid further comprises colloidal silver.
13. The method as claimed in claim 1, wherein the endoscope is housed within a moulded tray shaped to accommodate the endoscope, thereby to protect against compression of the endoscope channels during step (e).
14. The method as claimed in claim 1, wherein an absorbent pad is placed in the pouch together with the endoscope, said absorbent pad being arranged to collect disinfectant fluid expelled from the endoscope channels.

15. The method as claimed in claim 14, wherein the reduction of pressure within the pouch in step (e) causes evaporation of disinfectant fluid collected on the absorbent pad, thereby enabling coating of the external surfaces of the endoscope with said evaporated disinfectant fluid.

16. The method as claimed in claim 1, wherein following step (e), the pouch is subsequently housed within a rigid case to provide protection during transit.

17. The method as claimed in claim 1, wherein the endoscope is placed into the pouch between steps (c) and (d).

18. The method as claimed in claim 1, wherein the endoscope has a plurality of internal channels, comprising an air channel, a water channel and an aspiration channel, and wherein in step (a) each of said channels is connected to an individual dedicated connector in communication with the fluid reservoir.

19. The method as claimed in claim 18, wherein in step (b), each of said channels is charged in turn with disinfectant fluid, according to a pre-determined sequence.

20. Apparatus for use in a method of conditioning a flexible medical endoscope having internal channels, so as to maintain disinfection of said endoscope following processing to a state of high level disinfection, said apparatus including a conditioning station, comprising:

a reservoir for disinfectant fluid; connectors, in communication at one end thereof with the reservoir and adapted at the other end thereof for connection to the internal channels of the endoscope;

a pump associated with the reservoir and adapted to deliver the disinfectant fluid from the reservoir, through the connectors, and into the endoscope channels;

suction means, adapted for connection to a valve of a pouch having an air-tight seal, and further adapted to enable reduction of pressure within the pouch, thereby effecting evacuation of said pouch; and

a processor adapted to control operation of the reservoir pump and suction means according to the pre-programmed sequence.

21. The apparatus as claimed in claim 20, further comprising means for flushing the internal endoscope channels with pressurised filtered air, thereby to expel disinfectant fluid from said channels.

22. The apparatus as claimed in claim 20 or claim 21, wherein the conditioning station comprises a plurality of connectors, each adapted for connection to an individual dedicated internal channel of an endoscope having a plurality of internal channels, comprising an air channel, a water channel and an aspiration channel.

23. The apparatus as claimed in claim 22, wherein the disinfectant fluid reservoir communicates with the plurality of connectors via a manifold connection.

24. The apparatus as claimed in any of one claims 20 to 23, wherein the conditioning station further comprises a processor adapted to control operation of the reservoir pump and suction means according to a pre-programmed sequence.

25. The apparatus as claimed in claim 24, wherein the conditioning station further comprises a printer in communication with the processor.

26. The apparatus as claimed in any of one claims 20 to 25, further comprising a pouch having an air-tight seal, said pouch being adapted to house a flexible medical endoscope.

27. The apparatus as claimed in claim 26, wherein said pouch has two air-tight seals.


28. The apparatus as claimed in claim 26 or claim 27, wherein said pouch comprises a valve adapted for connection to said suction means.

29. The apparatus as claimed in any of claims 20 to 28, further comprising a moulded tray shaped to accommodate a flexible medical endoscope.

30. The apparatus as claimed in any one of claims 20 to 29, further comprising an absorbent pad for collection of disinfectant fluid expelled from the endoscope channels.

31. The apparatus as claimed in any one of claims 20 to 30, further comprising a rigid case, adapted to house and protect the evacuated pouch containing said endoscope.

Fig.2

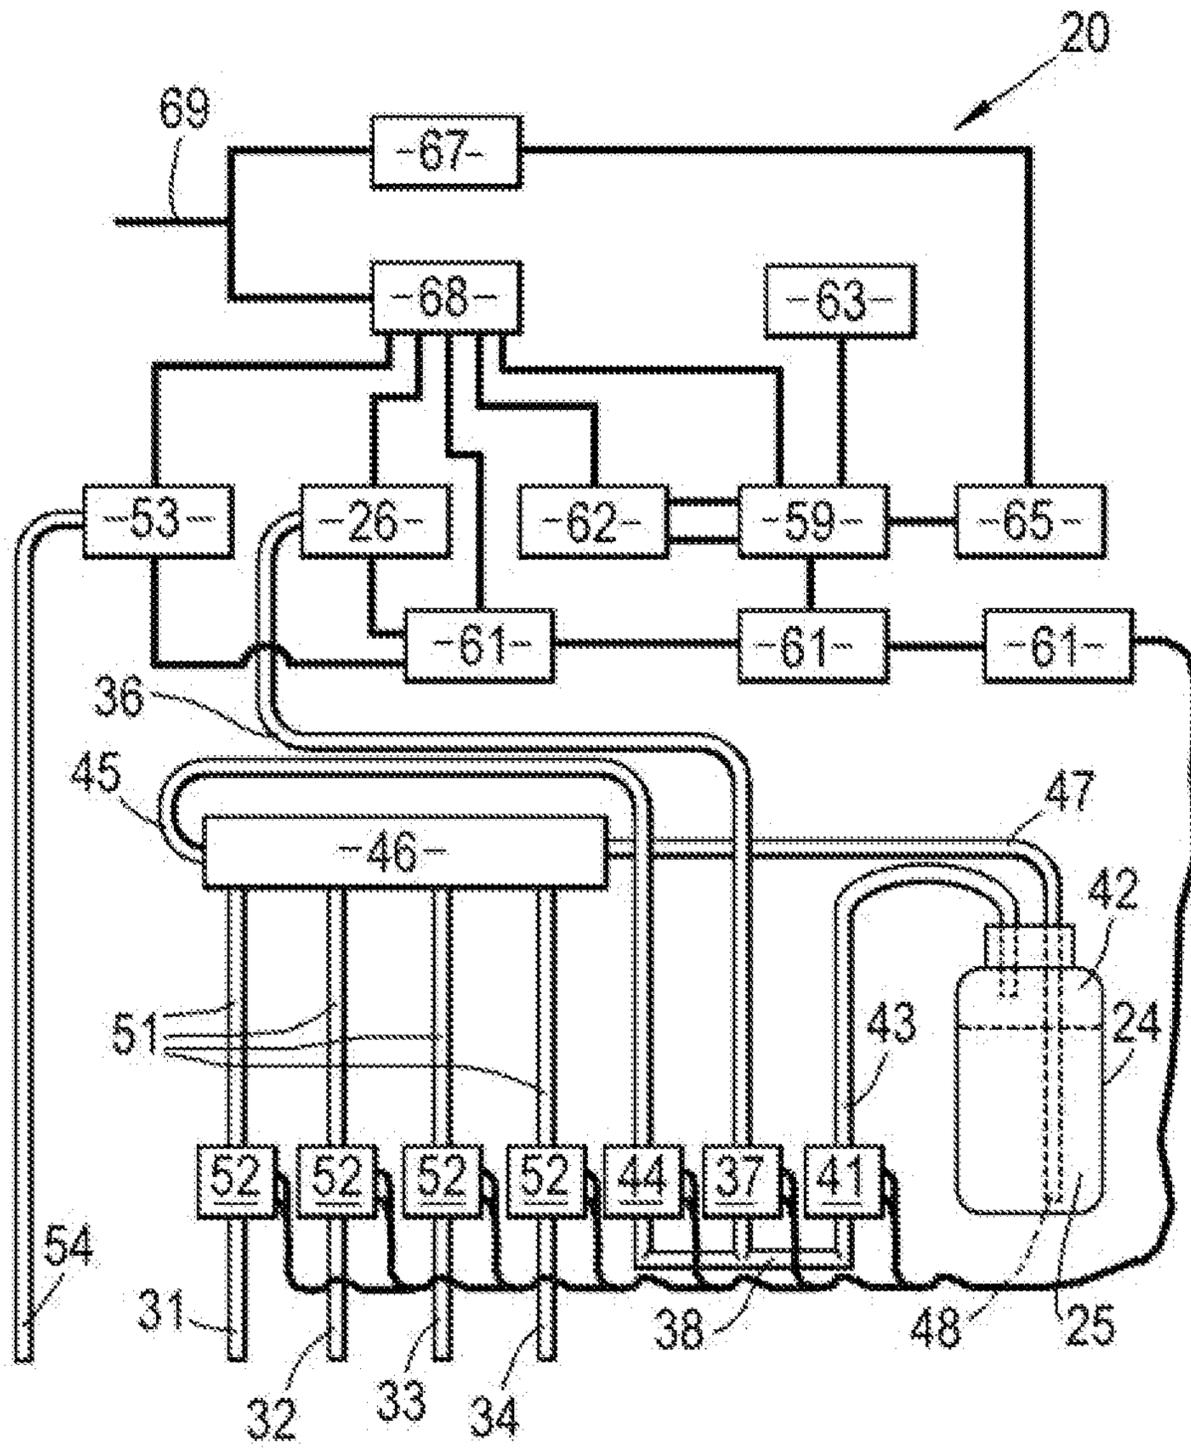

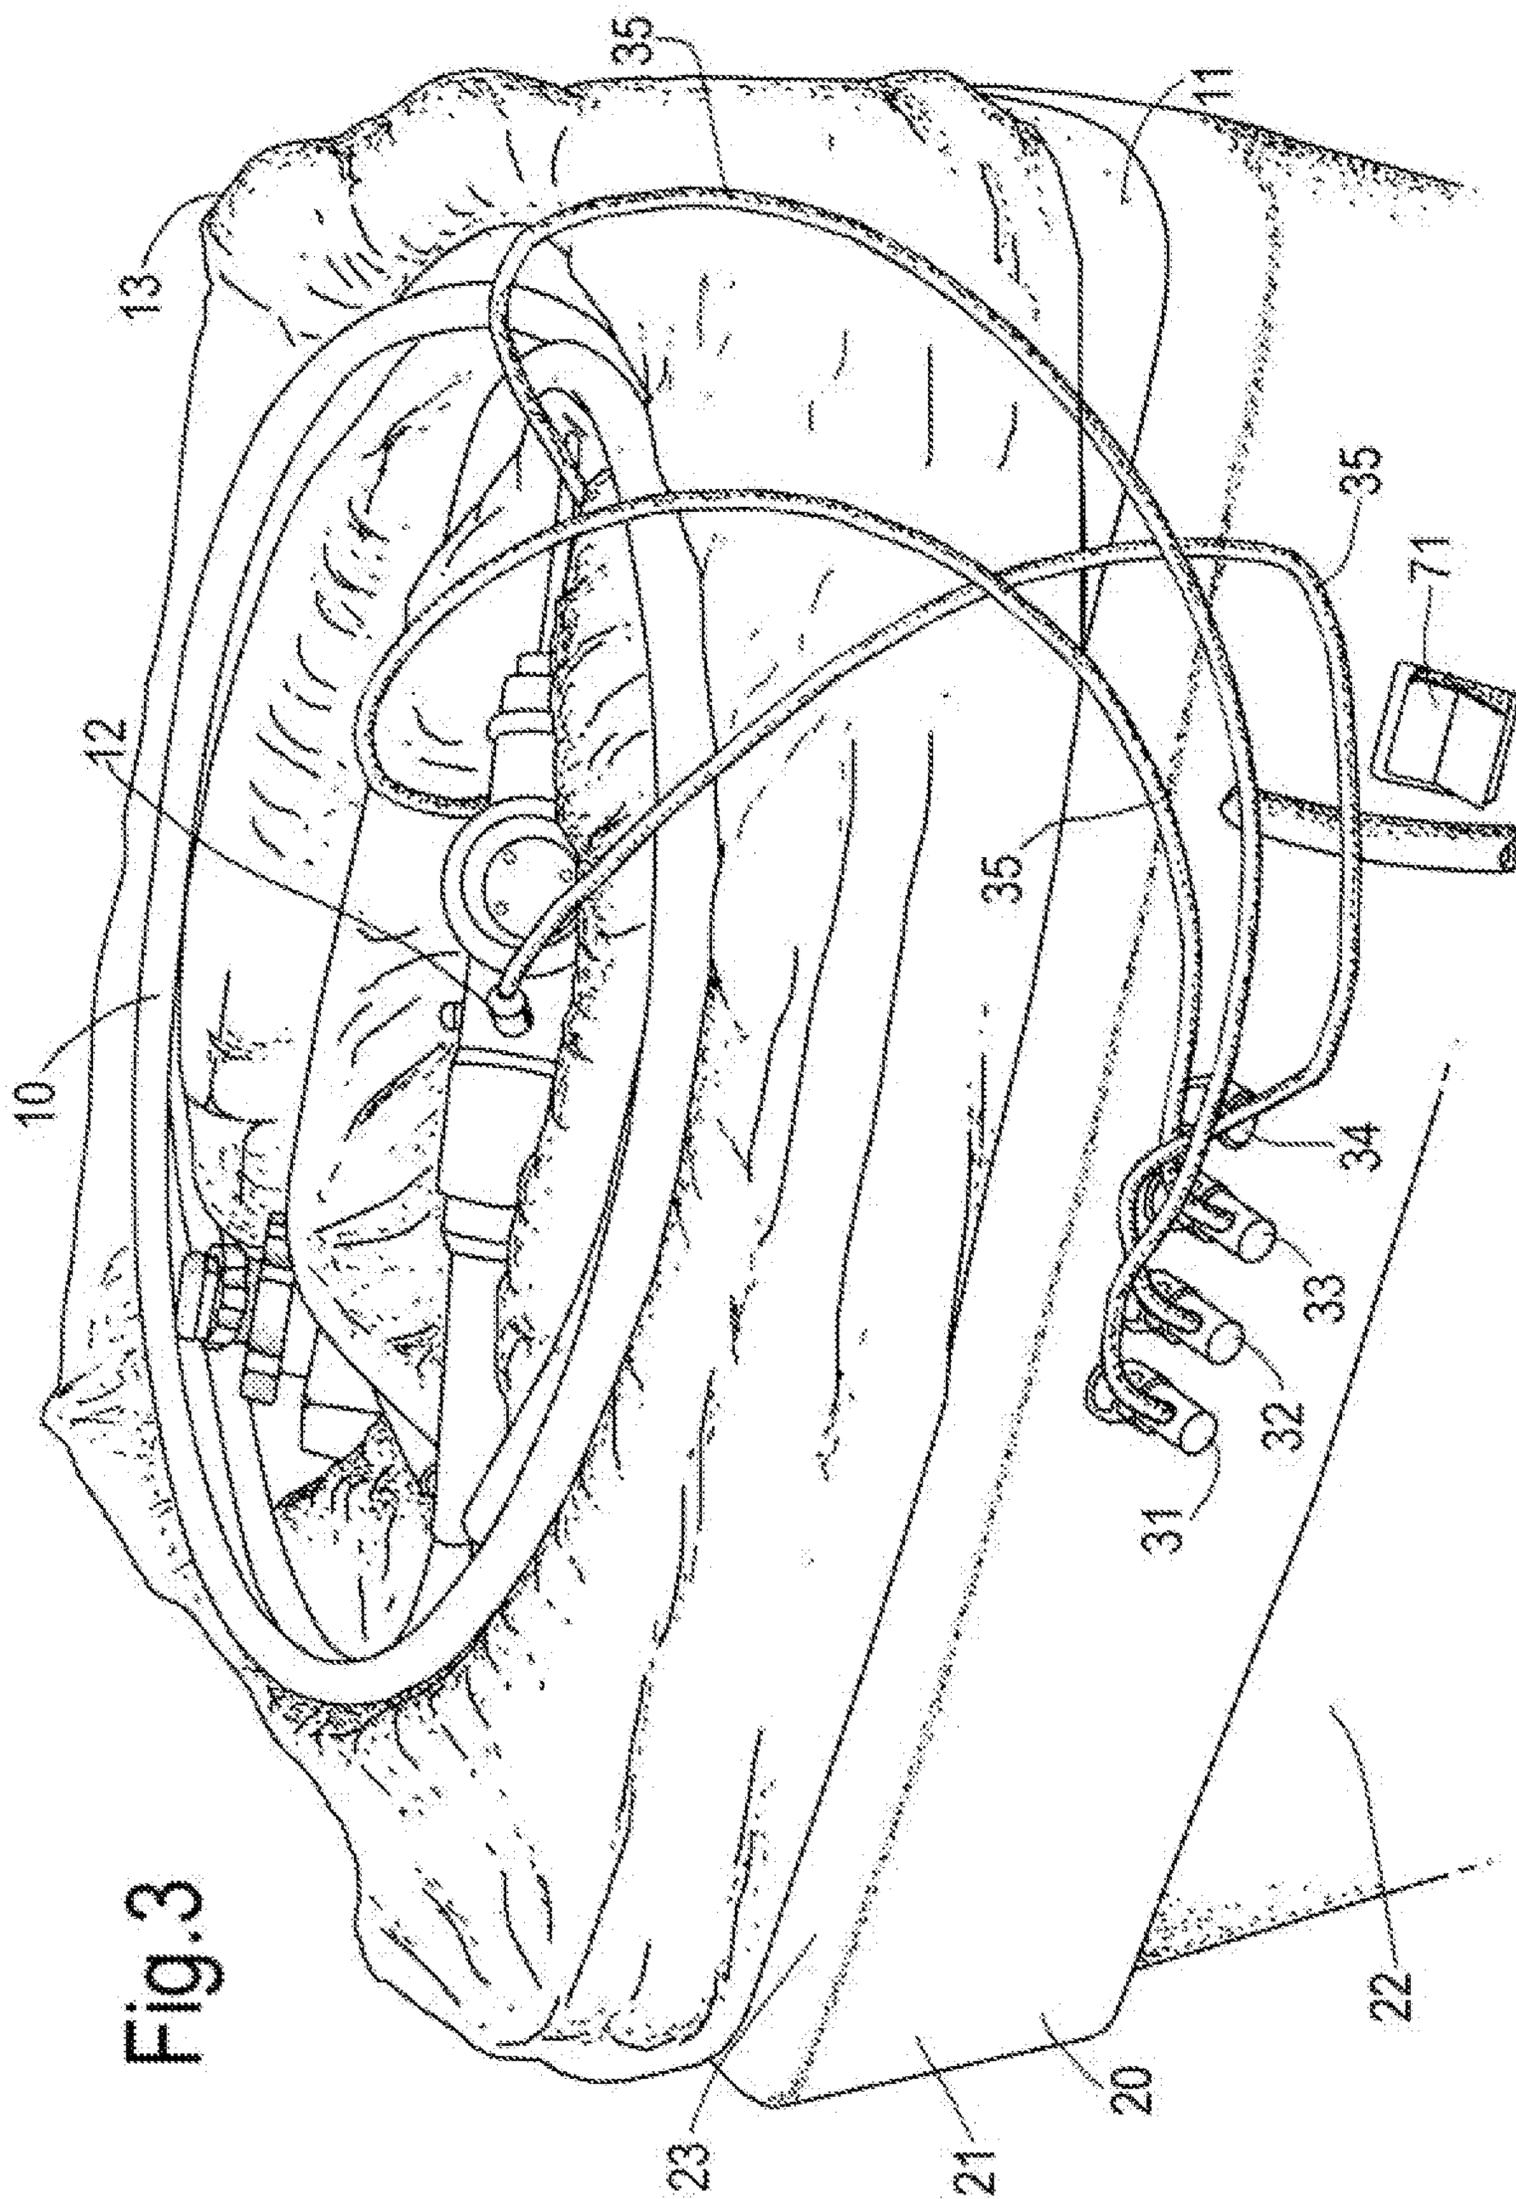


Fig.3

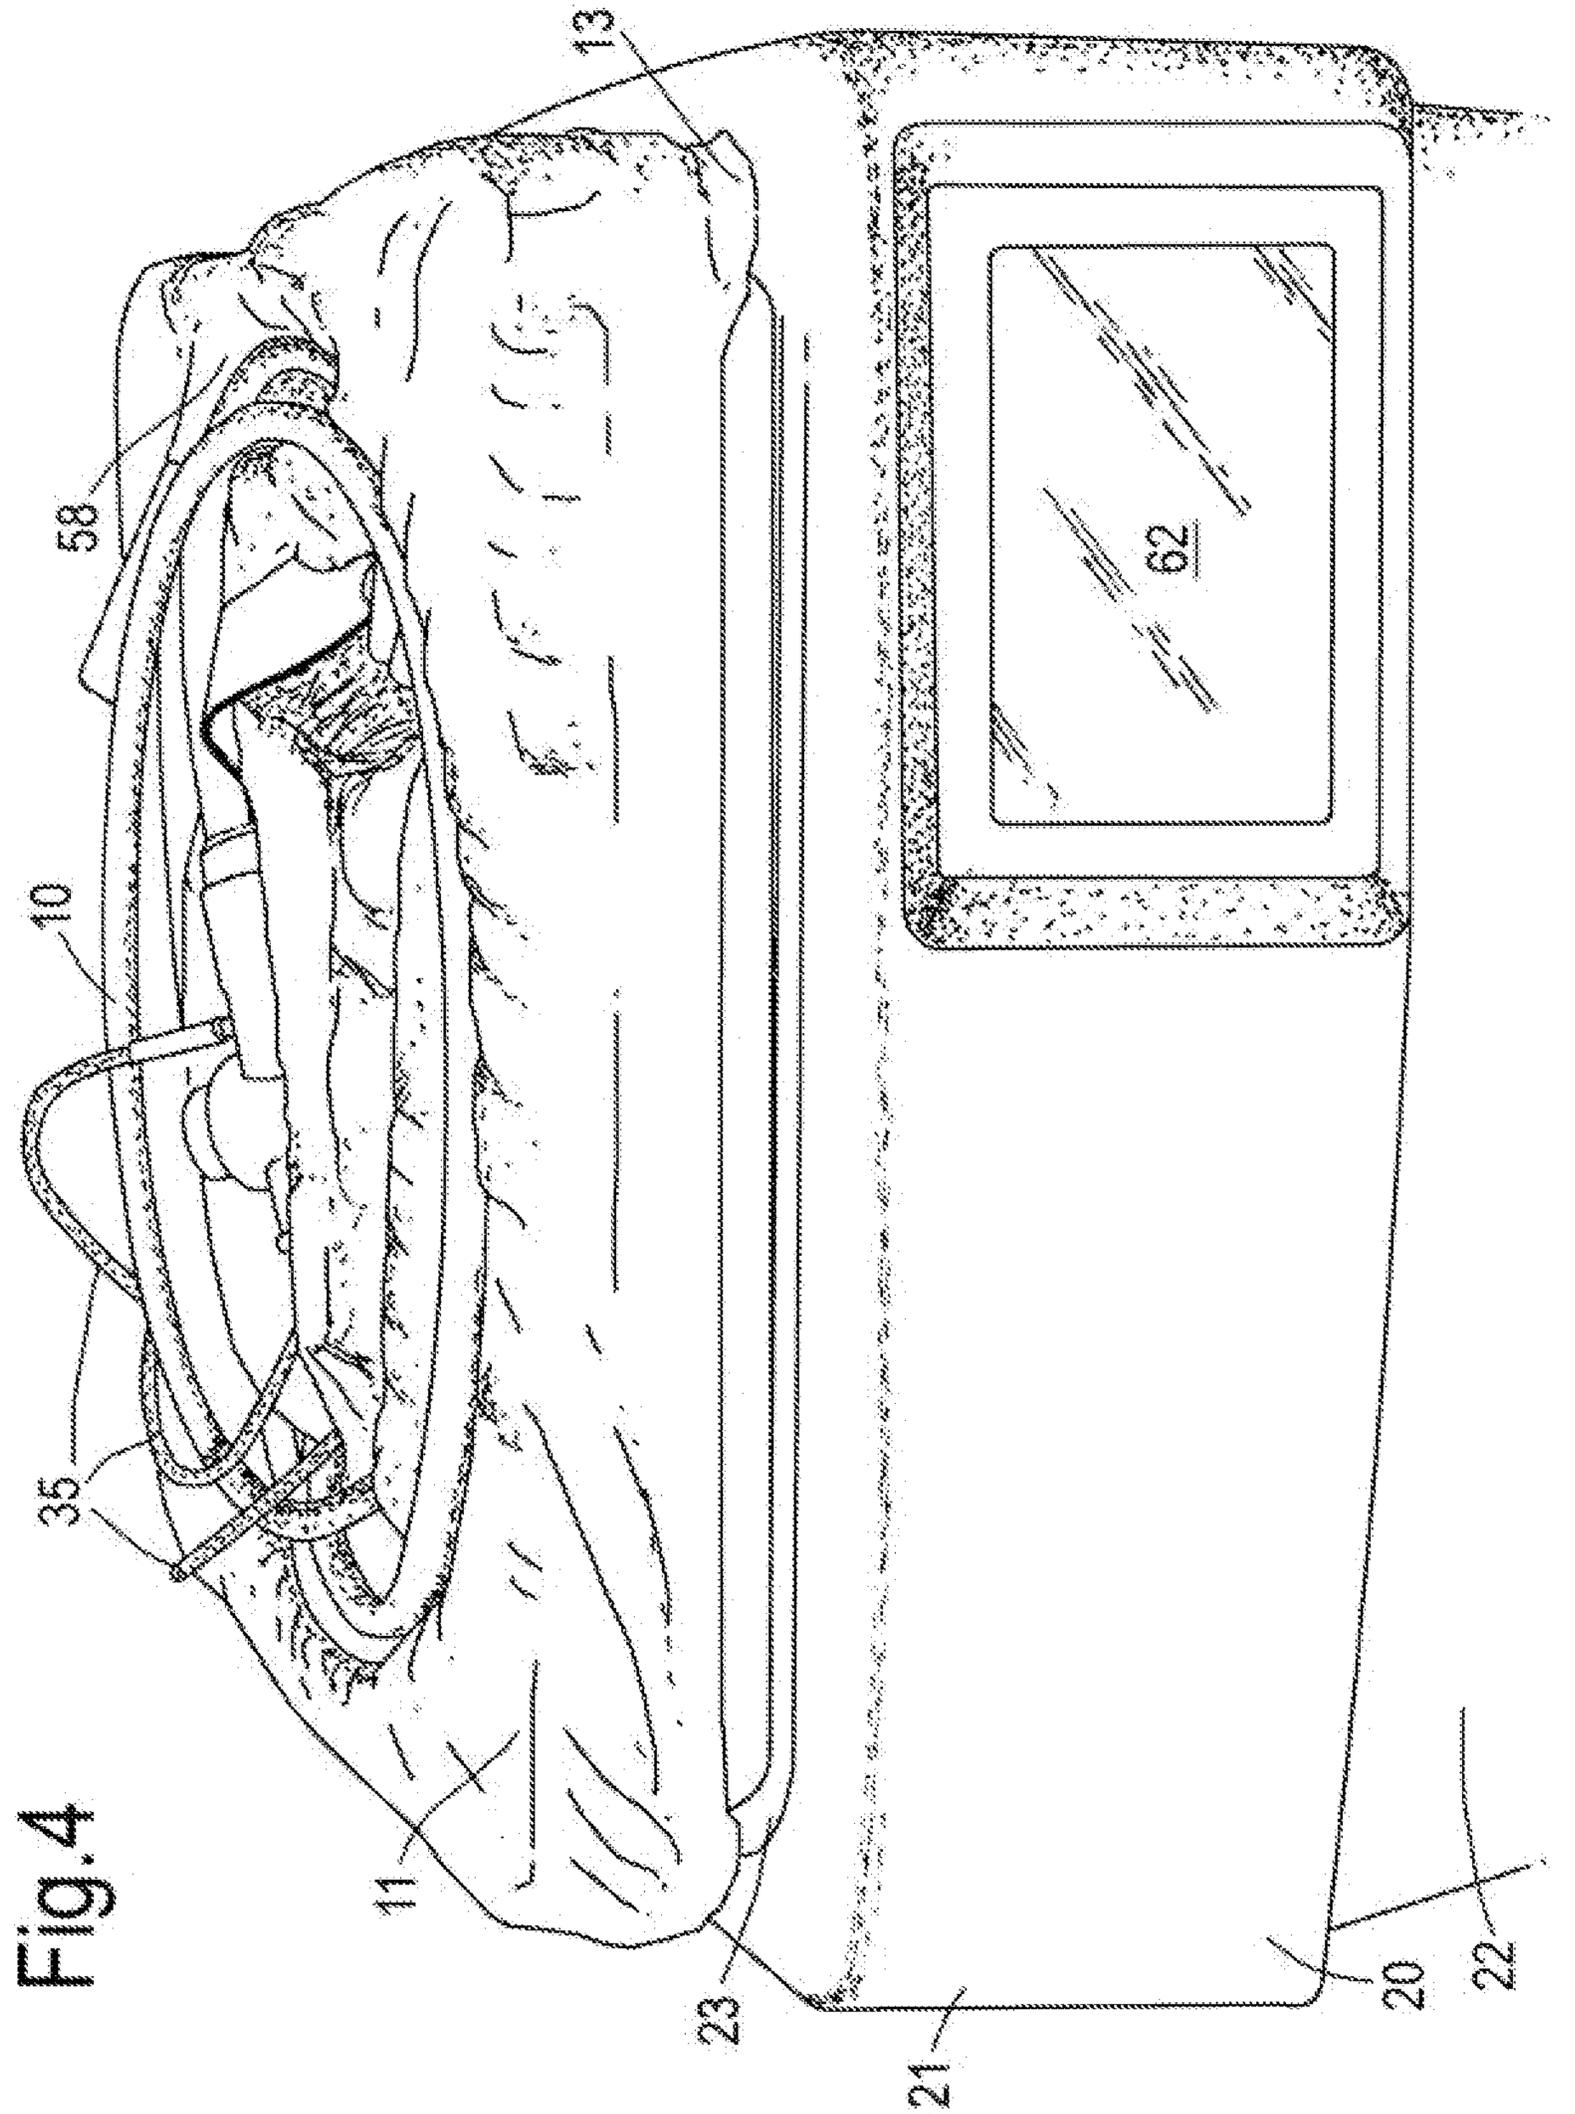


Fig. 4

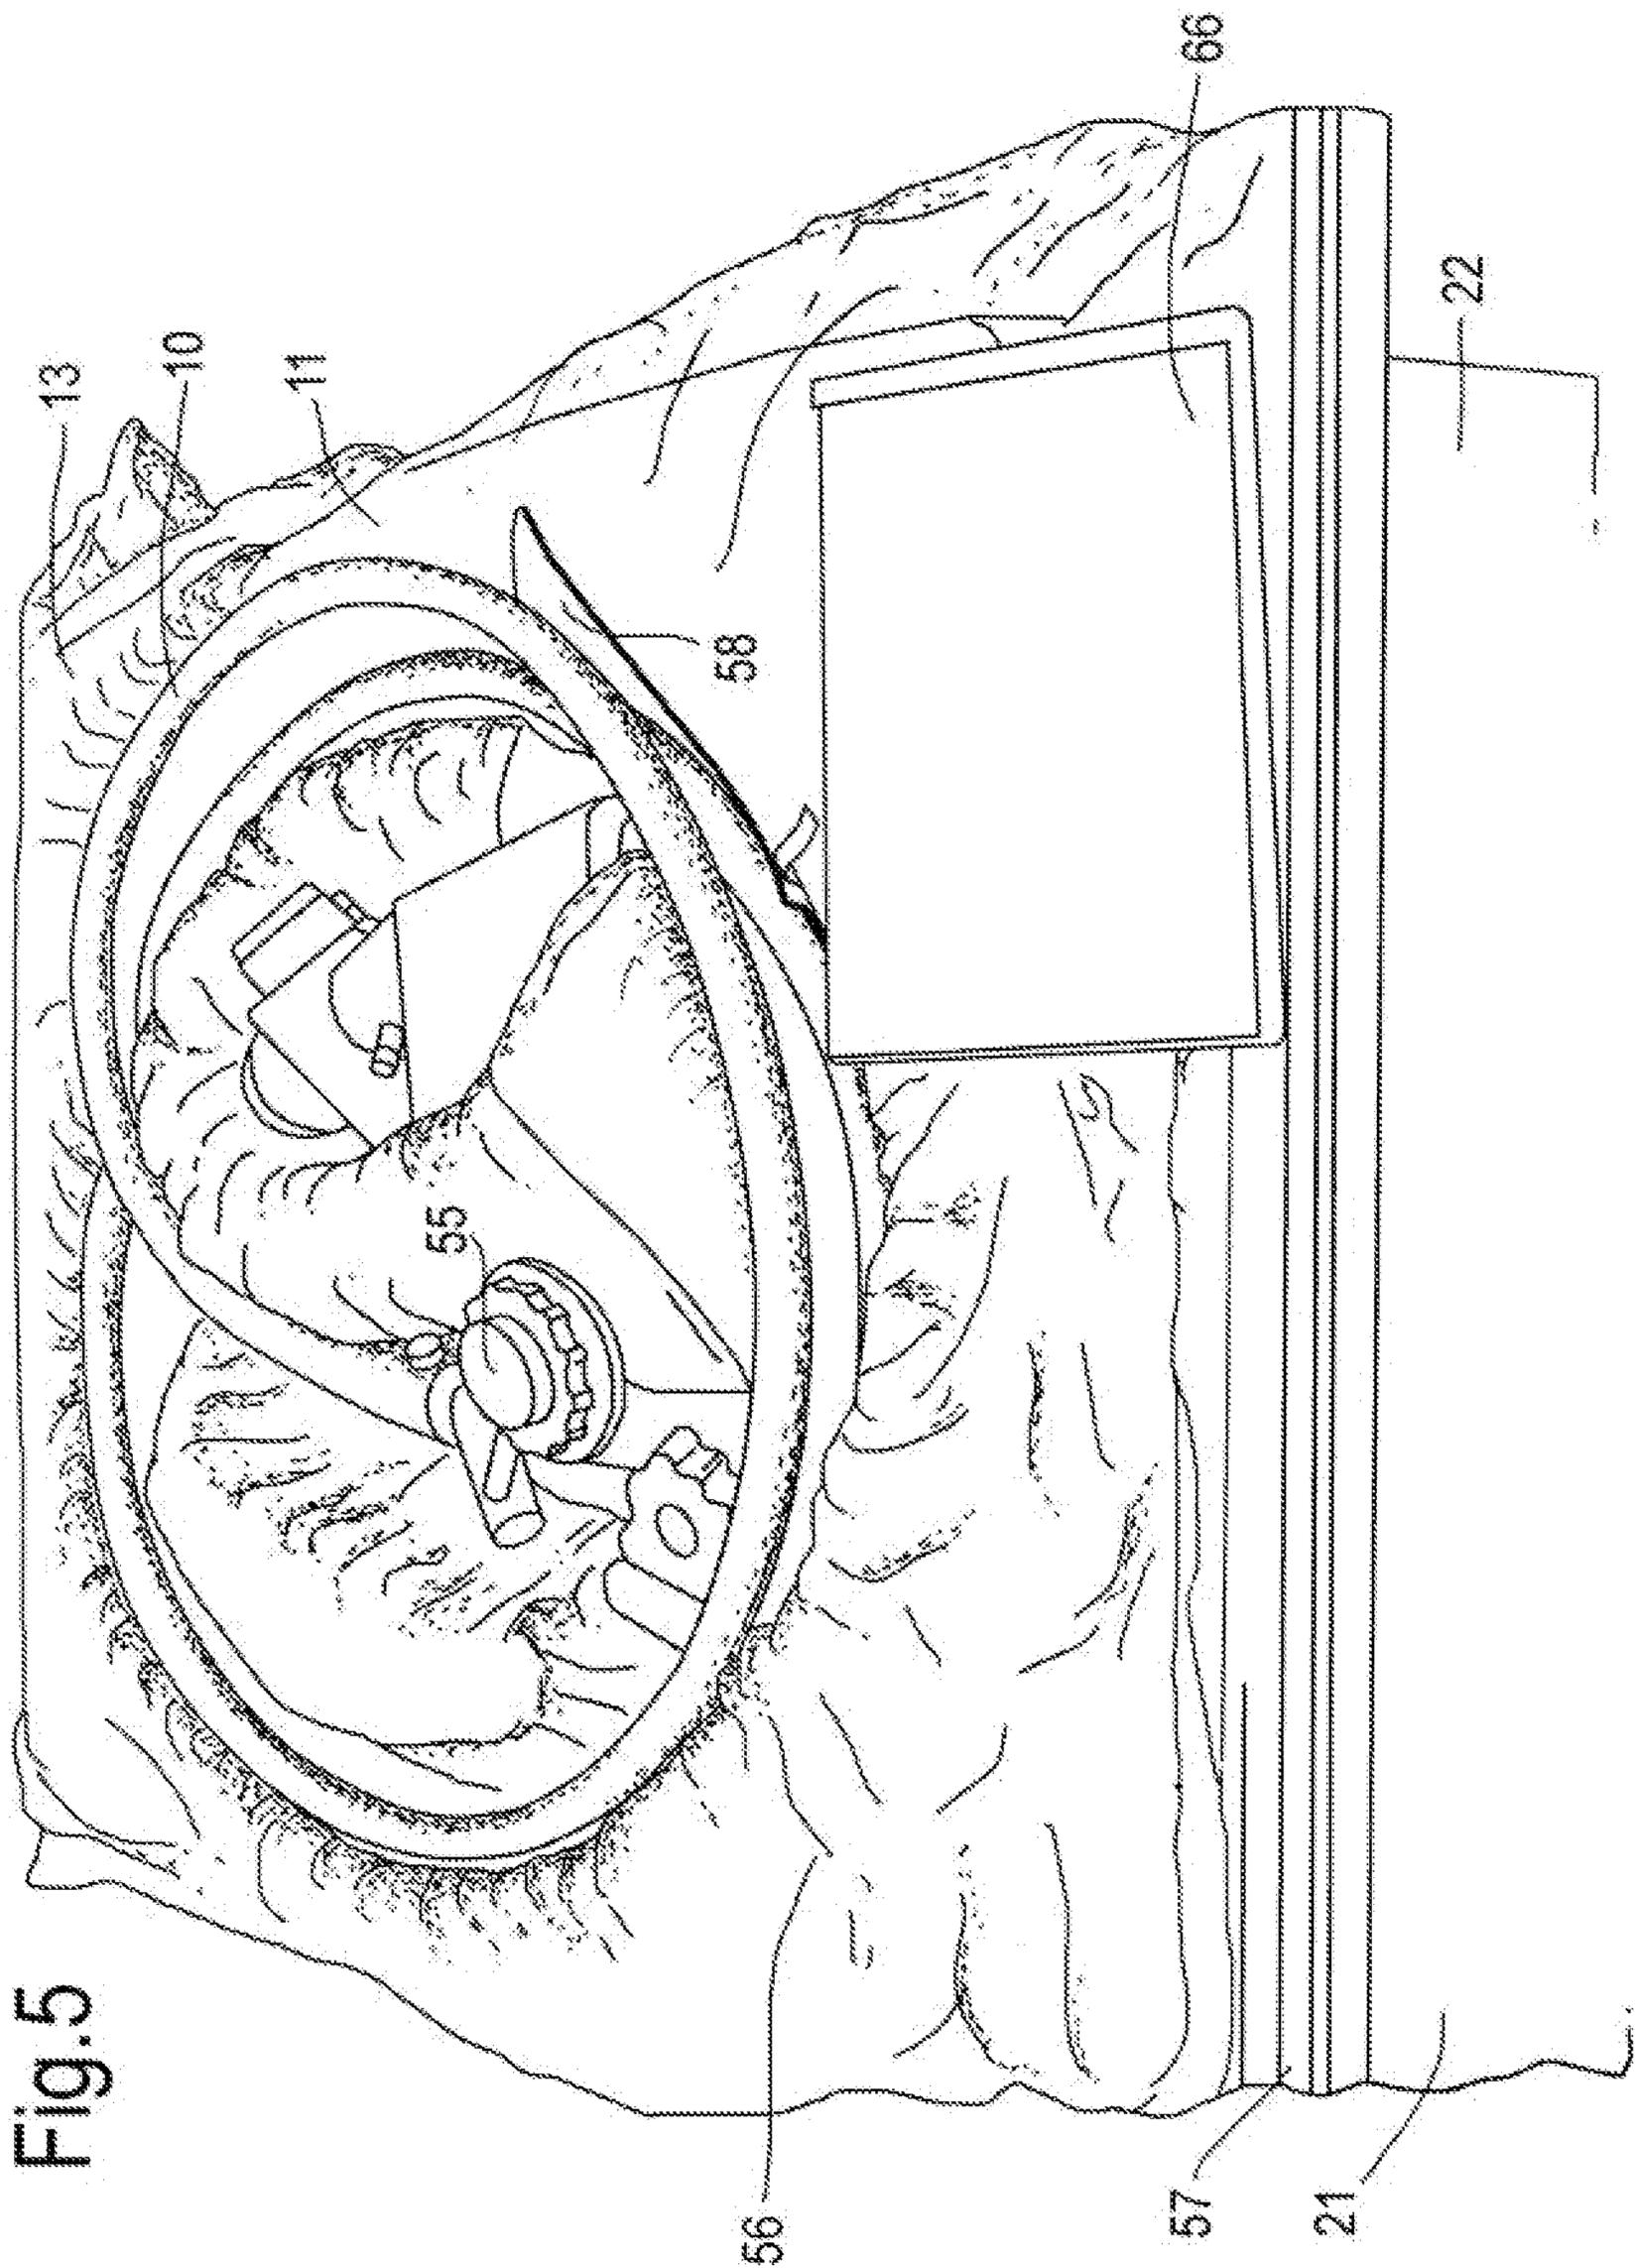


Fig. 5

