




(86) Date de dépôt PCT/PCT Filing Date: 2000/11/01
 (87) Date publication PCT/PCT Publication Date: 2001/05/10
 (85) Entrée phase nationale/National Entry: 2002/04/30
 (86) N° demande PCT/PCT Application No.: NO
 2000/000363
 (87) N° publication PCT/PCT Publication No.: 2001/032443
 (30) Priorité/Priority: 1999/11/02 (19995353) NO

(51) Cl.Int.⁷/Int.Cl.⁷ B44D 3/16, H05B 6/10
 (71) Demandeur/Applicant:
 JAK. J. ALVEBERG AS, NO
 (72) Inventeurs/Inventors:
 ALVEBERG, BJORN, ERIK, NO;
 BAANN, TOM, ARNE, NO
 (74) Agent: KIRBY EADES GALE BAKER

(54) Titre : DISPOSITIF ET PROCÉDE D'ELIMINATION DE LA ROUILLE ET DE LA PEINTURE
 (54) Title: DEVICE AND METHOD FOR REMOVAL OF RUST AND PAINT

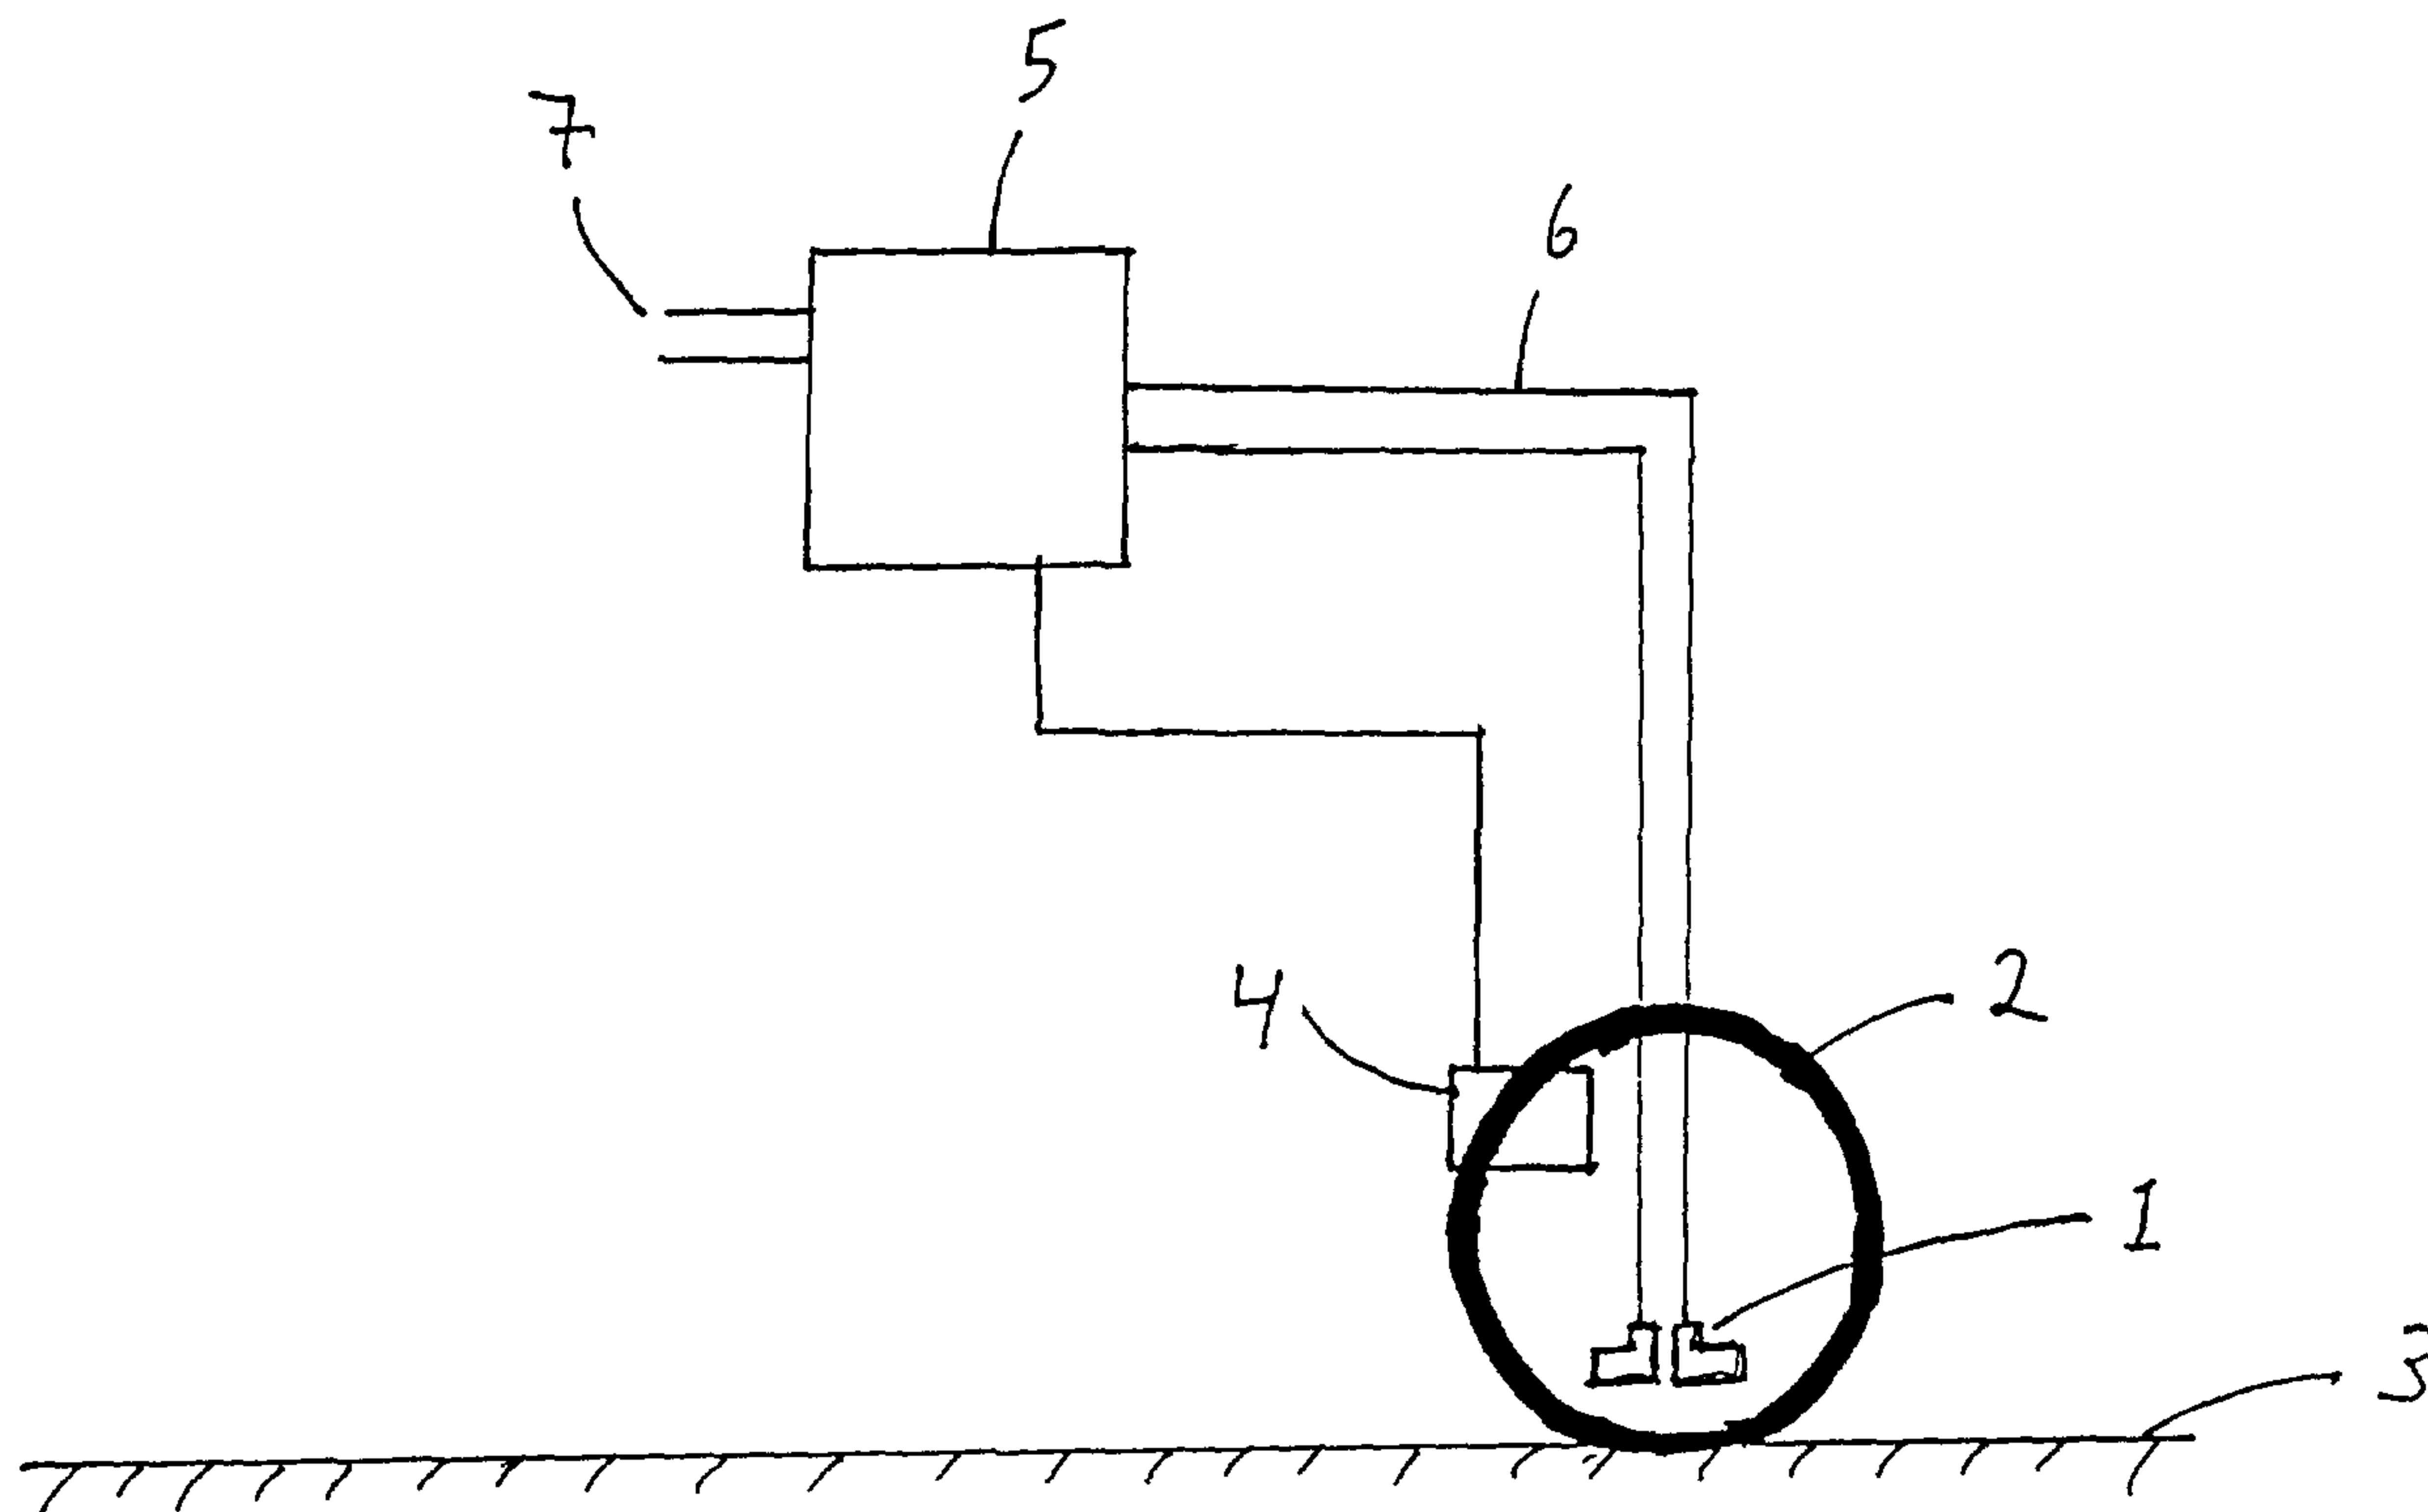

(57) **Abrégé/Abstract:**

The present invention relates to a method for removal of rust and paint from a metal surface (3), wherein induction heat is used for heating the metal surface (3). The invention also relates to a device for carrying out the method.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)


PCT

(10) International Publication Number
WO 01/32443 A1

- (51) International Patent Classification⁷: **B44D 3/16**, H05B 6/10 (74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M, N-0306 Oslo (NO).
- (21) International Application Number: PCT/NO00/00363 (81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date:
1 November 2000 (01.11.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
19995353 2 November 1999 (02.11.1999) NO
- (71) Applicant (*for all designated States except US*): JAK. J. ALVEBERG AS [NO/NO]; P.O. Box 67, N-1345 Østerås (NO). (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors; and
(75) Inventors/Applicants (*for US only*): ALVEBERG, Bjørn, Erik [NO/NO]; Måltrostveien 9D, N-0786 Oslo (NO). BAANN, Tom, Arne [NO/NO]; Avstikkerveien 52, N-3960 Stathelle (NO). Published:
— With international search report.

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR REMOVAL OF RUST AND PAINT

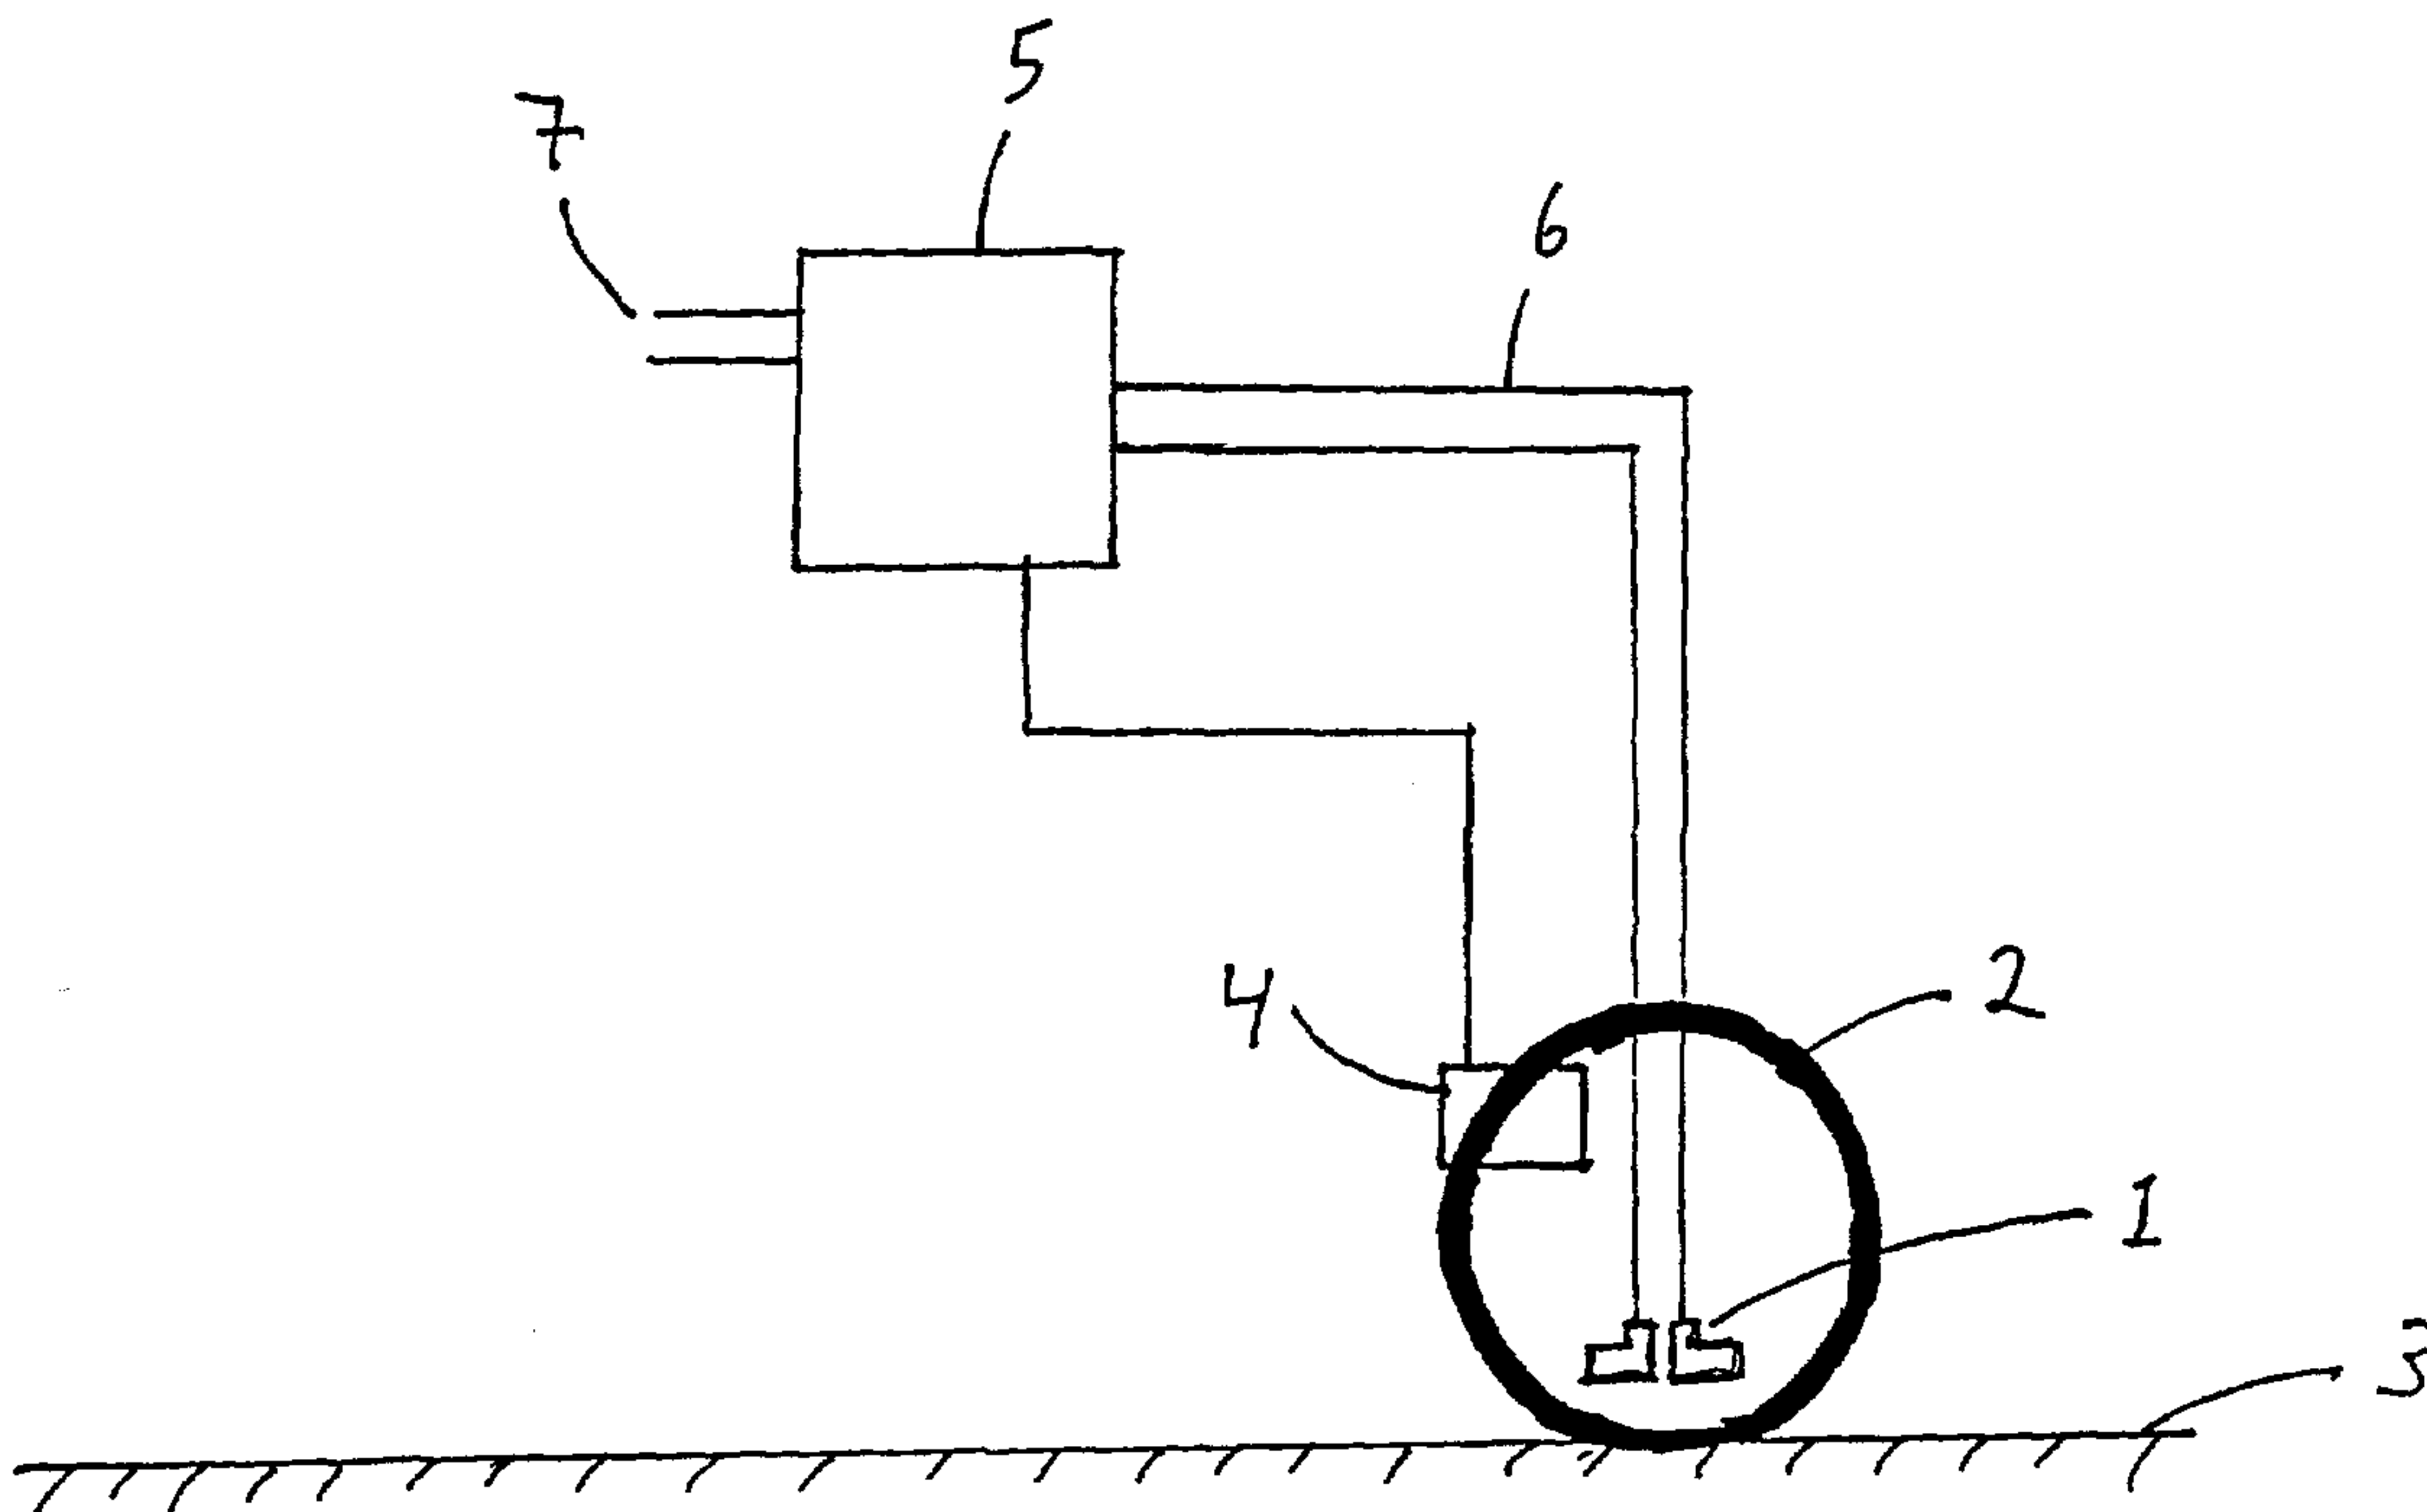

(57) Abstract: The present invention relates to a method for removal of rust and paint from a metal surface (3), wherein induction heat is used for heating the metal surface (3). The invention also relates to a device for carrying out the method.

WO 01/32443 A1

Device and method for removal of rust and paint

The present invention relates to a device and method for removal of rust and paint from a metal surface.

5

It is estimated that corrosion amounts to 3-4% of the BNP in the western world. Only in Norway millions of square meters are protected by paint each year. In order to achieve good results, the surfaces that are to be painted must be
10 cleaned and pretreated. In industrial applications this is usually done by sandblasting, grinding or jet water washing. Combinations of these methods are also used.

The most frequently used method is sandblasting. Old paint
15 and rust is removed by a blasting the surface with sand or other suitable agents. This is a costly and quite time-consuming process. The advantage of this method is that the blasting process creates a rough surface that gives a good adhesion for new paint. Furthermore, the used equipment is
20 cheap, simple to operate and easy to maintain. The disadvantages with this method is that large quantities of sand are used, which generates a lot of dust, the equipment is heavy and awkward to handle, the method is slow and does not remove grease and other foulings such as water soluble
25 salts, sulfates etc.

Jet water washing is a paint and rust removal method that has become more usual. The advantages of this method are that dust related problems are avoided, there is less
30 waste, and water-soluble foulings are removed. The disadvantages of this method are that the equipment is expensive and difficult to maintain, no roughness is made on the steel surface, a lot of water is spilled, large quantities of water is required (which is a problem on e.g. a ship),
35 and the treated surface must be dried before it can be painted.

Grinding is a method that no longer often is used. The method is mainly used for patchwise repairs.

5 Most often, the paint is mainly intact on the surface that is to be cleaned. Optimally, the paint only has to be removed, because the roughness on the steel surface is intact. An example is power plants, where the piping is sandblasted even if 95% of the existing paint is intact. The situation is the same in offshore applications.

10

There are increasing numbers of restrictions on sandblasting and alternative methods have continually been attempted without success.

15 The present invention aims at avoiding the aforementioned disadvantages, while providing a method and a device that more effectively removes paint and rust.

20 This aim is reached by means of a method according to claim 1 and a device according to claim 7. Further advantages and preferred embodiments are mentioned in the independent claims and in the specification under reference to the enclosed drawing, which shows a preferred embodiment of the present invention.

25

According to the present invention, rust and old paint is removed by means of induction heat. In addition, grease and other foulings are removed from the surface. This is a quick and reliable method that does not produce excessive
30 waste.

Induction heat is created in magnetic metals by means of magnetic fields. This is a known principle and is used for heating steel in bending and punching processes, and in
35 welding of steel and pipes, e.g. in connection with production of body details in the car industry.

By induction heating the steel to 250-300°C, the steel is heated without heating the rust and paint. The steel will expand and attached rust will peel off due to the much lower expansion coefficient of rust as compared to steel. The
5 paint will peel off as a result of the heated surface.

Equipment for generating induction heat is known *per se*, and heating of steel by means of induction heating has been utilized for a number of years. However, the use of induc-
10 tion heat for removal of rust and paint is not known in the prior art.

It is of utmost importance that the steel 3 is not over-heated. The provided heat has to be constant even if the
15 speed of an induction coil 1 over the steel 3 varies. According to the present invention, the quantity of energy deposited in the steel 3 is varied according to the velocity of the induction coil 1 over the steel surface 3. This ensures a constant temperature profile in the steel 3. Fur-
20 thermore, according to the present invention, this is achieved by means of arranging the induction coil 1 in a frame with a wheel 2. The wheel 2 is rolled over the steel surface, and the velocity of the wheel regulates the quantity of provided energy. The slower the wheel 2 rotates,
25 the less energy is provided to the coil. If the rotational speed increases, the supplied energy increases. In short, the quantity of energy per unit area of steel 3 is equal for one revolution, independent of the rotational speed.

30 The frequency (hertz) of the AC-current supplied to the induction coil 1 determines the depth of the magnetic field in the steel 3. The frequency (and thereby the depth) can be determined from the induction device according to the present invention. By controlling the current, that is the
35 supplied kW, and simultaneously controlling the frequency, the desired temperature is obtained in a desired layer of the steel 3.

About 90% of the supplied energy is used in the heating process. This means that the energy conversion loss is small compared to conventional methods for heating of steel. In the past, gas torches have been used for removing
5 rust and oxide scale from steel surfaces. This process was effective, but because only 5-10% of the supplied energy was converted to heat and because the heat from the gas torch had to penetrate rust and other covering layers, this process became expensive compared to other methods such as
10 sandblasting etc.

When using induction heating according to the present invention, only a layer of the steel, for example 0.5 mm, is heated for a limited time period, and the steel will rapidly cool down by heat propagation, thereby avoiding that
15 loosened paint "burns" to the surface. This also entails that heat does not propagate through the other side of steel with a thickness above about 3 mm, thereby avoiding damage to possible paint on said other side.

20 By removal of paint by means of induction heating it is important that the temperature in the steel is controlled. If use is made of "handheld" equipment without it's own drive mechanism, a power supply varying the supplied current according to the surface velocity of the induction
25 coil 1 is needed.

According to the present invention this is achieved in the following manner:

30 The induction coil 1 indirectly supplying heat to the steel 3 is supported on a freely running wheel 2 that ensures a specific distance from the coil 1 to the steel 3. The wheel 2 is connected to a tachometer 4, which feeds signals to a voltage regulator 5 in a transformer unit (not shown). This
35 insures that the supplied voltage is increased if the velocity increases and that more energy is supplied per unit time, at the same time as the deposited energy per unit area is the same, independent of the velocity.

The control unit 5 may comprise a standard PLS such as an impedance regulator, thyristor or triac. The preferred kind of PLS depends on the application and preferred function.

5 Alternatively, a combination of the aforementioned PLSs may be used, opening up the possibility for different functional modes.

The tachometer 4 may be of the stroboscope kind or any
10 other revolution counter that can feed signals to a PLS control unit 5.

The distance between the induction coil 1 and the surface 3 may be adjusted in addition to frequency, current strength
15 etc. The induction coil is arranged in relation to the wheel 2 such that a certain distance, that well may be adjustable, is kept.

The frequency and current strength of the induction coil 1
20 may be adjusted manually or automatically by means of the control unit 5, in order to obtain the desired temperature and temperature profile (e.g. the depth of a layer with a specific temperature) in the metal surface.

25 An essential feature of this process is the supplied energy to the steel 3. This energy has to be constant; otherwise it will effect the quality of the work. If the supplied energy is too small, the steel 3 will not achieve a high enough temperature for paint and rust to loosen. If the
30 supplied energy is too great, the paint on the other side of the steel may be damaged, and the loosened paint may "burn" to the surface.

In automatic embodiments this process may be developed to
35 achieve optimal rates for removal of rust and old paint. Theoretic rates may be converged and the conversion efficiency for the supplied energy may reach 90%.

The present invention, in combination with sandblasting only when there is a need for a rough surface and jet water washing for removal of water soluble foulings, is a very attractive alternative to prior art solutions. In addition,
5 this method also kills bacteria and other organisms that have proven to promote corrosion.

It is understood that a person skilled in the art, when reading this specification under reference to the attached
10 drawings, may conceive of modifications or alternatives that fall within the scope and idea of the present invention as defined in the following claims.

C l a i m s

1. A method for removal of rust and paint from a metal surface (3),
5 c h a r a c t e r i z e d i n t h a t i n d u c t i o n h e a t i s u s e d f o r h e a t i n g t h e m e t a l s u r f a c e (3).
2. A method according to claim 1,
c h a r a c t e r i z e d i n t h a t t h e i n d u c t i o n h e a t
10 i s p r o v i d e d b y a n i n d u c t i o n c o i l (1) a r r a n g e d i n c o n n e c t i o n w i t h a w h e e l (2) t h a t a l s o c o m p r i s e s a t a c h o m e t e r (4).
3. A method according to claim 2,
c h a r a c t e r i z e d i n t h a t a c o n t r o l u n i t (5)
15 c o n t r o l s t h e s u p p l y o f e n e r g y t o t h e i n d u c t i o n c o i l (1) a s a f u n c t i o n o f a s i g n a l r e c e i v e d f r o m t h e t a c h o m e t e r (4).
4. A method according to claim 3,
c h a r a c t e r i z e d i n t h a t t h e s u p p l i e d a m o u n t
20 o f e n e r g y f r o m t h e i n d u c t i o n c o i l (1) i s p r o p o r t i o n a l t o t h e r o t a t i o n a l v e l o c i t y o f t h e w h e e l (2).
5. A method according to claim 3 or 4,
c h a r a c t e r i z e d i n t h a t t h e s u p p l i e d a m o u n t
25 o f e n e r g y p e r u n i t s u r f a c e a r e a i s c o n s t a n t.
6. A method according to one of the previous claims,
c h a r a c t e r i z e d i n t h a t t h e f r e q u e n c y a n d
c u r r e n t s t r e n g t h o f t h e i n d u c t i o n c o i l (1) m a y b e a d j u s t e d
30 m a n u a l l y o r a u t o m a t i c a l l y b y m e a n s o f t h e c o n t r o l u n i t (5) i n o r d e r t o a c h i e v e t h e p r e f e r r e d t e m p e r a t u r e a n d t e m p e r a t u r e p r o f i l e i n t h e m e t a l (3).

7. An apparatus for removal of rust and paint from a metal surface (3),
c h a r a c t e r i z e d i n that an induction coil
5 (1) is arranged in connection with a wheel (2) that also comprises a tachometer (4).
8. An apparatus according to claim 7,
c h a r a c t e r i z e d i n that a control unit (5)
10 the supply of energy to the induction coil (1) as a function of a signal received from the tachometer (4).
9. An apparatus according to claim 7 or 8,
c h a r a c t e r i z e d i n that the supplied amount
15 of energy from the induction coil (1) is proportional to the rotational velocity of the wheel (2).
10. An apparatus according to claim 7, 8 or 9,
c h a r a c t e r i z e d i n that the supplied amount
20 of energy per unit surface area is constant.
11. An apparatus according to claim 7, 8, 9 or 10,
c h a r a c t e r i z e d i n that the frequency and
current strength of the induction coil (1) is adjusted
25 manually or automatically by means of the control unit (5) in order to achieve the preferred temperature and temperature profile in the metal (3).

Fig. 1

1/1

