




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C21B 7/10, F27D 1/12		A1	(11) International Publication Number: WO 98/54367
			(43) International Publication Date: 3 December 1998 (03.12.98)
(21) International Application Number: PCT/EP98/03194		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 May 1998 (28.05.98)			
(30) Priority Data:			
1006169	30 May 1997 (30.05.97)	NL	
1006693	31 July 1997 (31.07.97)	NL	
1006738	8 August 1997 (08.08.97)	NL	
(71) Applicant (for all designated States except US): HOOGOSENS STAAL B.V. [NL/NL]; P.O. Box 10000, NL-1970 CA IJmuiden (NL).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): VAN LAAR, Jacobus [NL/NL]; De Genestetlaan 9, NL-1985 GE Driehuis (NL). GLEIJM, Gerardus [NL/NL]; Fazantenlaan 43, NL-1971 KK IJmuiden (NL). TEERHUIS, Cornelis, Pieter [NL/NL]; Zeilstraat 13, NL-1156 CJ Marken (NL). TOXOPEUS, Hisko, Leon [NL/NL]; De Hogheweydt 37, NL-1851 EB Heiloo (NL).			
(74) Agent: HANSEN, Willem, Joseph, Maria; Hoogovens Corporate Services B.V., P.O. Box 10000, NL-1970 CA IJmuiden (NL).			
		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: REFRACTORY WALL STRUCTURE

(57) Abstract

Refractory wall structure for a furnace, in particular for a metallurgical furnace, such as for example a blast furnace with a high process temperature during operation, which wall structure is subjected to a high thermal loading, comprising a steel outer wall, a refractory lining consisting of one or more layers of a well heat-conducting material on the inside of the outer wall, and means for cooling the refractory wall structure, whereby the wall structure also comprises a permanent, well heat-conducting metallic filling in a gap in the refractory wall structure, which filling has been molten inside the gap and then after solidifying forms a low heat resistance across the gap.

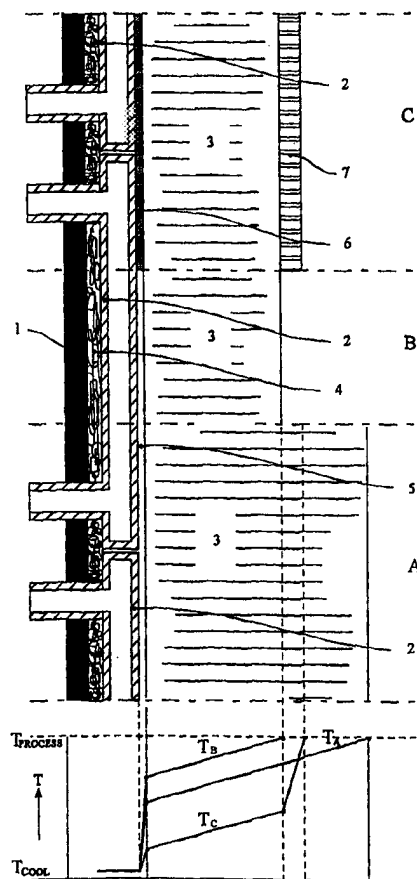

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

REFRACTORY WALL STRUCTURE

The invention relates to a refractory wall structure for a furnace, in particular for a metallurgical furnace, such as for example a blast furnace with a high process temperature during operation, which wall structure is subjected to a high thermal loading, comprising

- a steel outer wall,
- a refractory lining consisting of one or more layers of a well heat-conducting material on the inside of the outer wall, and
- means for cooling the refractory wall structure.

With the wall structure of this type, the refractory lining is exposed to a high temperature. As a consequence of this, considerable wear of the refractory lining occurs and its service life is reduced. At the state of the art the reference temperature is kept low by cooling and attempts are made to keep the interior temperature low by using refractory materials with a high heat conductivity, such as graphite, semi-graphite or other refractory materials containing graphite. The means for cooling the refractory wall structure can consist of means on the outside of the steel wall, such as for example spray-cooling, air-cooling or cooling ducts for fluid coolants, or of other means on the inside of the steel wall such as for example water-cooled cooling elements such as stave coolers or cooling plates which are generally made from copper.

- 2 -

The object of the invention is to reduce the wear of this wall structure and to improve the service life.

The object of the invention is also to create a repair process for the refractory wall structure of a furnace
5 which prolongs the service life.

With the invention this is achieved because the wall structure also comprises a permanent, well heat-conducting metallic filling in a gap in the refractory wall structure, which filling has been molten inside the gap
10 and then after solidifying forms a low heat resistance across the gap.

The invention relies on the notion that the gaps which inevitably occur or form in the refractory wall structure which is always of a composite nature, form considerable
15 heat resistances for the flow of dissipating heat passing through, so that the interior temperature of the refractory lining remains high. The filling, which in molten state has a close thermal contact with the gap walls, which contact remains unchanged following
20 solidification, and the good heat conductivity of the material of the filling, together provide a low heat resistance across the gap, so that the interior temperature of the refractory lining falls. In certain cases, a layer such as slag can even solidify onto and
25 build up on the inside. This results in a permanent, wear-resistant layer.

Preferably the gap with a good heat conducting metallic filling is a gap in the refractory lining, or a

- 3 -

gap between the steel outer wall and the refractory lining, or, if the means for cooling the refractory wall structure are water-cooled copper cooling elements, a gap between the refractory lining and a cooling element. A gap
5 in the refractory lining can be a gap between two layers of the refractory lining, or a gap between two elements such as blocks or bricks of the refractory lining, or a gap such as a heat crack in the material of the refractory lining. The most effective are fillings in gaps which lie
10 at right-angles to the flow of heat, so that the heat resistance for the heat dissipation is reduced.

The melting temperature of the metallic filling is preferably lower than the process temperature, higher than 200 °C and lower than 1,100 °C and the filling has a
15 coefficient of heat conductivity of over 15 W/m °C.

The filling is preferably selected from the group consisting of tin, lead, zinc, aluminium, silver, copper and alloys of these and combinations of these.

Preferably the filling is obtained during operation by
20 melting of foil which is applied in the gap during assembly of the refractory wall structure, the filling is cast into the gap in molten state during assembly or the filling is obtained during operation by melting a metal which is applied in the gap in the form of a mass
25 containing metal particles during assembly of the refractory wall structure. These embodiments of the invention are all very effective.

- 4 -

The embodiment with a mass containing metal particles is also suitable for wider gaps such as joints which are normally filled up with mortar, concrete, ramming mass, cement or other binding agents such as for example the joint between jacket (1) and graphite layer (3') in Fig. 2. Metal particles in the form of powder, grains, granulated material, chips, needles, small wires or similar are added to this mass. This metal-laden mass is applied in a joint during assembly of the refractory wall structure. In this state the metal particles are evenly divided present in the relevant joint, but still do not form a heat bridge over the joint. Following melting and solidification again of the metal, however, the joint is not homogeneously filled with metal but at sufficient loading of the mass with metal particles of for example 10-40 %vol a continuous metal lattice with a spongy or biscuit-like structure forms throughout the joint with a low heat resistance owing to the good heat conductivity of the metal and thus forms a heat bridge.

Also preferably the filling is obtained during operation by melting metal in the form of one or more pellets which are placed into one or more cavities in the refractory wall structure before or after the start of the operation of the furnace. In some cases in an alternative embodiment pellets can also be applied during operation. In this context pellets are taken to be a form of the filling which can be applied into the cavity singly or in multiples, such as tablets of round, oval or cylindrical

- 5 -

shape, but also shaped parts which fit into the cavity, or for example in rod-shaped pieces in the case where they are applied subsequently during operation. Capsules with a dosing opening are also possible so that the filling is
5 discharged over a longer period of time or several times, for example where the refractory wall structure breathes in the event of temperature fluctuations.

Preferably the filling is obtained during operation by melting metal which is introduced in the form of a
10 pumpable mass containing the metal into the refractory wall structure through a duct. The pumpable mass can for example be a slurry or a suspension, which is laden with the metal in finely divided state such as powder or grains to such an extent, for example 10 to 60 %wt, that it does
15 not sag. Preferably the pumpable mass also contains an oil product such as tar or pitch or a thermosetting resin as a carrier and the pumpable mass also contains graphite for example in the form of powder. Mortar and cement can also be added. After the pumpable mass has been introduced into
20 the gap by pumps the metal melts and forms a heat bridge over the gap. Following coking the tar or the pitch forms a skeleton which for example effects a certain gas tightness of the gap. The same effect can be obtained by the resin following setting, while the graphite can yield
25 extra wear resistance and/or heat conduction of the refractory wall structure. The embodiments of the invention with pellets and with a pumpable mass are

- 6 -

particularly suited to be applied after starting the operation of the furnace.

Preferably during assembly of the refractory wall structure cooling elements are used which, at least
5 partly, have been provided with a coating with the substance of the metallic filling. By a coating here is understood a layer which during its application has obtained a good heat-transfer contact with the cooling element.

10 For instance the coating can have been applied by melting a layer of the substance upon the cooling element, by immersing the cooling element in a melt of that substance, by electrodeposition or by spraying.

The aforementioned embodiments of the invention can be
15 combined with each other. Thus, the embodiment for example whereby a mass containing metal particles is applied in a gap during assembly, can ideally be combined with application of a pumpable mass in that gap after starting the operation.

20 In another aspect the invention is embodied in a method for repairing a blast furnace during operation with a refractory wall structure in accordance with Claim 1, comprising a steel outer wall (jacket), a refractory lining (brickwork) and means for cooling the refractory
25 wall structure comprising the stages

- during operation drilling a duct through the steel outer wall and into the refractory lining extending into or past a gap in the refractory wall structure

- 7 -

- during operation introducing into the duct a metal with a melting point in the vicinity of the instantaneous temperature at the gap.

Preferably the metal is introduced in the form of one
5 or more pellets or in the form of a pumpable mass containing the metal, by pumps.

In a preferred embodiment, whereby the means for cooling the refractory wall structure comprise stave coolers, recesses are left in the stave coolers through
10 which during operation a duct may be drilled.

The invention will now be illustrated by reference to the drawing.

Fig. 1 shows a refractory wall structure in accordance with the invention in a general embodiment in different
15 stages of wear together with the associated temperature curve.

Fig. 2 shows as example of the invention a refractory wall structure for a hearth of a blast furnace.

Fig. 3 shows as example of the invention a refractory
20 wall structure for a final reduction vessel of a smelting reduction process.

The refractory wall structure of Fig. 1 comprises a steel outer wall (1), means of cooling in the form of water-cooled, copper stave coolers (2) and a well heat-
25 conducting refractory lining (3), for example of graphite. The space between the steel outer wall and the stave coolers (2) is filled up with for example mortar (4).

- 8 -

The situation directly following starting the operation of the furnace is indicated by A, whereby no wear has yet occurred and the refractory lining (3) still has its original thickness. The associated temperature curve is indicated by T_A in the bottom part of Fig. 1. T_{process} indicates the process temperature and T_{cool} indicates the reference temperature of the cooling. The figure shows that a considerable fall in temperature occurs across the gap (5) between stave coolers (2) and refractory lining (3) as a result of the high heat resistance of gap (5).

The situation after the furnace has been in operation for some time is indicated by B. The refractory lining (3) is partly worn away as a result of the high temperature and the corrosive conditions. In particular slag containing FeO is especially corrosive. T_B indicates the temperature curve. As a result of the reduced thickness of refractory lining (3), the total heat transmission resistance of the wall structure has reduced, and the heat flow density has increased through the wall structure. This results in a steeper temperature curve across the residual thickness of refractory lining (3) and a greater temperature drop across gap (5). If the process of wear is allowed to continue then refractory lining (3) becomes further consumed and the risk of breakthrough increases.

C indicates the situation with a metallic filling (6) in gap (5) which filling has been molten and therefrom continues to maintain a good thermal contact with the gap

- 9 -

walls. In this case the filling is a low melting point metal such as for example a tin alloy. T_c shows that, as a result of the low heat resistance of the filling, the temperature drop across gap (5) is much less. The temperature of refractory lining (3) falls so that a slag layer (7) can solidify, which of itself does not conduct heat well, so that a big temperature drop occurs across it, but which protects the residual thickness of refractory lining (3) from further wear. Filling (6) can be cast into gap (5) during assembly of the refractory wall structure or be applied there as a film which in situation B will melt.

Fig. 2 shows the invention applied to the hearth of a blast furnace. Jacket (1) is cooled on the outside by means of spray-cooling (2). In the case shown here, refractory lining (3) consists of two layers, namely layer (3') of graphite and a layer (3'') of semi-graphite. A ramming compound of graphite is applied in gap (5) between layers (3') and (3''). Situations A and B are analogous to that of Fig. 1. In situation B a considerable part of inner coating layer (3'') has worn away and a considerable temperature drop is occurring across gap (5).

The figure shows how in situation B the wall structure is repaired after the start of the operation and during operation. To this end ducts (8) are drilled through jacket (1), mortar layer (4) and refractory lining layer (3'), which ducts (8) extend into or past gap (5) between lining layers (3') and (3''). In general drilling cannot

- 10 -

take place during the production of pig iron because the furnace is under pressure. Therefore the holes are drilled during operation but during a so-called standstill or maintenance stop whereby the production of pig iron is interrupted and whereby the hot blast is switched off and the pressure falls out. At a new furnace, however, the ducts can already be made wholly or partly during assembly of the refractory wall structure. Following drilling one or more pellets (9) of a metal with a melting point in the vicinity of the instantaneous temperature at the gap are introduced into the holes. Once the ducts have been drilled this temperature may be measured and the metal selected accordingly. In this case the metal can be an alloy of aluminium or copper. When pellets (9) melt the metal runs into gap (5). The reduced heat resistance of gap (5) makes the temperature drop fall across gap (5), and the temperature of the outer lining layer (3'') falls. Filling (6) solidifies and slag layer (7) can solidify and build up. Of course pellets (9) can also be placed in suitable places in the refractory wall structure prior to the operation of the blast furnace. If pellets are placed through such ducts as (8) or similar then these ducts may of course be filled in and sealed (possibly temporarily) after the pellets have been placed.

25 In another embodiment the ducts (8) can be provided with nipples (not shown) on the outside of the jacket (1) to which a pressure pipe is connected, through which a pumpable mass containing the metal can be pressed into the

- 11 -

ducts (8). The mass then spreads over the gaps in the refractory wall structure and following melting etc. forms heat bridges over the gaps. Contrary to drilling pumping can take place at a furnace under pressure.

5 Fig. 3 shows an invention applied to a final reduction vessel for a smelting reduction process, for example of the deep slag type such as for example the Cyclone Converter Furnace (CCF) process. The thermal loading here is especially high. Consequently in Fig. 3 not only are
10 stave coolers (2) used, but also water-cooled copper sills (10) which extend into the refractory lining and which serve to improve the heat contact between the refractory lining and the means of cooling (2), (10). Refractory lining (3) consists of at least a layer (3') of graphite.
15 The means of cooling (2), (10) limit the possibilities of applying pellets afterwards, that is to say during operation. Consequently in this case it was decided to apply pellets (9) during the assembly of the refractory wall structure into suitable cavities (11) in the
20 refractory wall structure, which pellets fill gap (5) as they melt on commissioning, or once refractory lining (3) has partly worn away. The cavities may also be made for example directly above sills (10). There is also the possibility to let recesses into the stave coolers through
25 which a duct can be drilled during operation.

Finally there is the possibility to use, during the assembly, cooling elements which on the side directed to gap (5) have been coated. The low heat-resistance across

- 12 -

the gap (5) can be achieved already during the assembly, by assembling the refractory lining (3) while, at least at the side facing the gap, being heated such that the filling melts.

- 5 A low heat resistance can, however, also be obtained later during the operation.

- 13 -

CLAIMS

1. Refractory wall structure for a furnace, in particular
for a metallurgical furnace, such as for example a
5 blast furnace with a high process temperature during
operation, which wall structure is subjected to a high
thermal loading, comprising
 - a steel outer wall,
 - a refractory lining consisting of one or more
 - 10 layers of a well heat-conducting material on the
inside of the outer wall, and
 - means for cooling the refractory wall structure,
characterised in that the wall structure also
comprises a permanent, well heat-conducting metallic
 - 15 filling in a gap in the refractory wall structure,
which filling has been molten inside the gap and then
after solidifying forms a low heat resistance across
the gap.
- 20 2. Refractory wall structure in accordance with Claim 1,
characterised in that it has a layer solidified onto
the inside.
3. Refractory wall structure in accordance with Claims
25 1-2, characterised in that the gap is a gap in the
refractory lining.

- 14 -

4. Refractory structure in accordance with Claims 1-3, characterised in that the gap is a gap between the steel outer wall and the refractory lining.
- 5 5. Refractory wall structure in accordance with Claim 1-4, characterised in that the means for cooling the refractory wall structure are water-cooled copper cooling elements, and in that the gap is a gap between the refractory lining and a cooling element.
- 10 6 Refractory wall structure in accordance with Claims 1-5, characterised in that the metallic filling has a melting temperature which is lower than the process temperature.
- 15 7. Refractory wall structure in accordance with Claim 6, characterised in that the melting temperature of the filling is higher than 200 °C.
- 20 8. Refractory wall structure in accordance with Claims 6-7, characterised in that the melting temperature of the filling is lower than 1,100 °C.
- 25 9. Refractory wall structure in accordance with Claims 1-8, characterised in that the filling has a coefficient of heat conductivity of over 15 W/m °C.

- 15 -

10. Refractory wall structure in accordance with Claims 1-9, characterised in that the filling is selected from the group consisting of tin, lead, zinc, aluminium, silver, copper, alloys of these and combinations of these.
11. Refractory wall structure in accordance with Claims 1-10, characterised in that the filling is obtained during operation by melting of foil which is applied in the gap during assembly of a refractory wall structure.
12. Refractory wall structure in accordance with Claims 1-10, characterised in that the filling is cast in molten state into the gap during assembly of the refractory wall structure.
13. Refractory wall structure in accordance with Claims 1-10, characterised in that the filling is obtained during operation by melting metal which is applied in the gap in the form of a mass containing metal particles during assembly of the refractory wall structure.
14. Refractory wall structure in accordance with Claims 1-10, characterised in that the filling is obtained during operation by melting metal in the form of one or more pellets which are placed into one or more

- 16 -

cavities in the refractory wall structure before or after commissioning of the furnace.

15. Refractory wall structure in accordance with Claims
5 1-10, characterised in that the filling is obtained during operation by melting metal which is introduced in the form of a pumpable mass containing the metal into the refractory wall structure through a duct.
- 10 16. Refractory wall structure in accordance with Claim 15, characterised in that the pumpable mass also contains an oil product such as tar or pitch or a thermosetting resin.
- 15 17. Refractory wall structure in accordance with Claims 15-16, characterised in that the pumpable mass also contains graphite.
18. Refractory wall structure in accordance with Claims
20 1-10, in which the means for cooling the refractory wall structure consist of water-cooled copper cooling-elements, characterised in that during assembly of the refractory wall structure cooling-elements are used which, at least partly, have been provided with a
25 coating with the substance of the metallic filling.
19. Method for repairing a furnace, in particular a metallurgical furnace, such as for example a blast

- 17 -

furnace with a refractory wall structure in accordance with Claim 1 comprising a steel outer wall (jacket), a refractory lining (brickwork) and means for cooling the refractory wall structure comprising the stages

- 5 - during operation drilling a duct through the steel outer wall and into the refractory lining extending into or past a gap in the refractory wall structure
- 10 - during operation introducing into the duct a metal with a melting point in the vicinity of the instantaneous temperature at the gap.

20. Method in accordance with Claim 19, characterised in that the metal is introduced in the form of one or
15 more pellets.

21. Method in accordance with Claim 19, characterised in that the metal is introduced in the form of a pumpable mass containing the metal, by pumps.

20

22. Method in accordance with Claims 19-21, whereby the means for cooling the refractory wall structure comprise stave coolers, characterised in that recesses are left in the stave coolers through which a duct is
25 drilled during operation.

1/3

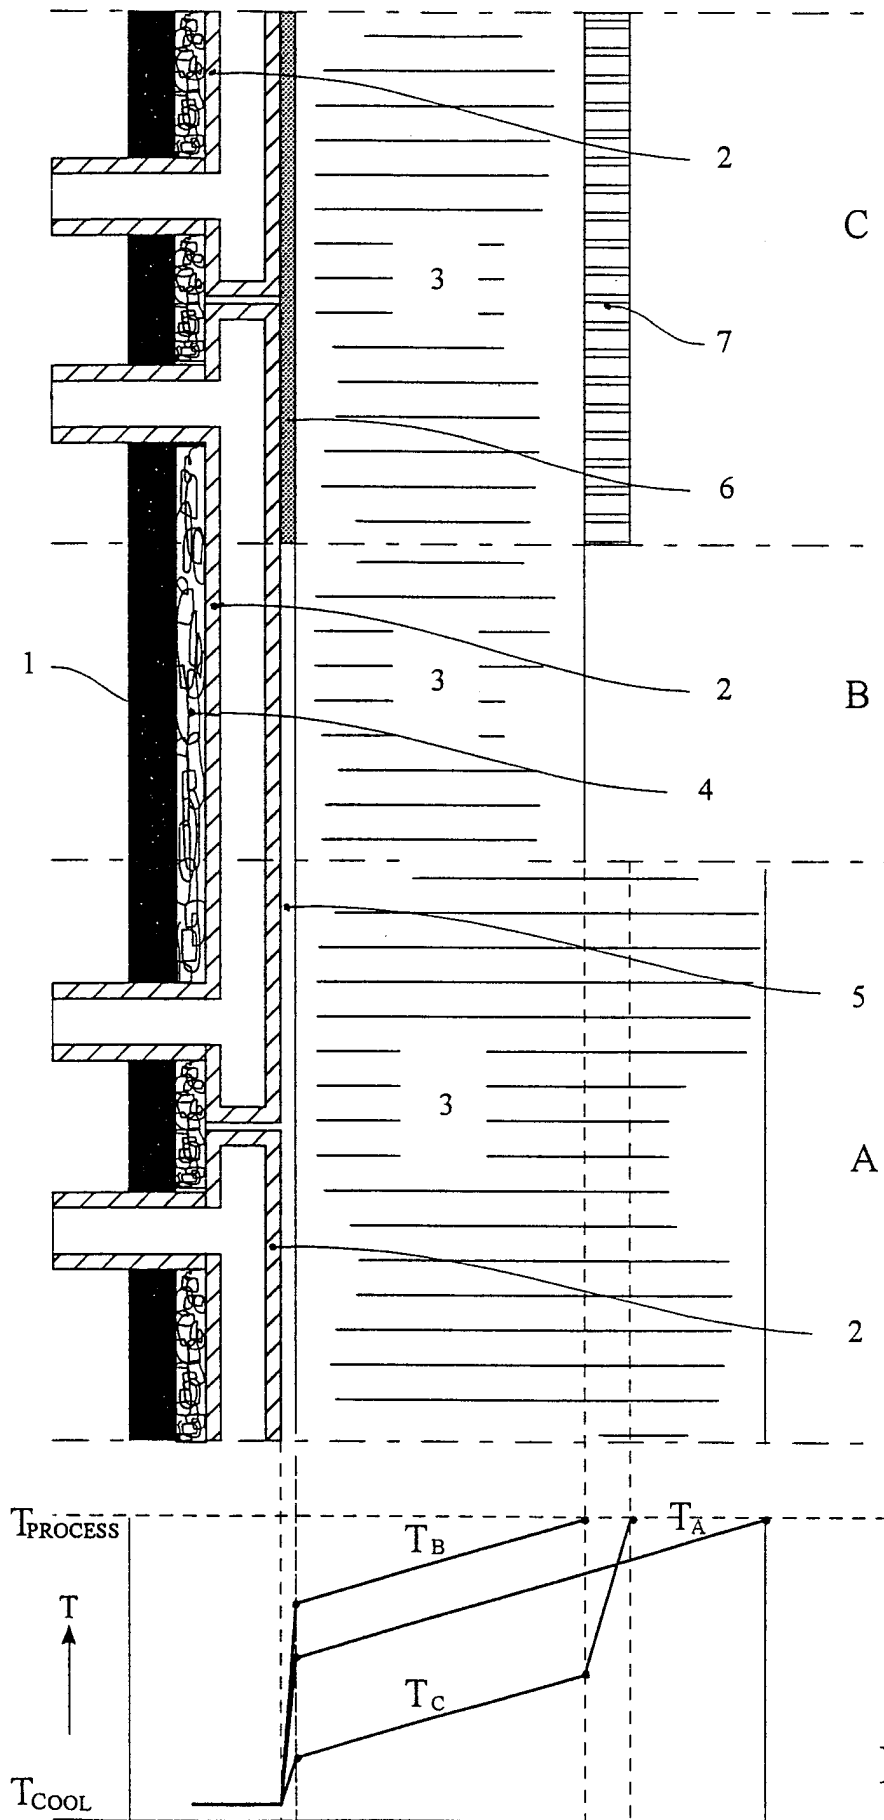


Fig. 1

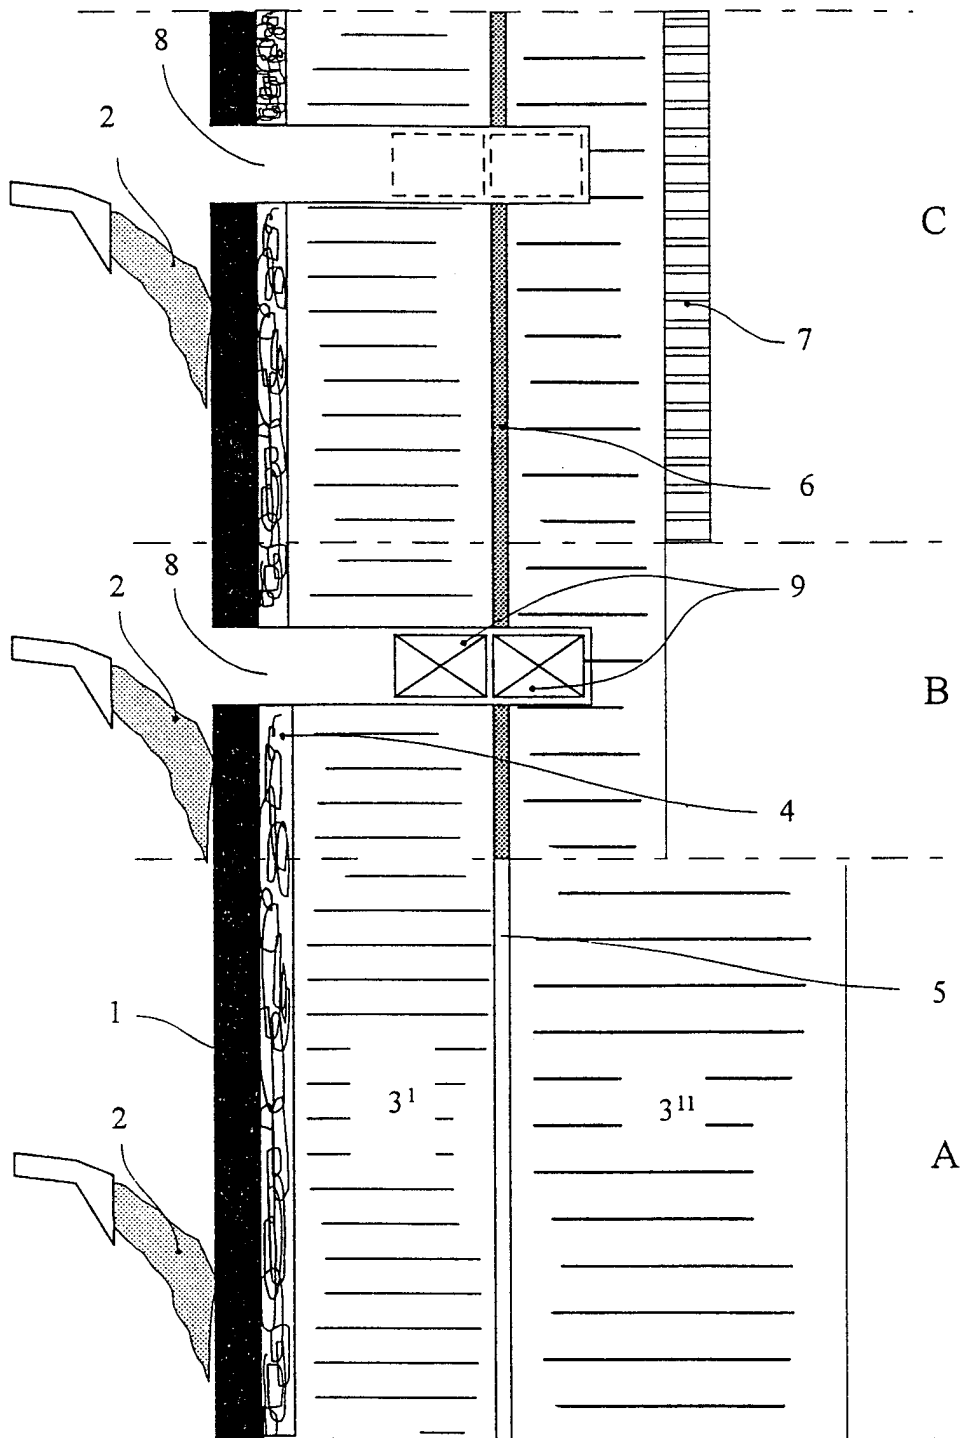


Fig. 2

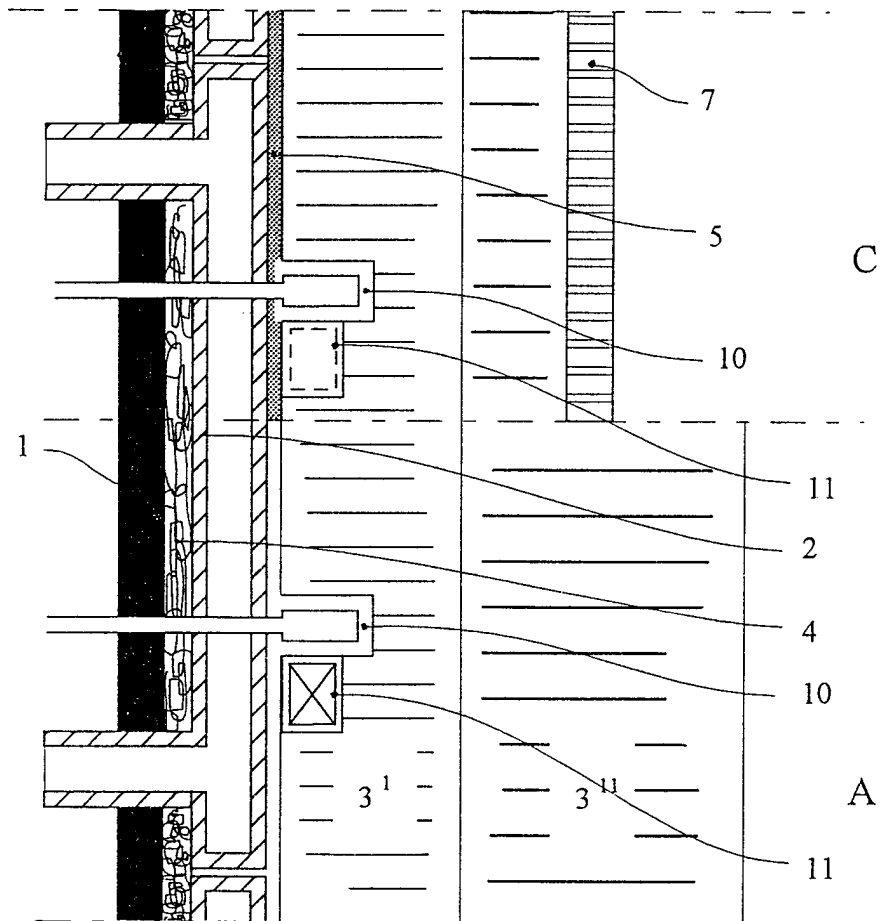


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/03194

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C21B7/10 F27D1/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C21B F27D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 149 575 A (USINOR) 24 July 1985 ----	
A	FR 2 558 173 A (USINOR) 19 July 1985 ----	
A	NL 7 510 905 A (HOOGO VENS YMUIDEN) 21 March 1977 ----	
A	WO 95 22732 A (THE UNIVERSITY OF MELBOURNE) 24 August 1995 ----	
A	DE 19 44 415 A (DIDIER-WERKE) 22 April 1971 ----	
A	FR 2 429 985 A (BBC) 25 January 1980 ----	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 October 1998

Date of mailing of the international search report

03/11/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Elsen, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/03194

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 010, no. 235 (C-366), 14 August 1986 & JP 61 069908 A (SUMITOMO METAL IND LTD), 10 April 1986 see abstract -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/03194

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 149575 A	24-07-1985	FR 2560215 A	30-08-1985
		AR 231843 A	29-03-1985
		BR 8504777 A	24-12-1985
		CA 1253687 A	09-05-1989
		DE 3560907 A	10-12-1987
		WO 8503310 A	01-08-1985
		JP 61500920 T	08-05-1986
FR 2558173 A	19-07-1985	NONE	
NL 7510905 A	21-03-1977	DE 2641757 A	07-04-1977
		FR 2324736 A	15-04-1977
		GB 1506546 A	05-04-1978
		JP 1062881 C	31-08-1981
		JP 52074504 A	22-06-1977
		JP 56001362 B	13-01-1981
		SE 7610295 A	18-03-1977
		US 4139183 A	13-02-1979
		ZA 7605509 A	31-08-1977
WO 9522732 A	24-08-1995	AU 682578 B	09-10-1997
		AU 1800895 A	04-09-1995
		BR 9506833 A	14-10-1997
		CA 2183520 A	24-08-1995
		CN 1142262 A	05-02-1997
		EP 0741853 A	13-11-1996
		FI 963195 A	15-10-1996
		JP 10501877 T	17-02-1998
		US 5785517 A	28-07-1998
DE 1944415 A	22-04-1971	FR 2060764 A	18-06-1971
		GB 1325057 A	01-08-1973
FR 2429985 A	25-01-1980	BR 7903997 A	11-03-1980
		DE 2829453 A	10-01-1980
		GB 2031565 A	23-04-1980
		JP 55006199 A	17-01-1980