



(51) International Patent Classification:
A61F 2/06 (2006.01) *A61F 2/90* (2006.01)

[US/US]; 750 N. Daniels Way, Bloomington, IN 47404 (US).

(21) International Application Number:
PCT/US2009/005997

(72) Inventors; and
(75) Inventors/Applicants (for US only): **RASMUSSEN, Erik** [DK/DK]; Vesterhaven 1, DK-4200 Slagelse (DK). **JENSEN, Kim, Moegelang** [DK/DK]; Straussvej 4, 2.mf, DK-2450 Koevenhavn SV (DK).

(22) International Filing Date:
6 November 2009 (06.11.2009)

(25) Filing Language: English

(74) Agent: **GODLEWSKI, Richard, J.**; P.O. Box 2269, Bloomington, IN 47402-2269 (US).

(26) Publication Language: English

(30) Priority Data:
0820360.6 6 November 2008 (06.11.2008) GB

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

(71) Applicants (for all designated States except US): **WILLIAM COOK EUROPE APS** [DK/DK]; Sandet 6, DK-4632 Bjaeverskov (DK). **COOK INCORPORATED**

[Continued on next page]

(54) Title: STENT MEMBER

(57) Abstract: A rotationally-symmetric stent graft (10; 30) for deploying in a curved vessel (32) has identical spaced stents (16) along its length, with the stents being further apart in the region of the greatest curvature. The ends of the stents are parallel to each other and to the ends of the graft. The inter-stent spacing (D) may vary along the entire length of the graft or only adjacent one end.

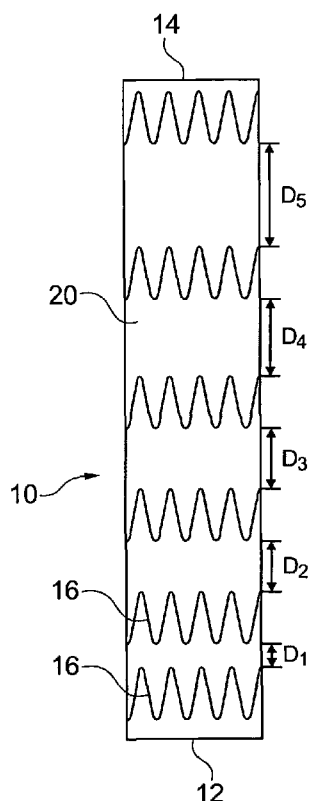


Fig. 1





HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

Published:

— *with international search report (Art. 21(3))*

STENT MEMBER

TECHNICAL FIELD

5

The present invention relates to stent members, such as stent grafts, having a plurality of stents, sometimes referred to as stent sections, spaced along their length.

BACKGROUND ART

10

At present stent grafts are provided with a plurality of stent sections evenly spaced along the graft. The spacing between the stent sections allows the stent graft to be curved when inserted in a body vessel but still provides sufficient

15

support to keep the vessel open for fluid flow.

US 2005/0182480 discloses a stent member having spaced undulating bands along its length, the bands being interconnected by longitudinal struts. The spacing between the bands at one or both ends of the stent member may differ from the spacing between the bands at the middle of the stent member.

20

WO 2008/051543 discloses a stent member designed to fit a curved body vessel in which parallel-sided stents are disposed along the length of the stent member. One side of the stent member is provided with buckled portions to permit it to expand when deployed. This requires the stent member to be oriented into the correct rotational portion before it is expanded into its final

25

disposition.

US 6,709,453 and US 6,723,119 disclose stent members with alternating circumferential bands of different patterns of loops.

DISCLOSURE OF THE INVENTION

30

The present invention seeks to provide an improved stent member.

According to an aspect of the present invention, there is provided a stent member having a longitudinal extent and comprising a plurality of spaced and mutually-parallel stents, the ends of all the stents being perpendicular to the longitudinal extent of the stent member and the spacing between mutually-

35

adjacent stents increasing monotonically in a direction from one end of the stent graft to the other.

Preferably, the stent member is substantially rotationally symmetrical.

The stents, or at least all the stents except one or both end stents, are substantially identical.

5 In preferred embodiments, the spacing between mutually-adjacent stents increases from one end of the stent member to the other end.

In other preferred embodiments, the spacing between mutually-adjacent stents is substantially uniform adjacent one end of the stent member, and increases from a central region of the stent member to the other end.

10 In preferred embodiments, the stents do not have mutually-interconnecting struts and are only connected by graft material.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, of which:

Figure 1 shows a stent member according to a first embodiment of the present invention in an unconstrained condition;

Figure 2 shows the stent member of Figure 1 in a curved configuration; and

20 Figure 3 shows the stent member according to a second embodiment of the present invention deployed into the thoracic arch and descending aorta of a patient.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Referring to the drawings, a stent graft 10 is shown in a straight configuration in which it can be mounted on and delivered by an introduction system. The stent graft 10 comprises a tubular piece of biocompatible graft material 20 defining a lumen 22 and having a first end 12 and second end 14. Separate stents 16 are provided along the length of the material 20. The stents are
30 shown only schematically in the Figures and may be self expanding z-stents made of stainless steel or shape memory material, such as Nitinol.

Starting from end 12 of the graft the spacing between adjacent stents 16 steadily increases so that, the following inequalities apply:

35 $D_1 < D_2 < D_3 < D_4 < D_5$

This has the advantage that the stents provide the overall amount of support which the graft requires, while permitting greater curvature of the part of the graft adjacent to end 14.

5 In use, the graft 20 is deployed in a curved body vessel in which case it is constrained to adapt the configuration shown in Figure 2. The graft is located with the part adjacent end 14 (which curves more easily) in the region of greatest curvature of the vessel. The part of graft 20 adjacent end 12 is located in a region with less curvature.

10 Thus there is provided a stent graft with parts which can be curved to different extents while still providing a substantial stent coverage. The improved flexibility of end 14 avoids it becoming misaligned in the curved body vessel.

The above-described arrangement has several advantages. In particular, since it is rotationally-symmetric about its longitudinal axis, its deployment is simple; there are no problems in orienting it correctly once it has reached its
15 desired location along the aorta since it can curve identically in all directions. Since the stents 16 are identical, the arrangement is cheaper and simpler to manufacture, and any of the stents can be attached to any location along the graft. The size of the stent graft and the spacing of the stents can be selected as desired so that the graft can be customised for a particular application.

20 In one preferred arrangement, the distance between adjacent stents increases regularly so that:

$$D_5 = D_4 + d = D_3 + 2d = D_2 + 3d = D_1 + 4d$$

25 where d is a fixed distance.

Thus in a stent member of diameter 22mm, D_1 can be 4mm and d can be 1mm, so that D_5 is 8mm. For a stent member of diameter 46mm, D_1 can be 8mm and d can be 1.75mm, so that D_5 is 15mm. In other arrangements, the distance between adjacent stents may increase in irregular manner provided the
30 relationship

$D_1 < D_2 < D_3 < D_4 < D_5$ is maintained.

The increases nearer end 12 may be smaller and, instead of monotonically increasing, may even be zero such that;

35 $D_1 = D_2 = D_3$

Here, as above, D_4 may be equal to D_3+d and D_5 may be equal to D_3+2d , where d is a fixed distance. In other arrangements, the distance corresponding to D_5-D_4 may be greater than the distance corresponding to D_4-D_3 .

Figure 3 shows a stent graft 30 deployed in the thoracic arch and descending aorta 32 of a patient. The arch has a variable curvature and the part of the stent graft adjacent end 14 is located in the region of the greatest curvature. The other part of the graft adjacent end 12 is only slightly curved and may be substantially straight.

The spacings between the stents depend on various factors such as the diameter of the stent graft, and the materials of the stents 16 and the graft material 20. The diameter of the graft preferably lies between 22 and 46mm. D_1 lies in the range 3 to 9mm, preferably 4 to 8mm. D_5 lies in the range 6 to 18mm, preferably 8 to 15mm. The spacings d lie in the range 0.5 to 2.5mm, preferably 1.0 to 1.75mm.

The stent graft may be applied to vessels other than the aortic arch and which have uneven curvature.

The stent graft may have an extra stent at one or each end which does not fall into the specific pattern of the other stents. Such extra stents may be provided with barb elements for attachment to the body vessel walls. In addition, the extra stents may be shorter than the other stents.

Some or all of the stents may be interconnected by struts if desired.

Instead of being self-expanding, the stents may be balloon-expandable. The stent graft may be provided with one or more fenestrations to permit communication with side vessels extending from a main body vessel.

The features of the various embodiments described above and their modifications may be substituted for or combined with one another as desired. It is also to be understood that the various features of the dependent claims appended hereto may be used with one another in any desired combination of those claims.

CLAIMS

1. A stent member (10; 30) having a longitudinal extent and comprising a plurality of spaced and mutually-parallel stents (16), the ends of all the stents being perpendicular to the longitudinal extent of the stent member and the spacing
5 between mutually-adjacent stents increasing monotonically in a direction from one end of the stent graft to the other.

2. A stent member (10; 30) according to claim 1 and which is substantially rotationally symmetric.

10

3. A stent member (10; 30) according to claim 1 or 2 wherein the stents (16) are substantially identical.

4. A stent member (10; 30) according to any of claims 1 to 3, wherein the
15 spacing (D) between mutually-adjacent stents (16) is substantially uniform adjacent one end of the stent member and increases monotonically from a central region of the stent member to the other end.

5. A stent member (10; 30) according to any preceding claim wherein the
20 increase in the spacing (D) between mutually-adjacent stents (16) itself increases in regular manner.

6. A stent member (10; 30) according to any preceding claim in the form of a stent graft with graft material (20) connecting the stents.

25

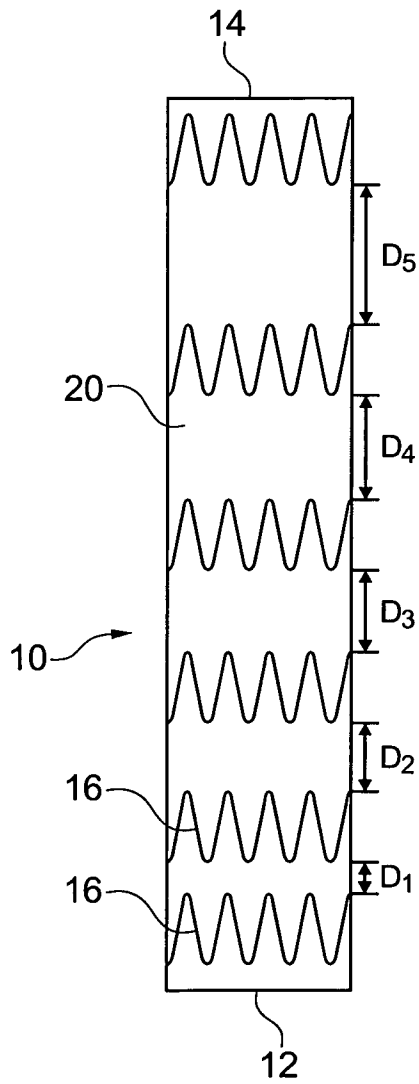


Fig. 1

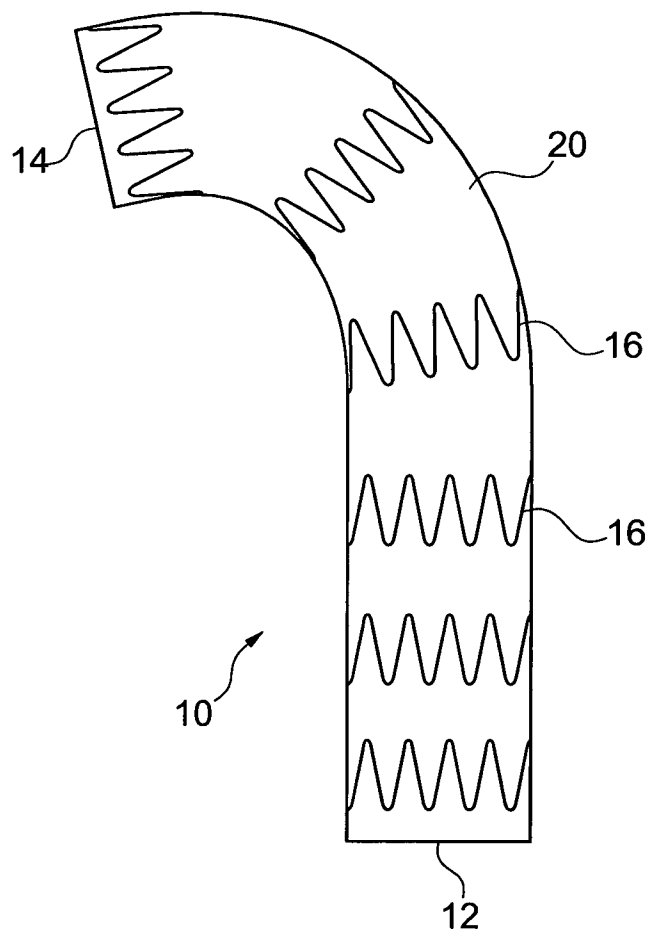


Fig. 2

2/2

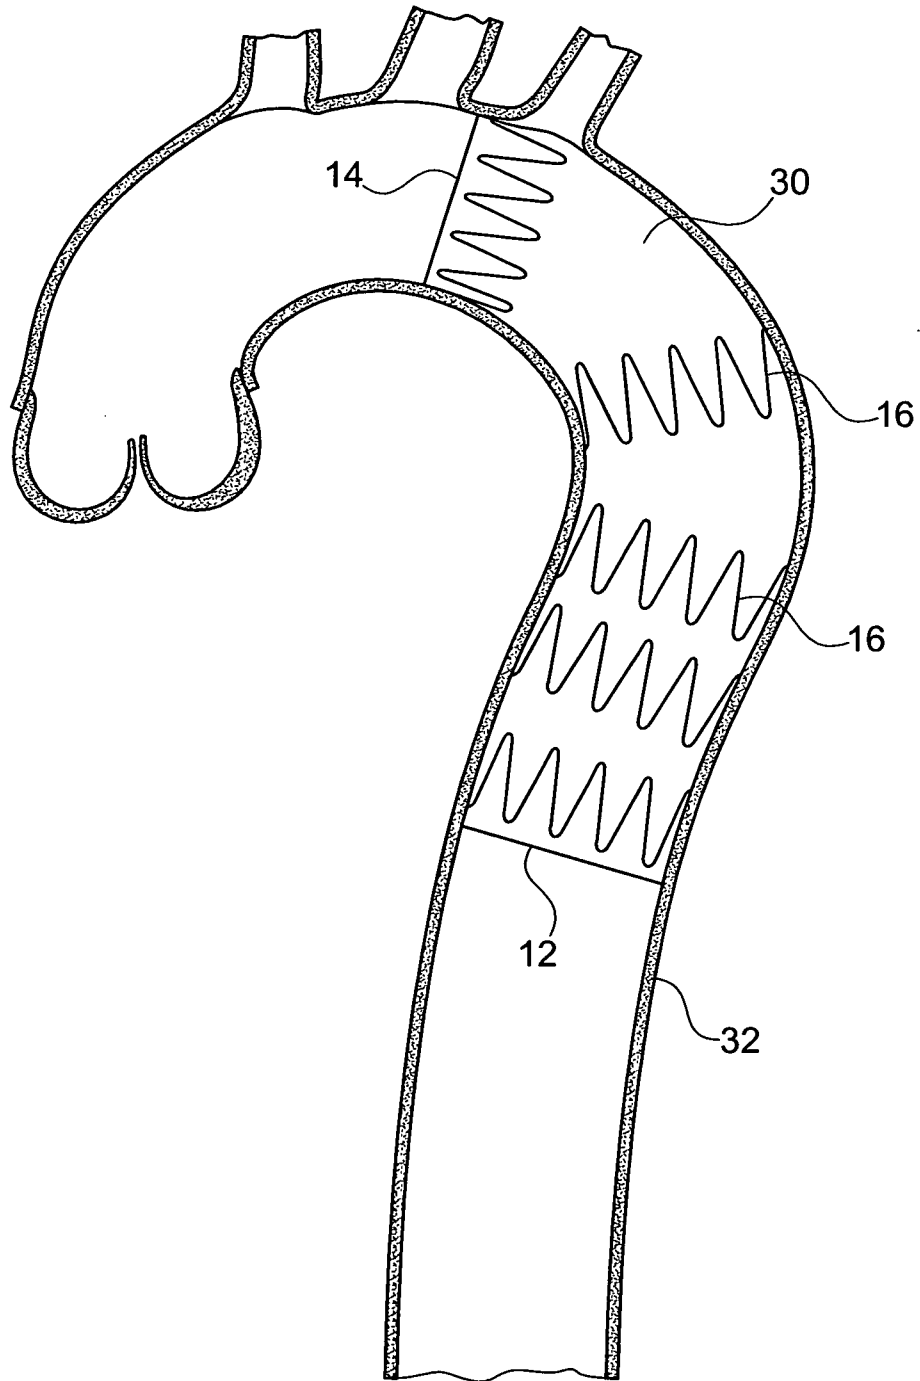


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/005997

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61F2/06 A61F2/90

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 808 614 A2 (SAMSUNG ELECTRONICS CO LTD [KR]) 26 November 1997 (1997-11-26) page 4, line 10 - page 5, line 48; figure 1	1-12
X	WO 97/18006 A1 (ENDOGAD RES PTY LTD [AU]; WHITE GEOFFREY H [AU]; YU WEIYUN [AU]) 22 May 1997 (1997-05-22)	1-2,4,8
A	page 12, line 26 - page 13, line 17; figure 3	9-12
X	WO 97/25937 A1 (JANG G DAVID [US]) 24 July 1997 (1997-07-24)	1-5
A	page 32, lines 14-34; figure 16	9-10
X	US 2004/186551 A1 (KAO STEPHEN [US] ET AL) 23 September 2004 (2004-09-23)	1-7
A	paragraph [0053]; figures 8-10	11-12

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 February 2010

Date of mailing of the international search report

17/02/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Chevalot, Nicolas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2009/005997

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0808614	A2	26-11-1997	CN 1170612 A 21-01-1998
			DE 69719237 D1 03-04-2003
			DE 69719237 T2 27-11-2003
			JP 3798507 B2 19-07-2006
			JP 10043315 A 17-02-1998
			US 6027525 A 22-02-2000
WO 9718006	A1	22-05-1997	WO 9717910 A1 22-05-1997
			WO 9717911 A1 22-05-1997
			BR 9611441 A 28-12-1999
			CA 2236602 A1 22-05-1997
			CA 2236905 A1 22-05-1997
			CN 1207658 A 10-02-1999
			CN 1207659 A 10-02-1999
			EP 0955952 A1 17-11-1999
			EP 0955953 A1 17-11-1999
			JP 2000500046 T 11-01-2000
			JP 2000500047 T 11-01-2000
			JP 3876246 B2 31-01-2007
			JP 2004089718 A 25-03-2004
			JP 4036844 B2 23-01-2008
			JP 2004202277 A 22-07-2004
			JP 2006312081 A 16-11-2006
			JP 2007319694 A 13-12-2007
			RU 2179421 C2 20-02-2002
			RU 2179003 C2 10-02-2002
			US 6099558 A 08-08-2000
			US 6045557 A 04-04-2000
WO 9725937	A1	24-07-1997	NONE
US 2004186551	A1	23-09-2004	US 2008208318 A1 28-08-2008
			US 2008208311 A1 28-08-2008
			US 2009264979 A1 22-10-2009