

(19)



(11)

EP 1 815 894 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

08.08.2007 Bulletin 2007/32

(51) Int Cl.:

A63C 5/12 (2006.01)

A63C 9/00 (2006.01)

(21) Application number: **07100642.3**

(22) Date of filing: **17.01.2007**

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK YU

(72) Inventor: **Spadetto, Ivano**

31044, Montebelluna (Treviso) (IT)

(74) Representative: **Gonella, Mario**

PROPRIA S.r.l.

P.O. Box 365

Via della Colonna, 35

33170 Pordenone (IT)

(30) Priority: **27.01.2006 IT PN20060006**

(71) Applicant: **NORDICA S.p.A.**

31040 Trevignano (Treviso) (IT)

(54) **Method for producing a sports article and sports article produced with such method**

(57) The present invention refers to a method for producing a sports article comprising a body (2) having an essentially two-dimensional shape, and at least a covering member (6) adapted to be positioned upon at least a portion of said body (2); a filler member (5) may possibly be placed between the body (2) and the covering member (6). The sports article (1) further includes mounting means for fastening means provided to fasten a sports footwear thereto, such mounting means comprising at

least one pair of inserts (7a, 7b; 8a, 8b) provided in a parallel arrangement along at least a portion of the body (2). The method comprises the steps of:

- incorporating at least one pair of inserts (7a, 7b; 8a, 8b) inside the covering member (6) or the filler member (5);
- firmly joining the covering member (6) and the possible filler member (5) to the body (2);
- providing respective guide grooves (9a, 9b) in each insert of said at least one pair of inserts (7a, 7b; 8a, 8b) adapted for slidably mounting the fastening means.

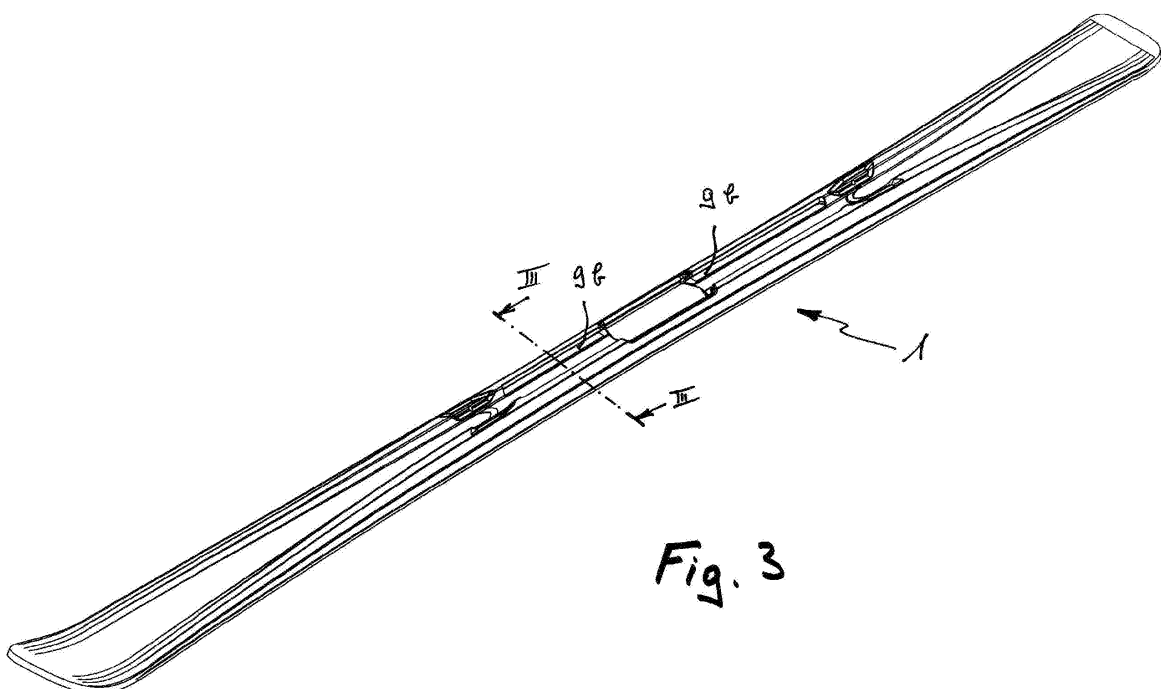


Fig. 3

EP 1 815 894 A1

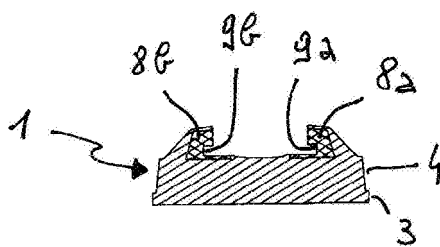


Fig. 3a

Description

[0001] The present invention refers to a method for producing a sports article, in particular a sports article adapted to glide over a cloak of snow or an iced surface, such as a ski, a snowboard or an ice-skate, or to roll on the ground, such as a roller skate, as well as to a sports article produced with a method according to the invention.

[0002] More specifically, the present invention refers to a method for producing a sports article, whose structures incorporates an arrangement enabling a footwear fastening device to be quickly mounted thereto and adjusted to the actual size of the footwear.

[0003] WO 02/49728 A1 discloses a ski that incorporates an assembly for the attachment of a boot fastening device in an adjustable manner; such assembly comprises at least a guide rail arranged within the ski and, furthermore, at least a slide member adapted to be received in the guide rails and movable lengthwise along the ski to be eventually locked in the desired position.

[0004] Although allowing for a quick mounting of such slide member or members, as the case may be, each one of which supporting a fastening element of the related boot fastening device, generally comprised of a heel-piece and a toe-piece, the above mentioned guide rails are each formed of a metal plate with a C-shaped contour that is inserted at a central portion of the ski and extends thereacross over approximately the whole width of the ski; including this plate in the ski structure therefore causes the overall weight of the ski to be sensibly increased. In addition, owing to the particular construction of the assembly, the load-bearing sections of such guide rails have a rather reduced thickness in an area that typically undergoes particularly heavy stresses during skiing: in fact, the force applied by the skier during skiing is transmitted to the ski via - among other things - the connection between the ski and the boot fastening device; a reduced cross-section of the guide rails in this area may therefore be quite easily subject to warping and wearing under load conditions, thereby causing the boot fastening device to detach from the ski with quite serious consequences for the skier.

[0005] DE 20 2004 001 356 U1 discloses a similar arrangement, in which the guide rails are formed of separate, independent elements, each one of them being either bonded by gluing to the surface of the body of the ski, as illustrated in Figure 3 of the above-cited utility model, or integrally formed with the core portion of the ski, as illustrated by way of example in Figure 4 of the same utility model. Although the guide rails are in this case provided with a load-bearing section having a greater thickness and, as a result, being exposed to possible distortions to a corresponding lesser extent, the risk of accidental separation still exists in the first case, in which the guide rails are attached to the ski by gluing, owing to the particularly heavy stresses which the mutually glued portions are subjected to.

[0006] This risk is practically done away with in the other case, i.e. in the embodiment calling for the guide rails being an integral part of the core portion of the ski. However, this construction - further to implying considerable moulding difficulties due to the undercuts being defined by the guide rails - calls for the core portion to be necessarily made of a high-strength material, instead of low specific-weight filling materials, such as polyurethane foam. This again implies a greater overall weight of the ski, further to a higher cost thereof owing to the use of premium-grade material in portions where it would not be necessary.

[0007] DE 20 2004 019 710 U1 discloses a solution in which the guide rails are again formed integrally with the body of the ski, so that even in this case considerable difficulties are therefore encountered when moulding the outer shell and/or the core portion, owing to the presence of the undercuts. A particular embodiment, which is illustrated in Figure 7 of the above-cited German utility model, calls for an undercut-free profile section to be inserted at each side of the upper surface of the ski; once such profile section is inserted, the guide rails are formed by milling the same profile section. The description of and the drawings accompanying the same utility model do not sufficiently disclose the way in which such profile sections are added or inserted: if they would be applied by gluing or mechanical fastening to the surface of the ski, it can be readily appreciated that the same drawbacks as described above in connection with the risk of the ski separating from the boot fastening device would still be there; if, on the other hand, the profile section would be inserted in the ski according to some other construction mode, such other construction mode is not described in the German utility model to any adequate extent for it to be concretely put into practice.

[0008] It is therefore a main object of the present invention to solve the above-noted problems, thereby doing away with the drawbacks of the cited prior art, by providing a method for producing a sports article that enables to incorporate in the structure of the same article mounting means adapted to allow for a quick mounting of appropriate footwear fastening means, or of support means for such fastening means; it is also an object of the present invention to provide a sports article produced in accordance with such method.

[0009] Within such general objects as stated above, it is a purpose of the present invention to provide a method wherein the above-cited mounting means are capable of being incorporated in the structure of the sports article in such a manner that the mounting of the footwear fastening means can be reliable and safe during the use of such sports article.

[0010] Another purpose of the present invention is to provide a method wherein the load-bearing section of the mounting means is adequate to resist both the static and dynamic mechanical stresses that are imposed thereon during the use of the sports article.

[0011] A further purpose of the present invention is to

provide a method that is effective in ensuring an adequate resistance of the above-mentioned mounting means to abrasion and/or wear and tear.

[0012] Yet a further purpose of the present invention is to provide a method for producing a sports article that can be manufactured at fully competitive costs using existing machinery and technologies as generally known as such in the art.

[0013] According to the present invention, these aims and advantages, along with further ones that will become apparent from the following disclosure, are reached by a method for producing a sports article as defined in claim 1.

[0014] Subsequent dependent claims define further features and advantages of the method according to the present invention, which will anyway be more readily understood from the description of a particular, although not sole embodiment that is given below by way of non-limiting example with reference to the accompanying drawings, in which:

- Figure 1 is a perspective exploded view of the component parts of a sports article, such as a ski, obtainable with a method according to the present invention;
- Figure 2 is a perspective top view of the ski shown in Figure 1 in an intermediate step of the method according to the present invention;
- Figure 2a is a cross-sectional view taken along the plane II-II of the ski shown in Figure 2;
- Figure 3 is a view similar to that of Figure 2 showing the ski of Figure 1 in a final step of the method according to the present invention;
- Figure 3a is a cross-sectional view taken along the plane III-III of the ski shown in Figure 3;
- Figure 4 is a view similar to the preceding ones, showing the ski of Figure 3 to which support means for appropriate footwear fastening means have been applied thereto;
- Figure 5 is a view similar to the preceding ones, showing the ski of Figure 3 featuring a different embodiment of the support means;
- Figure 6 is a view similar to the preceding ones, showing the ski of Figure 3 featuring yet a further different embodiment of the support means.

[0015] With reference to the above-cited Figures, the main component parts of a sports article, such as a ski 1, are shown in Figures 1 to 3, wherein such component parts are adapted to be assembled with a method according to the present invention; although throughout the

following description reference will be made to a manufacturing method as applied to the production of a ski for reasons of illustrative convenience, it shall be appreciated that the same method may be equally well be used to manufacture any other kind of sports article that anyway requires to be provided with mounting means for footwear fastening means, as this is for instance the case of a snowboard, an ice skate or a roller skate. To this purpose, the ski 1 comprises a body 2 having an essentially two-dimensional conformation, which - according to current construction techniques - generally includes a bottom sole 3 provided with metal edges at the sides thereof, and a ski top portion 4 obtained through generally known methods, such as the combined superposition in a sandwich-like manner of sheet-like metal and/or wooden layers, or forming such portion by moulding and/or injection moulding of foamed materials, or a combination of such methods thereof. To complete the finished product, to the top side of the body 2 there may be associated at least a semi-finished product formed into an essentially three-dimensional shape with a hollow interior, which may serve as a structural member or simply as a covering member; in the embodiment shown by way of example in Figure 1, the ski 1 comprises, on top of the body 2, a covering member 6 in the form of a shell; a filler member 5 arranged between the body 2 and the covering member 6 may be advantageously provided. The covering member 6 itself can serve both structural purposes or act as a simple covering, depending on the construction technique selected for the ski.

[0016] Within the covering member 6 and/or the filler member 5 there are incorporated mounting means for appropriate footwear fastening means (not shown in the Figures); these mounting means comprise at least one pair of inserts 7a, 7b, preferably in the form of profiled-section bars arranged to extend along the edges of the top surface of the body 2; advantageously, the ski 1 may be provided with two pairs of inserts 7a, 7b and 8a, 8b, respectively, to be arranged at those portions of the ski which are adapted to accommodate a heel-piece and a toe-piece constituting the above-cited footwear fastening means. The inserts 7a, 7b, 8a, 8b are advantageously made of either a moulded, preferably reinforced, plastic material or a suitably formed metal material.

[0017] In a first embodiment according to the inventive concept of the present invention, the method comprises the following steps:

- positioning the pairs of inserts 7a, 7b, 8a, 8b in a cavity of an injection mould having an essentially three-dimensional shape;
- injecting into the mould cavity a low-density plastic material at a low injection pressure, so that the material fill the cavity and incorporates the pairs of inserts 7a, 7b, 8a, 8b placed therein; as a result, when the mould is eventually opened, the filler member 5 incorporating the pairs of inserts 7a, 7b, 8a, 8b is

obtained;

- separately forming the covering member 6 to an essentially three-dimensional, internally hollow, shape;
- firmly joining the filler member 5 incorporating the pairs of inserts 7a, 7b, 8a, 8b to the body 2 by pressing in a pressing die, so as to obtain the finished ski assembly (Figure 2a);
- then forming in each insert of the pairs of inserts 7a, 7b, 8a, 8b respective guide grooves 9a, 9b allowing the footwear fastening means to be slidably mounted thereto (Figure 3a); in an advantageous manner, the guide grooves 9a, 9b are made by material-removing machining, e.g. milling.

[0018] In a different embodiment - comprised again within the same inventive concept of the present invention - the inventive method comprises the following steps:

- coupling the pairs of inserts 7a, 7b, 8a, 8b by mechanical fastening or gluing to the covering member 6 which is preformed to an essentially three-dimensional, internally hollow, shape;
- positioning the covering member 6 including the pairs of inserts 7a, 7b, 8a, 8b in a cavity of an injection mould above the body 2 or the sole 3;
- firmly joining the covering member 6 including the pairs of inserts 7a, 7b, 8a, 8b to the body 2 or the sole 3 through a low-pressure injection of a low-density material inside the said cavity, so as to form a matrix constituting the filling member 5 which incorporates the pairs of inserts 7a, 7b, 8a, 8b and binds the covering member 6 to the body 2 or the sole 3 (Figure 2a);
- then forming in each insert of the pairs of inserts 7a, 7b, 8a, 8b respective guide grooves 9a, 9b allowing the footwear fastening means to be slidably mounted thereto (Figure 3a); in an advantageous manner, the guide grooves 9a, 9b are made by material-removing machining, e.g. milling.

[0019] In a further embodiment - comprised again within the same inventive concept of the present invention - the inventive method comprises the following steps:

- positioning the pairs of inserts 7a, 7b, 8a, 8b on top of a portion of the body 2 that has preliminarily been inserted in a pressing die;
- positioning a laminate sheet forming the covering member 6 on top of the pairs of inserts 7a, 7b, 8a, 8b and the body 2;

- firmly joining the covering member 6 and the pairs of inserts 7a, 7b, 8a, 8b to the body 2 by pressing in the pressing die, so that the pairs of inserts 7a, 7b, 8a, 8b are incorporated between the covering member 6 and the body 2 (Figure 2a);

- then forming in each insert of the pairs of inserts 7a, 7b, 8a, 8b respective guide grooves 9a, 9b allowing the footwear fastening means to be slidably mounted thereto (Figure 3a); in an advantageous manner, the guide grooves 9a, 9b are made by material-removing machining, e.g. milling.

[0020] Once the ski - or in general a sports article of a similar kind - has been so completed in accordance with any of the embodiments described above, the footwear fastening means can be coupled to the related mounting means by first slidably inserting them in the guide grooves 9a, 9b and then locking them in position with the help of appropriate retaining means, possibly in an adjustable manner so as to allow the footwear fastening means to be given the most correct setting in view of the actual needs of the wearer. The footwear fastening means themselves shall of course include a slide-like portion provided with appropriate runners for them to be slidably coupled with the guide grooves 9a, 9b.

[0021] Illustrated in Figure 4 is an exemplary manner in which the footwear fastening means may be mounted to a ski 1 produced with a method according to the present invention; the footwear fastening means include one or more support plates 10, 11 for a heel-piece and/or a toe-piece (not shown), which are made in a slide-like form, so that each plate 10, 11 therefore comprises a pair of runners with a cross-section in the shape of a L or an overturned T adapted to slidably engage the guide grooves 9a, 9b of the ski 1. Upon having so been inserted in the grooves 9a, 9b, the plates 10, 11 can be interconnected with each other via a metal strip 12, as illustrated in Figure 5, in view of improving the drivability of the ski. Illustrated in Figure 6 is a different form in which said plates 10, 11 can be connected with each other, wherein a first strip 12a is connected, at an end portion thereof, to the plate 10 and, at the other end portion thereof, to the ski 1; similarly, a second strip 12b is connected at an end portion thereof to the other plate 11 and, at the other end portion thereof, to the ski 1.

[0022] Fully apparent from the considerations set forth above is therefore the ability of the method for producing a sports article according to the present invention to reach the afore-stated aims and advantages; the method, in fact, enables to incorporate in the structure of the same sports article mounting means 9a, 9b capable of allowing a quick mounting of corresponding footwear fastening means, or support means 10, 11 for such footwear fastening means.

[0023] In addition, the inserts 7a, 7b, 8a, 8b forming the above-cited mounting means 9a, 9b are made of high-strength materials, while their extension is limited to the

zone where the footwear fastening means are due to be coupled; as a result, the mounting of the fastening means is safe and reliable during the use of the sports article, since the load-bearing section of the inserts is fully adequate in view of its capability of withstanding both the static and dynamic mechanical stresses applied during the use of the sports article, thereby significantly reducing the possibility for the same inserts to suffer distortions under such stresses; at the same time, the size of the inserts is adequately small so as to avoid affecting the overall weight and the final cost of the sports article to any excessive extent.

[0024] The high strength of the material with which the inserts are made of, and the direct contact of the same inserts with the slide-like runners of the footwear fastening means, as ensured by the milling process which the inserts are subjected to in order to provide the grooves 9a, 9b, further enable an adequate resistance to abrasion and/or wear of the mounting means to be ensured, thereby maintaining the coupling accuracy between the sports article and the footwear fastening means unaltered in the course of time, which again translates into a greater accuracy in the way in which the pushing or driving force of the wearer is transmitted to the sports article.

[0025] It will anyhow be appreciated that the method according to the present invention, so as described and illustrated above, may be subject to a number of modifications and be embodied in a number of different manners without departing from the scope of the present invention. Furthermore, the materials used for the various component parts of the sports article produced with the inventive method, as well as the shapes and the sizing thereof, may of course be each time so selected as to more appropriately fit the particular applications and requirements.

Claims

1. Method for producing a sports article comprising a body (2) having an essentially two-dimensional shape, and at least a covering member (6) adapted to be positioned upon at least a portion of said body (2), a filler member (5) being possibly placed between the body (2) and the covering member (6), said sports article (1) further incorporating mounting means for fastening means provided to fasten a sports footwear thereto, such mounting means comprising at least one pair of inserts (7a, 7b; 8a, 8b) provided in a parallel arrangement along at least a portion of said body (2), **characterized in that** it comprises the steps of:

- incorporating said at least one pair of inserts (7a, 7b; 8a, 8b) within one of said filler member (5) and covering member (6);
- firmly joining said covering member (6) and said possible filler member (5) to said body (2);

- providing respective guide grooves (9a, 9b) in each insert of said at least one pair of inserts (7a, 7b; 8a, 8b) adapted for slidably mounting said fastening means.

2. Method according to claim 1, wherein

- said at least one pair of inserts (7a, 7b; 8a, 8b) is positioned in a cavity of an injection mould having an essentially three-dimensional shape;
- a low-density plastic material is injected at a low injection pressure into said mould cavity, so that the material fill the cavity and incorporates said at least one pair of inserts (7a, 7b; 8a, 8b), thereby obtaining said filler member (5) incorporating said at least one pair of inserts (7a, 7b; 8a, 8b);
- said covering member (6) is formed separately to an essentially three-dimensional, internally hollow, shape;
- said filler member (5) incorporating said at least one pair of inserts (7a, 7b; 8a, 8b) is firmly joined to said body (2) by pressing in a pressing die, so as to obtain said sports article;
- said guide grooves (9a, 9b) are formed by material-removing machining, such as milling, performed on said at least one pair of inserts (7a, 7b; 8a, 8b).

3. Method according to claim 1, wherein

- said at least one pair of inserts (7a, 7b; 8a, 8b) is coupled to said covering member (6) preliminarily preformed to an essentially three-dimensional, internally hollow, shape;
- said covering member (6) including said at least one pair of inserts (7a, 7b; 8a, 8b) is positioned in a cavity of an injection mould on top of said body (2) or of a bottom sole portion (3);
- said covering member (6) including said at least one pair of inserts (7a, 7b; 8a, 8b) is firmly joined to said body (2) or said bottom sole portion (3) through a low-pressure injection of a low-density plastic material inside said cavity, so as to form a matrix structure constituting said filler member (5) incorporating said at least one pair of inserts (7a, 7b; 8a, 8b) and binding said covering member (6) to said body (2) or said bottom sole portion (3);
- said guide grooves (9a, 9b) are formed by material-removing machining, such as milling, performed on said at least one pair of inserts (7a, 7b; 8a, 8b).

4. Method according to claim 1, wherein

- said at least one pair of inserts (7a, 7b; 8a, 8b) is positioned on top of a portion of said body (2)

- that has preliminarily been inserted in a pressing die;
- a laminate sheet forming said covering member (6) is positioned on top of said pairs of inserts (7a, 7b; 8a, 8b) and said body (2); 5
 - said covering member (6) and said pair of inserts (7a, 7b; 8a, 8b) are firmly joined to said body (2) by pressing in said pressing die, so that said pair of inserts (7a, 7b; 8a, 8b) is incorporated between said covering member (6) and said body (2); 10
 - said guide grooves (9a, 9b) are formed by material-removing machining, such as milling, performed on said at least one pair of inserts (7a, 7b; 8a, 8b). 15
5. Sports article produced by means of a method according to any of the preceding claims.
6. Sports article according to claim 5, constituted by a ski or a snowboard. 20

25

30

35

40

45

50

55

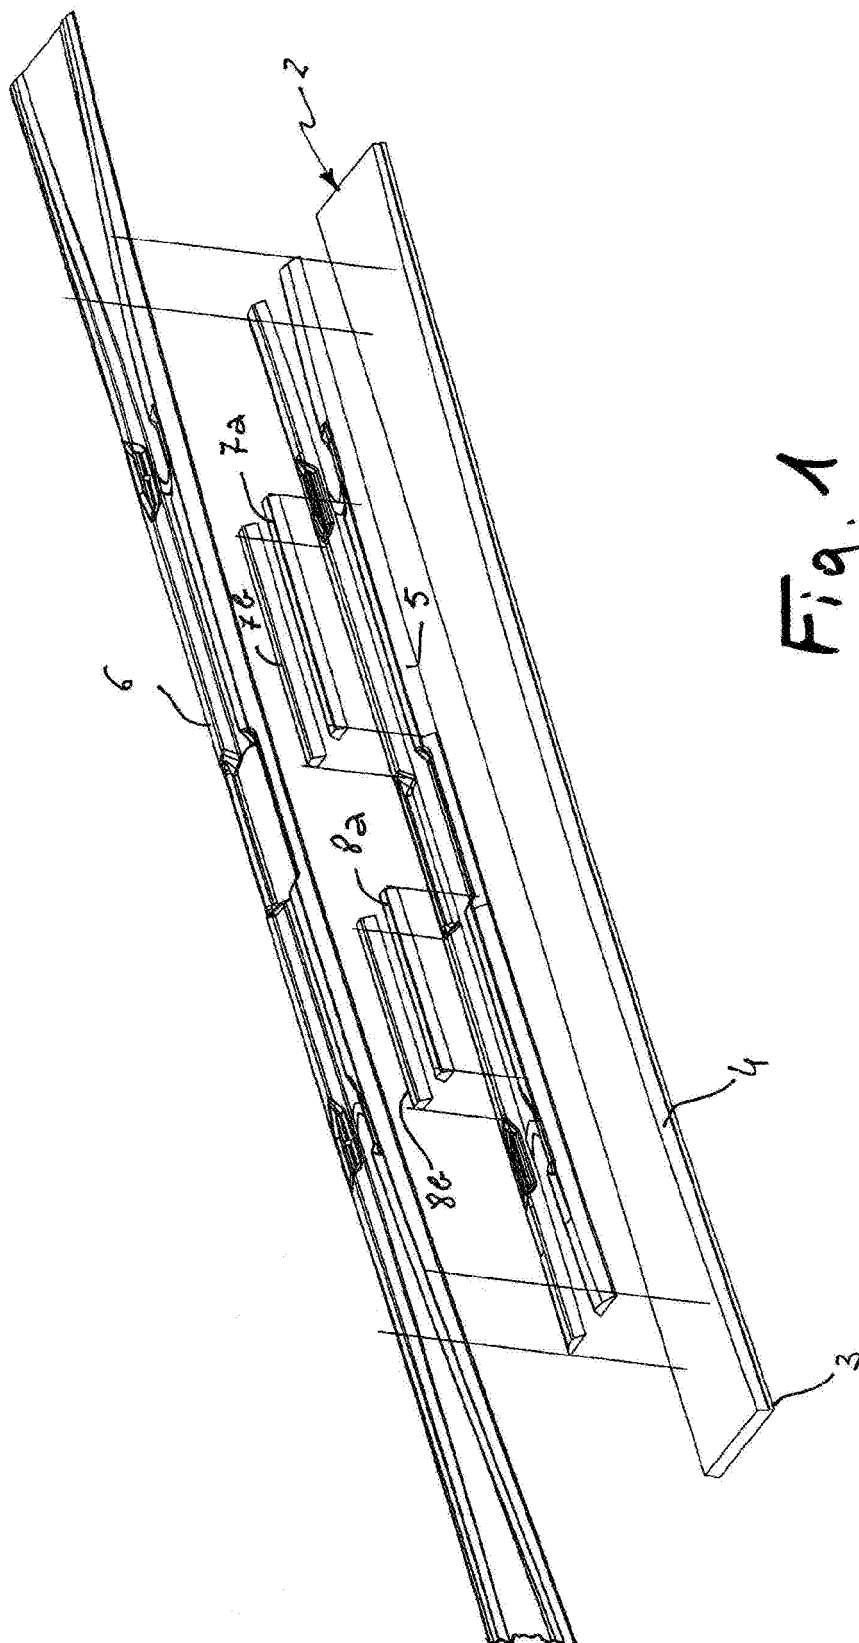


Fig. 1

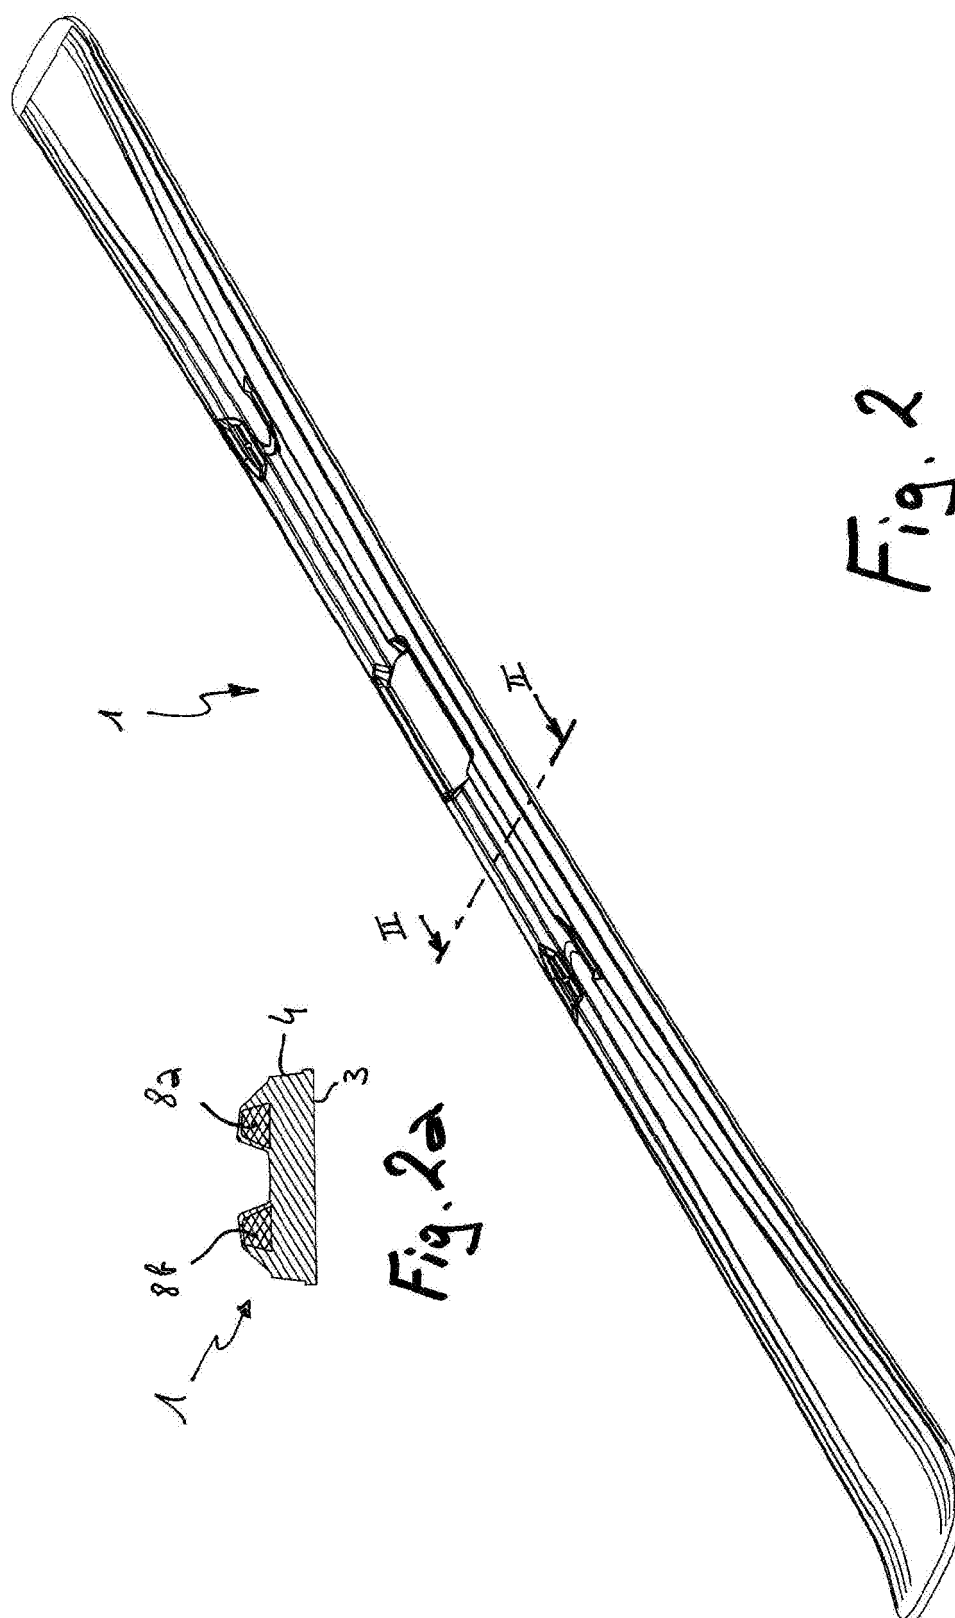
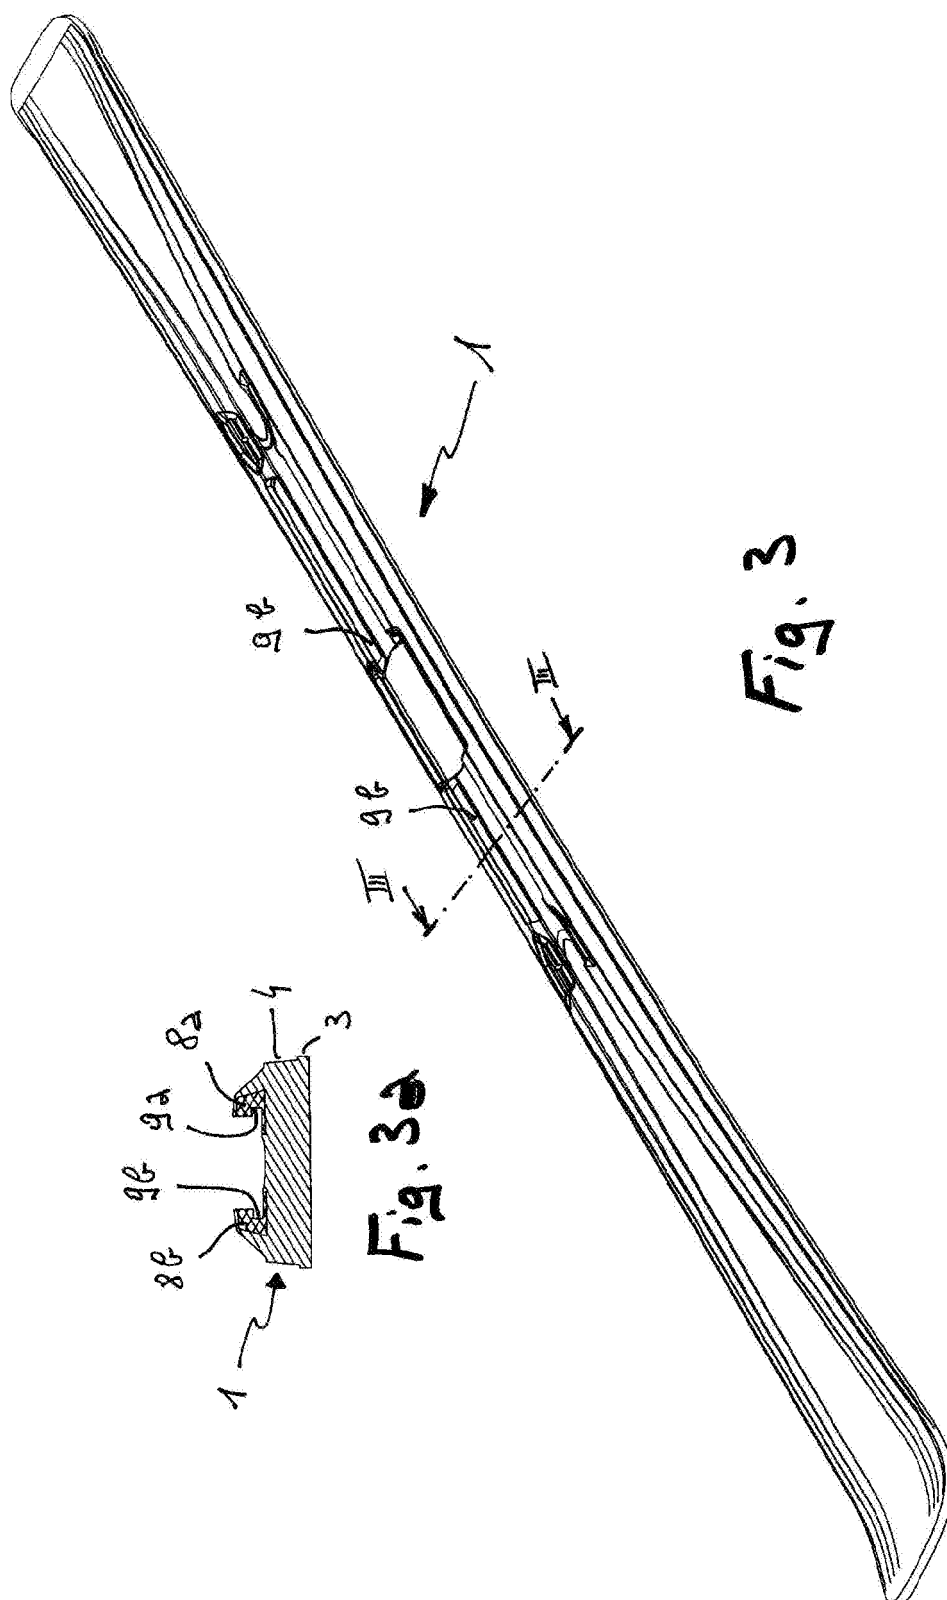


Fig. 2

Fig. 2a



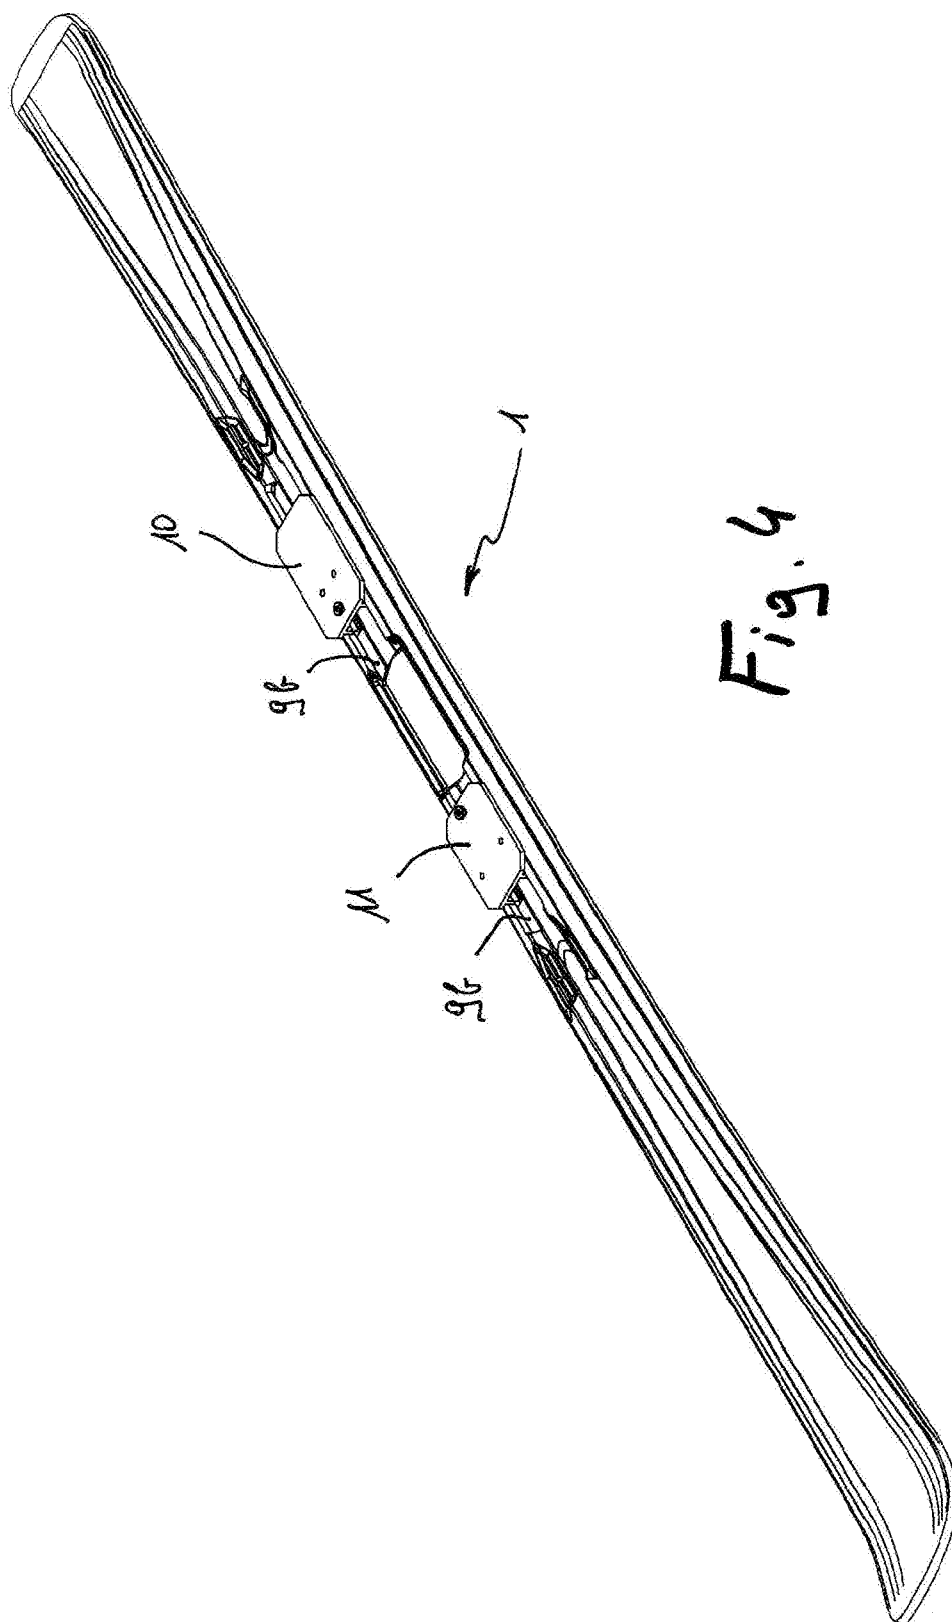


Fig. 4

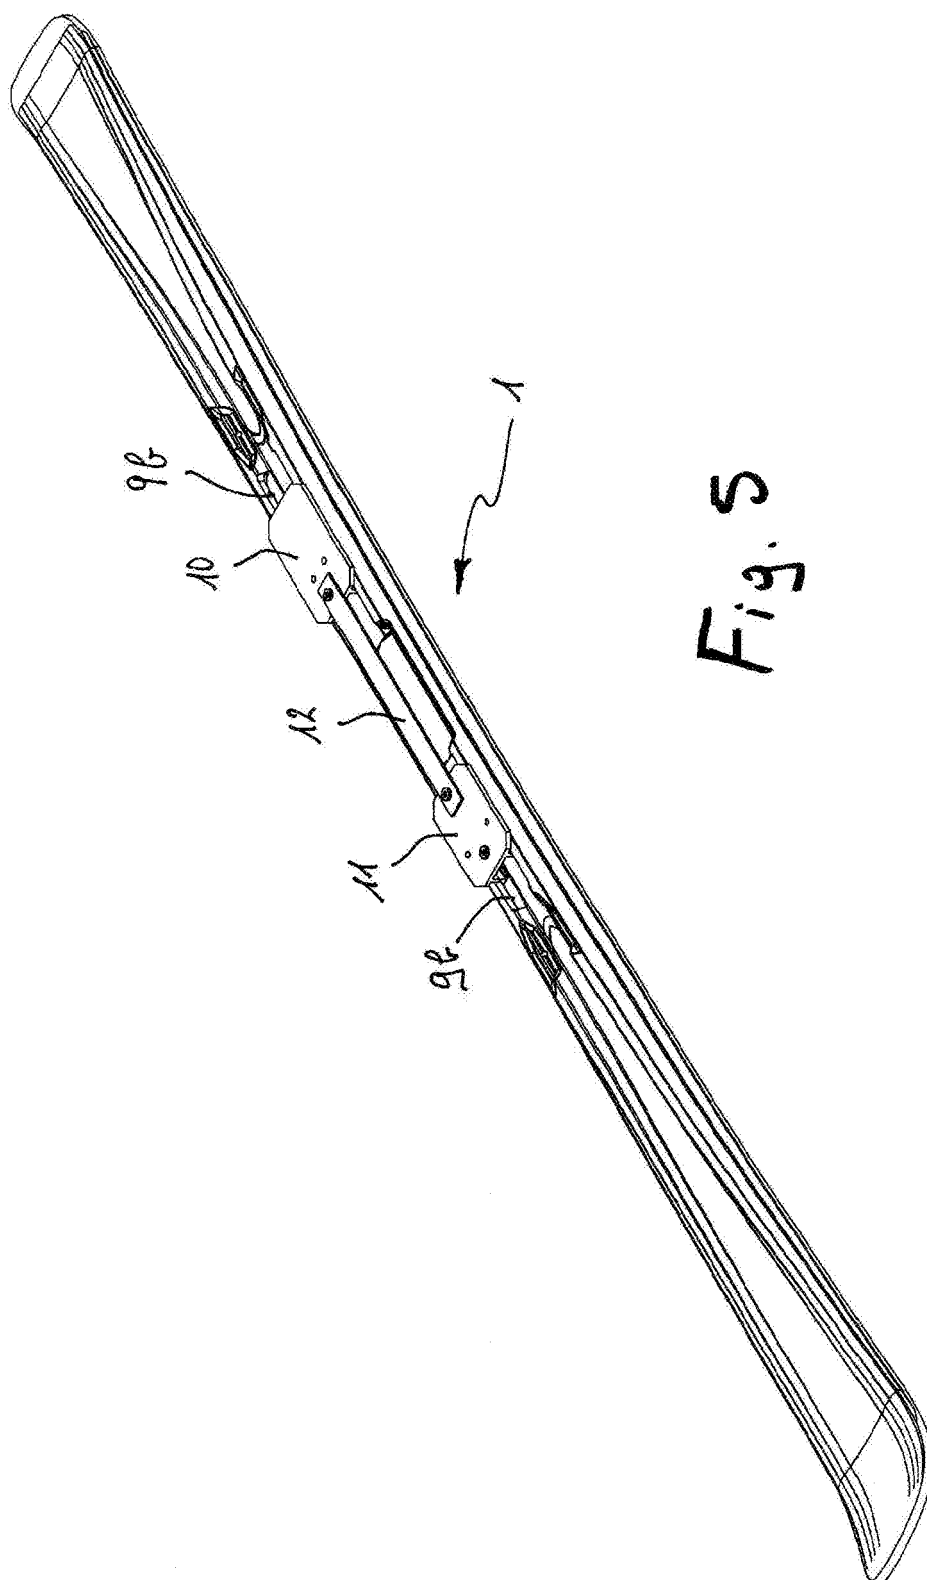


Fig. 5

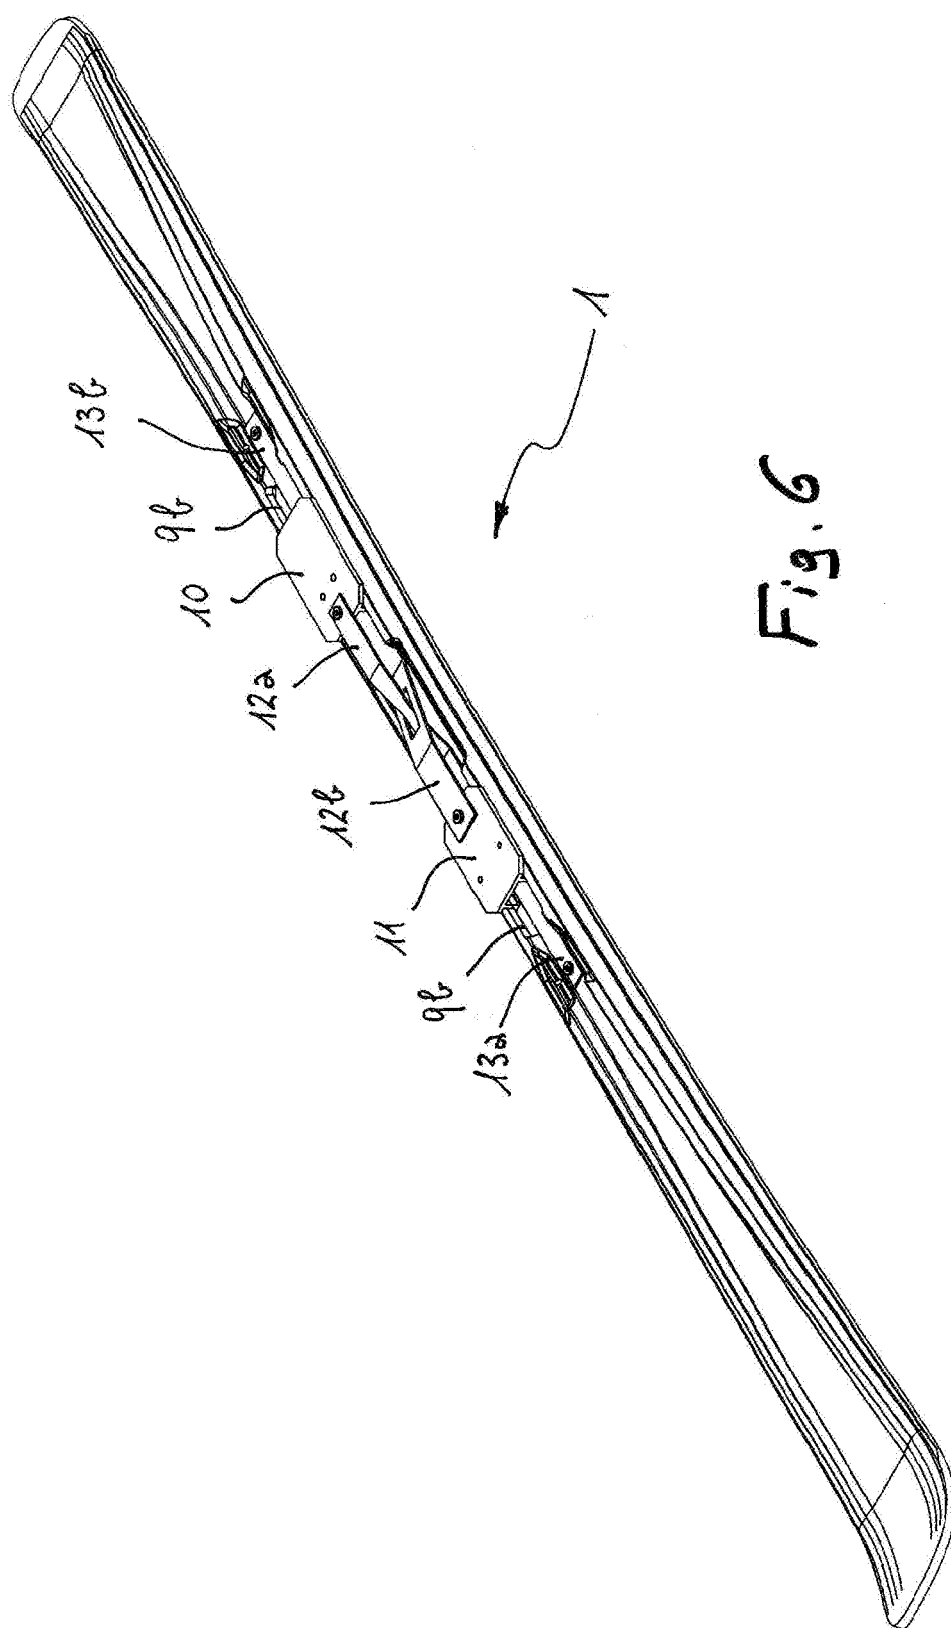


Fig. 6



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
D,X	DE 20 2004 019710 U1 (BLIZZARD SPORT GES M B H [AT]) 7 April 2005 (2005-04-07) * paragraphs [0004], [0015], [0023], [0035]; figure 7 *	1,3,5,6	INV. A63C5/12 A63C9/00
A	EP 1 366 785 A (HEAD TECHNOLOGY GMBH [AT]) 3 December 2003 (2003-12-03) * paragraphs [0016], [0017], [0028]; figures 3,4 *	1,5	
			TECHNICAL FIELDS SEARCHED (IPC)
			A63C
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 29 June 2007	Examiner Brunie, Franck
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 2
 EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 10 0642

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-06-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 202004019710 U1	07-04-2005	CN 1792402 A	28-06-2006
		EP 1674138 A1	28-06-2006
		US 2006131838 A1	22-06-2006

EP 1366785 A	03-12-2003	DE 10223547 A1	18-12-2003

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0249728 A1 [0003]
- DE 202004001356 U1 [0005]
- DE 202004019710 U1 [0007]