

# (12) United States Design Patent (10) Patent No.:

Komatsuzaki et al.

US D794.166 S

(45) Date of Patent: Aug. 8, 2017

### (54) FLUID CONTROL VALVE

(71) Applicants: Hisashi Komatsuzaki, Tsukubamirai (JP); Hisataka Kato, Tsukubamirai

(JP); Motohiro Soutome, Tsukubamirai

(72) Inventors: Hisashi Komatsuzaki, Tsukubamirai

(JP); Hisataka Kato, Tsukubamirai

(JP); Motohiro Soutome, Tsukubamirai

Assignee: **SMC Corporation**, Chiyoda-ku, Tokyo

(JP)

15 Years Term:

Appl. No.: 29/597,164

(22) Filed: Mar. 15, 2017

#### (30)Foreign Application Priority Data

Nov. 22, 2016 (JP) ...... 2016-025357 (51) LOC (10) Cl. ...... 23-01 U.S. Cl.

USPC ...... **D23/235** 

(58) Field of Classification Search USPC ...... D23/233-250; 137/301, 315.18, 486, 137/487.5, 599.05, 601.14, 554, 630.12; (Continued)

#### (56)References Cited

### U.S. PATENT DOCUMENTS

D181,319	$\mathbf{S}$	*	10/1957	Schumaat D23/235
3,566,920	Α	*	3/1971	Stewart B60T 8/1812
				137/625 64

### (Continued)

Primary Examiner — Cynthia Ramirez Assistant Examiner — Gino Colan

(74) Attorney, Agent, or Firm — Yokoi & Co., U.S.A.; Toshiyuki Yokoi

#### (57)CLAIM

The ornamental design for a fluid control valve, as shown and described.

### DESCRIPTION

FIG. 1 shows a front view of a fluid control valve showing our new design;

FIG. 2 shows a rear view thereof;

FIG. 3 shows a right side view thereof;

FIG. 4 shows a left side view thereof;

FIG. 5 shows a top view thereof;

FIG. 6 shows a bottom view thereof;


FIG. 7 shows a top, front and left side perspective view thereof; and,

FIG. 8 shows a bottom, rear and right side perspective view thereof.

The broken lines shown in the figures are included for the purpose of illustrating portions of the fluid control valve and form no part of the claimed design.

The present article is a fluid control valve used, for example, to immediately discharge a large amount of pressure fluid at high speed for wiping off dust attached to a bag filter of a dust collector. The fluid control valve includes: a body having two pressure fluid inlet/outlet ports; and a bonnet attached on an upper part of the body (See Reference drawings 1 and 2). The two pressure fluid inlet/outlet ports communicate with each other via a not illustrated passage formed inside the body. In the passage, a not illustrated valve body integrally formed with a diaphragm is provided. When using, for example, a not illustrated pressure fluid supply source such as an air tank is connected to one of the pressure fluid inlet/outlet ports, and a not illustrated injection pipe connected with an upper opening of the bag filter provided inside the dust collector is connected to the other of the pressure fluid inlet/outlet ports. In this state, when the pressure fluid is supplied to the present article, the valve body is opened according to the pressure of the pressure fluid, and the pressure fluid is injected inside the bag filter via the injection pipe. The injected pressure fluid causes impact on the bag filter to remove the dust attached to an outer periphery of the bag filter.

### 1 Claim, 8 Drawing Sheets

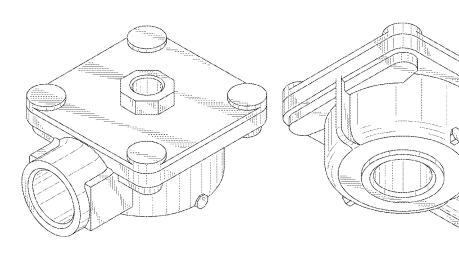

# (58) Field of Classification Search

USPC ... 251/129.15, 129.01, 129.11, 62, 327, 213, 251/324; D15/5 CPC .. F16K 31/0675; F16K 31/082; F16K 3/0254; F16K 31/1221; F16K 31/084; F04F 5/14;

F02B 37/00


See application file for complete search history.


#### (56) **References Cited**


## U.S. PATENT DOCUMENTS

D351,216	S	*	10/1994	Millett D23/233
5,924,441	Α	*	7/1999	Leys F16K 11/022
				137/312
6,575,187	B2	*	6/2003	Leys F16K 11/048
				137/15.21
D562,436	S	*	2/2008	Kato D23/233
D676,110	$\mathbf{S}$	*	2/2013	Oike D23/233
8,839,808	B2	*	9/2014	Murata F16K 31/1221
				137/15.19
D763,409	S	*	8/2016	Cox D23/235
2008/0029170	A1	*	2/2008	O'Reilly F24D 19/0012
				137/613
2013/0009086	A1	*	1/2013	Walker F16K 7/17
				251/331

<sup>\*</sup> cited by examiner

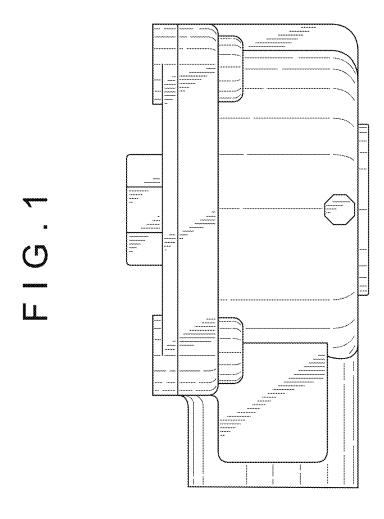

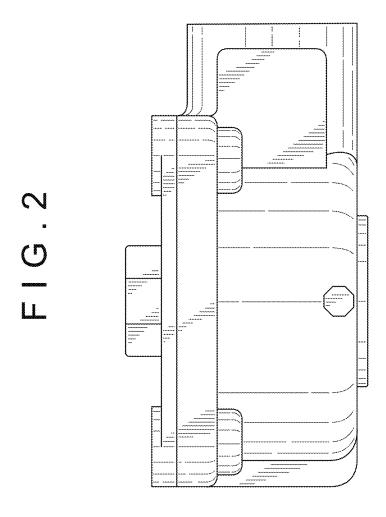

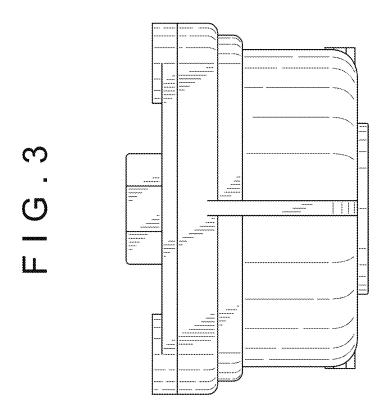

4. O

