



(51) International Patent Classification:

B62B 3/00 (2006.01) B65F 3/00 (2006.01)  
B62B 3/04 (2006.01) B65F 3/02 (2006.01)  
B65F 1/00 (2006.01) B65F 3/04 (2006.01)  
B65F 1/12 (2006.01) B65G 65/23 (2006.01)  
B65F 1/14 (2006.01) G06K 7/08 (2006.01)

(21) International Application Number:

PCT/US2018/012582

(22) International Filing Date:

05 January 2018 (05.01.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/442,746 05 January 2017 (05.01.2017) US

(72) Inventor; and

(71) Applicant: MALLADY, Roy [US/US]; 1028 Farm Brook Lane, NE, Atlanta, Georgia 30319 (US).

(74) Agent: SCHNEIDER, Ryan A. et al.; Troutman Sanders LLP, 600 Peachtree Street, NE, Suite 5200, Atlanta, Georgia 30308 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: CONTAINER TRANSPORTER AND METHODS

(57) Abstract: A container transporter systems, vehicle, and methods are disclosed. The container transporter can be automatically or manually controlled allowing for ease of use in moving a coupled container. The container transporter can be used with virtually any container, such as a refuse container. The automatic movement of the container transporter can assist users with time constrains or physical constraints in moving their refuse for pickup.

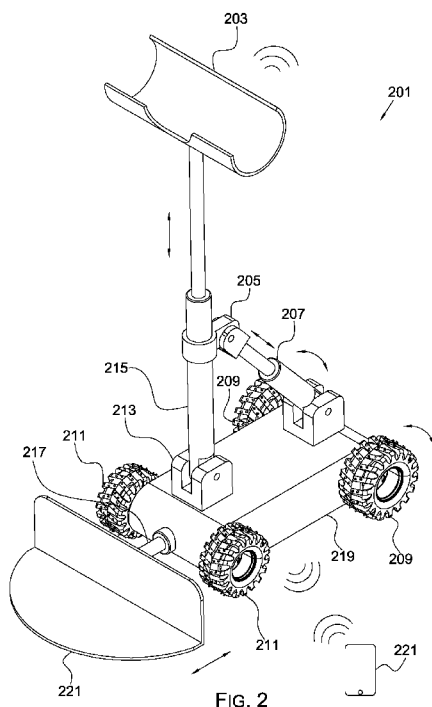

**CONTAINER TRANSPORTER AND METHODS**

**CROSS REFERENCE TO RELATED APPLICATION(S)**

5            This Application claims benefit, under 35 U.S.C. § 119(e), to U.S. Provisional Application No. 62/442,746 filed January 5, 2017. The entire contents and substance of the above application are hereby incorporated by reference.

**BACKGROUND**

10

1.        Field of the Invention

          Various embodiments of the disclosed vehicle relate to a container transporter, and more particularly, to a container transporter that can travel automatically from a parking or docking location to a second location. For example, the container transporter can move a refuse container to the curb for mechanical pick up and emptying by a garbage truck, and return the empty refuse container to its storage location before returning to a parking or docking station.

15

2.        Background of Related Art

          Conventional and widely used waste or refuse containers are of a molded plastic material having a hinged lid and four to five feet tall. Such a container includes a pair of wheels at the back side beneath a bar useable to pull the container by rolling it along the ground. Upon righting the container, the bottom edge of the front side rests on the ground and provides sufficient frictional contact with the ground to limit rolling except on relatively steep inclines.

20

          These refuse containers are usually parked at the end of a driveway adjacent a residence or behind a fence or wall to avoid visibility from the street. Once or twice a week, the residential user rolls the container to the curb and a garbage truck comes by the curb to pick up, lift and empty the contents of a refuse container into a bin of the garbage truck. Thereafter, the empty container is set on the ground adjacent the curb.

25

          As discussed, the container transporter has to be delivered to the curb, usually by hand along a path on top of the driveway. The refuse container, upon emptying, has to be retrieved from the curb and returned to its storage location. Those individuals with physical handicaps, limited strength, or insufficient time can have difficulty in moving a filled, heavy refuse

30

container to the curb and bringing back the emptied refuse container. If the driveway is inclined, unfinished or unpaved the difficulty of moving the container transporter is exacerbated. If the driveway is inclined downwardly toward the curb, it requires a significant amount of strength to keep the container transporter from rolling too fast and going out of control. To pull an emptied  
5 refuse container up a driveway can additionally create difficulty.

What is needed, therefore, is a vehicle or transportation system suitable for use with the varying standardized refuse containers mandated in different locals to automate the process of container travel to and from the curb. Additionally, the vehicle or transportation system should be usable with any refuse container already possessed by the user. It is to such a system that  
10 embodiments of the container transporter are primarily directed.

### SUMMARY

It is a primary object of the container transporter to provide an automated, self-propelled  
15 container transporter capable of independent travel from a parking or docking location to a location for pick up by a refuse collection truck and return to the parking station.

Embodiments of the container transporter can comprise container transporter including a motor system for driving and a steering system for directing, both permitting purposeful locomotion of the container transporter along nearly any terrain. Embodiments can provide  
20 means for guidance for travel of the container transporter from a parking or docking location to a location for pick up by a refuse collection truck, and return to the parking station. Further, embodiments can provide a platform, enclosure, cradle, nest, grip, arm, or other suitable means for securing a container, for example a refuse container, to the container transporter.

Embodiments of the container transporter can comprise a motor system. For example,  
25 embodiments can comprise a wheel, wheels, a track, tracks, or a gyroscopic wheel or ball system to enable movement. The wheel or track can be engaged by a motor system for driving the wheel or track, and thus providing locomotion to the container transporter.

Embodiments of the container transporter can comprise a steering system. For example,  
30 a steering motor can be mechanically coupled with a wheel or track to direct the wheel or track in a given direction. Additional embodiments of the container transporter can comprise a swiveling third wheel and a pair of driving wheels independently actuated to provide both

locomotion and steering by modifying the rate of rotation of one driving wheel with respect to the other. A further embodiment can incorporate a pair of driving tracks on opposed sides of the container transporter to provide locomotion and steering by differential speed of the driving tracks. Still another embodiment of the container transporter can comprise wide tires or balloon  
5 tires to increase the footprint of each wheel and thereby reduce the possibility of the container transporter becoming mired.

Embodiments of the container transporter can comprise a sensor system for detecting ambient conditions. For example, a sensor or multiple sensors can be used to detect obstacles, inclement weather, the presence of a full container, the presence of an empty container, or  
10 combinations thereof. The container transporter can comprise different interchangeable operation modules, sensors, and computers capable of interacting with dynamic ambient conditions. These modules, sensors, and computers allow the container transporter to interact with real world conditions and accomplish its current task.

Embodiments of the container transporter can comprise an intelligence system. For  
15 example, the intelligence system can be a computer, microprocessor, controller, or combinations thereof. In some embodiments, the intelligence system can direct the motor and steering systems in response to inputs from the sensor system.

Embodiments of the container transporter can comprise a platform suited to a removable container. In some embodiments, the container transporter can comprise a platform having a  
20 topless enclosure. In some embodiments, the platform can comprise a dolly system including a lip, arm, and/or grip suited to a removable container. In some embodiment, the platform can be bare, using friction alone to interact with a container. The platform can be suited to a local mandated refuse container(s). In some embodiments, the container transporter can be suited to the container so that modification of the container is not necessary. Thus, a user can continue to  
25 use his or her current refuse container.

Some embodiments of the container transporter comprise a parking or docking location or docking station for use in conjunction with the container transporter to store the container transporter or the container transporter and container. For example, some embodiments of the  
30 container transporter comprise a parking or docking location for an electric powered container transporter that provides the capability for automatic charging of a battery powering the container transporter. In some embodiments the parking structure can provide shelter for the

container transporter and additionally can be configured to charge the vehicle. In some embodiments, the container transporter can comprise a parking or docking location that transfer power from a system designed to capture solar energy.

Some embodiments of the container transporter comprise a method for automatically transporting a container transporter from a parking or docking location to a second location, and returning the container transporter to its parking or docking location. In some embodiments the container transporter can transport both itself and the container from a parking or docking location to a second location. For example, the container vehicle can transport both itself and a refuse container from a parking or docking location to a refuse pick up location, and return itself or both itself and the refuse container to the parking location.

These and other objects, features, and advantages of the container transporter can become more apparent upon reading the following specification.

### BRIEF DESCRIPTION OF THE FIGURES

15

Reference can now be made to the accompanying figures, which are not necessarily drawn to scale, and wherein:

**FIG. 1** is a drawing of a prior art refuse container.

**FIG. 2** is a drawing of a container transporter, in accordance with an example embodiment of the presently disclosed subject matter.

**FIG. 3A** is a drawing of a container transporter, in accordance with an example embodiment of the presently disclosed subject matter, and a refuse container.

**FIG. 3B.** is another drawing of a container transporter, in accordance with an example embodiment of the presently disclosed subject matter, and a refuse container.

25

### DETAILED DESCRIPTION

To facilitate an understanding of the principles and features of the various embodiments of the invention, various illustrative embodiments are explained below. Although embodiments of the invention are explained in detail as being container transporter or refuse container transporter systems and methods, it is to be understood that other embodiments are

contemplated, such as embodiments employing other types of vehicles, containers, or methods of transportation and transporting. Accordingly, it is not intended that the invention is limited in its scope to the details of construction and arrangement of components set forth in the following description or examples. The invention is capable of other embodiments and of being practiced or carried out in various ways. Also, in describing the embodiments, specific terminology can be resorted to for the sake of clarity.

It must also be noted that, as used in the specification and the appended claims, the singular forms “a,” “an” and “the” include plural references unless the context clearly dictates otherwise. For example, reference to a component is intended also to include composition of a plurality of components. References to a composition containing “a” constituent is intended to include other constituents in addition to the one named.

Also, in describing the exemplary embodiments, terminology can be resorted to for the sake of clarity. It is intended that each term contemplates its broadest meaning as understood by those skilled in the art and includes all technical equivalents which operate in a similar manner to accomplish a similar purpose.

Ranges can be expressed herein as from “about” or “approximately” or “substantially” one particular value and/or to “about” or “approximately” or “substantially” another particular value. When such a range is expressed, other exemplary embodiments include from the one particular value and/or to the other particular value.

By “comprising” or “containing” or “including” is meant that at least the named compound, element, particle, or method step is present in the composition or article or method, but does not exclude the presence of other compounds, materials, particles, method steps, even if the other such compounds, material, particles, method steps have the same function as what is named.

It is also to be understood that the mention of one or more method steps does not preclude the presence of additional method steps or intervening method steps between those steps expressly identified. Similarly, it is also to be understood that the mention of one or more components in a composition does not preclude the presence of additional components than those expressly identified.

The materials described as making up the various elements of the invention are intended to be illustrative and not restrictive. Many suitable materials that would perform the same or a

similar function as the materials described herein are intended to be embraced within the scope of the invention. Such other materials not described herein can include, but are not limited to, for example, materials that are developed after the time of the development of the invention.

To facilitate an understanding of the principles and features of the present invention, various illustrative embodiments are explained below. In particular, various embodiments of the container transporter are described as container transporter systems and methods. Some aspects of the invention, however, can be applicable to other contexts, and embodiments employing these aspects are contemplated. For example, some aspects of the invention can be applicable to various types of container transports and/or methods of container transportation, or other types of vehicles altogether. Accordingly, where terms such as “refuse container” or “vehicle” or related terms are used throughout this disclosure, it can be understood that other devices, entities, objects, or activities can take the place of these in various embodiments of the invention.

As explained above, and as shown in **FIG. 1**, a problem with existing containers is that they require a user to physically exert themselves to move the container. For example, a problem with the existing refuse container **101** is that it must be pushed or pulled to the curb either the night before or early in the morning of the day of garbage pickup. Thereafter, the refuse container must be transported from the curb and returned to its parking or storage location. These shortcomings require substantial investment in time and effort over the life of a person. Further, for users who are not physically able, moving a container or refuse container can be almost overwhelming. For example, should a user’s driveway be inclined downwardly or upwardly toward the curb, the movement of a heavily loaded refuse container can be difficult to control. Moreover, to draw the refuse container up to its storage location, even though empty, can be a difficult physical task. This is despite the fact that many containers, for example refuse containers, include wheels **107** intended to ease movement. It is the function and purpose of the container transporter to permit automatic transport of the container to and from at least a second location to alleviate the strain and potential injury that can result from manually transporting the container. The container transporter can comprise a container transporter that is compatible with any container.

Embodiments of the container transporter described herein provide several solutions to the problems with the prior art. For example, as shown in **FIG. 2**, an embodiment of the container transporter can include wheels **209, 211** comprising a motor system and/or a steering

system. The wheels **209**, **211** can operate in unison, separately, or in tandem, for example, with the front wheels **211** operating independently from the back wheels **209**. The wheels can be operated by a motor and control unit contained in a chassis **219**. The chassis can contain other modules, including an intelligence system, for example, to operate the container transporter.

5           Embodiments of the container transporter can comprise a motor system and/or a steering system. For example, embodiments can comprise a wheel, wheels, a track, tracks, and/or a gyroscopic wheel or ball system to enable movement. The wheel or track can be engaged by a motor system for driving the wheel or track, and thus providing locomotion to the container transporter. In some embodiments, a steering motor can be mechanically coupled with a wheel  
10           or track to direct the wheel or track in a given direction. In some embodiments, the container transporter can comprise a swiveling third wheel and a pair of driving wheels independently actuated to provide both locomotion and steering by modifying the rate of rotation of one driving wheel with respect to the other. A further embodiment can incorporate a pair of driving tracks on opposed sides of the container transporter to provide locomotion and steering by differential  
15           speed of the driving tracks. Some embodiments may use differential speed of wheels or other movement systems to provide locomotion and steering.

          In some embodiments, the container vehicle can comprise a wheel or wheels housed in a wheel compartment or wheel compartments. A compartment can be formed above a wheel to house various elements attendant operation of the wheel. This compartment can be formed by a  
20           wall extending interiorly of another wall conventionally formed as part of front of the container transporter. A steering motor can be mechanically coupled with a fork supporting the wheel, and the motor can be attached to and supported by a flange of a sliding member. Upon actuation of the steering motor, the wheel can be caused to pivot. A jack screw mechanism can include a motor secured with a flange of the sliding member. These features can also be used on a wheel  
25           without a wheel compartment.

          In some embodiments, the container vehicle can comprise a jack screw that can engage a jack nut. A frame can be secured to the front of the container transporter by mounting elements, each of which elements can include a conventional nut and washer to secure the frame to the front of the refuse container. Upon activation of motor of the jack screw mechanism, the jack  
30           screw can rotate in threaded engagement with the jack nut. This can cause sliding member to move upwardly and thereby retract wheel to a location above the bottom of the container

transporter. With such retraction, the container transporter has a limited ability to roll because of the friction between its bottom and the ground. Moreover, in an example embodiment where the container transporter and refuse container are joined and where the wheel can be retracted, the retraction can limit or eliminate damage during raising of the coupled refuse container and container transporter off of the ground, and while placing the combination on the ground.

In some embodiments, the container transporter can comprise wheels mounted upon axles of a power unit. For example, the power unit can comprise an electric motor, gas motor, or other suitable motor. In an electric motor, a battery can be used to power the motor. A power unit can include an output shaft that can be mounted in bearings and extend into a gear box. An output gear of the gear box can cause rotation of shaft supporting the wheels, and the shaft can be journaled in the bearings. It can be understood that the motor can be caused to rotate in either direction with commensurate rotation of the wheel mounted on the shaft. A further motor causes rotation of output shaft journaled in bearings. The output shaft can be connected to a gear box having an output gear for driving shaft supporting wheel. The shaft can be mounted within the bearings. The motor can be capable of rotating in either direction to provide a commensurate direction of rotation of shaft and wheel attached thereto. A control unit for controlling operation of motors can be mounted within space intermediate the motors. The power unit, control unit, battery and/or related equipment can be mounted within a power and control chassis secured to the container transporter. The power unit, control unit, battery, and/or other related equipment can also each be in a separate or interconnected chassis.

In some embodiments, the container transporter can comprise a driving wheel which permits elimination of power unit driving rear wheels. A wheel motor can be in operative engagement with a wheel to cause the wheel to rotate on command in either direction. Electrical power for a wheel motor, as well as for steering motor and jack screw mechanism, can be provided by a battery. Control of these three motors can be affected by a control unit. The motor and related equipment can be stored in a chassis.

In some embodiments, the container transporter can comprise a container transporter having a pair of tracks disposed on each side. These tracks can be in lieu of or in addition to wheels. These tracks can provide traction over relatively soft ground, loose rocks, and snow. The tracks can also climb irregular terrain (such as drop off at the end of a driveway) better than the wheeled version. Additionally, by operating at different speeds, turning movement of the

container transporter can be achieved. Operation of the two tracks can be controlled by a control unit working in tandem with a tracking unit.

5 In some embodiments, the container transporter can comprise wide wheels or balloon tires in lieu of or in addition to wheels or tracks. The wide wheels or balloon tires can act to traverse soft ground and to reduce the likelihood of becoming mired in either mud or snow, relative to conventional wheels.

10 Embodiments of the container transporter can comprise a sensor system for detecting an ambient condition. In some embodiments the container transporter comprise different interchangeable operation modules which are selectively and autonomously dockable to the container transporter. Such a system makes it economically feasible to develop robot applications to fulfill a plurality of operations. The container transporter can additionally be equipped with the latest state-of-the-art navigational, speech recognition, communication and decision-making hardware and software, since the same autonomous mobile robot can then be used for a plurality of different applications.

15 In some embodiments, the sensor system can comprise a guidance system. The guidance system can aid automated transport of the container transporter between its parking or docking location and a second location, or between any number of locations. Such guidance system can take any one of several forms. For example, a global positioning system (GPS) can be employed. To improve accuracy, a magnetic strip placed along the desired track can be used.  
20 Such a strip would be sensed by a sensor on the container transporter to control the direction of travel both to and from the storage location. At locations wherein the track is unlikely to be covered by snow, a stripe can be painted along the track and light sensors on the container transporter would detect the stripe of paint and provide input signals to the control unit to maintain travel along the stripe. An electrically energized wire placed on the ground  
25 commensurate with the desired track or buried in the ground can be used to guide the travel of the refuse container. The electrical field generated by such wire can be sensed and provide the requisite control signals to the control unit to guide the travel of the refuse container.

30 In some embodiments, the container transporter can comprise or can further comprise guidance system similar to a dead reckoning system. The purpose of such a system is to manually transport the container transporter along the desired track to manually control the speed, direction of travel and change in direction of travel commensurate with the desired track

and recording such movement in a memory of the control unit. This can be accomplished by attaching a handle to fork pivotally extending from a housing, which, in fact, corresponds with front of the container transporter. After attachment of handle, the container transporter can be transported along the intended path. As the wheels rotate, a signal can be generated by motor  
5 reflective of the speed of rotation. Data attendant such signal can be stored in a memory of the control unit. Similarly, any rotation of fork can produce rotation of the armature of motor and generate a signal. This signal can also be stored in the memory of a control unit. To initiate this "teaching" of the path to be followed by the refuse container, a button or other switch can first be actuated. After such manual transport of refuse container, the path from a storage location of the  
10 container transporter to the curb and return can be recorded in the memory of the control unit. Thereafter, upon actuation of the automated system, the trash container can travel in the path "taught" at a predetermined speed. After arrival at the curb, a wheel can be retracted. Retraction of the wheel prior to engagement of the container transporter by the arms of the garbage truck can terminate control inputs to motivate the refuse container. Upon subsequent extension of  
15 wheel after the container transporter was placed on the ground by the arms of the garbage truck, the control system can cause the container transporter to return to its storage location.

As seen in **FIG. 2**, an example container transporter **201** can contain one or more actuators **207**, **215**, **217**. These actuators can be used to control one or more feature of the container transporter. For example, the actuator **217** can be used to control and effect the dolly  
20 lip **221**. The dolly lip **221** can in turn interact with a container. For example, the dolly lip **221** can slide under a refuse container. As an additional example, the actuator **215** can be used to extend or manipulate a grip arm **203**. For example, the grip arm **203** can extend away from the container transporter to make contact with a container, capture the container, and pull the captured container back towards the container transporter. The grip arm **203** can perform any of  
25 these actions independently or in any combination. Further, the grip arm **203** can capture a container using any number of standard means, including, for example, a friction fit, claw, hook, or hinged apparatus. As yet another example, the actuator **207** can be used to change the tilt or angle of the grip arm **203**. The actuator **207** can use a hinge **205** to connect it to the grip arm **203**, allowing multiple independent and/or coordinated movements of the grip arm **203**. For  
30 example, the grip arm **203** can independently or in coordinated movements extend, tilt, grab, capture, pull, and move a container. As an additional example, a series of coordinated

movements can be used to capture and tilt a refuse container with wheels, allowing the container transporter to roll the refuse container in the same or similar way that user would manually operate the refuse container. One or more of the actuators **207**, **215**, **217** and grip arm **203** can additionally comprise one or more sensors, for example, a resistance sensor or radio frequency identification sensor that allows interaction with surrounding objects, for example, a container.

In some embodiments, the container transporter can comprise numerous sensors, controls and actuators incorporated in the control unit of the container transporter or as several interconnected modules. For example, an input/output module can include primary controls for operation of the container transporter, as represented by a keyboard. A processor module can include a central processor unit, generally referred to as a microprocessor, for controlling operation related to activation and movement of the refuse container. A sensor system or module can include any or all of a plurality of sensors including, but not limited to, a global position sensor, radio frequency identification (RFID) sensor, resistance sensor, weight sensor, electronic compass direction sensor, vision camera, tilt sensor, bump sensor, accelerometer, microphone, ultra-sonic range sensor, radio tag sensor, path following sensor, lid open/close sensor, moisture sensor, weight sensor, light sensor, fault detection, and training sensor. Certain of these sensors can be related to and a function of the tracking unit incorporated with the container transporter to control travel of the refuse container. In particular, the tracking unit can incorporate any of global position sensor, RFID sensor, electronic compass direction sensor, vision camera, ultra sonic sensor, radio tag sensor, and path following sensor. It is to be understood that the ground across which the container transporter is to travel from its storage location to the location of discharge of refuse and return can be denoted by a length of wire to be sensed, whether or not it is electrically charged, a plurality of magnets or magnetic strip to be sensed or other path denoting element that is readily sensed to control the direction of travel of the refuse container. Alternatively, for example, a global positioning unit programmed to control travel of the container transporter in accordance with a preset path can be used. As a further example, a system of dead reckoning preset in the microprocessor can be incorporated. It is to be understood that the various other tracking units can be embodied either alone or in combination in the invention. In some embodiments, one or more actuator will be used. For example, actuators may be screw drive actuators, hydraulic fluid actuators, or any actuator suitable for the purpose.

In some embodiments, the container transporter can comprise various ancillary sensors that can be incorporated for safety or other reasons. For example, a proximity sensor can be used to prevent damage by contact of an immobile or mobile element/person. As a further example, to prevent inadvertent spillage of refuse by the container transporter tilting, a tilt sensor can be incorporated. As yet another example, to properly align a container with the container transporter, RFID sensor(s) and/or actuators can be controlled to secure the container and properly position it. Various optical apparatus can be used as a sensor to prevent collision with an object or person. By suitable programming, such optical apparatus can even be used to control the direction of travel and rate of travel of the refuse container. Additionally, in some embodiments, the container transporter can include a panic button to immediately terminate movement.

Embodiments of the container transporter can comprise an intelligence system. For example, in some embodiments, a control unit, which can include a processor and various circuitry subject to input signals, can control operation of motor system, steering system, jack screw mechanism, and/or actuator modules. In another example, the container transporter can comprise an on-board computer, a plurality of sensors, a signaling interface a mechanical coupling interface and communication means, wherein the on-board computer uses inputs from the plurality of sensors to activate the various components to direct the container transporter to accomplish its objective.

In some embodiments, the container transporter can comprise a computer having a processor, memory means, and a plurality of computer programs for controlling the container transporter. The memory can store digital maps of the present environment, as well as navigation beacons and information of each and every operation module. The memory can also carry strategies for navigation, orientation, maneuvering, communication, and strategy for avoiding collisions. All information and programs can be supplied by a network, such as a wireless local area network (LAN) or the Internet. The sensors can comprise distance measuring means, such as an ultrasonic radar, sound measuring means, such as a microphone, and visual measurement system, such as a vision system including optics and an image sensor like an electronic device that is capable of transforming a light pattern (image) into an electric charge pattern, such as a Charge-Coupled-Device (CCD).

In some embodiments, the container transporter can comprise an intelligence system that can activate control modules based on motor system and/or steering system in the container transporter. For example, a control module or control modules would be activated to control operation of the left motor and a second control module or control modules would be activated to control the right motor in the case where the pair of wheels at the rear of container transporter are the driving wheels. In the event a wheel at the front of the container transporter is both the driving wheel and the steering wheel, a single control module can be actuated. A tilt actuator module can be actuated to raise and lower wheel at the front of the container transporter to avoid damage thereto during the process of having the container transporter raised and lowered by, for example, a garbage truck. Similarly, an actuator module can be actuated to raise and lower a dolly lip and/or grip to interact with a container. If a lid is to be raised and lowered on command, a lid actuator module can be incorporated. Power for operating the driving wheels, the steering wheel and the control unit, including the tracking unit, can be provided by a power module. A power module can include one or more batteries to provide a source of electrical power and can be configured for effecting charging of the battery. Charging of the battery can take place, for example, at a parking or docking location. In several embodiments there is no need to raise or lower wheels, as the container transporter will not be picked up with a container. In some embodiments, however, it is beneficial to have the ability to raise and lower wheels, as it can prevent damage to the container transporter. In these embodiments, it can be useful to include a rubber or other cushioning material on the bottom of the container transporter. For example, in an embodiment where the container transporter is configured to be picked up with the container, it could have a rubber bottom and retracting wheels. Such an example could be an embodiment where the container transporter and container are a single unit, for example, where a new locally mandated refuse container is a “smart trash can.”

In some embodiments, a wireless communication module can be included. Wireless communication can be autonomous or involve a user. For example, container transporter can use wireless communication between itself and a fixed location to control travel and other operations of the container transporter. As indicated, a power bus can interconnect a power control module with each of the other modules to provide electrical power as required. A communication bus can interconnect a main processor module with each of the remaining modules to control their respective operations.

Embodiments of the container transporter can comprise a platform suited to a removable container. For example, in some embodiments, the container transporter can comprise a platform having a topless enclosure. The enclosure can be 6 to 36, 12 to 30, 18 to 24, 18 to 30, 24 to 36, or 12 to 24 inches tall. In some embodiments, the enclosure can be slightly larger than the refuse container. For example, the topless enclosure can be circular or square, with radius or length slightly longer than the radius of the intended container. Different sizes of the container transporter can be available to accommodate various sizes of refuse containers. For example, the radius of the enclosure can be 6 to 36, 12 to 30, 18 to 24, 18 to 30, 24 to 36, or 12 to 24 inches wide, or larger if necessary. In some embodiments the topless enclosure can be suited to fit a standard size refuse container. For example, the topless enclosure can be suited to fit a 32 gallon, 44 gallon, or 50 gallon refuse container.

The platform can also be configured to hold a refuse container via friction. In some embodiments, the platform can comprise no enclosure, lip, dolly system or dolly lip, or grip. In some embodiments, the platform can contain a nest-like or cradle-like top suited to a container. For example, while not really being an enclosure, it can be useful to have a platform with a graduated edge that can help guide or provide additional stability to a container.

In some embodiments, the platform can comprise a frame secured to the front of the container transporter by mounting elements. The frame can comprise a dolly lip that can slide under a container. For example, a dolly lip can be used to slide under a refuse container that contains wheels, engaging the refuse container and allowing the platform to take advantage of the refuse container's intended use. In some embodiments, the dolly lip can be effected by an actuator module or system of actuator modules. In some embodiments, the frame can comprise a topless enclosure into which a refuse container can be placed. In some embodiments, a counter weight or counter weight system can be used. For example, in an embodiment where a frame is attached to the platform, a counterweight can be added to account for the weight of a container. A counter weight or counter weight system can container actuators or other common means of moving the counterweight that allow for movement. For example, a counter weight system can be moved by an actuator based on one or more sensors that detect the weight of a container, providing the entire system with a desired center of balance.

In some embodiments, the container and the container transporter can be fused or inseparable. In this embodiment, the container transporter would not move separately from the

container, but instead would always travel with the container because it would be apart of the container, not a separate machine or component of a system. This can be, for example, a “smart trash can” that can be autonomous or remote controlled. For example, the local mandated refuse container can be updated to be such a “smart trash can,” in which case the “smart trash can” would travel from its parking or docking location to a second location, for example, an area designated for refuse pickup, and then the “smart trash can” can travel back to its parking or docking location. In some embodiments, the container transporter can travel to multiple predetermined locations.

In some embodiments, the platform can comprise an additional arm, grip, and/or other means of interacting with the container. This arm, grip, and/or other means can be in addition to or in lieu of a frame, dolly lip, or topless enclosure. In some embodiments, the platform and/or container transporter can comprise a grip controlled by one or more actuators, which uses an RFID system to interact with and secure a container. For example, a grip effectuated by one or more actuators can extend from the container transporter and use a RFID sensor to detect an RFID tag on a refuse container, thereby locating and securing the refuse container.

As seen in **FIG. 2**, an example container transporter **201** can include a grip arm **203** or chassis **219** that comprise one or more communicators. For example, the grip arm **203** can comprise a RFID sensor that can detect an RFID tag on a container. As an additional example, the chassis **219** can contain a wireless communication device configured to interact with another wireless communication device, for example, a cell phone, that can allow control or manipulation of the container transporter and its components. The grip arm **203** or chassis **219** can additionally have an RFID sensor that interacts with a parking or docking location. For example, the RFID sensor can guide the container transporter to its parking or docking location, allowing for, for example, storage, charging, or protection from the elements. Embodiments of the container transporter can comprise a communicator. The communicator or communication devices can interact with, for example, garage doors, home gates, a parking or docking location, and/or a mobile phone. Such communication devices can be of the standard variety including, but not limited to, infrared, RFID, and other communication means. As an additional example, an RFID system can be used to allow the container transporter to interact with a container at one or more points. As yet another example, a container transporter can use an RFID system to interact with a refuse container with wheels, such as a locally mandated refuse container fitted

with a RFID tag, using the refuse container's intended design to tilt and transport the refuse container to and from a desired location. An RFID system can additionally be used to navigate the container transporter between one or more locations.

Embodiments of the container transporter can include a parking or docking location. In some embodiments the parking or docking location includes a platform for supporting the container transporter. Side rails can extend from the platform to guide entry of the refuse container, and can include a tapered design to facilitate easier entry. The platform can include non-skid surfaces to insure traction of the wheels and/or tracks located at the rear of refuse container. In the event a wheel at the front of the container transporter is the driving wheel, a further non-skid surface would be incorporated for engagement by this wheel. If the charging unit for the battery or batteries in the container transporter is mounted at the bottom of the refuse container, an induction charger interface can be located upon platform to effect charging of the battery or batteries. In some embodiments, a cord can be used to connect a charging unit, such as an electrical outlet, and a battery powering the container transporter. A module can be located at the rear of the parking or docking location to house the various components attendant the refuse container. A keypad/ display module can be mounted on a stanchion extending from module. It can provide means for controlling operation of the parking or docking location and to provide visual cues of various functions to be performed and being performed. A power cord can be used to interconnect module with a source of power. Additionally, a cord can be used to interconnect module and the equipment therein with the internet or with a telephone wire. The parking or docking location can additionally incorporate wireless internet or other wireless connectivity, such as using short-wavelength UHF radio waves, for example in the ISM band from 2.4 to 2.485 GHz. In some embodiments the parking or docking location provides the capability of maintaining the batteries within the container transporter fully charged and provides the capability for controlling operation and travel of the container transporter in accordance with a preset pattern. Additionally, it can provide an indication of the status of various components and the capability for interconnecting the control unit of the container transporter with a remote location.

In some embodiments, the container transporter can comprise various modules and sensors for determining operation of certain components in the container transporter, which can

be incorporated in the parking station. Communication there between can be provided by wireless communications, as reflected by antennae.

In some embodiments, the container transporter can comprise various other modules that can be incorporated into the parking station. In particular, various modules and certain functions that can be performable by keypad/display. A wireless module includes several components, as listed, for communicating with the container transporter. Various sensors can be incorporated. Power module includes various components relating to charging and maintenance of the battery or batteries embodied within the refuse container. The parking or docking location can include a connector for charging by a solar panel and various other functions. Operation of these modules is controlled by processor module, which can be in the form of a microprocessor, as represented by a central processor unit. The processor module is interconnected with the remaining modules through a communication bus. Additionally, a power bus, represented by triple lines, provides power to the modules.

As shown in **FIGS. 3A** and **3B**, embodiments of the present invention can further comprise methods of transporting a container. For example, in some embodiments, the grip arm **203** and dolly lip **221** of a container transporter can interact with a refuse container handle **303** and refuse container base **305**, respectively. This interaction can be accomplished through one or more actions taken together, in succession, or independently. For example the wheels **209, 211** of a container transporter can position the container transporter so that the grip arm **203** is proximate a refuse container. The grip arm **203** can then extend and/or tilt to interact with a refuse container handle. As an additional example, as seen in **FIG. 3B**, the grip arm **203** can capture the refuse container handle **303**, tipping the refuse container into a position where the friction from the refuse container base **305** is no longer creating sufficient friction to prevent the refuse container's wheels from rotating. Similarly, the dolly lip **221** can extend, tilt, and/or lift on the refuse container base **305**, providing a second contact point for the container transporter with the refuse container. Once the refuse container's wheel can rotate, the container transporter can guide, pull, or otherwise move the refuse container to a desired location using the container transporter's motor system and/or steering system. While, a refuse container is used as an example, and is shown in **FIGS. 3A** and **3B**, a person of skill in the art will appreciate that the container transporter is not limited to such examples.

Those of skill in the art will recognize that the method steps described herein can be performed in various orders, and thus the order of steps described above is not limiting. For example, the container transporter can have only one point of contact with a container, such as the grip arm **203** or the dolly lip **221**. As an additional example, the dolly lip **221** can make the initial contact with the container, followed by the grip arm **203**.

The container transporter can also travel to numerous positions, incorporating multiple steps in multiple order. Embodiments and examples in this paragraph are not exhaustive. In some embodiments, the container transporter can travel from its parking or docking location to the desired container, capture the container, move itself and the container to a desired second location, and return to parking or docking location. In another embodiment, after moving itself and the container to a desired second location, the container transporter can stay with the container until a desired time or until a desired event has occurred, and then travel with the container back to a parking or docking location. The desired event can be sensed by one or more sensor of the container transporter. For example, a weight or resistance sensor can detect that the container has been emptied or removed. In yet another embodiment, the container transporter, after moving itself and the container to a desired second location, can move itself to a third location, wait for a desired time or event, again retrieve the container, and transport itself and the container to the parking or docking location. For example, the container transporter can move to a third location proximate a location designated for refuse pickup, but out of the way of the container and any interaction from a third party, for example, a trash collector. In still another embodiment, the container transporter can transport the container from a desired second location back to the same location it originally retrieved the container from, to a new location, to the area proximate the container transporter's parking or docking location, or the container transporter can remain in contact with the container while it returns to its parking or docking location.

As described above, in some embodiments, a container transporter need not comprise all or even some of the elements shown **FIGS. 2, 3A, or 3B**. The Figures and the examples provided above are provided merely to illustrate one or more embodiment of the disclosed container transporter. Thus, while certain systems and methods related to container transporters, and specifically refuse container transporters, have been disclosed, many modifications, additions, and deletions may be made without departing from the spirit and scope of the system, method, and their equivalents, as set forth in the claims. The embodiments and claims disclosed

herein are further capable of other embodiments and of being practiced and carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein are for the purposes of description and should not be regarded as limiting the claims.

5 Accordingly, those skilled in the art will appreciate that the conception upon which the application and claims are based may be readily utilized as a basis for the design of other devices, methods, and systems for carrying out the several purposes of the embodiments and claims presented in this application. It is important, therefore, that the claims be regarded as including such equivalent constructions.

## CLAIMS

What is claimed is:

1. A container transporter comprising:
  - a motor system;
  - a steering system;
  - a sensor system for detecting an ambient condition;
  - an intelligence system; and,
  - a platform suited to a container.
2. The container transporter of claim 1, wherein the platform comprises a grip arm.
3. The container transporter of claim 1, wherein the platform comprises a dolly lip.
4. The container transporter of claim 1, wherein the platform comprises a topless enclosure.
5. The container transporter of claim 1, wherein the container transporter additionally comprises at least one sensor system for detecting a container.
6. The container transporter of claim 5, wherein the sensor system comprises an RFID sensor.
7. The container transporter of claim 5, wherein the sensor system comprises a resistance sensor.
8. The container transporter of claim 5, wherein the sensor system comprises an RFID sensor and a resistance sensor.
9. The container transporter of claim 1, the container transporter additionally comprising a communicator for interacting with a paired communicator.
10. The container transporter of claim 1, wherein the container transporter is configured to dock with a station.
11. The container transporter of claim 10, wherein the docking station is configured to provide an electric charge to the container transporter when docked.
12. The container transporter of claim 11, wherein the charging station roof contains a solar power system configured to provide an electric charge to the container transporter.
13. A container transporter comprising:
  - a motor system comprising at least one wheel;

a steering system;

an intelligence system;

a platform suited to a container, the platform comprising:

    a grip arm having

        a first actuator configured to affect the height of the grip arm;

        a second actuator configured to affect the pitch of the grip arm;

        at least one resistance sensor configured to detect the container,

        at least one RFID sensor configured to detect an RFID tag on the container; and,

        a grip configured to capture the container;

    a dolly lip having at least one actuator;

    a communicator for interacting with a paired communicator, the communicator configured of relaying messages to the intelligence system;

    a docking station configured to dock with the container transporter and configured to provide an electric charge to the container transporter, wherein the docking station comprises a solar power system configured to transfer energy from the docking station to the container transporter.

14. A method for transporting a container from a storage location to a location for discharge of

the contents of the container , and return, the method comprising:

    energizing a container transporter to cause travel of the container transporter from a parking or docking location to an area proximate the container;

    interacting with the container using a platform that allows the container transporter to move the container;

    moving the container to the location for discharge of the contents of the container; and,

    returning the container transporter to the parking or docking location.

15. The method of claim 14, further comprising a step where the container transporter moves to a new location prior to returning to the parking or docking location.
16. The method of claim 15, further comprising a step where the container transporter moves from the new location to the location for discharge of the contents of the container, interacts with the container using the platform, and returns the container to the storage location prior to returning to the parking or docking location.
17. The method of claim 14, wherein the step of interacting with the container using a platform comprises use of a gripping arm.
18. The method of claim 14, wherein the step of interacting with the container using a platform comprises use of a dolly lip.
19. The method of claim 14, wherein the step of interacting with the container using a platform comprises use of a topless enclosure.
20. The method of claim 14, wherein the step of interacting with the container using a platform results in tilting the container.
21. The method of claim 14, further including charging a battery included in the container transporter at the parking or docking location.

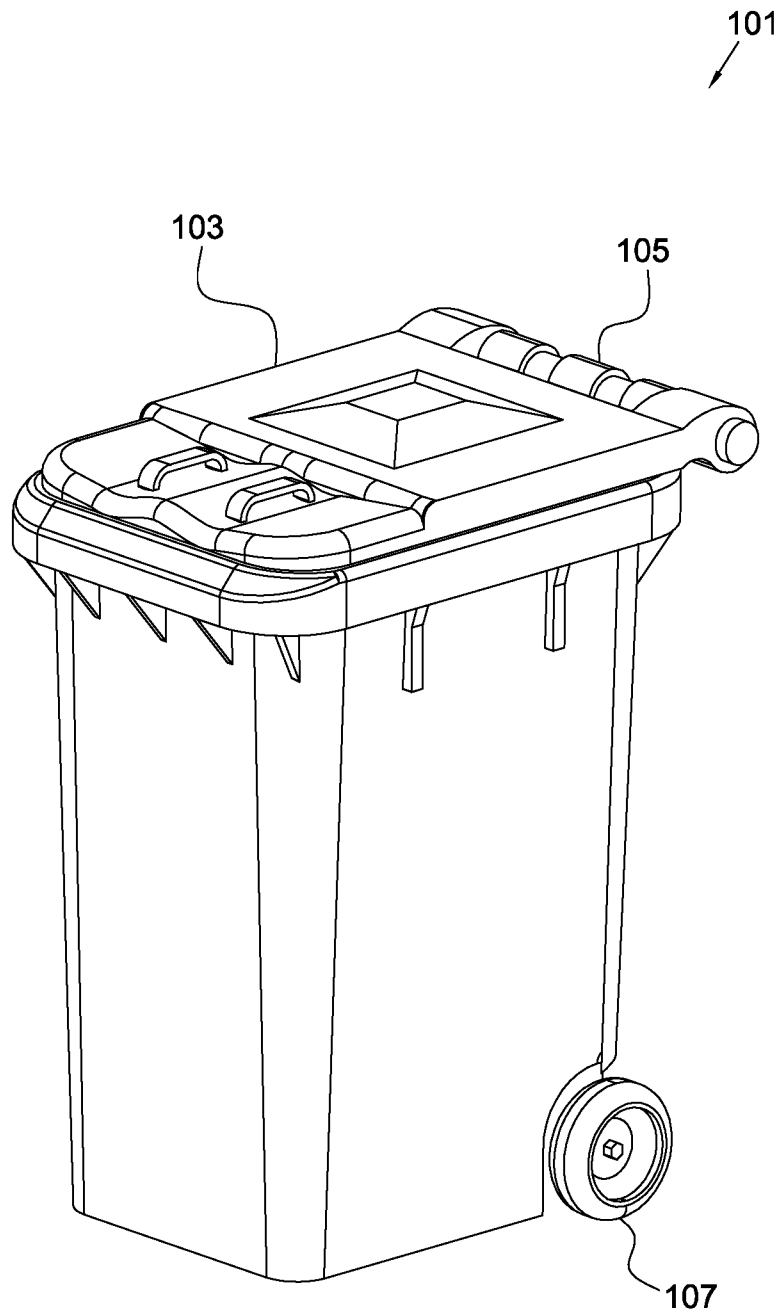
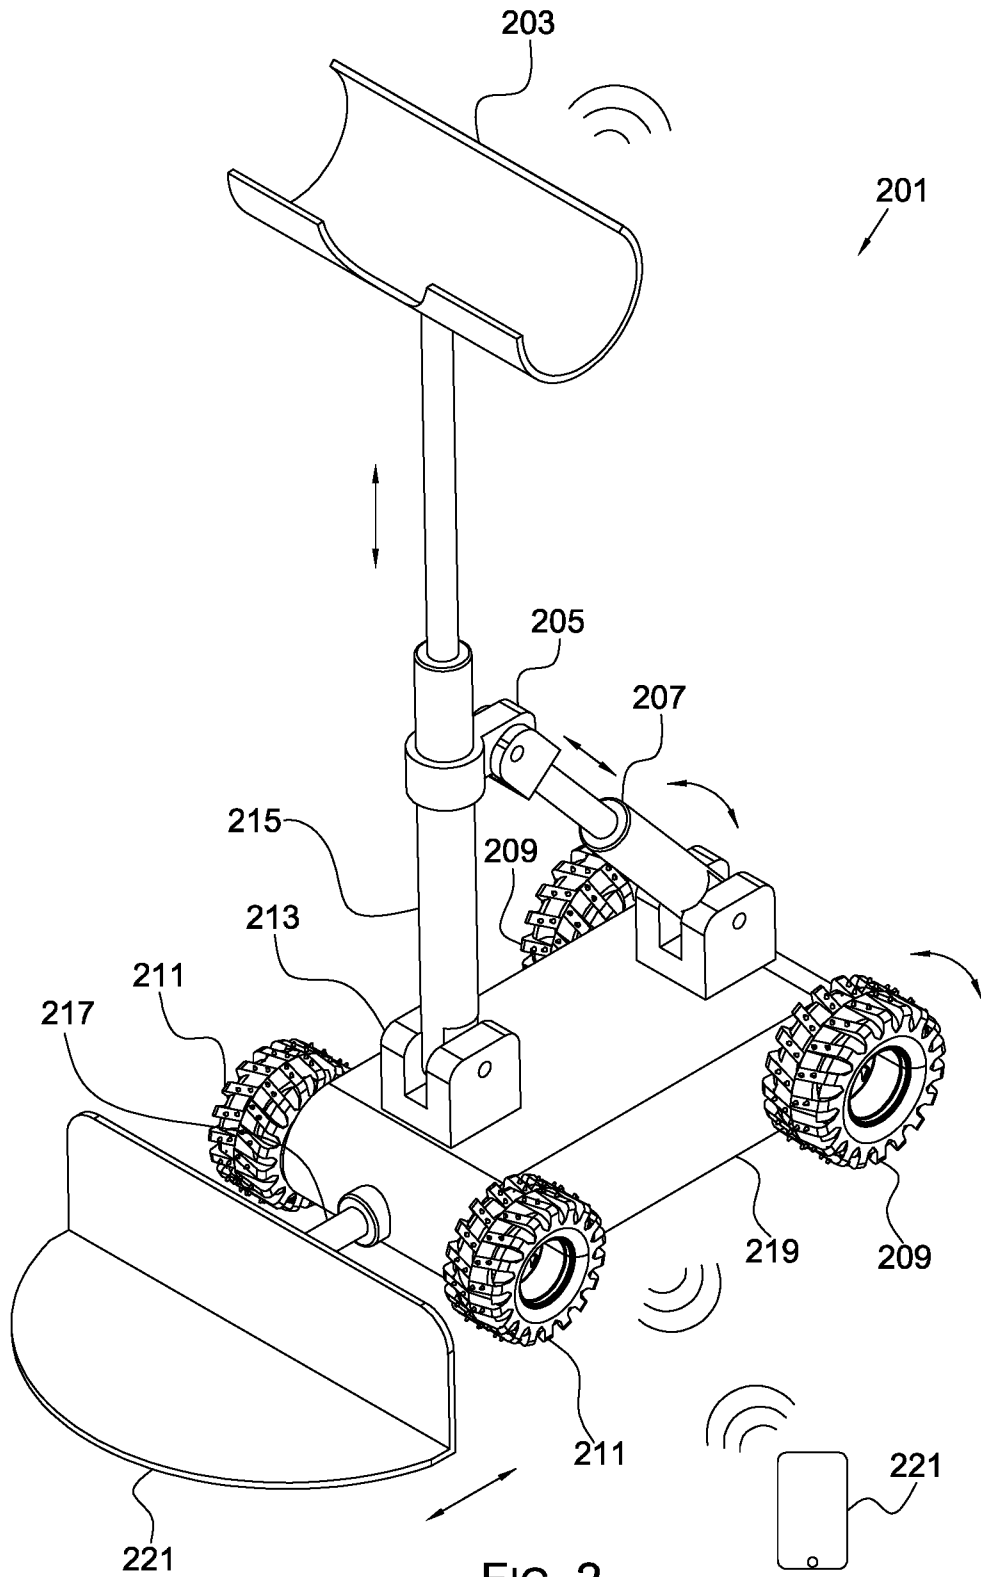


FIG. 1  
(PRIOR ART)



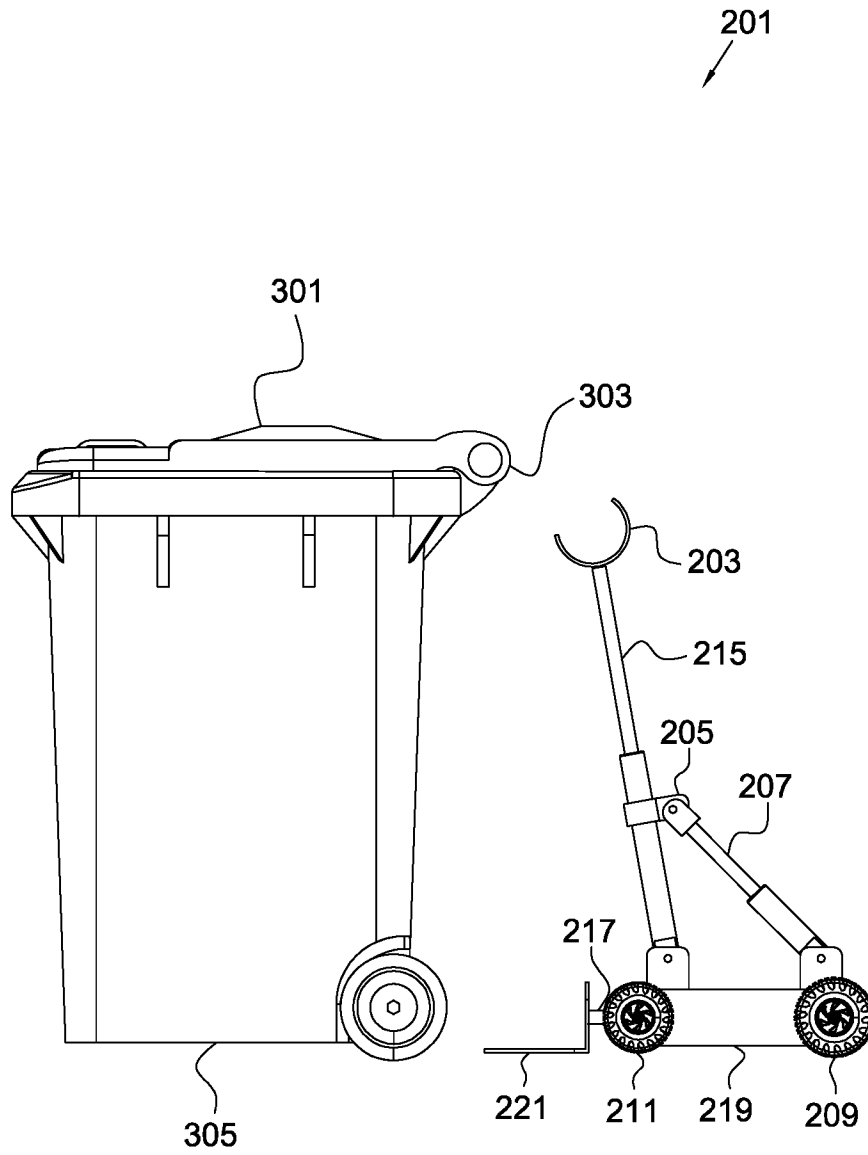


FIG. 3A

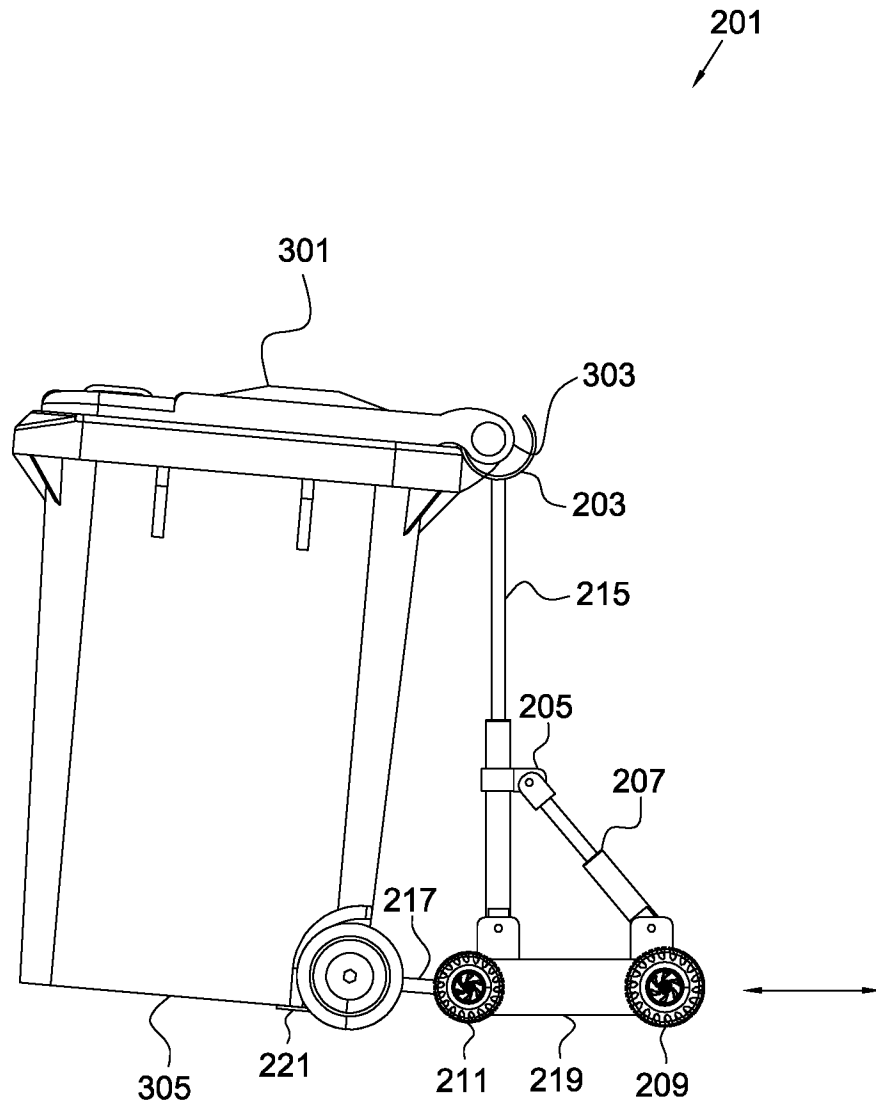


FIG. 3B

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US18/12582

## A. CLASSIFICATION OF SUBJECT MATTER

IPC - B62B 3/00, 3/04; B65F 1/00, 1/12, 1/14, 3/00, 3/02, 3/04; B65G 65/23; G06K 7/08 (2018.01)  
 CPC - B62B 3/00, 3/04, 3/0612, 3/0625, 5/0033; B65F 1/00, 1/12, 1/14, 1/1452, 1/1468, 3/00, 3/02, 3/04; B65G 65/23; G06K 7/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	WO 2015/120384 A1 (THE COCA-COLA COMPANY); 13 August 2015 (13.08.2015); figures 13-15; claim 1; paragraphs [00152]; [00166], [00167]	1-2, 4-5, 7, 9-12 ----- 3, 6, 8, 13-21
Y	US 5,565,846 A (GEISZLER, T. D., et al.); 15 October 1996 (15.10.1996); figure 1; column 4, lines 1-10	6, 8, 13
Y	US 2005/0127625 A1 (ZIMMER, J.); 16 June 2005 (16.06.2005); figure 1; figure 6; abstract	3, 13, 18
Y	EP 2192021 A2 (HOLDINGELSKABET MKR FINANS AP); 02 June 2010 (02.06.2010); figure 3; abstract; paragraphs [0025], [0026]	14-21
Y	US 2016/0260161 A1 (WAL-MART STORES, INC.); 08 September 2016 (08.09.2016); abstract; paragraphs [0029], [0087], [0091]	16

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

09 March 2018 (09.03.2018)

Date of mailing of the international search report

22 MAR 2018

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents  
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300  
PCT OSP: 571-272-7774