

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/027938 A1

(43) International Publication Date
20 February 2014 (20.02.2014)

WIPO | PCT

(51) International Patent Classification:
H04W 76/04 (2009.01) *H04L 1/06* (2006.01)

(21) International Application Number:
PCT/SE2013/050486

(22) International Filing Date:
3 May 2013 (03.05.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/682,547 13 August 2012 (13.08.2012) US
61/694,519 29 August 2012 (29.08.2012) US
61/702,373 18 September 2012 (18.09.2012) US

(71) Applicant: TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; SE-164 83 Stockholm (SE).

(72) Inventors: NAMMI, Sairamesh; Ringstedsgatan 39, S-164 48 Stockholm (SE). LIDIAN, Namir; Bygatan 37, S-171 49 Solna (SE). KONUSKAN, Cagatay; Franzéngatan 10, S-112 17 Stockholm (SE).

(74) Agent: AYOUB, Nabil; Ericsson AB, Patent Unit Kista RAN2, SE-16480 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHODS OF MAPPING RETRANSMISSIONS RESPONSIVE TO BUNDLED NACK MESSAGES AND RELATED DEVICES

Figure 1

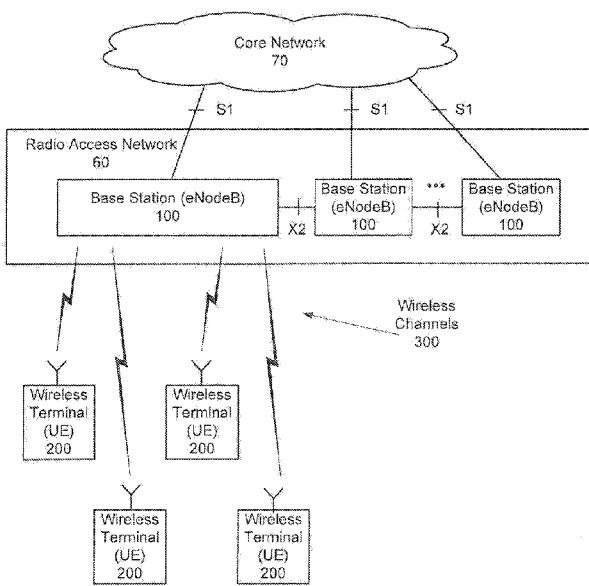

(57) Abstract: A method of transmitting data from a network node to a wireless terminal may include transmitting first and second data blocks over respective first and second MIMO layers to the wireless terminal during a first MIMO transmission time interval (TTI). Feedback may be received from the wireless terminal for the first MIMO TTI with the feedback including first and second ACK-NACK codewords that map to the respective first and second MIMO layers. Responsive to the network node being transmit buffer limited for the wireless terminal and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, a discontinuous transmission indicator for the first MIMO layer may be transmitted to the wireless terminal, and the second data block may be retransmitted over the second MIMO layer to the wireless terminal during a second MIMO TTI after transmitting the discontinuous transmission indicator.

WO 2014/027938 A1

METHODS OF MAPPING RETRANSMISSIONS RESPONSIVE TO BUNDLED NACK MESSAGES AND RELATED DEVICES

5

TECHNICAL FIELD

[0001] The present disclosure is directed to wireless communications and, more particularly, to multiple-input-multiple-output (MIMO) wireless communications and related network nodes and wireless terminals.

10

BACKGROUND

[0002] In a typical cellular radio system, wireless terminals (also referred to as user equipment unit nodes, UEs, and/or mobile stations) communicate via a radio access network (RAN) with one or more core networks. The RAN covers a geographical area which is divided into cell areas, with each cell area being served by a radio base station (also referred to as a RAN node, a "NodeB", and/or enhanced NodeB "eNodeB"). A cell area is a geographical area where radio coverage is provided by the base station equipment at a base station site. The base stations communicate through radio communication channels with UEs within range of the base stations.

[0003] Moreover, a cell area for a base station may be divided into a plurality of sectors surrounding the base station. For example, a base station may service three 120 degree sectors surrounding the base station, and the base station may provide a respective directional transceiver and sector antenna array for each sector. Stated in other words, a base station may include three directional sector antenna arrays servicing respective 120 degree base station sectors surrounding the base station.

[0004] Multi-antenna techniques can significantly increase capacity, data rates, and/or reliability of a wireless communication system as discussed, for example, by Telatar in "Capacity Of Multi-Antenna Gaussian Channels" (European Transactions On Telecommunications, Vol. 10, pp. 585-595, Nov. 1999). Performance may be improved if both the transmitter and the receiver for a base station sector are equipped with multiple antennas (e.g., an sector antenna array) to provide a multiple-input multiple-output (MIMO) communication channel(s) for the base station sector. Such systems and/or related techniques are commonly referred to as MIMO. The LTE standard is currently evolving with enhanced MIMO support and MIMO antenna deployments. A spatial multiplexing mode is provided for relatively high data rates in more favorable channel conditions, and a transmit diversity

mode is provided for relatively high reliability (at lower data rates) in less favorable channel conditions.

[0005] In a downlink from a base station transmitting from a sector antenna array over a MIMO channel to a wireless terminal in the sector, for example, spatial multiplexing (or SM) may allow the simultaneous transmission of multiple symbol streams over the same frequency from the base station sector antenna array for the sector. Stated in other words, multiple symbol streams may be transmitted from the base station sector antenna array for the sector to the wireless terminal over the same downlink time/frequency resource element (TFRE) to provide an increased data rate. In a downlink from the same base station sector transmitting from the same sector antenna array to the same wireless terminal, transmit diversity (e.g., using space-time codes) may allow the simultaneous transmission of the same symbol stream over the same frequency from different antennas of the base station sector antenna array. Stated in other words, the same symbol stream may be transmitted from different antennas of the base station sector antenna array to the wireless terminal over the same time/frequency resource element (TFRE) to provide increased reliability of reception at the wireless terminal due to transmit diversity gain.

[0006] Four layer MIMO transmission schemes are proposed for High-Speed-Downlink-Packet-Access (HSDPA) within Third Generation Partnership Project (3GPP) standardization. Accordingly, up to 4 channel encoded transport data blocks (sometimes referred to as transport data block codewords) may be transmitted using a same TFRE when using 4-branch MIMO transmission. Because ACK/NACK signaling and/or channel encoding for each transport data block to be transmitted during a same TFRE may require wireless terminal feedback (e.g., as ACK/NACK and/or CQI or channel quality information), feedback to define ACK/NACK and/or channel encoding for 4 transport data blocks may be required when using 4-branch MIMO transmission. Feedback signaling when using 4-branch MIMO transmission may thus be undesirably high, for example, because different MIMO layers may be received at a wireless terminal during a same TFRE with different qualities, signal strengths, error rates, etc.

30

SUMMARY

[0007] It may therefore be an object to address at least some of the above mentioned disadvantages and/or to improve performance in a wireless communication system. Some embodiments of present inventive concepts, for example, may provide improved HARQ retransmission gain(s) without significantly increasing delay(s).

[0008] According to some embodiments of inventive concepts, a method of transmitting data from a network node to a wireless terminal may include transmitting first and second data blocks over respective first and second MIMO layers to the wireless terminal during a first MIMO transmission time interval (TTI). Feedback may be received from the 5 wireless terminal for the first MIMO TTI with the feedback including first and second ACK-NACK codewords that map to the respective first and second MIMO layers. Responsive to the network node being transmit buffer limited for the wireless terminal and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, a discontinuous transmission indicator for the first MIMO layer may be transmitted 10 to the wireless terminal, and the second data block may be retransmitted over the second MIMO layer to the wireless terminal during a second MIMO TTI after transmitting the discontinuous transmission indicator.

[0009] By using a discontinuous transmission indicator when the base station is transmit buffer limited with respect to the wireless terminal, communication and/or 15 processing resources may be conserved at the base station and/or at the wireless terminal while supporting retransmission of non-acknowledged data.

[0010] Transmitting the discontinuous transmission indicator may include transmitting the discontinuous transmission indicator over a downlink signaling channel, and retransmitting the second data block may include retransmitting the second data block over a 20 downlink traffic channel. For example, the downlink signaling channel may be a High Speed Shared Control Channel (HS-SCCH), and the downlink traffic channel may be a High Speed Physical Downlink Shared Channel (HS-PDSCH).

[0011] According to some embodiments, the discontinuous transmission indicator may be transmitted as a bit pattern, such as a 111111 bit pattern, in a transport block size field 25 of the HS-SCCH downlink signaling channel for the first MIMO layer. Because the 111111 bit pattern is not used as a transport block size (TBS) code and because no transport block size needs to be communicated for a MIMO layer(s) and/or HARQ process subject to discontinuous transmission, a discontinuous transmission indicator can be transmitted to the wireless terminal without increasing communication resources used for downlink signaling.

30 According to some other embodiments, the discontinuous transmission indicator may be transmitted as a bit pattern, such as a 11110 bit pattern or a 11111 bit pattern, in a modulation and transmission rank field of the HS-SCCH downlink signaling channel.

[0012] In addition, a third data block may be transmitted over a third MIMO layer to the wireless terminal during the first MIMO transmission time interval (TTI), with the second

ACK-NACK codeword mapping to the second and third MIMO layers. Responsive to the network node being transmit buffer limited for the wireless terminal and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, the third data block may be retransmitted over the third MIMO layer to the wireless

5 terminal during the second MIMO TTI after transmitting the discontinuous transmission indicator. A fourth data block may also be transmitted over a fourth MIMO layer to the wireless terminal during the first MIMO transmission time interval, with the first ACK-NACK codeword mapping to the first and fourth MIMO layers. Moreover, retransmitting the second and third data blocks may include retransmitting the second and third data blocks
10 without retransmitting the first and fourth data blocks during the second MIMO TTI while maintaining a MIMO transmission rank of the first MIMO TTI for the second MIMO TTI.

[0013] Responsive to the first and second ones of the ACK-NACK codewords being Negative-Acknowledgements (NACKs), the first and second data blocks may be transmitted over the respective first and second MIMO layers to the wireless terminal during a second
15 MIMO TTI.

[0014] The second data block may be retransmitted without retransmitting the first data block during the second MIMO TTI while maintaining a MIMO transmission rank of the first MIMO TTI for the second MIMO TTI.

[0015] According to some other embodiments of inventive concepts, a base station of
20 a radio access network may include a transceiver configured to provide communications over a wireless channel with a wireless terminal, and a processor coupled to the transceiver. More particularly, the processor may be configured to transmit first and second data blocks through the transceiver over respective first and second MIMO layers to the wireless terminal during a first MIMO transmission time interval (TTI) and to receive feedback through the
25 transceiver from the wireless terminal for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords that map to the respective first and second MIMO layers. The processor may be further configured to transmit a discontinuous transmission indicator for the first MIMO layer through the transceiver to the wireless terminal responsive to the network node being transmit buffer limited for the wireless terminal and responsive to the
30 first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK. In addition, the processor may be configured to retransmit the second data block through the transceiver over the second MIMO layer to the wireless terminal during a second MIMO TTI after transmitting the discontinuous transmission indicator responsive to the network node being transmit buffer limited for the wireless terminal and responsive to the

first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK.

[0016] The processor may be configured to transmit discontinuous transmission indicator over a downlink signaling channel, and to retransmit the second data block over a downlink traffic channel. For example, the downlink signaling channel may be a High Speed Shared Control Channel (HS-SCCH), and the downlink traffic channel may be a High Speed Physical Downlink Shared Channel (HS-PDSCH).

[0017] According to some embodiments, the discontinuous transmission indicator may be transmitted as a bit pattern, such as a 111111 bit pattern, in a transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

[0018] According to still other embodiments of inventive concepts, a method of transmitting data from a network node to a wireless terminal may include transmitting first and second data blocks over respective first and second MIMO layers to the wireless terminal during a first MIMO transmission time interval (TTI), and receiving feedback from the wireless terminal for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords that map to the respective first and second MIMO layers. Responsive to the network node being transmit buffer limited for the wireless terminal, the first and second data blocks may be transmitted over the respective first and second MIMO layers to the wireless terminal during a second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK).

[0019] A third data block may be transmitted over a third MIMO layer to the wireless terminal during the first MIMO transmission time interval (TTI), with the second ACK-NACK codeword mapping to the second and third MIMO layers. Responsive to the network node being transmit buffer limited for the wireless terminal, the third data block may be retransmitted over the third MIMO layer to the wireless terminal during the second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK).

[0020] In addition, a fourth data block may be transmitted over a fourth MIMO layer to the wireless terminal during the first MIMO transmission time interval (TTI), with the first ACK-NACK codeword mapping to the first and fourth MIMO layers. Responsive to the network node being transmit buffer limited for the wireless terminal, the fourth data block may be retransmitted over the fourth MIMO layer to the wireless terminal during the second

MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK).

[0021] Responsive to the first and second ones of the ACK-NACK codewords being

5 Negative-Acknowledgements (NACKs), the first and second data blocks may be transmitted over the respective first and second MIMO layers to the wireless terminal during a second MIMO TTI.

[0022] According to yet other embodiments of inventive concepts, a base station of a

radio access network may include a transceiver configured to provide communications over a 10 wireless channel with a wireless terminal, and a processor coupled to the transceiver. More particularly, the processor may be configured to transmit first and second data blocks through the transceiver over respective first and second MIMO layers to the wireless terminal during a first MIMO transmission time interval (TTI), and to receive feedback through the transceiver from the wireless terminal for the first MIMO TTI with the feedback including

15 first and second ACK-NACK codewords that map to the respective first and second MIMO layers. The processor may be further configured to retransmit the first and second data blocks through the transceiver over the respective first and second MIMO layers to the wireless terminal during a second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK) responsive to the network node being 20 transmit buffer limited for the wireless terminal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The accompanying drawings, which are included to provide a further

25 understanding of the disclosure and are incorporated in and constitute a part of this application, illustrate certain non-limiting embodiment(s) of the present inventive concepts. In the drawings:

[0024] Figure 1 is a block diagram of a communication system that is configured according to some embodiments;

30 **[0025]** Figure 2 is a block diagram illustrating a base station and a wireless terminal according to some embodiments of Figure 1;

[0026] Figure 3A is a message sequence chart for a MIMO communication system;

[0027] Figure 3B is illustrates a feedback channel report format of Figure 3A;

[0028] Figure 4 is a block diagram illustrating elements/functionalities of base station processors according to some embodiments of Figure 2;

[0029] Figure 5 is a block diagram illustrating elements/functionalities of wireless terminal processors according to some embodiments of Figure 2;

5 **[0030]** Figure 6 illustrates schematically a medium access control (MAC) entity in a wireless terminal (UE);

[0031] Figures 7A and 7B are tables illustrating combinations of sharing HARQ processes between multiple MIMO data streams for rank/layer 3 and 4 MIMO transmissions;

10 **[0032]** Figures 8A and 8B are flow charts illustrating operations of base stations and wireless terminals according to some embodiments;

[0033] Figure 9 is a flow chart illustrating base station operations according to some embodiments;

[0034] Figures 10, 11, 12, and 13 are tables illustrating MIMO rank selection according to some embodiments;

15 **[0035]** Figure 14 is a table illustrating allocations of two HARQ processes to MIMO data layers/streams for rank 1, 2, 3, and 4 MIMO transmission/reception according to some other embodiments;

[0036] Figures 15, 16, 17, and 18 are tables illustrating MIMO rank selection according to some embodiments;

20 **[0037]** Figure 19 is a flow chart illustrating operations for retransmissions according to some embodiments of present inventive concepts;

[0038] Figures 20A, 20B, and 20C are tables illustrating retransmission for different ranks according to embodiments of Figure 19;

25 **[0039]** Figure 21 is a flow chart illustrating operations for retransmissions according to some other embodiments of present inventive concepts;

[0040] Figures 22A, 22B, and 22C are tables illustrating retransmission for different ranks according to embodiments of Figure 21;

[0041] Figures 23A, 23B, 23C, and 23D are block diagrams illustrating downlink signaling structures according some embodiments; and

30 **[0042]** Figures 24 and 25 are tables illustrating modulation and rank bit patterns according to some embodiments.

DETAILED DESCRIPTION

[0043] Present inventive concepts will now be described more fully hereinafter with reference to the accompanying drawings, in which examples of embodiments of inventive concepts are shown. Present inventive concepts may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

5 Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of present inventive concepts to those skilled in the art. It should also be noted that these embodiments are not mutually exclusive. Components from one embodiment may be tacitly assumed to be present/used in another embodiment.

[0044] For purposes of illustration and explanation only, these and other 10 embodiments of present inventive concepts are described herein in the context of operating in a RAN that communicates over radio communication channels with wireless terminals (also referred to as UEs). It will be understood, however, that present inventive concepts are not limited to such embodiments and may be embodied generally in any type of communication network. As used herein, a wireless terminal (also referred to as a UE) can include any 15 device that receives data from a communication network, and may include, but is not limited to, a mobile telephone ("cellular" telephone), laptop/portable computer, pocket computer, hand-held computer, and/or desktop computer.

[0045] In some embodiments of a RAN, several base stations can be connected (e.g., 20 by landlines or radio channels) to a radio network controller (RNC). The radio network controller, also sometimes termed a base station controller (BSC), supervises and coordinates various activities of the plural base stations connected thereto. The radio network controller is typically connected to one or more core networks.

[0046] The Universal Mobile Telecommunications System (UMTS) is a third 25 generation mobile communication system, which evolved from the Global System for Mobile Communications (GSM), and is intended to provide improved mobile communication services based on Wideband Code Division Multiple Access (WCDMA) technology. UTRAN, short for UMTS Terrestrial Radio Access Network, is a collective term for the Node B's and Radio Network Controllers which make up the UMTS radio access network. Thus, UTRAN is essentially a radio access network using wideband code division multiple 30 access for UEs.

[0047] The Third Generation Partnership Project (3GPP) has undertaken to further evolve the UTRAN and GSM based radio access network technologies. In this regard, specifications for the Evolved Universal Terrestrial Radio Access Network (E-UTRAN) are ongoing within 3GPP. The Evolved Universal Terrestrial Radio Access Network (E-

UTRAN) comprises the Long Term Evolution (LTE) and System Architecture Evolution (SAE).

[0048] Note that although terminology from 3GPP (3rd Generation Partnership Project) LTE (Long Term Evolution) is used in this disclosure to exemplify embodiments of present inventive concepts, this should not be seen as limiting the scope of inventive concepts to only these systems. Other wireless systems, including WCDMA (Wideband Code Division Multiple Access), WiMax (Worldwide Interoperability for Microwave Access), UMB (Ultra Mobile Broadband), HSDPA (High-Speed Downlink Packet Access), GSM (Global System for Mobile Communications), etc., may also benefit from exploiting 10 embodiments of present inventive concepts disclosed herein.

[0049] Also note that terminology such as base station (also referred to as eNodeB or Evolved Node B) and wireless terminal (also referred to as UE or User Equipment) should be considered non-limiting and does not imply a certain hierarchical relation between the two. In general a base station (e.g., an "eNodeB") and a wireless terminal (e.g., a "UE") may be 15 considered as examples of respective different communications devices that communicate with each other over a wireless radio channel. While embodiments discussed herein may focus on wireless transmissions in a downlink from an eNodeB to a UE, embodiments of the inventive concepts may also be applied, for example, in the uplink.

[0050] Figure 1 is a block diagram of a communication system that is configured to 20 operate according to some embodiments of present inventive concepts. An example RAN 60 is shown that may be a Long Term Evolution (LTE) RAN. Radio base stations (e.g., eNodeBs) 100 may be connected directly to one or more core networks 70, and/or radio base stations 100 may be coupled to core networks 70 through one or more radio network controllers (RNC). In some embodiments, functionality of a radio network controller(s) may 25 be performed by radio base stations 100. Radio base stations 100 communicate over wireless channels 300 with wireless terminals (also referred to as user equipment nodes or UEs) 200 that are within their respective communication service cells (also referred to as coverage areas). The radio base stations 100 can communicate with one another through an X2 interface and with the core network(s) 70 through S1 interfaces, as is well known to one who 30 is skilled in the art.

[0051] Figure 2 is a block diagram of a base station 100 and a wireless terminal 200 of Figure 1 in communication over wireless channel 300 according to some embodiments of present inventive concepts. As shown, base station 100 may include transceiver 109 coupled between processor 101 and antenna array 117 (including multiple antennas), and memory 118

coupled to processor 101. Moreover, wireless terminal 200 may include transceiver 209 coupled between antenna array 217 and processor 201, and user interface 221 and memory 218 may be coupled to processor 201. Accordingly, base station processor 101 may transmit communications through transceiver 109 and antenna array 117 for reception at wireless

5 terminal processor 201 through antenna array 217 and transceiver 209. In the other direction, wireless terminal processor 201 may transmit communications through transceiver 209 and antenna array 217 for reception at base station processor 101 through antenna array 117 and transceiver 109. To support up to 4-branch MIMO (allowing parallel transmission of 4 layers/streams of data using a same TFRE), each of antenna arrays 117 and 217 may include 10 four (or more) antenna elements. Wireless terminal 200 of Figure 2, for example, may be a cellular radiotelephone, a smart phone, a laptop/netbook/tablet/handheld computer, or any other device providing wireless communications. User interface 211, for example, may include a visual display such as an liquid crystal display, a touch sensitive visual display, a keypad, a speaker, a microphone, etc.

15 **[0052]** For MIMO downlink transmissions from RAN 60 to wireless terminal 200, a codebook of precoding vectors (known at both RAN 60 and wireless terminal 200) is used to precode (e.g., to apply precoding weights to) the different data layers (data streams) that are transmitted in parallel from a sector antenna array(s) to the wireless terminal 200 during a same TFRE, and to decode the data layers (data streams) received in parallel during the same 20 TFRE at wireless terminal 200. The same codebook of precoding vectors may be stored in wireless terminal memory 218 and in base station memory 118. Moreover, wireless terminal 200 may estimate characteristics of each downlink channel to generate channel quality information (CQI), and CQI feedback from wireless terminal 200 may be transmitted to base station 100. This CQI feedback may then be used by the base station processor 101 to select: 25 transmission rank (i.e., a number of data layers/streams to be transmitted during a subsequent TFRE); transport data block length(s); channel code rate(s) to be used to channel encode different transport data blocks; modulation order(s); symbol to layer mapping schemes; and/or precoding vectors for respective downlink transmissions to the wireless terminal 200.

[0053] By way of example, base station antenna array 117 may include 4 antennas 30 and wireless terminal antenna array 217 may include four antennas so that wireless terminal 200 may receive up to four downlink data layers (data streams) from base station antenna array 117 during MIMO communications. In this example, the precoding codebook may include rank 1 precoding vectors (used when transmitting one downlink data stream from a base station sector antenna array 117 to wireless terminal 200), rank 2 precoding vectors

(used when transmitting two downlink data streams from a base station sector antenna array 117 to wireless terminal 200), rank 3 precoding vectors (used when transmitting three downlink data streams from a base station sector antenna array 117 to wireless terminal 200), and rank 4 precoding vectors (used when transmitting four downlink data streams from a base station sector antenna array 117 to wireless terminal 200). Precoding vectors may also be referred to, for example, as precoding codebook entries, precoding codewords, and/or precoding matrices.

5 **[0054]** An issue for four layer MIMO transmission schemes for HSDPA is what number of HARQ (Hybrid Automatic Repeat Request) codewords/processes should be supported. To reduce uplink and/or downlink signaling, two HARQ codewords/processes may be used in four layer MIMO transmission schemes for feedback relating to one, two, three, and four layer downlink transmissions. Use of two HARQ codewords/processes may be relatively easier to implement without significantly reducing performance (relative to use of four HARQ codewords/processes).

10 **[0055]** A Hybrid Automatic Repeat Request (HARQ) process(es) may be used in a wireless system to overcome transmission errors that cannot be corrected using a forward error correction code (also referred to as a channel code) alone. In some embodiments of a HARQ process, the HARQ process is mapped to one or more MIMO transmission layers, and the transmitting device (e.g., base station 100) attaches an error detection/correction code (e.g., a cyclic redundancy check or CRC code) to each transport data block (also referred to as a data block, data packet, packet, etc.) of a TTI/TFRE to provide error detection/correction. At the receiving device (e.g., at wireless terminal 200), the contents of each received transport data block may be validated using the respective error detection/correction code attached thereto. If the transport data block fails the error detection/correction validation, the receiving device may send a HARQ codeword including a negative acknowledgement NACK message (also referred to as a non-acknowledgement message) for the HARQ process back to the transmitting device to request a retransmission of the failed transport data block or blocks mapped to the HARQ process. A failed data block may be retransmitted until it is either decoded or until a maximum number of allowed retransmissions (e.g., four to six retransmissions) have occurred. If the transport data block passes the error detection/correction validation, a HARQ codeword including an acknowledgement ACK message is sent back to the transmitting device to acknowledge reception and correct decoding of the transport data block. A HARQ process may thus be mapped to one or more MIMO transmission layers, and for each TTI/TFRE, the HARQ

process may generate a HARQ ACK/NACK feedback message that is transmitted in a HARQ codeword of the feedback channel (e.g., HS-PDCCH).

[0056] As discussed in greater detail below, a wireless terminal 200 implementing HARQ functionality may include a soft buffer for each transport data block received during a TFRE so that originally transmitted and retransmitted transport data blocks may be combined before decoding to thereby improve system throughput. Depending on the way the originally transmitted and retransmitted transport data blocks are combined, HARQ systems/processes may be classified as chase combining or CC (retransmitting the same transport data block without additional information) or Incremental Redundancy or IR (transmitting the same transport data block with additional parity bits).

[0057] A single soft buffer may be used for layer/rank one MIMO transmission/reception (with one transport data block received during a TFRE), two soft buffers may be used for layer/rank two MIMO transmission/reception (with two transport data blocks received during a TFRE), three soft buffers may be used for layer/rank three MIMO transmission/reception (with three transport data blocks received during a TFRE), and four soft buffers may be used for layer/rank four MIMO transmission/reception (with four transport data blocks received during a TFRE). Each soft buffer stores a demodulator output for a transport data block before decoding to be used after a retransmission if the transport data block is not successfully decoded. For Release 7 MIMO supporting up to two rank/layer transmissions (with up to two transport data blocks transmitted to a UE during a TFRE), a HARQ process is provided for each soft buffer and thus for each transport data block. When two HARQ processes are mapped to three or four layer/rank MIMO transmission/reception, however, a mechanism to map UE receiver soft buffers to HARQ processes may be needed.

[0058] According to some embodiments discussed herein, methods may be provided to map functionalities between base station 100 transmission layers, wireless terminal 200 receiver layers (including respective soft buffers), and HARQ processes for situations when the number of supported HARQ processes is less than a number of MIMO transmission layers/ranks supported by the system (e.g., when rank/layer 3 and/or 4 MIMO transmissions are supported but only two HARQ processes are supported). With two HARQ processes, both HARQ ACK/NACK messages may be included in a HARQ codeword of the feedback channel (e.g., HS-DPCCH).

[0059] Figure 3A illustrates a message sequence between base station 100 and wireless terminal 200 in a MIMO communications system. As shown in Figure 3A, base station 100 transmits pilot signals over the downlink channel(s), and wireless terminal 200

estimates the downlink channel(s) at block 391 (for transmissions from base station 100 to wireless terminal 200) based on the pilot signals. Wireless terminal 200 generates (e.g., computes) channel state information at block 393 for the downlink channel(s), and wireless terminal 200 reports the channel state information to base station 100 over a feedback

5 channel. An example of a format for a feedback channel report for two reporting intervals is illustrated in Figure 3B, and Figure 3B shows that the feedback channel report may include a HARQ element/message/codeword (including acknowledge/ACK and/or negative-acknowledge/NACK information) and/or CQI/PCI (channel quality information and/or precoding control indicator) information.

10 **[0060]** More particularly, wireless terminal 200 may transmit CQI/PCI information (over the feedback channel) including a rank indicator requesting/recommending a MIMO transmission rank for subsequent downlink transmissions from base station 100 to wireless terminal 200. Base station processor 101 may select the requested/recommended MIMO rank or a different MIMO rank, and base station 100 may identify the selected MIMO rank 15 in downlink signaling transmitted to wireless terminal 200, for example, using a downlink signaling channel HS-SCCH (High-Speed Shared Control Channel). Base station 100 may then transmit one or more transport data blocks using respective MIMO streams over the downlink channel in a subsequent TFRE in accordance with the selected MIMO rank as downlink traffic, for example, using a downlink traffic channel HS-PDSCH (High-Speed 20 Physical Downlink Shared Channel). Based on success/failure decoding each received transport data block, wireless terminal 200 may generate respective HARQ ACK/NACK messages that are transmitted to base station 100 over the feedback channel.

25 **[0061]** Figure 4 is block diagram illustrating elements/functionalities of base station processor 101 of Figure 2 supporting two HARQ codeword MIMO with 4 channel encoders and up to four rank MIMO downlink transmission according to some embodiments. According to embodiments of Figure 4, four channel encoders CE1, CE2, CE3, and CE4 may be provided for four streams of transport data blocks B1, B2, B3, and B4, with symbols of one data input stream for wireless terminal 200 being mapped to as many as four different data streams. As shown, processor 101 may include transport data block generator 401, 30 channel encoder 403, modulator 405, layer mapper 407, spreader/scrambler 409, and layer precoder 411. In embodiments of Figure 4, channel encoder 403 may include channel encoders CE1, CE2, CE3, and CE4 for the four streams of transport data blocks B1, B2, B3, and B4, modulator 405 may include interleavers/modulators IM1, IM2, IM3, and IM4, and layer mapper 407 may be configured to map resulting symbols of the four streams to as many

as four different MIMO layers (streams) X1, X2, X3, and X4 as discussed in greater detail below. Moreover, adaptive controller 415 may be configured to control transport data block generator 401, channel encoder 403, modulator 405, layer mapper 407, and/or layer precoder 411 responsive to channel quality information (CQI) received as feedback from wireless terminal 200. Accordingly, symbols generated responsive to codewords respectively generated by channel encoders CE1, CE2, CE3, and CE4 using different channel coding (determined by adaptive controller 415 responsive to wireless terminal 200 feedback) may be interleaved and distributed (mapped) to 4 different MIMO layers. More particularly, symbols generated responsive to two data codewords CW (where a data codeword CW is a transport data block with additional channel coding and/or CRC bits) may be interleaved and then split between two different MIMO layers. According to some embodiments discussed herein, layer mapper 407 may perform a one-to-one mapping.

[0062] Base station processor 101, for example, may receive input data (e.g., from core network 70, from another base station, etc.) for transmission to wireless terminal 200, and transport data block generator 401 (including transport data block data generators TB1, TB2, TB3, and TB4) may provide a single stream of data blocks (for rank 1 transmissions) or separate the input data into a plurality of different streams of data blocks (for rank 2, rank 3, and rank 4 transmission). More particularly, for rank 1 transmissions (providing only 1 MIMO layer/stream), all input data may be processed through transport data block generator TB1 to provide a single stream of transport data blocks B1 (including individual transport data blocks b1-1, b1-2, b1-3, etc.) without using transport data block generators TB2, TB3, or TB4 and without generating other streams of transport data blocks B2, B3, or B4. For rank 2 transmissions (providing 2 MIMO layersstreams), transport data block generator TB1 may generate a stream of transport data blocks B1 (including individual transport data blocks b1-1, b1-2, b1-3, etc.), and transport data block generator TB3 may generate a stream of transport data blocks B3 (including individual transport data blocks b3-1, b3-2, b3-3, etc.) without using transport data block generators TB2 or TB4 and without generating other streams of transport data blocks B2 or B4. For rank 3 transmissions (providing 3 MIMO layersstreams), transport data block generator TB1 may generate a stream of transport data blocks B1 (including individual transport data blocks b1-1, b1-2, b1-3, etc.), transport data block generator TB2 may generate a stream of transport data blocks B2 (including individual transport data blocks b2-1, b2-2, b2-3, etc.), and transport data block generator TB3 may generate a stream of transport data blocks B3 (including individual transport data blocks b3-1, b3-2, b3-3, etc.), without using transport data block generator TB4 and without generating

another stream of transport data blocks B4. For rank 4 transmissions (providing 4 MIMO layers/streams), transport data block generator TB1 may generate a stream of transport data blocks B1 (including individual transport data blocks b1-1, b1-2, b1-3, etc.), transport data block generator TB2 may generate a stream of transport data blocks B2 (including individual transport data blocks b2-1, b2-2, b2-3, etc.), transport data block generator TB3 may generate a stream of transport data blocks B3 (including individual transport data blocks b3-1, b3-2, b3-3, etc.), and transport data block generator TB4 may generate a stream of transport data blocks B4 (including individual transport data blocks b4-1, b4-2, b4-3, etc.).

[0063] Channel encoder 403 (including channel encoders CE1, CE2, CE3, and CE4) may encode the stream/streams of data blocks B1, B2, B3, and/or B4 generated by transport data block generator 401 to provide respective streams of data codewords CW1 (including individual data codewords cw1-1, cw1-2, cw1-3, etc.), CW2 (including individual data codewords cw2-1, cw2-2, cw2-3, etc.), CW3 (including individual data codewords cw3-1, cw3-2, cw3-3, etc.), and/or CW4 (including individual data codewords cw4-1, cw4-2, cw4-3, etc.), for example, using turbo coding, convolutional coding, etc. Moreover, coding characteristics (e.g., coding rates) applied by channel encoders CE1, CE2, CE3, and CE4 may be separately determined by adaptive controller 415 responsive to wireless terminal 200 feedback (e.g., CQI regarding the downlink channel). For rank 1 transmissions, channel encoder 403 may generate a single stream of data codewords CW1 responsive to the stream of data blocks B1 using only channel encoder CE1. For rank 2 transmissions, channel encoder 403 may generate two streams of data codewords CW1 and CW3 responsive to respective streams of data blocks B1 and B3 using channel encoder CE1 and channel encoder CE3. For rank 3 transmissions, channel encoder 403 may generate three streams of data codewords CW1, CW2, and CW3 responsive to respective streams of data blocks B1, B2, and B3 using channel encoder CE1, channel encoder CE2, and channel encoder CE3. For rank 4 transmissions, channel encoder 403 may generate four streams of data codewords CW1, CW2, CW3, and CW4 responsive to respective streams of data blocks B1, B2, B3, and B4 using channel encoder CE1, channel encoder CE2, channel encoder CE3, and channel encoder CE4. According to some embodiments, channel encoders CE1, CE2, CE3, and/or CE4 may apply different coding characteristics (e.g., different coding rates) during rank 2, rank 3, and/or rank 4 transmissions to generate respective (differently coded) data codewords cw1-1, cw2-1, cw3-1, and/or cw4-1 including data to be transmitted during a same TFRE.

[0064] Modulator 405 (including interleaver/modulators IM1, IM2, IM3, and IM4) may interleave and modulate the stream/streams of data codewords CW1, CW2, CW3, and/or

CW4 generated by channel encoder 403 to provide respective streams of unmapped symbol blocks D1 (including unmapped symbol blocks d1-1, d1-2, d1-3, etc.), D2 (including unmapped symbol blocks d2-1, d2-2, d2-3, etc.), D3 (including unmapped symbol blocks d3-1, d3-2, d3-3, etc.), and/or D4 (including unmapped symbol blocks d4-1, d4-2, d4-3, etc.).

5 For rank 1 transmissions (providing only 1 MIMO layer/stream), modulator 405 may generate a single stream of unmapped symbol blocks D1 responsive to the stream of data codewords CW1 using only interleaver/modulator IM1. For rank 2 transmissions, modulator 405 may generate two streams of unmapped symbol blocks D1 and D3 responsive to respective streams of data codewords CW1 and CW3 using interleaver/modulators IM1 and 10 IM3. For rank 3 transmissions, modulator 405 may generate three streams of unmapped symbol blocks D1, D2, and D3 responsive to respective streams of data codewords CW1, CW2, and CW3 using interleaver/modulators IM1, IM2, and IM3. For rank 4 transmissions, modulator 405 may generate four streams of unmapped symbol blocks D1, D2, D3, and D4 responsive to respective streams of data codewords CW1, CW2, CW3, and CW4 using 15 interleaver/modulators IM1, IM2, IM3, and IM4. Modulator 405 may apply modulation orders responsive to input from adaptive controller 415 determined based on CQI feedback from wireless terminal 200.

[0065] In addition, each interleaver/modulator IM1, IM2, IM3, and/or IM4 may 20 interleave data of two or more codewords of a stream so that two or more consecutive unmapped symbol blocks of a respective stream include symbols representing data of the two or more consecutive codewords. For example, data of consecutive data codewords cw1-1 and cw1-2 of codeword stream CW1 may be interleaved and modulated to provide consecutive unmapped symbol blocks d1-1 and d1-2 of stream D1. Similarly, data of consecutive data codewords cw2-1 and cw2-2 of codeword stream CW2 may be interleaved 25 and modulated to provide consecutive unmapped symbol blocks d2-1 and d2-2 of stream D2; data of consecutive data codewords cw3-1 and cw3-2 of codeword stream CW3 may be interleaved and modulated to provide consecutive unmapped symbol blocks d3-1 and d3-2 of stream D3; and/or data of consecutive data codewords cw4-1 and cw4-2 of codeword stream CW4 may be interleaved and modulated to provide consecutive unmapped symbol blocks d4-1 and d4-2 of stream D4.

[0066] Symbols of streams of unmapped symbol blocks D1, D2, D3, and D4 may be mapped to respective streams of mapped symbol blocks X1, X2, X3, and X4 (for respective MIMO transmission layers), for example, using a one-to-one mapping. While one-to-one mapping is discussed by way of example, other mappings may be used provided that the

mapping function of layer mapper 407 is known to both base station 100 and wireless terminal 200.

[0067] Spreader/scrambler 409 may include four spreader/scramblers SS1, SS2, SS3, and SS4, and for each mapped symbol stream provided by layer mapper 407,

5 spreader/scrambler 409 may generate a respective stream of spread symbol blocks Y1, Y2, Y3, and Y4 (e.g., using a Walsh code). Layer precoder 411 may apply a MIMO precoding vector (e.g., by applying precoding weights) of the appropriate rank (based on wireless terminal feedback as interpreted by adaptive controller 415) to the streams of spread symbol blocks for transmission through transceiver 109 and antennas Ant-1, Ant-2, Ant-3, and Ant-4 of antenna array 117. According to some embodiments, with rank one transmissions, only first layer of elements (e.g., TB1, CE1, IM1, and/or SS1) of Figure 4 may be used; with rank two transmissions, two layers of elements (e.g., TB1, TB3, CE1, CE3, IM1, IM3, SS1, and/or SS3) of Figure 4 may be used; with rank three transmissions, three layers of elements (e.g., TB1, TB2, TB3, CE1, CE2, CE3, IM1, IM2, IM3, SS1, SS2, and/or SS3) of Figure 4 may be used; and with rank four transmissions, four layers of elements (e.g., TB1, TB2, TB3, TB4, CE1, CE2, CE3, CE4, IM1, IM2, IM3, and IM4, SS1, SS2, SS3, and/or SS4) of Figure 4 may be used. According to some other embodiments, with rank one transmissions, only a first layer of elements (e.g., TB1, CE1, IM1, and/or SS1) of Figure 4 may be used; with rank two transmissions, two layers of elements (e.g., TB1, TB2, CE1, CE2, IM1, IM2, SS1, and/or SS2) of Figure 4 may be used; with rank three transmissions, three layers of elements (e.g., TB1, TB2, TB3, CE1, CE2, CE3, IM1, IM2, IM3, SS1, SS2, and/or SS3) of Figure 4 may be used; and with rank four transmissions, four layers of elements (e.g., TB1, TB2, TB3, TB4, CE1, CE2, CE3, CE4, IM1, IM2, IM3, and IM4, SS1, SS2, SS3, and/or SS4) of Figure 4 may be used.

25 **[0068]** In embodiments of Figure 4, base station processor 101 may support two HARQ process/codeword MIMO with 4 channel encoders CE1-CE4. Using feedback from wireless terminal 200 (indicated by “feedback channel”), adaptive controller 415 chooses transport block length, modulation order, and coding rate (used by transport block generator 401, encoder 403, and/or modulator 405). Adaptive controller 415 also generates precoding 30 weight information used by layer precoder 411. Even though encoder 403 includes four channel encoders CE1-CE4, wireless terminal 200 may only provide feedback information for a maximum of two encoded transport block codewords. Stated in other words, wireless terminal 200 may provide one HARQ process/codeword for rank one transmissions (with one transport data blocks per TFRE using one downlink data streams), wireless terminal 200 may

provide two HARQ processes/codewords for rank two transmissions (with two transport data blocks per TFRE using two downlink data streams), wireless terminal 200 may provide two HARQ processes/codewords for rank three transmissions (with three transport data blocks per TFRE using three downlink data streams), and wireless terminal 200 may provide two HARQ processes/codewords for rank four transmissions (with four transport data blocks per TFRE using four downlink data streams).

[0069] For rank three and rank four transmissions, a number of data streams generated by transport block generator 401, encoder 403, modulator 405, and spreader scrambler 409 is greater than a number of HARQ processes/codewords supported by base station 100 and/or wireless terminal 200. According to embodiments of present inventive concepts discussed herein, a HARQ process/codeword may be mapped to more than one data stream for rank 3 and rank 4 transmissions. For rank one transmissions, one HARQ process/codeword may be mapped directly to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1). For rank two transmission, a first HARQ process/codeword may be mapped directly to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1), and a second HARQ process/codeword may be mapped directly to a second data stream (e.g., transmitted using a third transmission layer including TB3, CE3, IM3, and/or SS3 and received using a third reception layer including DM3, SB3, and/or CD3). For rank three transmission, a first HARQ process/codeword may be mapped to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1) and to a second data stream (e.g., transmitted using a second transmission layer including TB2, CE2, IM2, and/or SS2 and received using a second reception layer including DM2, SB2, and/or CD2), and a second HARQ process/codeword may be mapped to a third data stream (e.g., transmitted using a third transmission layer including TB3, CE3, IM3, and/or SS3 and received using a third reception layer including DM3, SB3, and/or CD3). For rank four transmission, a first HARQ process/codeword may be mapped to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1) and to a second data stream (e.g., transmitted using a second transmission layer including TB2, CE2, IM2, and/or SS2 and received using a second reception layer including DM2, SB2, and/or CD2), and a second HARQ process/codeword may be mapped to a third data stream (e.g., transmitted

using a third transmission layer including TB3, CE3, IM3, and/or SS3 and received using a third reception layer including DM3, SB3, and/or CD3) and to a fourth data stream (e.g., transmitted using a fourth transmission layer including TB4, CE4, IM4, and/or SS4 and received using a fourth reception layer including DM4, SB4, and/or CD4).

5 [0070] According to some other embodiments, For rank one transmissions, one HARQ process/codeword may be mapped directly to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1). For rank two transmission, a first HARQ process/codeword may be mapped directly to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1), and a second HARQ process/codeword may be mapped directly to a second data stream (e.g., transmitted using a third transmission layer including TB2, CE2, IM2, and/or SS2 and received using a third reception layer including DM2, SB2, and/or CD2). For rank three transmission, a first

10 15 HARQ process/codeword may be mapped to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1), and a second HARQ process/codeword may be mapped to a second data stream (e.g., transmitted using a second transmission layer including TB2, CE2, IM2, and/or SS2 and received using a second reception layer including DM2,

20 25 SB2, and/or CD2) and to a third data stream (e.g., transmitted using a third transmission layer including TB3, CE3, IM3, and/or SS3 and received using a third reception layer including DM3, SB3, and/or CD3). For rank four transmission, a first HARQ process/codeword may be mapped to a first data stream (e.g., transmitted using a first transmission layer including TB1, CE1, IM1, and/or SS1 and received using a first reception layer including DM1, SB1, and/or CD1) and to a fourth data stream (e.g., transmitted using a fourth transmission layer including TB4, CE4, IM4, and/or SS4 and received using a fourth reception layer including DM4, SB4, and/or CD4), and a second HARQ process/codeword may be mapped to a second data stream (e.g., transmitted using a second transmission layer including TB2, CE2, IM2, and/or SS2 and received using a second reception layer including DM2, SB2, and/or CD2)

30 and to a third data stream (e.g., transmitted using a third transmission layer including TB3, CE3, IM3, and/or SS3 and received using a third reception layer including DM3, SB3, and/or CD3).

[0071] Based on the rank chosen by adaptive controller 415, transport data blocks may be passed to encoder 403, and encoder outputs may be interleaved and modulated using

modulator 405. Outputs of modulator 405 may be mapped to space time layers using layer mapper 407, and as discussed above, layer mapper 407 may provide a one-to-one layer mapping. The symbol stream(s) generated by layer mapper 407 may be spread and scrambled using spreader/scrambler 409, and layer precoder 411 may precode outputs of spreader/scrambler 409, with precoder outputs being passed through transceiver 109 and antenna array 117 (including Antennas Ant-1, Ant-2, Ant-3, and Ant-4).

5 [0072] At wireless terminal 200, operations of processor 201 may mirror operations of base station processor 101 when receiving the MIMO downlink communications transmitted by the base station. More particularly, elements/functionalities of wireless 10 terminal processor 201 are illustrated in Figure 5 mirroring elements/functionalities of base station processor 101 discussed above with reference to Figure 4.

10 [0073] Radio signals may be received through MIMO antenna elements of MIMO antenna array 217 and transceiver 209, and the radio signals may be decoded by layer decoder 601 using a MIMO decoding vector to generate a plurality of MIMO decoded 15 symbol layers X1', X2', X3', and/or X4' depending on MIMO rank used for transmission/reception. Layer Decoder 601 may use a decoding vector corresponding to the precoding vector used by base station 100. Layer decoder 601 may generate a single decoded symbol layer X1' for rank 1 reception, layer decoder 601 may generate two decoded symbol layers X1' and X3' for rank 2 reception, layer decoder 601 may generate three decoded 20 symbol layers X1', X2', and X3' for rank 3 reception, and layer decoder 601 may generate four decoded symbol layers X1', X2', X3', and X4' for rank 4 transmission. Layer decoder 601 may thus perform a converse of operations performed by layer precoder 411 and 25 spreading/scrambler 409 of base station 100. Layer decoder 601 may perform functionalities of a MIMO detector (corresponding to a converse of layer precoder 411) and of disspreading/descrambling blocks for each data stream/layer (corresponding to a converse of spreading/scrambler 409). Layer demapper 603 may function as a converse of layer mapper 407 to demap decoded symbol layers X1', X2', X3', and/or X4' to respective unmapped symbol layers D1', D2', D3', and/or D4' according to the transmission rank.

30 [0074] For rank one reception, layer demapper 603 may demap symbols of decoded symbol layer X1' blocks x1'-j directly to symbols of unmapped symbol layer D1' blocks d1'-j, demodulator/deinterleaver DM-1 may demodulate/deinterleave unmapped symbol layer blocks d1'-j to provide data codewords cw1'-j of codeword stream CW1', and channel decoder CD1 may decode data codewords cw1'-j of codeword stream CW1' to provide transport blocks b1'-j of stream B1'. Transport block generator 607 may then pass transport

blocks $b1'-j$ of stream $B1'$ as a data stream. During rank one reception, demodulators/deinterleavers DM2, DM3, and DM4 and channel decoders CD2, CD3, and CD4 may be unused.

[0075] For rank two reception, layer decoder 601 may generate decoded symbol layers $X1'$ and $X3'$. Layer demapper 603 may demap symbols of decoded symbol layer $X1'$ blocks $x1'-j$ directly to symbols of unmapped symbol layer $D1'$ blocks $d1'-j$, and layer demapper 603 may demap symbols of decoded symbol layer $X3'$ blocks $x3'-j$ directly to symbols of unmapped symbol layer $D3'$ blocks $d3'-j$. Demodulator/deinterleaver DM-1 may demodulate/deinterleave unmapped symbol layer blocks $d1'-j$ to provide data codewords $cw1'-j$ of codeword stream $CW1'$, and demodulator/deinterleaver DM-3 may demodulate/deinterleave unmapped symbol layer blocks $d3'-j$ to provide data codewords $cw3'-j$ of codeword stream $CW3'$. Channel decoder CD1 may decode data codewords $cw1'-j$ of codeword stream $CW1'$ to provide transport blocks $b1'-j$ of stream $B1'$, and channel decoder CD3 may decode data codewords $cw3'-j$ of codeword stream $CW3'$ to provide transport blocks $b3'-j$ of stream $B3'$. Transport block generator 607 may then combine transport blocks $b1'-j$ and $b3'-j$ of streams $B1'$ and $B3'$ as a data stream. During rank two reception, demodulators/deinterleavers DM2 and DM4 and channel decoders CD2 and CD4 may be unused.

[0076] For rank three reception, layer decoder 601 may generate decoded symbol layers $X1'$, $X2'$, and $X3'$. Layer demapper 603 may demap symbols of decoded symbol layer $X1'$ blocks $x1'-j$ directly to symbols of unmapped symbol layer $D1'$ blocks $d1'-j$, layer demapper 603 may demap symbols of decoded symbol layer $X2'$ blocks $x2'-j$ directly to symbols of unmapped symbol layer $D2'$ blocks $d2'-j$, and layer demapper 603 may demap symbols of decoded symbol layer $X3'$ blocks $x3'-j$ directly to symbols of unmapped symbol layer $D3'$ blocks $d3'-j$. Demodulator/deinterleaver DM-1 may demodulate/deinterleave unmapped symbol layer blocks $d1'-j$ to provide data codewords $cw1'-j$ of codeword stream $CW1'$, demodulator/deinterleaver DM-2 may demodulate/deinterleave unmapped symbol layer blocks $d2'-j$ to provide data codewords $cw2'-j$ of codeword stream $CW2'$, and demodulator/deinterleaver DM-3 may demodulate/deinterleave unmapped symbol layer blocks $d3'-j$ to provide data codewords $cw3'-j$ of codeword stream $CW3'$. Channel decoder CD1 may decode data codewords $cw1'-j$ of codeword stream $CW1'$ to provide transport blocks $b1'-j$ of stream $B1'$, channel decoder CD2 may decode data codewords $cw2'-j$ of codeword stream $CW2'$ to provide transport blocks $b2'-j$ of stream $B2'$, and channel decoder CD3 may decode data codewords $cw3'-j$ of codeword stream $CW3'$ to provide transport

blocks $b3'-j$ of stream $B3'$. Transport block generator 607 may then combine transport blocks $b1'-j$, $b2'-j$, and $b3'-j$ of streams $B1'$, $B2'$, and $B3'$ as a data stream. During rank three reception, demodulator/deinterleaver DM4 and channel decoder CD4 may be unused.

[0077] For rank four reception, layer decoder 601 may generate decoded symbol

5 layers $X1'$, $X2'$, $X3'$, $X4'$. Layer demapper 603 may demap symbols of decoded symbol layer $X1'$ blocks $x1'-j$ directly to symbols of unmapped symbol layer $D1'$ blocks $d1'-j$, layer demapper 603 may demap symbols of decoded symbol layer $X2'$ blocks $x2'-j$ directly to symbols of unmapped symbol layer $D2'$ blocks $d2'-j$, and layer demapper 603 may demap symbols of decoded symbol layer $X3'$ blocks $x3'-j$ directly to symbols of unmapped symbol layer $D3'$ blocks $d3'-j$, and layer demapper 603 may demap symbols of decoded symbol layer $X4'$ blocks $x4'-j$ directly to symbols of unmapped symbol layer $D4'$ blocks $d4'-j$.

Demodulator/deinterleaver DM-1 may demodulate/deinterleave unmapped symbol layer

blocks $d1'-j$ to provide data codewords $cw1'-j$ of codeword stream $CW1'$,

demodulator/deinterleaver DM-2 may demodulate/deinterleave unmapped symbol layer

10 blocks $d2'-j$ to provide data codewords $cw2'-j$ of codeword stream $CW2'$, demodulator/deinterleaver DM-3 may demodulate/deinterleave unmapped symbol layer blocks $d3'-j$ to provide data codewords $cw3'-j$ of codeword stream $CW3'$, and demodulator/deinterleaver DM-4 may demodulate/deinterleave unmapped symbol layer blocks $d4'-j$ to provide data codewords $cw4'-j$ of codeword stream $CW4'$. Channel decoder

15 CD1 may decode data codewords $cw1'-j$ of codeword stream $CW1'$ to provide transport blocks $b1'-j$ of stream $B1'$, channel decoder CD2 may decode data codewords $cw2'-j$ of codeword stream $CW2'$ to provide transport blocks $b2'-j$ of stream $B2'$, channel decoder CD3 may decode data codewords $cw3'-j$ of codeword stream $CW3'$ to provide transport blocks $b3'-j$ of stream $B3'$, and channel decoder CD4 may decode data codewords $cw4'-j$ of codeword stream $CW4'$ to provide transport blocks $b4'-j$ of stream $B4'$. Transport block

20 generator 607 may then combine transport blocks $b1'-j$, $b2'-j$, $b3'-j$, and $b4'-j$ of streams $B1'$, $B2'$, $B3'$, and $B4'$ as a data stream.

[0078] As further shown in Figure 5, a respective soft buffer SB1, SB2, SB3, and SB4

may be provided for each stream of received data, and each decoder CD1, CD2, CD3, and

30 CD4 may be configured to determine whether each decoded transport data block passes or fails decoding. In greater detail, each undecoded transport data block generated by a demodulator/decoder DM may be saved in the respective soft buffer SB until a decoding result is determined by the channel decoder CD. If the transport data block passes decoding, an ACK (acknowledge message) may be generated and provided as feedback for the base

station, and retransmission of the successfully decoded (passed) data block is not required. If the transport data block does not pass decoding, a NACK (negative acknowledge message) may be generated and provided as feedback for the base station, and the undecoded output of the demodulator/deinterleaver (also referred to as soft bits) may be saved in soft buffer SB.

5 Responsive to the NACK, the base station may retransmit the failed transport data block, and wireless terminal 200 may use the retransmitted data block together with the previously undecoded output of the demodulator/deinterleaver (that is saved in the respective soft buffer) to decode the retransmitted data block on the second pass. By using the soft buffer to combine first and second versions of the demodulated data block, a likelihood of successful 10 decoding may be increased after retransmission.

[0079] As shown in Figure 5, layer decoder 601 (e.g., including a MIMO detector such as a minimum mean squared error or MMSE receiver), may reduce interference from the multipath channel and/or may reduce other antenna interference. After dispersing, demapping, demodulating, and/or deinterleaving, wireless terminal 200 may attempt to

15 decode the coded bits of a transport data block using a respective channel decoder. If the decoding attempt fails, wireless terminal 200 buffers the received soft bits of the transport data block in the respective soft buffer, and requests retransmission of the transport data block by transmitting a NACK message (e.g., as a part of an HARQ-ACK codeword, also referred to as a HARQ codeword). Once the retransmission is received (and subjected to 20 decoding, demapping, demodulating, and/or deinterleaving) by wireless terminal 200, wireless terminal may combine the buffered soft bits with the received soft bits from the retransmission and attempt to decode the combination using a respective channel decoder.

[0080] For soft combining to operate properly, the wireless terminal may need to know whether a received transmission is a new transmission of a transport data block or a 25 retransmission of a previously transmitted transport data block. For this purpose, the downlink control signaling may include a data indicator (also referred to as an indicator, a new data indicator, a new/old data indicator, etc.) that is used by the wireless terminal to control whether the soft buffer should be cleared or whether soft combining of the soft buffer and the received soft bits should take place. For a given transmission/retransmission to 30 wireless terminal 200, the data indicator may thus have one value to indicate an initial transmission of new data and another value to indicate a retransmission of previously transmitted data.

[0081] Whenever a current transmission is not a retransmission, a NodeB base station MAC-ehs element of base station processor 101 may increment a single bit data indicator.

Accordingly, the single bit data indicator may be toggled each time a new transport data block is transmitted over a MIMO layer. The data indicator can thus be used by wireless terminal processor 201 to clear the soft buffer/buffers for each initial transmission because no soft combining should be done for new/initial transmissions. The indicator may also be used

5 to detect error cases in the status signaling. If the data indicator is not toggled despite the fact that the previous data for the HARQ process in question was correctly decoded and acknowledged (using an ACK message), for example, an error in the uplink signaling has most likely occurred. Similarly, if the indicator is toggled but the previous data for the HARQ process was not correctly decoded, the wireless terminal may replace the data

10 previously in the soft buffer for the HARQ process with the new received data.

[0082] For rank four transmissions, wireless terminal 200 may thus receive up to four transport data blocks in a same TFRE to support four streams of transport data blocks. After decoding four data blocks for a TFRE during a rank 4 transmission, each decoder CD1, CD2, CD3, and CD4 may generate a respective local ACK or NACK depending on whether the

15 respective transport data block passed or failed decoding. In a rank 4 transmission, decoders CD1 and CD2 may be mapped to the first HARQ process so that the resulting HARQ ACK/NACK is an ACK only if both decoders CD1 and CD2 generate a local ACK and the resulting HARQ ACK/NACK message from the first HARQ process is a NACK if either decoder CD1 or CD2 generated a local NACK; and decoders CD3 and CD4 may be mapped

20 to the second HARQ process so that the resulting HARQ ACK/NACK from the second HARQ process is an ACK only if both decoders CD3 and CD4 generate a local ACK and the resulting HARQ ACK/NACK message is a NACK if either decoder CD3 or CD4 generated a local NACK.

[0083] For rank three transmissions, wireless terminal 200 may thus receive up to three transport data blocks in a same TFRE. After decoding three data blocks for a TFRE during a rank 3 transmission, each decoder CD1, CD2, and CD3 may generate a respective local ACK or NACK depending on whether the respective transport data block passed or failed decoding. In a rank 3 transmission, decoders CD1 and CD2 may be mapped to the first HARQ process so that the resulting HARQ ACK/NACK is an ACK only if both decoders

25 CD1 and CD2 generate a local ACK and the resulting HARQ ACK/NACK message from the first HARQ process is a NACK if either decoder CD1 or CD2 generated a local NACK; and decoder CD3 may be mapped to the second HARQ process so that the resulting HARQ

30 ACK/NACK from the second HARQ process is an ACK if decoder CD3 generates a local

ACK and the resulting HARQ ACK/NACK message is a NACK if decoder CD3 generates a local NACK.

[0084] For rank two transmissions, wireless terminal 200 may receive up to two transport data blocks in a same TFRE. After decoding two data blocks for a TFRE during a rank 2 transmission, each decoder CD1 and CD3 may generate a respective local ACK or NACK depending on whether the respective transport data block passed or failed decoding. In a rank two transmission, decoders CD1 may be mapped to the first HARQ process so that the resulting HARQ ACK/NACK is an ACK only if decoder CD1 generates a local ACK and the resulting HARQ ACK/NACK message from the first HARQ process is a NACK if decoder CD1 generates a local NACK; and decoder CD3 may be mapped to the second HARQ process so that the resulting HARQ ACK/NACK from the second HARQ process is an ACK if decoder CD3 generates a local ACK and the resulting HARQ ACK/NACK message is a NACK if decoder CD3 generates a local NACK.

[0085] For rank one transmissions, wireless terminal 200 may thus receive one transport data block in a TFRE. After decoding one data block for a TFRE during a rank 1 transmission, decoder CD1 may generate a respective ACK or NACK depending on whether the transport data block passed or failed decoding. In a rank one transmission, decoder CD1 may be mapped to the first HARQ process so that the resulting HARQ ACK/NACK is an ACK if decoder CD1 generates a local ACK and the resulting HARQ ACK/NACK message from the first HARQ process is a NACK if decoder CD1 generates a local NACK.

[0086] According to some other embodiments, first transmission/reception layers TL1/RL1 may be used during rank 1 transmission/reception, and HARQ process HARQ-1 may be mapped to a data block of the first transmission/reception layers TL1/RL1 during rank 1 transmission/reception. First and second transmission/reception layers TL1/RL1 and TL2/RL2 may be used during rank 2 transmission/reception, HARQ process HARQ-1 may be mapped to a data block of the first transmission/reception layers TL1/RL1 during rank 1 transmission/reception, and HARQ process HARQ-2 may be mapped to a data block of the second transmission/reception layers TL2/RL2 during rank 2 transmission/reception. First, second, and third transmission/reception layers TL1/RL1, TL2/RL2, and TL3/RL3 may be used during rank 3 transmission/reception, HARQ process HARQ-1 may be mapped to a data block of the first transmission/reception layers TL1/RL1 during rank 3 transmission/reception, and HARQ process HARQ-2 may be mapped to data blocks of the second and third transmission/reception layers TL2/RL2 and TL3/RL3 during rank 3 transmission/reception. First, second, third, and fourth transmission/reception layers

TL1/RL1, TL2/RL2, TL3/RL3, and TL4/RL4 may be used during rank 4 transmission/reception, HARQ process HARQ-1 may be mapped to data blocks of the first and fourth transmission/reception layers TL1/RL1 and TL4/RL4 during rank 4 transmission/reception, and HARQ process HARQ-2 may be mapped to data blocks of the 5 second and third transmission/reception layers TL2/RL2 and TL3/RL3 during rank 4 transmission/reception. A MIMO layer (supported by respective transmission/reception layers) may thus define a logical channel over which a data block (or a stream of data blocks) is transmitted.

[0087] According to embodiments of present inventive concepts, a HARQ process in 10 a MAC-ehs of wireless terminal processor 101 may provide MAC functionality illustrated in Figure 6. Figure 6 illustrates MAC (Media Access Control) functionality at wireless terminal 200. As shown in Figure 6, one HARQ entity may handle HARQ functionality for one user per HS-DSCH (High Speed Downlink Shared Channel). One HARQ entity may be capable of supporting multiple instances (multiple HARQ processes) of stop and wait HARQ 15 protocols. According to some embodiments, there shall be one HARQ entity per HS-DSCH, one HARQ process per TTI (Transmission Time Interval) for single stream (rank one) transmission, and two HARQ processes per TTI for two stream (rank two) transmission, three stream (rank three) transmission, and four stream (rank four) transmission.

[0088] Because only 2 HARQ processes are supported for MIMO 20 transmission/reception using three downlink streams (rank three) and for MIMO transmission/reception using four downlink streams (rank four), the mapping of soft buffers may be provided according to the table of Figure 7A for rank 3 downlink transmission/reception and according to the table of Figure 7B for rank 4 downlink transmission/reception. Note that any one of the combinations of Figure 7A may be used for 25 rank 4 downlink transmission, and that any one of the combinations of Figure 7B may be used for rank 3 down link transmissions. Whenever the data indicator for a shared HARQ process (i.e., a HARQ process shared by two or more streams/layers) indicates that new data has been initially transmitted over the downlink (e.g., the data indicator bit has been toggled), the soft buffers for both/all streams associated with the shared HARQ process should be 30 cleared. Whenever the data indicator for a shared HARQ process (i.e., a HARQ process shared by two or more streams/layers) indicates that old data is being retransmitted, the soft buffers for both/all streams associated with the shared HARQ process should be combined with the retransmitted data of the respective data streams.

[0089] For rank one transmissions, a first HARQ process may be used for the single downlink data stream (e.g., for a downlink stream transmitted using TB1, CE1, IM1, and/or SS1 defining a first transmission layer and received using DM1, SB1, and/or CD1 defining a first reception layer). Accordingly, one data indicator flag may be transmitted by base station

5 for one transport data block of the downlink data stream, and wireless terminal 200 may receive the one transport data block using DM1, SB1, and CD1. If the data indicator indicates that the transport data block is a new/initial transmission, wireless terminal 200 may clear soft buffer SB1 and attempt to decode using channel decoder CD1. If the data indicator indicates that the transport data block is a retransmission of a previously failed transmission, 10 wireless terminal 200 may combine soft bits of the retransmission (generated by demodulator/deinterleaver DM1) with soft bits from soft buffer SB1 and attempt to decode the combination using channel decoder CD1. If channel decoder CD1 is able to successfully decode the transmission/retransmission, an ACK message is generated and transmitted to base station 100 (e.g., as an element of a HARQ-ACK codeword, also referred to as a HARQ 15 codeword). If channel decoder CD1 is unable to decode the transmission/retransmission, a NACK message is generated and transmitted to base station 100 (e.g., as an element of a HARQ-ACK codeword, also referred to as a HARQ codeword). A single HARQ process (including a data indicator, a NACK message and/or an ACK message) may thus map to each transport data block transmitted over the rank/layer one downlink data stream.

20 **[0090]** For rank two transmissions, a first HARQ process (including a data indicator, a NACK message and/or an ACK message) may map to each transport data block transmitted over a first stream of the rank two transmission (e.g., for a downlink stream transmitted using TB1, CE1, IM1, and/or SS1 defining a first transmission layer and received using DM1, SB1, and/or CD1 defining a first reception layer), and a second HARQ process (including a 25 data indicator, a NACK message and/or an ACK message) may map to each transport data block transmitted over a second stream of the rank two transmission (e.g., for a downlink stream transmitted using TB3, CE3, IM3, and/or SS3 defining a third transmission layer and received using DM3, SB3, and/or CD3 defining a third reception layer). Each of the first and second HARQ processes may thus operate for transport data blocks of respective streams of 30 the rank two transmissions as discussed above with respect to rank/layer one transmissions. Stated in other words, a respective data indicator may be provided for each transport data block received during a same TFRE, soft buffers for the respective downlink data streams may be independently cleared or maintained for retransmission combining responsive to the

respective data indicators, and respective ACK/NACK messages may be generated and transmitted to base station 100 for each transport data block received during a same TFRE.

[0091] For higher order transmission ranks/layers, however, a HARQ process may be shared by two or more downlink data streams to reduce uplink feedback signaling. For rank

5 three downlink transmissions, a first HARQ process (including one data indicator and one ACK/NACK message per TFRE) may map to first and second streams of transport data blocks, and a second HARQ process (including one data indicator and one ACK/NACK message per TFRE) may map to a third stream of transport data blocks. For rank three downlink transmissions, for example, a first HARQ process may map to each transport data 10 block transmitted over a first stream of the rank three transmission (e.g., for a downlink stream transmitted using TB1, CE1, IM1, and/or SS1 defining a first transmission layer and received using DM1, SB1, and/or CD1 defining a first reception layer) and to each transport data block transmitted over a second stream of the rank three transmission (e.g., for a downlink stream transmitted using TB2, CE2, IM2, and/or SS2 defining a second 15 transmission layer and received using DM2, SB2, and/or CD2 defining a second reception layer); and a second HARQ process may map to each transport data block transmitted over a third stream of the rank three transmission (e.g., for a downlink stream transmitted using TB3, CE3, IM3, and/or SS3 defining a third transmission layer and received using DM3, SB3, and/or CD3 defining a third reception layer). During rank three transmissions, the first 20 HARQ process may thus be shared by data blocks of the first and second streams that are transmitted using a same TFRE so that the first and second streams are bundled to a same HARQ process. Accordingly, one HARQ ACK/NACK message and one data indicator may be mapped to both data blocks of a same TFRE for the first and second streams during rank three transmission. In contrast, the second HARQ process, may be applied to only the third 25 data stream, so that one HARQ ANK/NACK message and one data indicator may be mapped to one data block of each TFRE of the third stream.

[0092] Accordingly, first, second, and third transport data blocks may be transmitted during a same TFRE over respective the first, second, and third streams during a rank three transmission. A first data indicator may be transmitted by base station 100 for both of the

30 first and second transport data blocks of the first and second downlink data streams. If the first data indicator indicates a new/initial transmission, wireless terminal 200 may clear soft buffers SB1 and SB2 and attempt to decode the first and second transport data blocks using channel decoders CD1 and CD2. If the first data indicator indicates a retransmission, wireless terminal 200 may combine soft bits of the first and second transport data blocks

(generated by demodulators/deinterleavers DM1 and DM2) with soft bits from respective soft buffers SB1 and SB2 and attempt to decode the combinations using respective channel decoders CD1 and CD2. If both channel decoders CD1 and CD2 are able to successfully decode the transmissions/retransmissions, an ACK message is generated and transmitted to

5 base station 100 (e.g., as an element of a shared HARQ-ACK codeword, also referred to as a HARQ codeword). If either of channel decoders CD1 or CD2 is unable to decode the transmissions/retransmissions, a NACK message is generated and transmitted to base station 100 (e.g., as an element of a shared HARQ-ACK codeword, also referred to as a HARQ codeword). The first HARQ process (including a single data indicator and a single

10 ACK/NACK message) may thus be shared by two transport data blocks transmitted over different downlink data streams during a same TFRE. A second data indicator may be transmitted by base station 100 for the third transport data block of the third stream, and soft buffer SB3 may be cleared if the second data indicator indicates that the third transport data block is an initial transmission, or soft buffer SB3 may be maintained for combined decoding

15 if the second data indicator indicates that the first transport data block is a retransmission. If both channel decoders CD3 able to successfully decode the transmission/retransmission, an ACK message is generated and transmitted to base station 100 (e.g., as an element of a HARQ-ACK codeword, also referred to as a HARQ codeword). If channel decoders CD3 is unable to decode the transmissions/retransmissions, a NACK message is generated and

20 transmitted to base station 100 (e.g., as an element of a HARQ-ACK codeword, also referred to as a HARQ codeword).

[0093] For rank/layer four downlink transmissions according to some embodiments, the first HARQ process may be shared between a first stream (e.g., for a downlink stream transmitted using TB1, CE1, IM1, and/or SS1 defining a first transmission layer and received using DM1, SB1, and/or CD1 defining a first reception layer) and a second stream (e.g., for a downlink stream transmitted using TB2, CE2, IM2, and/or SS2 defining a second transmission layer and received using DM2, SB2, and/or CD2 defining a second reception layer), and the second HARQ process may be shared between a third stream (e.g., for a downlink stream transmitted using TB3, CE3, IM3, and/or SS3 defining a third transmission layer and received using DM3, SB3, and/or CD3 defining a third reception layer) and a fourth stream (e.g., for a downlink stream transmitted using TB4, CE4, IM4, and/or SS4 defining a fourth transmission layer and received using DM4, SB4, and/or CD4 defining a fourth reception layer). The sharing of a HARQ process between any two data streams may be the same as discussed above with respect the sharing of the first HARQ process between

first and second data streams during rank three transmissions. Where a HARQ process is shared between two streams, the HARQ process provides one data indicator and one ACK/NACK message for each TFRE for all data streams sharing the HARQ process. Operations of a HARQ process shared by multiple data streams will now be discussed in 5 greater detail below with respect to the flow charts of Figures 8A and 8B.

[0094] Figure 8A illustrates operations of a base station transmitting multiple MIMO data streams using a shared HARQ process according to some embodiments, of present inventive concepts, and Figure 8B illustrates operations of a wireless terminal receiving multiple MIMO data streams using a shared HARQ process according to some embodiments 10 of present inventive concepts. Operations of Figures 8A and 8B may be discussed concurrently because the base station and wireless terminal operations may be interleaved.

[0095] As shown in Figure 8A, base station processor 101 may determine for an HARQ process if the HARQ process is being applied to a single MIMO data stream or if the HARQ process is being shared by multiple (e.g., two) MIMO data streams at block 811. If 15 the HARQ process is being applied to only one MIMO data stream, the HARQ process may be applied individually to the single MIMO data stream at block 815 so that one ACK/NACK message (received from wireless terminal 200) from the prior TFRE is applied only to the single MIMO data stream for the current TFRE, and so that one data indicator is applied only to the single MIMO data stream for the current TFRE.

20 **[0096]** If the HARQ process is being shared by multiple MIMO data streams at block 811, base station processor 101, may determine whether an ACK message or a NACK message was received in response to transport data blocks transmitted over the multiple MIMO data streams in a/the preceding TFRE. As discussed above, one ACK or NACK message may be transmitted by wireless terminal 200 for a plurality data streams sharing a 25 HARQ process.

[0097] If an ACK message was received for the prior TFRE transmission at block 817, base station processor 101 may generate and transmit a data indicator indicating an initial transmission of new data for all transport data blocks being transmitted during the current TFRE for the data streams sharing the HARQ process at block 819. At block 821, 30 base station processor 101 may generate and transmit new transport data blocks for all data streams sharing the HARQ process.

[0098] If a NACK message was received for the prior TFRE transmission at block 817, base station processor 101 may generate and transmit a data indicator indicating a retransmission of the prior data for all transport data blocks being transmitted during the

current TFRE for the data streams sharing the HARQ process at block 831. At block 833, base station processor 101 may retransmit the previously transmitted transport data blocks for all data streams sharing the HARQ process. A single NACK message may thus result in retransmission of transport data blocks for all data streams sharing the HARQ process.

5 [0099] As shown in Figure 8B, responsive to receiving data for a TFRE at block 849, wireless terminal processor 201 may determine for a HARQ process if the HARQ process is being applied to a single MIMO data stream or if the HARQ process is being shared by multiple (e.g., two) MIMO data streams at block 851. If the HARQ process is being applied to only one MIMO data stream, the HARQ process may be applied individually 10 to the single MIMO data stream at block 853 so that one ACK/NACK message is generated for only the single MIMO data stream, and so that a data indicator is applied only to the single MIMO data stream for the current TFRE. As discussed above with respect to a four antenna system, for example, a first HARQ process (HARQ-1) may be applied individually to a first MIMO data stream (e.g., using TB1, CE1, IM1, DM1, SB1, and/or CD1) for rank 1, 15 rank 2, and rank 3 transmission/reception, and a second HARQ process (HARQ-2) may be applied individually to a second MIMO data stream (e.g., using TB2, CE2, IM2, DM2, SB2, and/or CD2) for rank 2 transmission/reception.

[00100] If the HARQ process is being shared by multiple MIMO data streams at block 851, wireless terminal processor 201 may determine at block 855 whether a data indicator 20 (transmitted by base station 100) indicates that the transport data blocks are initial transmissions of new data or retransmissions of old data transmitted in a previous TFRE. As discussed above with respect to a four antenna system, for example, a first HARQ process (HARQ-1) may be shared by a first MIMO data stream (e.g., using TB1, CE1, IM1, DM1, SB1, and/or CD1) and a fourth MIMO data stream (e.g., using TB4, CE4, IM4, DM4, SB4, 25 and/or CD4) for rank 4 transmission/reception, and a second HARQ process (HARQ-2) may be shared by a second MIMO data stream (e.g., using TB2, CE2, IM2, DM2, SB2, and/or CD2) and a third MIMO data stream (e.g., using TB3, CE3, IM3, DM3, SB3, and/or CD3) for rank 3 and rank 4 transmission/reception.

[00101] If the transport data blocks of the shared HARQ process are initial 30 transmissions of new data, all soft buffers of the data streams sharing the HAQ process are cleared at block 861 (responsive to the one data indicator), and each of the transport data blocks of the data streams sharing the HARQ process are separately demodulated at block 863 to generate soft bits for the respective transport data blocks. The soft bits for the respective transport data blocks are then decoded at bock 865 to generate the original

transport data blocks. If all of the current transport data blocks (of the current TFRE) of the MIMO data streams sharing the HARQ process are successfully decoded at block 867, one ACK message may be generated and transmitted to base station 100 at block 869 for all of the transport data blocks sharing the HARQ process. If one of the current transport data 5 blocks (of the current TFRE) of the MIMO data streams sharing the HARQ process fails decoding at block 867, one NACK message may be generated and transmitted to base station 100 at block 871 for all of the transport data blocks sharing the HARQ process.

[00102] If the transport data blocks of the shared HARQ process are retransmissions at block 855, all soft buffers of the data streams sharing the HAQ process are maintained at 10 block 881 (responsive to the one data indicator indicating retransmission), and each of the transport data blocks of the data streams sharing the HARQ process are separately demodulated at block 883 to generate soft bits for the respective transport data blocks. The soft bits for the respective transport data blocks are then combined with the corresponding soft bits from respective soft buffers at block 885, and the combinations of old/new soft bits 15 are separately decoded at bock 887 to generate the original transport data blocks. If all of the current transport data blocks (of the current TFRE) of the MIMO data streams sharing the HARQ process are successfully decoded at block 887 and 867, one ACK message may be generated and transmitted to base station 100 at block 869 for all of the transport dta blocks sharing the HARQ process. If one of the current transport data blocks (of the current TFRE) 20 of the MIMO data streams sharing the HARQ process fails decoding at block 867, one NACK message may be generated and transmitted to base station 100 at block 871 for all of the transport data blocks sharing the HARQ process.

[00103] In a multiple HARQ codeword MIMO system supporting up to four MIMO data streams with HARQ codeword dimensioning, for example, two HARQ codewords may 25 be mapped to three MIMO data streams/layers for rank 3 transmissions and to four MIMO data streams/layers for rank 4 transmissions. For rank three downlink transmissions, for example, a first HARQ process (HARQ-1) may map to each transport data block transmitted over a first stream of the rank three transmission (e.g., for a downlink stream transmitted using TB1, CE1, IM1, and/or SS1 defining a first transmission layer TL1 and received using 30 DM1, SB1, and/or CD1 defining a first reception layer RL1) and to each transport data block transmitted over a second stream of the rank three transmission (e.g., for a downlink stream transmitted using TB2, CE2, IM2, and/or SS2 defining a second transmission layer TL2 and received using DM2, SB2, and/or CD2 defining a second reception layer RL2); and a second HARQ process (HARQ-2) may map to each transport data block transmitted over a third

stream of the rank three transmission (e.g., for a downlink stream transmitted using TB3, CE3, IM3, and/or SS3 defining a third transmission layer TL3 and received using DM3, SB3, and/or CD3 defining a third reception layer RL3). For rank four downlink transmissions, the first HARQ process (HARQ-1) may map to each transport data block transmitted over a first stream of the rank four transmission (e.g., for a downlink stream transmitted using TB1, CE1, IM1, and/or SS1 defining a first transmission layer TL1 and received using DM1, SB1, and/or CD1 defining a first reception layer RL4) and to each transport data block transmitted over a second stream of the rank four transmission (e.g., for a downlink stream transmitted using TB2, CE2, IM2, and/or SS2 defining a second transmission layer TL2 and received using DM2, SB2, and/or CD2 defining a second reception layer RL2); and the second HARQ process (HARQ-2) may map to each transport data block transmitted over a third stream of the rank four transmission (e.g., for a downlink stream transmitted using TB3, CE3, IM3, and/or SS3 defining a third transmission layer TL3 and received using DM3, SB3, and/or CD3 defining a third reception layer RL4) and over a fourth stream of the rank four transmission (e.g., for a downlink stream transmitted using TB4, CE4, IM4, and/or SS4 defining a fourth transmission layer TL4 and received using DM4, SB4, and/or CD4 defining a fourth reception layer RL4). This sharing of HARQ processes may be referred to as bundling and/or sharing.

[00104] As further discussed above, if either data block sharing a HARQ process is not successfully decoded at the respective channel decoder (e.g., if a data block fails at either of channel decoders CD1 or CD2 sharing the first HARQ process (HARQ-1) during a rank 3 or a rank 4 transmission, or if a data block fails at either of channel decoders CD3 or CD4 sharing the second HARQ process (HARQ-2) during a rank 4 transmission, a single NACK for the bundled/shared HARQ process may be transmitted to base station 100 and soft bits for both of the failed data blocks may be saved at respective soft buffers (corresponding to the respective channel decoders and/or HARQ processes) for subsequent combining with retransmissions of the failed data blocks. If the transmission rank requested by wireless terminal 200 changes between transmitting the initial data blocks and retransmitting the failed data blocks, however, the retransmission may be complicated if the updated rank does not support the shared HARQ process for the failed data blocks. More particularly, the soft buffers may be mapped to respective HARQ processes so that the soft bits saved in one or both of the respective soft buffers may be unavailable if the mapping of the bundled HARQ process according to the updated transmission rank does not include both soft buffers. Accordingly, base station 100 may be unable to retransmit the failed bundled data blocks.

using the updated rank thereby increasing delay in retransmitting the failed bundled data blocks.

[00105] In a rank 3 or a rank 4 transmission using one TFRE to transmit three or four data blocks, for example, a first data block may be transmitted using a first transmission layer

5 TL1 (e.g., including TB1, CE1, IM1, and/or SS1) and received using a first reception layer RL1 (e.g., including DM1, SB1, and/or CD1), and a second data block may be transmitted using a second transmission layer TL2 (e.g., including TB2, CE2, IM2, and/or SS2) and received using a second reception layer RL2 (e.g., including DM2, SB2, and/or CD2). If either or both of the first or second data blocks fails decoding at respective channel decoder
10 CD1 and/or CD2, wireless terminal 200 may transmit a single NACK message to base station 100 indicating failure of the bundled first and second data packets, and soft bits of the first and second data blocks (from respective demodulators/deinterleavers DM1 and DM2) may be saved at respective soft buffers SB1 and SB2 for subsequent combining with retransmissions of the first and second data blocks. If the transmission rank is reduced to rank 1 or rank 2,
15 however, transmission/reception along the second transmission layer TL2 (e.g., including TB2, CE2, IM2, and/or SS2) and the second reception layer RL2 (e.g., including DM2, SB2, and/or CD2) may no longer be supported so that parallel retransmission of the first and second data packets using the first HARQ process HARQ-1 (including both soft buffers SB1 and SB2) may not be possible.

20 **[00106]** Similarly, in a rank 4 transmission using one TFRE, for example, a third data block may be transmitted using a third transmission layer TL3 (e.g., including TB3, CE3,

IM3, and/or SS3) and received using a third reception layer RL3 (e.g., including DM3, SB3, and/or CD3), and a fourth data block may be transmitted using a fourth transmission layer TL4 (e.g., including TB4, CE4, IM4, and/or SS4) and received using a fourth reception layer

25 RL4 (e.g., including DM4, SB4, and/or CD4). If either or both of the third and/or fourth data blocks fails decoding at respective channel decoder CD3 and/or CD4, wireless terminal 200 may transmit a single NACK message to base station 100 indicating failure of the bundled third and fourth data blocks, and soft bits of the third and fourth data blocks (from respective demodulators/deinterleavers DM3 and DM4) may be saved at respective soft buffers SB3 and
30 SB4 for subsequent combining with retransmissions of the first and second data blocks. If the transmission rank is reduced to rank 1, rank 2, or rank 3, however, transmission/reception along the third and/or fourth transmission/reception layers may no longer be supported so that parallel retransmission of the third and fourth data packets using the second HARQ process

HARQ-2 (including both soft buffers SB3 and SB4) may not be possible.

[00107] According to some embodiments, base station 100 may delay changing a downlink transmission rank for wireless terminal 200 until either ACKs have been received for all data blocks previously transmitted to wireless terminal 200 or a maximum number of retransmissions have occurred. Accordingly, mappings of HARQ processes to 5 transmission/reception layers (including respective soft buffers) may be maintained as needed for retransmissions of any failed data blocks that were initially transmitted using a shared/bundled HARQ process. Because downlink channel conditions may vary at a relatively low rate over two to three consecutive transmission time intervals, however, a relatively low transmission quality of the downlink channel which resulted in the initial 10 channel decoder failure may remain relatively low so that a higher number of retransmissions may be needed to achieve successful decoding and CRC validation of the failed data block(s) . The increased number of retransmissions, however, may increase delay transferring the data block(s) to higher processing layers, and/or an increased residual block error rate may occur.

[00108] According to embodiments of present inventive concepts, base station 15 processor 101 may use mapping tables of Figures 10-13 to retransmit failed data packets (e.g., associated with a bundled HARQ process) when wireless terminal 200 reports/requests a downlink transmission rank that is different than the downlink transmission rank used to initially transmit the now failed data packets. Embodiments of present inventive concepts are discussed in greater detail below with respect to the tables of Figures 9-13 for systems 20 including 4 transmit and 4 receive MIMO antennas supporting one, two, three, and four MIMO transmission ranks. While embodiments relating to 4 transmit and 4 receive MIMO antennas are discussed by way of example, embodiments of present inventive concepts may be applied to systems including fewer and/or more MIMO transmit and receive antennas.

[00109] According to some embodiments, base station processor 101 may operate 25 according to a retransmission algorithm such that if a NACK is generated for a bundled HARQ ACK/NACK message for a plurality of data blocks (e.g., for first and second data blocks of a same TFRE transmitted/received using first and second transmission/reception layers including channel decoders CD1 and CD2 during rank 3 and/or rank 4 transmissions, and/or transmitted/received using third and fourth transmission/reception layers including 30 channel decoders CD3 and CD4 during rank 4 transmissions), the bundled data blocks may be retransmitted using a rank selected to maintain a HARQ process mapping for the bundled HARQ NACK message. For example, a base station processor 101 may maintain a rank that is at least as high as that used for the original transmission even if wireless terminal 200 has requested/recommended a lower rank. According to some embodiments, base station

processor 101 may maintain a same transmission rank for retransmission of bundled data packets even if wireless terminal 200 has requested/recommended a lower downlink transmission rank to thereby maintain a mapping of the HARQ process (for which the bundled NACK message was received) to the respective transmission and reception layers for 5 both the initial transmission and subsequent retransmission(s).

[00110] As shown in Figure 9, base station processor 101 may select a downlink (DL) transmission rank for subsequent downlink transmissions to wireless terminal 200 responsive to downlink transmission rank requests and/or recommendations received from wireless terminal 200 over a feedback channel, but base station processor 101 may select a different 10 DL transmission rank if retransmission of any bundled data blocks is required responsive to a HARQ NACK message received for a bundled HARQ process. When a request/recommendation for a new DL transmission rank is received from wireless terminal 200 at block 901, base station processor 101 may determine at block 903 if retransmission of any bundled data blocks to wireless terminal 200 is required. More particularly, two data 15 blocks may be transmitted using a same TFRE over transmission/reception layers sharing a HARQ process, and if either or both data block(s) fail decoding at wireless terminal 200, a shared/bundled HARQ NACK message from wireless terminal 200 may request retransmission of the two data blocks.

[00111] If no retransmission is required at block 903 (e.g., if all previously transmitted 20 data blocks using shared/bundled HARQ processes have either been acknowledged with ACKs or retransmitted a maximum number of allowed times), base station processor 101 may proceed with the requested and/or recommended DL transmission rank at block 907. If retransmission of previously transmitted data blocks using a shared/bundled HARQ process(es) is required at block 903, however, base station processor 101 may select a DL 25 transmission rank at block 905 to maintain HARQ process mapping for any such retransmissions. DL transmission rank selection of block 905 will be discussed in greater detail below with respect to the mapping tables of Figures 10-13. Once all previously failed bundled data blocks have either been successfully transmitted (as indicated by a HARQ ACK message) or retransmitted a maximum allowed number of times at block 903, base station 30 processor 101 may then proceed with the requested and/or recommended DL transmission rank at block 907.

[00112] The mapping tables of Figures 10-13 illustrate base station processor 101 operations to select transmission rank according to embodiments of present inventive concepts including four transmission/reception layers with two HARQ processes identified as

HARQ-1 and HARQ-2. By way of example, first transmission and reception layers TL1 and RL1 may be implemented using TB1, CE1, IM1, SS1, DM1, SB1, and/or CD1 of Figures 4 and 5; second transmission and reception layers TL2 and RL2 may be implemented using TB2, CE2, IM2, SS2, DM2, SB2, and/or CD2 of Figures 4 and 5; third transmission and 5 reception layers TL3 and RL3 may be implemented using TB3, CE3, IM3, SS3, DM3, SB3, and/or CD3 of Figures 4 and 5; and fourth transmission and reception layers TL4 and RL4 may be implemented using TB4, CE4, IM4, SS4, DM4, SB4, and/or CD4 of Figures 4 and 5. Moreover, first HARQ process HARQ-1 may map only (without bundling/sharing) to first 10 transmission and reception layers TL1 and RL1 for rank 1 and rank 2 transmissions, and first HARQ process HARQ-1 may map (with bundling/sharing) to both first and second transmission/reception layers TL1, RL1, TL2, and RL2 for rank 3 and rank 4 downlink transmissions. Second HARQ process HARQ-2 may map only (without bundling/sharing) to third transmission and reception layers TL3 and RL3 for rank 2 and rank 3 downlink 15 transmissions, and second HARQ process HARQ-2 may map (with bundling/sharing) to both third and fourth transmission/reception layers TL3, RL3, TL4, and RL4 for rank 4 transmissions. For rank 1 downlink transmissions, second HARQ process HARQ-2 may be unused.

[00113] In each of the tables of Figures 10-13, the “Initial Transmission” heading identifies the status of the most recent HARQ-ACK/NACK message (received from wireless 20 terminal 200) corresponding to the most recent downlink transmission for the respective HARQ process (i.e., HARQ-1 and/or HARQ-2). More particularly, P (pass) represents a HARQ ACK message received for the respective HARQ process representing successful decoding of all of the data block or blocks associated with the HARQ process, F (fail) represents a HARQ NACK message received for the respective HARQ process representing 25 unsuccessful decoding of any one data block or blocks associate with the HARQ process, and “--” represents non-use of the HARQ process (e.g., HARQ-2 may be unused for rank 1 downlink transmissions). The “UE reported rank” heading identifies a requested/recommended downlink transmission rank (also referred to as a rank) reported by wireless terminal 200, and the “Scheduled Rank” heading identified a downlink transmission 30 rank actually scheduled by base station processor 101. The “Retransmission” HARQ-1 column identifies whether a new transmission of a new transport data block or blocks (NT) is allowed for the respective HARQ process, whether a retransmission of a previously transmitted data block or blocks (OT) is to be performed for the respective HARQ process, or whether no transmission (“--”) is to be performed for the respective HARQ process.

[00114] The table of Figure 10 illustrates base station processor 101 rank schedulings when an initial rank 1 downlink transmission is performed using the first HARQ process HARQ-1 mapped to first transmission/reception layers TL1 and RL1. Accordingly, the initial transmission includes only a single data block transmitted/received using

5 transmission/reception layers TL1 and RL1, and the resulting ACK/NACK message for the HARQ-1 process maps to only the single data block (i.e., an ACK message is generated if the single data block passes decoding at CD1, or a NACK message is generated if the single data block fails decoding at CD1). In each case where the single data block passes P (i.e., rows 1, 3, 5, and 7 of Figure 10) decoding (so that an ACK message is received), base station

10 processor 101 may schedule the rank recommended/requested by wireless terminal 200, and new data NT may be transmitted in accordance with the UE reported rank. With scheduled rank 4, new first and second data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and new third and fourth data blocks may be transmitted over respective

15 transmission/reception layers TL3/RL3 and TL4/RL4 bundled with HARQ-2 using the same TFRE as shown in row 1 of Figure 10. With scheduled rank 3, new first and second data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and a new third data block may be transmitted over respective transmission/reception layers TL3/RL3 using HARQ-2 without

20 bundling using the same TFRE as shown in row 3 of Figure 10. With scheduled rank 2, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using a TFRE, and a second data block may be transmitted over transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the TFRE as shown in row 5 of Figure 10. With scheduled rank 1, a new first data block may be

25 transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using the TFRE, and HARQ-2 may remain unused during the TFRE as shown in row 7 of Figure 10.

[00115] In cases where the single data block fails F (rows 2, 4, 6, and 8 of Figure 10) decoding (so that a NACK message is received), base station processor 101 may consider the 30 reported rank, but base station processor 101 may schedule the downlink transmission rank to maintain a HARQ process mapping to support the retransmission of the failed data block. As shown at rows 2, 4, and 6 of Figure 10, if wireless terminal 200 reports a higher rank (i.e., a reported rank of 2, 3, or 4 with an initial rank of 1), base station processor 101 may allow scheduling of a rank 2 transmission to maintain a mapping of HARQ-1 only (without

bundling/sharing) to transmission/reception layers TL1 and RL1 for the retransmission of the initially failed data block (OT) using a TFRE while allowing transmission of a new data block (NT) using a mapping of HARQ-2 only (without bundling/sharing) to transmission/reception layers TL3 and RL3 using the TFRE. In an alternative to scheduling 5 rank 2 at rows 2, 4, and 6 of Figure 10, base station processor 101 may schedule rank 1 to retransmit the failed data block maintaining a mapping of HARQ-1 only to transmission/reception layers TL1 and RL1 without transmitting a new data block using HARQ-2. If the reported rank is the same as the initial rank as shown in row 8 of Figure 10, the scheduled rank may remain unchanged so that the mapping of HARQ-1 to 10 transmission/reception layers TL1/RL1 is unchanged and so that the failed data block may be retransmitted using the same HARQ-1 mapping.

[00116] The table of Figure 11 illustrates base station processor 101 rank scheduling when an initial rank 2 downlink transmission is performed using the first HARQ process HARQ-1 mapped to first transmission/reception layers TL1 and RL1 (without 15 bundling/sharing) and using the second HARQ process HARQ-2 mapped to third transmission/reception layers TL3 and RL3 (without bundling/sharing). Accordingly, the initial transmission includes a first data block transmitted/received using transmission/reception layers TL1 and RL1 and a second data block transmitted/received using transmission/reception layers TL3 and RL3. The resulting ACK/NACK message for 20 the HARQ-1 process maps to only the first data block (i.e., an ACK message is generated if the first data block passes decoding at CD1, or a NACK message is generated if the single data block fails decoding at CD1), and the resulting ACK/NACK message for the HARQ-2 process maps to only the second data block (i.e., an ACK message is generated if the second data block passes decoding at CD3, or a NACK message is generated if the second data block 25 fails decoding at CD3).

[00117] In each case where both of the first and second data blocks pass P (i.e., rows 1, 5, 9, and 13) decoding (so that two ACK messages are received), base station processor 101 may schedule the rank recommended/requested by wireless terminal 200, and new data NT may be transmitted in accordance with the UE reported rank. With scheduled rank 4, new 30 first and second data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and new third and fourth data blocks may be transmitted over respective transmission/reception layers TL3/RL3 and TL4/RL4 bundled with HARQ-2 using the same TFRE as shown in row 1 of Figure 11. With scheduled rank 3, new first and second data blocks may be transmitted over respective

transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and a new third data block may be transmitted over respective transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the same TFRE as shown in row 5 of Figure 11. With scheduled rank 2, a new first data block may be transmitted over

5 transmission/reception layers TL1/RL1 using HARQ-1 without bundling using a TFRE, and a second data block may be transmitted over transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the TFRE as shown in row 9 of Figure 11. With scheduled rank 1, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using the TFRE, and HARQ-2 may remain unused during

10 the TFRE as shown in row 13 of Figure 11.

[00118] In each case where wireless terminal 200 reports a recommended/requested rank 2 that is the same as the initial rank (as in rows 9, 10, 11, and 12 of Figure 11), base station processor 101 may maintain the same scheduled rank (i.e., rank 2) regardless of the pass/fail status of the initially transmitted data blocks. The same rank 2 HARQ process

15 mappings for HARQ-1 and HARQ-2 are maintained for the next transmission/retransmission regardless of the status P/F of the initial rank 2 transmission. Accordingly, retransmissions of one or both of the first and second data blocks (OT) may be supported using the same HARQ mappings, and/or new data blocks may be transmitted for either or both HARQ processes for which initial decoding passed.

20 **[00119]** When wireless terminal 200 reports a higher rank (i.e., rank 3 or rank 4) and the first data block (mapped to HARQ-1 without bundling/sharing) of the initial transmission fails F decoding resulting in a HARQ-1 NACK message (as in rows 3, 4, 7, and 8 of Figure 11), base station processor 101 may select rank 2 to maintain the same downlink transmission rank. The same rank 2 HARQ process mappings for HARQ-1 and HARQ-2 are thus

25 maintained for the retransmission of the first data block that failed and for the possible retransmission of the second data block using HARQ-2 if it failed or the transmission of a new data block using HARQ-2 if the initial second data block passed. According to one alternative of row 7 of Figure 11, base station processor 101 may schedule a lower rank 1 transmission if the second data block of HARQ-2 passed to support retransmission of the first 30 data block of HARQ-1 without transmitting a new data block using HARQ-2.

[00120] When wireless terminal 200 reports a higher rank (i.e., rank 3 or rank 4), when the first data block (mapped to HARQ-1 without bundling/sharing) of the initial transmission passes P decoding, and when the second data block (mapped to HARQ-2 without bundling/sharing) of the initial transmission fails F decoding resulting in a HARQ-2 NACK

message (as in rows 2 and 6 of Figure 11), base station processor 101 may select rank 3 (at rows 2 and 6 of Figure 11) to maintain the same HARQ-2 mapping to transmission/reception layers TL3/RL3 (without sharing/bundling) while allowing HARQ-1 to be mapped to transmission/reception layers TL1/RL1 and TL2/RL2 to allow transmission of two new data blocks NT using the HARQ-1 process. Stated in other words, a higher rank may be allowed even though the second data block failed because the mapping of HARQ-2 to transmission/reception layers TL3/RL3 (without sharing/bundling) is the same for both rank 2 and rank 3 transmissions. While the mapping of HARQ-1 is different for rank 2 and rank 3 transmissions, a same mapping of HARQ-1 is not required because the initial HARQ-1 data block passed. Accordingly, a higher data rate rank 3 transmission (allowing retransmission of the one HARQ-2 data packed that failed and 2 new HARQ-1 data packets) may be allowed while supporting the HARQ-2 retransmission.

[00121] At row 14 of Figure 11, if the first data block (of HARQ-1) of the initial transmission passes (P), if the second data block (HARQ-2) of the initial transmission fails (F), and wireless terminal 200 reports rank 1, base station processor may schedule an alternative rank one transmission retransmitting the second data block of the initial transmission using HARQ-2 (without bundling/sharing) over transmission/reception layers TL3/RL3. In an alternative at row 14 of Figure 11, rank 2 may be scheduled to support transmission of a new data block over transmission/reception layers TL1/RL1 using HARQ-1 and retransmission of the second data block over transmission/reception layers TL3/RL3 using HARQ-2.

[00122] At row 15 of Figure 11, if the first data block (of HARQ-1) of the initial transmission fails (F), if the second data block (HARQ-2) of the initial transmission passes (P), and wireless terminal 200 reports rank 1, base station processor 101 may schedule a conventional rank one transmission retransmitting the first data block of the initial transmission using HARQ-1 (without bundling/sharing) over transmission/reception layers TL1/RL1. At row 16 of Figure 11, if both of the first data block (HARQ-1) and the second data block (HARQ-2) of the initial transmission fail (F) and wireless terminal 200 reports rank 1, base station processor 101 may force a rank 2 transmission to maintain the mappings of HARQ-1 to transmission/reception layers TL1/RL1 and HARQ-2 to transmission/reception layers TL3/RL3 for retransmissions of both of the failed data blocks.

[00123] The table of Figure 12 illustrates base station processor 101 rank schedulings when an initial rank 3 downlink transmission is performed using the first HARQ process HARQ-1 mapped to first and second transmission/reception layers TL1/RL1 and TL2/RL2

(with bundling/sharing) and using the second HARQ process HARQ-2 mapped to third transmission/reception layers TL3/RL3 (without bundling/sharing). Accordingly, the initial transmission includes a first data block transmitted/received using transmission/reception layers TL1/RL1, and second data block transmitted/received using transmission/reception layers TL2/RL2, and a third data block transmitted/received using transmission/reception layers TL3/RL3. The resulting ACK/NACK message for the HARQ-1 process thus maps to the first and second data blocks (i.e., an ACK message is generated if both the first and second data blocks pass decoding at CD1 and CD2, or a NACK message is generated if either or both of the first and second data block fail decoding at CD1/CD2), and the resulting ACK/NACK message for the HARQ-2 process maps to only the third data block (i.e., an ACK message is generated if the third data block passes decoding at CD3, or a NACK message is generated if the third data block fails decoding at CD3).

[00124] If each of the first, second, and third data blocks pass decoding so that both HARQ-1 and HARQ-2 pass P (i.e., so two ACK messages are received), base station processor 101 may schedule the rank recommended/requested by wireless terminal 200 (as in rows 1, 5, 9, and 13 of Figure 12), and new data NT may be transmitted in accordance with the UE reported rank. With scheduled rank 4, new first and second data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and new third and fourth data blocks may be transmitted over respective transmission/reception layers TL3/RL3 and TL4/RL4 bundled with HARQ-2 using the same TFRE as shown in row 5 of Figure 12. With scheduled rank 3, new first and second data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and a new third data block may be transmitted over respective transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the same TFRE as shown in row 1 of Figure 12. With scheduled rank 2, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using a TFRE, and a second data block may be transmitted over transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the TFRE as shown in row 9 of Figure 12. With scheduled rank 1, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using the TFRE, and HARQ-2 may remain unused during the TFRE as shown in row 13 of Figure 12.

[00125] In each case where wireless terminal 200 reports a recommended/requested rank 3 that is the same as the initial rank (as in rows 1, 2, 3, and 4 of Figure 13), base station

processor 101 may maintain the same scheduled rank (i.e., rank 3). The same rank 2 HARQ process mappings for HARQ-1 and HARQ-2 are maintained for the next transmission/retransmission regardless of the status P/F of the initial rank 3 transmission. Accordingly, retransmissions of the first and second data blocks (OT) of HARQ-1 and/or 5 retransmission of the third data block (OT) of HARQ-2 may be supported using the same HARQ mappings, and/or new data blocks may be transmitted for either or both HARQ processes for which initial decoding passed.

[00126] When wireless terminal 200 reports a higher rank (i.e., rank 4) and the third data block (mapped to HARQ-2 without bundling/sharing) of the initial transmission fails F 10 decoding resulting in a HARQ-2 NACK message (as in rows 6 and 8 of Figure 12), base station processor 101 may maintain rank 3 to maintain the same rank 3 HARQ process mappings for HARQ-1 and HARQ-2. Accordingly, any needed retransmissions may be supported.

[00127] When wireless terminal 200 reports a higher rank (i.e., rank 4) and the third data block (mapped to HARQ-2 without bundling/sharing) of the initial transmission passes decoding resulting in a HARQ-2 ACK message (as in rows 5 and 7 of Figure 12), base station processor 101 may schedule rank 4 so that HARQ-1 is mapped to transmission/reception 15 layers TL1/RL1 and TL2/RL2 and so that HARQ-2 is mapped to transmission/reception layers TL3/RL3 and TL4/RL4. Here the HARQ-1 mapping is unchanged between rank 3 and rank 4 to support retransmission of first and second data blocks mapped to HARQ-1 if 20 needed as shown at row 7 of Figure 12.

[00128] When wireless terminal 200 reports rank 2 and the first and second data blocks (mapped to HARQ-1 with sharing/bundling) pass decoding resulting in a HARQ-1 ACK 25 message (as in rows 9 and 10 of Figure 12), base station processor 101 may schedule rank 2 so that HARQ-1 is mapped to transmission/reception layers TL1/RL1 (without sharing/bundling) and so that HARQ-2 is mapped to transmission/reception layers TL3/RL3 (without sharing/bundling). Accordingly, a mapping of HARQ-2 to transmission/reception 30 layers TL3/RL3 is the same for rank 2 and rank 3 downlink transmissions. Because both of the first and second data blocks of the initial HARQ-1 transmission passed decoding, retransmission using the HARQ-1 process is not required and remapping of the HARQ-1 process can occur without affecting any HARQ-1 retransmissions.

[00129] When wireless terminal 200 reports rank 2 and either or both of the first and second data blocks (mapped to HARQ-1 with sharing/bundling) fail decoding (F) resulting in a HARQ-1 NACK message (as in rows 11 and 12 of Figure 12), base station processor 101

may continue scheduling rank 3 (as in rows 11 and 12 of Figure 12) so that mappings of HARQ-1 and HARQ-2 remain unchanged (i.e., HARQ-1 maps to transmission/reception layers TL1/RL1 and TL2/RL2 and HARQ-2 maps to transmission/reception layer TL3/RL3). Accordingly, retransmissions of first and second data blocks of HARQ-1 may be supported, 5 and retransmission of third data block of HARQ-2 may be supported if needed (at row 12 of Figure 12).

[00130] At row 14 of Figure 12, if the first and second data blocks (mapped to HARQ-1) of the initial transmission pass (P), if the third data block (mapped to HARQ-2) of the initial transmission fails (F), and wireless terminal 200 reports rank 1, base station processor 10 101 may schedule an alternative rank one transmission retransmitting the third data block of the initial transmission using HARQ-2 (without bundling/sharing) over transmission/reception layers TL3/RL3. In another alternative at row 14, base station processor may schedule a conventional rank 2 transmission so that a new data block may be transmitted using transmission/reception layers TL1/RL1 and HARQ-1 and so that the third 15 data block may be retransmitted.

[00131] At rows 15 and 16 of Figure 12, if either or both of the first data blocks (mapped to HARQ-1) of the initial transmission fails (F), and wireless terminal 200 reports rank 1, base station processor 101 may continue scheduling rank 3 to support retransmission of the first and second data blocks that are mapped to HARQ-1.

[00132] The table of Figure 13 illustrates base station processor 101 rank schedulings when an initial rank 4 downlink transmission is performed using the first HARQ process HARQ-1 mapped to first and second transmission/reception layers TL1/RL1 and TL2/RL2 (with bundling/sharing) and using the second HARQ process HARQ-2 mapped to third and fourth transmission/reception layers TL3/RL3 and TL4/RL4 (with bundling/sharing). 20 Accordingly, the initial transmission includes a first data block transmitted/received using transmission/reception layers TL1/RL1, and second data block transmitted/received using transmission/reception layers TL2/RL2, a third data block transmitted/received using transmission/reception layers TL3/RL3, and a fourth data block transmitted using transmission/reception layers TL4/RL4. The resulting ACK/NACK message for the HARQ- 25 process thus maps to the first and second data blocks (i.e., an ACK message is generated if both the first and second data blocks pass decoding at CD1 and CD2, or a NACK message is generated if either or both of the first and second data block fail decoding at CD1/CD2), and the resulting ACK/NACK message for the HARQ-2 process maps to the third and fourth data 30 blocks (i.e., an ACK message is generated if both the third and fourth data blocks pass

decoding at CD3 and CD4, or a NACK message is generated if either or both of the third and fourth data blocks fail decoding at CD3/CD4).

[00133] In each case where all of the first, second, third and fourth data blocks pass decoding so that both HARQ-1 and HARQ-2 pass P (i.e., so two ACK messages are received), base station processor 101 may schedule the rank recommended/requested by wireless terminal 200 (as in rows 1, 5, 9, and 13 of Figure 13), and new data NT may be transmitted in accordance with the UE reported rank. With scheduled rank 4, new first and second data blocks may be transmitted over respective transmission/reception layers

TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and new third and fourth data blocks may be transmitted over respective transmission/reception layers TL3/RL3 and TL4/RL4 bundled with HARQ-2 using the same TFRE as shown in row 1 of Figure 13. With scheduled rank 3, new first and second data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL2/RL2 bundled with HARQ-1 using a same TFRE, and a new third data block may be transmitted over respective transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the same TFRE as shown in row 5 of Figure 13. With scheduled rank 2, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using a TFRE, and a second data block may be transmitted over transmission/reception layers TL3/RL3 using HARQ-2 without bundling using the TFRE as shown in row 9 of Figure 13. With scheduled rank 1, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using the TFRE, and HARQ-2 may remain unused during the TFRE as shown in row 13 of Figure 13.

[00134] In each case where wireless terminal 200 reports a recommended/requested rank 4 that is the same as the initial rank (as in rows 1, 2, 3, and 4 of Figure 13), base station processor 101 may maintain the same scheduled rank (i.e., rank 4). The same rank 4 HARQ process mappings for HARQ-1 and HARQ-2 are maintained for the next transmission/retransmission regardless of the status P/F of the initial rank 4 transmission. Accordingly, retransmissions of the first and second data blocks (OT) of HARQ-1 and/or retransmission of the third and fourth data blocks (OT) of HARQ-2 may be supported using the same HARQ mappings, and/or new data blocks may be transmitted for either or both HARQ processes for which initial decoding passed.

[00135] When wireless terminal 200 reports a lower rank (e.g., rank 3, rank 2, or rank 1) and either or both of the third or fourth data blocks (mapped to HARQ-2 with sharing/bundling) fail decoding F resulting in a HARQ-2 NACK message (as in rows 6, 8,

10, 12, 14, or 16 of Figure 13), base station processor 101 may continue scheduling rank 4 so that HARQ-2 is mapped to the third and fourth transmission/reception layers TL3/RL3 and TL4/RL4 to support retransmission of the third and fourth data blocks. By continuing rank 4, HARQ-1 may continue to be mapped to transmission/reception layers TL1/RL1 and

5 TL2/RL2 to support retransmission of the first and second data blocks (mapped to HARQ-1 with sharing/bundling) if needed (e.g., at rows 8, 12, or 16 of Figure 13), or two new data blocks may be transmitted using HARQ-1 (e.g., at rows 6, 10, or 14 of Figure 13).

[00136] When wireless terminal 200 reports rank 3 and the third and fourth data blocks (mapped to HARQ-2 with sharing/bundling) pass decoding P resulting in a HARQ-2 ACK

10 message (as in rows 5 and 7 of Figure 13), base station processor 101 may schedule rank 3 so that HARQ-1 is mapped to the first and second transmission/reception layers TL1/RL1 and TL2/RL2 (with bundling/sharing) to support retransmission of the first and second data blocks if needed, and so that HARQ-2 is mapped to the third transmission/reception layer TL3/RL3 (without bundling/sharing).

15 **[00137]** When wireless terminal 200 reports rank 2 and either or both of the first and second data blocks (mapped to HARQ-1 with sharing/bundling) fail decoding resulting in a HARQ-1 NACK message and both of the third and fourth data blocks (mapped to HARQ-2) pass decoding resulting in a HARQ-2 ACK (as in row 11 of Figure 13), base station processor 101 may schedule rank 3 so that HARQ-1 is mapped to transmission/reception

20 layers TL1/RL1 and TL2/RL2 (with sharing/bundling) and so that HARQ-2 is mapped to transmission/reception layers TL3/RL3 (without sharing/bundling). Accordingly, a mapping of HARQ-1 to transmission/reception layers TL1/RL1 and TL2/RL2 is the same for rank 3 and rank 4 downlink transmissions to support retransmission of the first and second data blocks. Because both of the third and fourth data blocks of the initial HARQ-2 transmission 25 passed decoding, retransmission using the HARQ-2 process is not required and remapping of the HARQ-2 process can occur without affecting any HARQ-2 retransmissions.

[00138] When wireless terminal 200 reports rank 1 and either or both of the first and second data blocks (mapped to HARQ-1 with sharing/bundling) fail decoding (F) resulting in a HARQ-1 NACK message and both of the third and fourth data blocks (mapped to HARQ-2

30 with sharing/bundling) pass decoding (P) resulting in a HARQ-2 ACK message at row 15 of Figure 13, base station processor 101 may schedule rank 3 so that mappings of HARQ-1 remain unchanged (i.e., HARQ-1 maps to transmission/reception layers TL1/RL1 and TL2/RL2). Accordingly, retransmissions of first and second data blocks of HARQ-1 may be

supported, and HARQ-2 may be mapped to transmission/reception layers TL1/RL1 (without bundling/sharing) for transmission of a new data block.

[00139] As set forth in the tables of Figures 10-13, P may represent an ACK for the respective HARQ process, and F may represent a NACK for the respective HARQ process.

5 Moreover, NT (new transmission) represents a new transmission of a new data block(s), and OT (old transmission) represents a retransmission of a previously transmitted data block(s) for which the associate HARQ process generated a NACK.

[00140] According to embodiments discussed above, radio base station processor 101 may select a MIMO transmission rank for a subsequent downlink transmission responsive to 10 a rank reported (e.g., requested/recommended) by wireless terminal 200, but base station processor 101 may deviate from the reported rank if a NACK has been received for one or more HARQ processes used for a preceding downlink transmission. More particularly, wireless terminal 200 may deviate from the reported rank to select a MIMO transmission rank that maintains a HARQ process mapping from the preceding downlink transmission if 15 the HARQ process generated a NACK for the preceding downlink transmission. When two HARQ processes are used in a 4 antenna system supporting up to 4 downlink data streams (i.e., up to rank 4), for example, if an initial downlink transmission has rank 2 or higher and both HARQ processes generate NACKs, base station processor 101 may maintain the same rank for the next transmission (even if a lower or a higher rank was reported) to support 20 retransmission of all data blocks of both HARQ processes (see, rows 4, 8, 12, and 16 of Figure 11; rows 4, 8, 12, and 16 of Figure 12; and rows 4, 8, 12, and 16 of Figure 13). If all HARQ processes used in an initial downlink transmission generate ACKs, base station processor 101 may change the rank for the next transmission to any rank reported by wireless terminal 200 (see, rows 1, 3, 5, 7 of Figure 10; rows 1, 5, 9, and 13 of Figure 11; rows 1, 5, 9, 25 and 13 of Figure 12; and rows 1, 5, 9, and 13 of Figure 13). If a bundled/shared HARQ process used in an initial downlink transmission generates a NACK, base station processor 101 may require a rank of three or higher for the next transmission.

[00141] According to some embodiments of present inventive concepts, a first transmission/reception layer (corresponding to a stream of data codewords CW1) may be 30 supported using TB1, CE1, IM1, and/or SS1 at base station 100 and using DM1, SB1, and/or CD1 at wireless terminal 200; a second transmission/reception layer (corresponding to a stream of data codewords CW2) may be supported using TB2, CE2, IM2, and/or SS2 at base station 100 and using DM2, SB2, and/or CD2 at wireless terminal 200; a third transmission/reception layer (corresponding to a stream of data codewords CW3) may be

supported using TB3, CE3, IM3, and/or SS3 at base station 100 and using DM3, SB3, and/or CD3 at wireless terminal 200; and a fourth transmission/reception layer (corresponding to a stream of data codewords CW4) may be supported using TB4, CE4, IM4, and/or SS4 at base station 100 and using DM4, SB4, and/or CD4 at wireless terminal 200. As shown in Figure

5 14 for rank 1 transmission/reception, a single stream of data codewords CW1 may be transmitted/received using the first transmission/reception layer (e.g., including TB1, CE1, IM1, and/or SS1 at base station 100 and including DM1, SB1, and/or CD1 at wireless terminal 200) without using the second, third, and fourth transmission/reception layers, and a first HARQ process/codeword (HARQ-1) may be mapped directly to the single stream of

10 data codewords CW1. As shown in Figure 14 for rank 2 transmission/reception, a first stream of data codewords CW1 may be transmitted/received using the first transmission/reception layer (e.g., including TB1, CE1, IM1, and/or SS1 at base station 100 and including DM1, SB1, and/or CD1 at wireless terminal 200), and a second stream of data codewords CW2 may be transmitted/received using the second transmission/reception layer

15 (e.g., including TB2, CE2, IM2, and/or SS2 at base station 100 and including DM2, SB2, and/or CD2 at wireless terminal 200), without using the third and fourth transmission/reception layers. For rank 2 transmission/reception, the first HARQ process/codeword (HARQ-1) may be mapped directly to the first stream of data codewords CW1, and a second HARQ process/codeword (HARQ-2) may be mapped directly to the

20 second stream of data codewords CW2. For rank 1 and 2 transmission/reception of Figure 14, each stream of codewords may be mapped directly to a respective HARQ process/codeword without bundling as discussed above.

[00142] As shown in Figure 14 for rank 3 transmission/reception, a first stream of data codewords CW1 may be transmitted/received using the first transmission/reception layer (e.g., including TB1, CE1, IM1, and/or SS1 at base station 100 and including DM1, SB1, and/or CD1 at wireless terminal 200), a second stream of data codewords CW2 may be transmitted/received using the second transmission/reception layer (e.g., including TB2, CE2, IM2, and/or SS2 at base station 100 and including DM2, SB2, and/or CD2 at wireless terminal 200), and a third stream of data codewords CW3 may be transmitted/received using the third transmission/reception layer (e.g., including TB3, CE3, IM3, and/or SS3 at base station 100 and including DM3, SB3, and/or CD3 at wireless terminal 200), without using the fourth transmission/reception layer. For rank three transmission/reception, the first HARQ process/codeword (HARQ-1) may be mapped directly to the first stream of data codewords CW1, while the second HARQ process/codeword (HARQ-2) may be mapped to both of the

second and third streams of data codewords CW2 and CW3. For rank 3 transmission/reception, the first stream of codewords may be mapped directly to the first HARQ process/codeword without bundling, while the second and third streams of codewords may be bundled with the second HARQ process.

5 [00143] As shown in Figure 14 for rank 4 transmission/reception, a first stream of data codewords CW1 may be transmitted/received using the first transmission/reception layer (e.g., including TB1, CE1, IM1, and/or SS1 at base station 100 and including DM1, SB1, and/or CD1 at wireless terminal 200), a second stream of data codewords CW2 may be transmitted/received using the second transmission/reception layer (e.g., including TB2, CE2, IM2, and/or SS2 at base station 100 and including DM2, SB2, and/or CD2 at wireless terminal 200), a third stream of data codewords CW3 may be transmitted/received using the third transmission/reception layer (e.g., including TB3, CE3, IM3, and/or SS3 at base station 100 and including DM3, SB3, and/or CD3 at wireless terminal 200), and a fourth stream of data codewords CW4 may be transmitted/received using the fourth transmission/reception 10 layer (e.g., including TB4, CE4, IM4, and/or SS4 at base station 100 and including DM4, SB4, and/or CD4 at wireless terminal 200). Moreover, the first HARQ process/codeword (HARQ-1) may be mapped to both of the first and fourth streams of data codewords CW1 and CW4, and the second HARQ process/codeword (HARQ-2) may be mapped to both of the second and third streams of data codewords CW2 and CW3. For rank 4 15

20 transmission/reception, the first and second streams of codewords may be bundled with first HARQ process/codeword, while the second and third streams of codewords may be bundled with the second HARQ process.

[00144] According to embodiments of Figure 14, the first transmission/reception layer TL1/RL1 (transmitted using TB1, CE1, IM1, and/or SS1 at base station 100 and received 25 using DM1, SB1, and/or CD1 at wireless terminal 200) may support transmission/reception of data codewords CW1, and the first transmission layer may be mapped to the first HARQ process (HARQ-1) for transmission according to ranks 1, 2, 3, and 4. The second transmission/reception layer TL1/RL1 (transmitted using TB2, CE2, IM2, and/or SS2 at base 30 station 100 and received using DM2, SB2, and/or CD2 at wireless terminal 200) may support transmission/reception of data codewords CW2, and the second transmission layer may be mapped to the second HARQ process (HARQ-2) for transmission according to ranks 2, 3, and 4. The third transmission/reception layer TL3/RL3 (transmitted using TB2, CE3, IM3, and/or SS3 at base station 100 and received using DM3, SB3, and/or CD3 at wireless terminal 200) may support transmission/reception of data codewords CW3, and the third

transmission layer may be mapped to the second HARQ process (HARQ-2) for transmission according to ranks 3 and 4. The fourth transmission/reception layer TL4/RL4 (transmitted using TB4, CE4, IM4, and/or SS4 at base station 100 and received using DM4, SB4, and/or CD4 at wireless terminal 200) may support transmission/reception of data codewords CW4, 5 and the fourth transmission layer may be mapped to the second HARQ process (HARQ-2) for transmission according to rank 4. Accordingly, each transmission/reception layer (when used) is mapped to a same HARQ process regardless of the transmission/reception rank being use. Accordingly, each wireless terminal decoder and soft buffer may be mapped to a same HARQ processes for any rank using the decoder and soft buffer.

10 **[00145]** According to embodiments of Figure 14: a mapping of layer 1 to the first HARQ process HARQ-1 remains the same for ranks 1, 2, 3, and 4; a mapping of layer 2 to the second HARQ process HARQ-2 remains the same for ranks 2, 3, and 4; and a mapping of layer 3 to the second HARQ process HARQ-2 remains the same for ranks 3 and 4. Accordingly, if the rank changes between ranks 3 and 4, the bundled mapping of layers 2 and 15 3 to the second HARQ process HARQ-2 stays the same, thereby supporting retransmissions over layers 2 and 3 while changing to either rank 3 or rank 4 with HARQ 2 bundled to the 2nd and 3rd layers. Similarly, if the rank changes between ranks 1 and 2, between ranks 2 and 3, or between ranks 1 and 3, the direct mapping of layer 1 to the first HARQ process HARQ-1 stays the same, thereby supporting retransmissions over layer 1 while changing to rank 1, 20 rank 2, or rank 3 with HARQ-1 bundled to the first layer (without bundling). Partial retransmission (e.g., where previously transmitted data for one HARQ process is retransmitted and new data for the other HARQ process is initially transmitted during the same TTI) may thus be supported while changing rank as long as the layer or layers mapped to the HARQ process for the retransmission is unchanged.

25 **[00146]** Wireless terminal processor 201 and/or transceiver 209 may define a plurality of reception layers/streams as discussed above with respect to Figures 4 and/or 5: with a first layer RL1 being used for MIMO ranks 1, 2, 3, and 4; with a second layer RL2 being used for MIMO ranks 2, 3, and 4; with a third layer RL3 being used for MIMO ranks 3 and 4; and with a fourth MIMO layer RL4 being used for MIMO rank 4. Separate decoding (e.g., using 30 decoder functionally illustrated by decoders CD1-4 of Figure 5) may be performed for each MIMO layer received during a MIMO TTI. Wireless terminal processor 201, for example, may define, configure, and/or use one or more of reception layers RL1, RL2, RL3, and/or RL4 for a given TTI/TFRE responsive to rank and/or precoding vector information provided from base station 100 via downlink signaling as discussed above with respect to Figure 3A.

For example, a higher MIMO rank (defining a respective higher number of reception layers/streams) may be selected when the wireless terminal detects that the downlink channel has a higher SINR (e.g., when the wireless terminal is relatively close to the base station), and a lower MIMO rank (defining a respective lower number of reception layers/streams) may be selected when the wireless terminal detects that the downlink channel has a lower SINR (e.g., when the wireless terminal is relatively distant from the base station).

[00147] While separate transport block generator, encoder, modulator, layer mapper, spreader/scrambler, and layer precoder blocks are illustrated in Figure 4 by way of example, the blocks of Figure 4 merely illustrate functionalities/operations of base station processor 101 and/or transceiver 109. Sub-blocks (e.g., transport blocks TB1-TB4 channel encoders CE1-CE4, interleavers/modulators IM1-IM4, and spreader scramblers SS1-SS4) of Figure 4 further illustrate functionalities/operations of transport block generator, encoder block, modulator block, and spreader/scrambler block supporting transmission layers TL1-TL4. Processor 101, however, may provide/define/configure functionality/operations of only one transmission layer TL1 during rank 1 transmission; processor 101 may provide/define/configure functionality/operations of only two transmission layers TL1 and TL2 during rank 2 transmission; processor 101 may provide/define/configure functionality/operations of only 3 transmission layers TL1, TL2, and TL3 during rank 3 transmission; and functionality/operations of four transmission layers TL1, TL2, TL3, and TL4 may only be provided during rank 4 transmission. When multiple transmission layers are provided/defined/configured, for example, processor 101 may provide/define/configure functionality/operations of multiple transport block sub-blocks, multiple channel decoder sub-blocks, multiple interleaver/modulator sub-blocks, and/or multiple spreader/scrambler sub-blocks to allow parallel processing of data of different transmission layers before transmission during a TTI/TFRE, or processor 101 may provide/define/configure functionality/operations of a single transport block, a single channel encoder, a single interleaver/modulator, and/or a single spreader scrambler to allow serial processing of data of different transmission layers before transmission during a TTI/TFRE.

[00148] While separate layer decoder, layer demapper, demodulator/deinterleaver, soft buffer, channel decoder, and transport block combiner blocks/sub-blocks are illustrated in Figure 5 by way of example, the blocks of Figure 5 merely illustrate functionalities/operations of wireless terminal processor 201 and/or transceiver 209. For example, sub-blocks (e.g., demodulator/deinterleaver DM1-DM4, soft buffers SB1-SB4, and channel decoders CD1-CD4) of Figure 5 illustrate functionalities/operations providing

reception layers RL1-RL4. Processor 101, however, may provide/define/configure functionality/operations of only one reception layer RL1 during rank 1 reception; processor 101 may provide/define/configure functionality/operations of only two reception layers RL1 and RL2 during rank 2 transmission; processor 101 may provide/define/configure

5 functionality/operations of only 3 reception layers RL1, RL2, and RL3 during rank 3 transmission; and functionality/operations of four reception layers RL1, RL2, RL3, and RL4 may only be provided during rank 4 transmission. When multiple reception layers are provided/defined/configured, for example, processor 101 may provide/define/configure functionality/operations of multiple demodulator/deinterleaver blocks, multiple soft buffer 10 blocks, and/or multiple channel decoder blocks to allow parallel processing of data of different reception layers during a TTI/TFRE, or processor 101 may provide/define/configure functionality/operations of a single demodulator/deinterleaver block, a single soft buffer, and/or a single channel decoder to allow serial processing of data of different reception layers during a TTI/TFRE.

15 **[00149]** According to embodiments of present inventive concepts discussed above with respect to Figure 14, base station processor 101 may use mapping tables of Figures 15-18 to retransmit failed data packets (e.g., associated with a bundled HARQ process) as an alternative to using mapping tables of Figures 10-13 as discussed above with respect to operations of Figure 9 when wireless terminal 200 reports/requests a downlink transmission 20 rank that is different than the downlink transmission rank used to initially transmit the now failed data packets. These embodiments will now be discussed in greater detail below with respect to the tables of Figures 15-18 for systems including 4 transmit and 4 receive MIMO antennas supporting one, two, three, and four MIMO transmission ranks. While 25 embodiments relating to 4 transmit and 4 receive MIMO antennas are discussed by way of example, embodiments of present inventive concepts may be applied to systems including fewer and/or more MIMO transmit and receive antennas.

[00150] If retransmission of previously transmitted data blocks using a shared/bundled HARQ process(es) is required at block 903 of Figure 9, base station processor 101 may select a DL transmission rank at block 905 to maintain a same HARQ process mapping for any such 30 retransmissions as set forth in the tables of Figures 15-18. The headings, acronyms, and abbreviations of Figures 15-18 have the same meanings as those discussed above with respect to Figures 10-13.

[00151] The table of Figure 15 illustrates base station processor 101 rank schedulings when an initial rank 1 downlink transmission is performed using the first HARQ process

HARQ-1 mapped to first transmission/reception layers TL1/RL1. Accordingly, the initial transmission includes only a single data block transmitted/received using transmission/reception layers TL1/RL1, and the resulting ACK/NACK message for the HARQ-1 process maps to only the single data block (i.e., an ACK message is generated if the 5 single data block passes decoding at CD1, or a NACK message is generated if the single data block fails decoding at CD1). In each case where the single data block passes P (i.e., rows 1, 3, 5, and 7 of Figure 15) decoding (so that an ACK message is received), base station processor 101 may schedule the rank reported/requested by wireless terminal 200, and new data NT may be transmitted in accordance with the UE reported rank. With scheduled rank 10 4, new first and fourth data blocks may be transmitted over respective transmission/reception layers TL1/RL1 and TL4/RL4 bundled with HARQ-1 using a same TFRE, and new second and third data blocks may be transmitted over respective transmission/reception layers TL2/RL2 and TL3/RL3 bundled with HARQ-2 using the same TFRE as shown in row 1 of Figure 15. With scheduled rank 3, a new first data block may be transmitted over respective 15 transmission/reception layers TL1/RL1 using HARQ-1 using a TFRE without bundling, and new second and third data blocks may be transmitted over respective transmission/reception layers TL2/TL2 and TL3/RL3 bundled with HARQ-2 using the same TFRE as shown in row 3 of Figure 15. With scheduled rank 2, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using a TFRE, and a 20 second data block may be transmitted over transmission/reception layers TL2/RL2 using HARQ-2 without bundling using the TFRE as shown in row 5 of Figure 15. With scheduled rank 1, a new first data block may be transmitted over transmission/reception layers TL1/RL1 using HARQ-1 without bundling using the TFRE, and HARQ-2 may remain unused during the TFRE as shown in row 7 of Figure 15.

25 [00152] In cases where the single data block fails F (rows 2, 4, 6, and 8 of Figure 15) decoding (so that a NACK message is received), base station processor 101 may consider the reported rank, but base station processor 101 may schedule the downlink transmission using the reported rank or a different rank to maintain a HARQ process mapping to support the retransmission of the failed data block. As shown at rows 2, 4, and 6 of Figure 15, for 30 example, if wireless terminal 200 reports a rank higher than that of the initial transmission (i.e., a reported rank of 2, 3, or 4 with an initial rank of 1), base station processor 101 may allow scheduling of a higher rank transmission but not necessarily the rank reported/requested by wireless terminal 200. As shown at rows 4 and 6 of Figure 15, if wireless terminal 200 reports/requests a rank of 3 or 2 after a failed rank 1

transmission/reception, base station processor 101 may schedule the reported/requested rank (i.e., rank 3 or 2) because the HARQ-1 is mapped to the first transmission/reception layer TL1/RL1 without bundling for rank 1, 2, and 3 transmission/reception according to embodiments of Figure 14. As shown at row 2 of Figure 15, if wireless terminal 200

5 reports/requests a rank of 4 after a failed rank 1 transmission/reception, base station processor 101 may schedule a rank 3 transmission (higher than the previous rank 1 transmission) because a rank 3 transmission maintains the mapping of the first transmission/reception layer TL1/RL1 to HARQ-1 without bundling to support retransmission (in contrast to a rank 4 transmission that would bundle HARQ-1). If the reported rank is the same as the initial rank

10 as shown in row 8 of Figure 15, the scheduled rank may remain unchanged so that the mapping of HARQ-1 to transmission/reception layers TL1/RL1 is unchanged and so that the failed data block may be retransmitted using the same HARQ-1 mapping. More generally, if the reported rank is unchanged relative to the initial rank as shown in rows 7 and 8 of Figure 15, the reported rank may be scheduled whether the initial data block(s) was(were)

15 successfully decoded or not.

[00153] Figure 16 illustrates base station processor 101 rank schedulings when an initial rank 2 downlink transmission is performed using HARQ-1 mapped to first transmission/reception layers TL1/RL1 (without bundling/sharing) and using HARQ-2 mapped to second transmission/reception layers TL2/RL2 (without bundling/sharing).

20 Accordingly, the initial transmission includes a first data block transmitted/received using transmission/reception layers TL1/RL1 and a second data block transmitted/received using transmission/reception layers TL2/RL2. The resulting ACK/NACK message for HARQ-1 maps to only the first data block (i.e., an ACK message is generated if the first data block passes decoding at CD1, or a NACK message is generated if the single data block fails

25 decoding at CD1), and the resulting ACK/NACK message for the HARQ-2 process maps to only the second data block (i.e., an ACK message is generated if the second data block passes decoding at CD2, or a NACK message is generated if the second data block fails decoding at CD2).

[00154] In each case where both of the first and second data blocks pass P (i.e., rows 1, 30 5, 9, and 13) decoding (so that two ACK messages are received), base station processor 101 may schedule the rank recommended/requested by wireless terminal 200, and new data NT may be transmitted in accordance with the UE reported rank as discussed above with respect to rows 1, 3, 5, and 7 of Figure 15. In each case where wireless terminal 200 reports/recommends rank 2 that is the same as the initial rank (as in rows 9, 10, 11, and 12 of

Figure 11), base station processor 101 may maintain the same scheduled rank (i.e., rank 2) regardless of the pass/fail status of the initially transmitted data blocks. The same rank 2 HARQ process mappings for HARQ-1 and HARQ-2 are maintained for the next transmission/retransmission regardless of the status P/F of the initial rank 2 transmission.

5 Accordingly, retransmissions of one or both of the first and second data blocks (OT) may be supported using the same HARQ mappings, and/or new data blocks may be transmitted for either or both HARQ processes for which initial decoding passed.

[00155] When wireless terminal 200 reports a higher rank (i.e., rank 3 or rank 4) and the second data block (mapped to HARQ-2 without bundling/sharing) of the initial 10 transmission fails F decoding resulting in a HARQ-2 NACK message (as in rows 2, 4, 6, and 8 of Figure 16), base station processor 101 may select rank 2 to maintain the same downlink transmission rank. The same rank 2 HARQ process mappings for HARQ-1 and HARQ-2 are thus maintained for the retransmission of the second data block using HARQ-2 that failed and for the possible retransmission of the first data block using HARQ-1 if it failed or the 15 transmission of a new data block using HARQ-1 if the initial first data block passed.

[00156] When wireless terminal 200 reports a higher rank (i.e., rank 3 or rank 4), when the second data block (mapped to HARQ-2 without bundling/sharing) of the initial 20 transmission passes P decoding, and when the first data block (mapped to HARQ-1 without bundling/sharing) of the initial transmission fails F decoding resulting in a HARQ-1 NACK message (as in rows 3 and 7 of Figure 16), base station processor 101 may select rank 3 (at rows 3 and 7 of Figure 16) to maintain the same HARQ-1 mapping to transmission/reception layers TL1/RL1 (without sharing/bundling) while allowing HARQ-2 to be mapped to transmission/reception layers TL2/RL2 and TL3/RL3 to allow transmission of two new data blocks NT using the HARQ-2 process. Stated in other words, a higher rank may be allowed 25 even though the first data block failed because the mapping of HARQ-1 to transmission/reception layers TL1/RL1 (without sharing/bundling) is the same for both rank 2 and rank 3 transmissions. While the mapping of HARQ-2 is different for rank 2 and rank 3 transmissions, a same mapping of HARQ-2 is not required because the initial HARQ-2 data block passed. Accordingly, a higher data rate rank 3 transmission (allowing retransmission 30 of the one HARQ-1 data packet that failed and 2 new HARQ-2 data packets) may be allowed while supporting the HARQ-1 retransmission.

[00157] At row 14 of Figure 16, if the first data block (of HARQ-1) of the initial transmission passes (P), if the second data block (of HARQ-2) of the initial transmission fails (F), and wireless terminal 200 reports rank 1, base station processor 101 may schedule a rank

two transmission to support transmission of a new data block over transmission/reception layers TL1/RL1 using HARQ-1 and retransmission of the second data block over transmission/reception layers TL2/RL2 using HARQ-2. At row 15 of Figure 16, if the first data block (of HARQ-1) of the initial transmission fails (F), if the second data block (HARQ-2) of the initial transmission passes (P), and wireless terminal 200 reports rank 1, base station processor 101 may schedule a rank one transmission retransmitting the first data block of the initial transmission using HARQ-1 (without bundling/sharing) over transmission/reception layers TL1/RL1. At row 16 of Figure 16, if both of the first data block (HARQ-1) and the second data block (HARQ-2) of the initial transmission fail (F) and wireless terminal 200 reports rank 1, base station processor 101 may force a rank 2 transmission to maintain the mappings of HARQ-1 to transmission/reception layers TL1/RL1 and HARQ-2 to transmission/reception layers TL2/RL2 for retransmissions of both of the failed data blocks.

[00158] Figure 17 illustrates base station processor 101 rank schedulings when an initial rank 3 downlink transmission is performed using HARQ-1 mapped to first transmission/reception layers TL1/RL1 (without bundling/sharing) and using HARQ-2 mapped to second and third transmission/reception layers TL2/RL2 and TL3/RL3 (with bundling/sharing). Accordingly, the initial transmission includes a first data block transmitted/received using transmission/reception layers TL1/RL1, a second data block transmitted/received using transmission/reception layers TL2/RL2, and a third data block transmitted/received using transmission/reception layers TL3/RL3. The resulting ACK/NACK message for HARQ-1 thus maps to the first data block (i.e., an ACK message is generated if the first data block passes decoding at CD1, or a NACK message is generated if the first data block fails decoding at CD1), and the resulting ACK/NACK message for the HARQ-2 process maps to the second and third data blocks (i.e., an ACK message is generated if both of the second and third data block pass decoding at CD2 and CD3, or a NACK message is generated if either of the second and/or third data blocks fail decoding at CD2 and/or CD3).

[00159] In cases where each of the first, second, and third data blocks pass decoding so that both HARQ-1 and HARQ-2 pass P (i.e., so two ACK messages are received), base station processor 101 may schedule the rank recommended/requested by wireless terminal 200 (as in rows 1, 5, 9, and 13 of Figure 17), and new data NT may be transmitted in accordance with the UE reported rank as discussed above with respect to Figures 15 and 16. In each case where wireless terminal 200 reports a recommended/requested rank 3 that is the same as the initial rank (as in rows 5, 6, 7, and 8 of Figure 13), base station processor 101

may maintain the same scheduled rank (i.e., rank 3). The same rank 3 HARQ process mappings for HARQ-1 and HARQ-2 are thus maintained for the next transmission/retransmission regardless of the status P/F of the initial rank 3 transmission. Accordingly, retransmission of the first data block (OT) of HARQ-1 and/or retransmission of 5 the second and third data blocks (OT) of HARQ-2 may be supported using the same HARQ mappings, and/or new data blocks may be transmitted for either or both HARQ processes for which initial decoding passed.

[00160] When wireless terminal 200 reports a higher rank (i.e., rank 4) and the first data block (mapped to HARQ-1 without bundling/sharing) of the initial transmission fails F 10 decoding resulting in a HARQ-1 NACK message (as in rows 3 and 4 of Figure 17), base station processor 101 may maintain rank 3 to maintain the same rank 3 HARQ process mappings for HARQ-1 and HARQ-2. Accordingly, any needed retransmissions may be supported. When wireless terminal 200 reports a higher rank (i.e., rank 4) and the first data block (mapped to HARQ-1 without bundling/sharing) of the initial transmission passes 15 decoding resulting in a HARQ-1 ACK message (as in rows 1 and 2 of Figure 17), base station processor 101 may schedule rank 4 so that HARQ-1 is mapped to transmission/reception layers TL1/RL1 and TL4/RL4 and so that HARQ-2 is mapped to transmission/reception layers TL2/RL2 and TL3/RL3. Here the HARQ-2 mapping is unchanged between rank 3 and rank 4 to support retransmission of second and third data blocks mapped to HARQ-2 if 20 needed as shown at row 2 of Figure 17.

[00161] When wireless terminal 200 reports rank 2 and the second and third data blocks (mapped to HARQ-2 with sharing/bundling) pass decoding resulting in a HARQ-2 ACK message (as in rows 9 and 11 of Figure 17), base station processor 101 may schedule 25 rank 2 so that HARQ-1 is mapped to transmission/reception layers TL1/RL1 (without sharing/bundling) and so that HARQ-2 is mapped to transmission/reception layers TL2/RL2 (without sharing/bundling). Accordingly, a mapping of HARQ-1 to transmission/reception layers TL1/RL1 is the same for rank 2 and rank 3 downlink transmissions. Because both of the second and third data blocks of the initial HARQ-2 transmission passed decoding, retransmission using the HARQ-2 process is not required and remapping of the HARQ-2 30 process can occur without affecting any HARQ-2 retransmissions.

[00162] When wireless terminal 200 reports rank 2 and either or both of the second and third data blocks (mapped to HARQ-2 with sharing/bundling) fail decoding (F) resulting in a HARQ-2 NACK message (as in rows 10 and 12 of Figure 17), base station processor 101 may continue scheduling rank 3 (as in rows 10 and 12 of Figure 17) so that mappings of

HARQ-1 and HARQ-2 remain unchanged (i.e., HARQ-1 maps to transmission/reception layers TL1/RL1 and HARQ-2 maps to transmission/reception layers TL2/RL2 and TL3/RL3). Accordingly, retransmissions of second and third data blocks of HARQ-2 may be supported, and retransmission of a first data block of HARQ-1 may be supported if needed (at 5 row 12 of Figure 17).

[00163] At rows 13 and 15 of Figure 17, if the second and third data blocks (mapped to HARQ-2) of the initial transmission pass (P) and wireless terminal 200 reports rank 1, base station processor may schedule a rank 1 transmission supporting transmission of new data or retransmission of old data using the first transmission/reception layers RL1/TL1. At rows 14 10 and 16 of Figure 17, if either of the second and/or third data blocks (mapped to HARQ-2) of the initial transmission fail (F) and wireless terminal 200 reports rank 1, base station processor 101 may schedule/maintain rank 3 transmission to support retransmission of the second and/or third data blocks using transmission/reception layers RL2/TL2 and RL3/TL3 mapped to HARQ-2.

[00164] The table of Figure 18 illustrates base station processor 101 rank schedulings when an initial rank 4 downlink transmission is performed using HARQ-1 mapped to first and fourth transmission/reception layers TL1/RL1 and TL4/RL4 (with bundling/sharing) and using HARQ-2 mapped to second and third transmission/reception layers TL2/RL2 and TL3/RL3 (with bundling/sharing). Accordingly, the initial transmission includes a first data 15 block transmitted/received using transmission/reception layers TL1/RL1, a second data block transmitted/received using transmission/reception layers TL2/RL2, a third data block transmitted/received using transmission/reception layers TL3/RL3, and a fourth data block transmitted using transmission/reception layers TL4/RL4. The resulting ACK/NACK message for HARQ-1 thus maps to the first and fourth data blocks (i.e., an ACK message is 20 generated if both the first and fourth data blocks pass decoding at CD1 and CD4, or a NACK message is generated if either or both of the first and fourth data blocks fail decoding at CD1/CD4), and the resulting ACK/NACK message for HARQ-2 maps to the second and 25 third data blocks (i.e., an ACK message is generated if both the second and third data blocks pass decoding at CD2 and CD3, or a NACK message is generated if either or both of the second and third data blocks fail decoding at CD2/CD3). 30

[00165] In each case where all of the first, second, third and fourth data blocks pass decoding so that both HARQ-1 and HARQ-2 pass P (i.e., so two ACK messages are received), base station processor 101 may schedule the rank reported/requested by wireless terminal 200 (as in rows 1, 5, 9, and 13 of Figure 18), and new data NT may be transmitted in

accordance with the UE reported rank as discussed above with respect to Figures 15, 16, and 17. In each case where wireless terminal 200 reports a recommended/requested rank 4 that is the same as the initial rank (as in rows 1, 2, 3, and 4 of Figure 18), base station processor 101 may maintain the same scheduled rank (i.e., rank 4). The same rank 4 HARQ process

5 mappings for HARQ-1 and HARQ-2 are thus maintained for the next transmission/retransmission regardless of the status P/F of the initial rank 4 transmission. Accordingly, retransmissions of the first and fourth data blocks (OT) of HARQ-1 and/or retransmission of the second and third data blocks (OT) of HARQ-2 may be supported using the same HARQ mappings, and/or new data blocks may be transmitted for either or both 10 HARQ processes for which initial decoding passed.

[00166] When wireless terminal 200 reports a lower rank (e.g., rank 3, rank 2, or rank 1) and either or both of the first and fourth data blocks (mapped to HARQ-1 with sharing/bundling) fail decoding F resulting in a HARQ-1 NACK message (as in rows 7, 8, 11, 12, 15, or 16 of Figure 18), base station processor 101 may continue scheduling rank 4 so 15 that HARQ-1 is mapped to the first and fourth transmission/reception layers TL1/RL1 and TL4/RL4 to support retransmission of the first and fourth data blocks. By continuing rank 4, HARQ-2 may continue to be mapped to transmission/reception layers TL2/RL2 and TL3/RL3 to support retransmission of the second and third data blocks (mapped to HARQ-2 with sharing/bundling) if needed (e.g., at rows 8, 12, or 16 of Figure 18), or two new data 20 blocks may be transmitted using HARQ-2 (e.g., at rows 7, 11, or 15 of Figure 18).

[00167] When wireless terminal 200 reports rank 3 and the first data block (mapped to HARQ-1 without sharing/bundling) passes decoding P resulting in a HARQ-1 ACK message (as in rows 5 and 6 of Figure 18), base station processor 101 may scheduling rank 3 so that HARQ-1 is mapped to the first transmission/reception layers TL1/RL1 (without 25 bundling/sharing), and so that HARQ-2 is mapped to the second and third transmission/reception layers RL2/TL2 and TL3/RL3 (with bundling/sharing) to support retransmission of the second and third data blocks if needed (e.g., at row 6 of Figure 18).

[00168] When wireless terminal 200 reports rank 2 and any of the first, second, third, and/or fourth data blocks fail decoding resulting in a HARQ-1 NACK and/or a HARQ-2 30 NACK (as in rows 10, 11, and/or 12), base station processor 101 may schedule rank 4 so that HARQ-1 is mapped to transmission/reception layers RL1/TL1 and RL4/TL4 (with bundling/sharing) and HARQ-2 is mapped to transmission/reception layers RL2/TL2 and RL3/TL3 (with bundling/sharing). Accordingly, mappings of HARQ-1 to

transmission/reception layers TL1/RL1 and TL4/RL4 and HARQ-2 to transmission/reception layers RL2/TL2 and RL3/TL3 are maintained to support retransmissions as needed.

[00169] When wireless terminal 200 reports rank 1 and any of the first, second, third, and/or fourth data blocks fail decoding (F) resulting in a HARQ-1 NACK and/or a HARQ-2

5 NACK message (as in rows 14, 15, and/or 16), base station processor 101 may schedule rank 4 so that HARQ-1 is mapped to transmission/reception layers RL1/TL1 and RL4/TL4 (with bundling/sharing) and HARQ-2 is mapped to transmission/reception layers RL2/TL2 and RL3/TL3 (with bundling/sharing). Accordingly, mappings of HARQ-1 to transmission/reception layers TL1/RL1 and TL4/RL4 and HARQ-2 to transmission/reception

10 layers RL2/TL2 and RL3/TL3 are maintained to support retransmissions as needed.

[00170] According to embodiments discussed above with respect to Figures 14-18, when an initial transmission/reception has a rank greater than 1 (e.g., rank 2, 3, or 4) and both HARQ processes pass (i.e., both HARQ-1 and HARQ-2 generate ACK messages), base station processor 101 may select the rank reported/requested by wireless terminal 200 for a 15 subsequent transmission to wireless terminal 100. When an initial transmission/reception has a rank greater than 1 (e.g., rank 2, 3, or 4) and both HARQ processes fail (i.e., HARQ-1 and HARQ-2 generate NACK messages), base station processor 101 may maintain the rank used for the initial transmission (regardless of the rank reported/requested by wireless terminal 200) to support retransmission of data blocks corresponding to HARQ-1 and HARQ-2.

[00171] If an initial transmission is a rank 2 transmission so that an initial data block transmitted/received over transmission/reception layers RL2/TL2 and mapped to HARQ-2 without bundling, and if HARQ-2 generates a NACK due to failure decoding the initial data block, base station processor 101 may restrict the next transmission to rank 2 (regardless of the rank reported/requested by wireless terminal 200) to support retransmission of the data 25 block over transmission/reception layers RL2/TL2 as shown in rows 2, 4, 6, 8, 10, 12, 14, and 16 of Figure 16 because no other rank (e.g., rank 1, 3, or 4) supports non-bundled use of transmission/reception layers RL2/TL2. Stated in other words, if a data block is mapped to a HARQ process without bundling and the data block fails decoding, the same rank may be maintained for retransmission (regardless of the rank reported/requested by wireless terminal) 30 if no other rank supports non-bundled transmission/reception using the same transmission/reception layer.

[00172] Using mappings of Figures 15-18, bundled transport blocks sharing a same HARQ process that fail decoding during an initial transmission may thus be retransmitted using the same transmission/reception layers bundled to the same HARQ process.

[00173] Base station operations for shared HARQ processes have been discussed above with respect to Figures 8A and 9-18 where a base station 100 transmit buffer (e.g., included in base station processor 101 and/or memory 118) for wireless terminal 200 is not buffer limited (e.g., the transmit buffer includes sufficient data for wireless terminal 200 for a next transmission data block or blocks). Stated in other words, a base station transmit buffer for wireless terminal 200 is not buffer limited when it includes new data for one or more new transport data blocks (NT as shown in the tables of Figures 10-13 and 15-18) to be transmitted to wireless terminal 200. In the event that downlink transmission to wireless terminal 200 is buffer limited (e.g., sufficient new data is not available for new transport data blocks NT to be sent to wireless terminal 200) when a partial retransmission is called for responsive to receiving both a NACK and an ACK for a rank 2 or higher MIMO TTI, however, an additional mechanism(s) may be useful to efficiently handle the retransmission.

[00174] In a multicodeword MIMO system with two HARQ codewords supporting more than two MIMO layers/ranks, if one HARQ codeword is an ACK (or P for pass) and the other HARQ codeword is a NACK (or F for fail), embodiments discussed below may provide a mechanism to retransmit a failed transport data block or blocks corresponding to the NACK when downlink transmissions are buffer limited. More particularly, embodiments discussed below may address retransmission of a transport data block or blocks corresponding to the NACK when the base station processor 101 (e.g., a transmit buffer of the base station processor 101 for wireless terminal 200) is buffer limited (e.g., the transmit buffer does not have enough data to transmit a transport data block or blocks on the MIMO layer or layers corresponding to the ACK). This situation may occur, for example, at the end of a communication/session/call with/for wireless terminal 200 when a base station transmit buffer for wireless terminal 200 is empty or when downlink transmissions are not continuous, and a retransmission is needed responsive to a NACK. While embodiments are discussed for systems including 4 transmit and 4 receive antennas supporting up to 4 MIMO layers, embodiments may be applied in any multi-antenna system supporting rank 2 and/or higher MIMO transmission/reception.

[00175] According to some embodiments illustrated in Figures 19 and 20A-C, when a NACK and an ACK are received from wireless terminal 200 at base station 100 for a rank 2 or higher TTI and the base station 100 is transmit buffer limited with respect to wireless terminal 200 (e.g., there is insufficient buffered data for a transport data block or blocks for the MIMO layer or layers corresponding to the ACK), base station 200 may retransmit the same data on the MIMO layer(s) corresponding to the NACK and on the MIMO layer(s)

corresponding to the ACK even though wireless terminal 200 has acknowledged successful receipt of the data on the layer(s) corresponding to the ACK. Stated in other words, the successfully transmitted and received data (corresponding to the ACK) may be retransmitted to facilitate retransmission of the failed data (corresponding to the NACK) of the same

5 MIMO TTI.

[00176] As shown in the flow chart of Figure 19 at block 1899, base station processor 101 may transmit one or more transport data blocks over respective MIMO layers (also referred to as MIMO streams) during a first MIMO transmission time interval (TTI), also referred to as a Time Frequency Resource Element or TFRE. While a 4 antenna system 10 supporting up to four MIMO layers will be discussed by way of example, embodiments may be applied to any multi-antenna MIMO systems supporting rank 2 or higher MIMO transmission/reception (e.g., an 8 antenna system supporting up to eight MIMO layers/streams). For a rank 1 MIMO transmission of a 4 antenna system, base station processor 101 may transmit one transport data block over a first MIMO layer during the first 15 MIMO TTI, and a first HARQ process (HARQ-1) may map to the first transport data block of the first MIMO layer. For a rank 2 MIMO transmission of a 4 antenna system, base station processor 101 may transmit first and second transport data blocks over respective first and second MIMO layers/streams during the first MIMO TTI, and first and second HARQ processes (HARQ-1 and HARQ-2) may map to the respective first and second transport data 20 blocks of the respective first and second MIMO layers. For a rank 3 MIMO transmission of a 4 antenna system, base station processor 101 may transmit first, second, and third transport data blocks over respective first, second, and third MIMO layers during the first MIMO TTI, the first HARQ process may map to the first transport data block of the first MIMO layer, and the second HARQ process may map to the second and third transport data blocks of the 25 respective second and third MIMO layers. For a rank 4 MIMO transmission of a 4 antenna system, base station processor 101 may transmit first, second, third, and fourth transport data blocks over respective first, second, third, and fourth MIMO layers during the first MIMO TTI, the first HARQ process may map to the first and fourth transport data blocks of the respective first and fourth MIMO layers, and the second HARQ process may map to the 30 second and third transport data blocks of the respective second and third MIMO layers.

[00177] As discussed above, wireless terminal 200 generates an ACK or a NACK for each HARQ process used during the first MIMO TTI. If all transport data blocks that map to a HARQ process for the first TTI are successfully decoded by wireless terminal 200, wireless terminal 200 transmits an ACK for that HARQ process. If any one of the transport data

blocks that maps to a HARQ process for the first TTI is not successfully decoded by wireless terminal 200, wireless terminal 200 transmits a NACK for that HARQ process. At block 1901, base station processor 101 receives HARQ process feedback (i.e., ACKs/NACKs) from wireless terminal 200 for each HARQ process used during the 1st TTI. If the 1st MIMO TTI 5 was a rank 1 TTI used to transmit one transport data block, an ACK is received for the first HARQ process if the transport data block was successfully decoded, or a NACK is received for the first HARQ process if the transport data block is not successfully decoded. The second HARQ process is not used for a rank 1 TTI. If the 1st MIMO TTI was a rank 2 TTI used to transmit first and second transport data blocks, an ACK is received for the first 10 HARQ process if the first transport data block was successfully decoded or a NACK is received for the first HARQ process if the first transport data block is not successfully decoded, and an ACK is received for the second HARQ process if the second transport data block was successfully decoded or a NACK is received for the second HARQ process if the second transport data block was not successfully decoded. If the 1st MIMO TTI was a rank 3 15 TTI used to transmit first, second, and third transport data blocks, an ACK is received for the first HARQ process if the first transport data block was successfully decoded or a NACK is received for the first HARQ process if the first transport data block was not successfully decoded, and an ACK is received for the second HARQ process if the second and third transport data blocks were both successfully decoded or a NACK is received for the second 20 HARQ process if either or both of the second and/or third transport data blocks was not successfully decoded. If the 1st MIMO TTI was a rank 4 TTI used to transmit first, second, third, and fourth transport data blocks, an ACK is received for the first HARQ process if the first and fourth transport data blocks were successfully decoded or a NACK is received for the first HARQ process if either or both of the first and/or second transport data blocks was 25 not successfully decoded, and an ACK is received for the second HARQ process if the second and third transport data blocks were successfully decoded or a NACK is received for the second HARQ process if either or both of the second and/or third transport data blocks was not successfully decoded.

[00178] At block 1903 and/or at block 1905, if the 1st MIMO TTI was a rank 1 TTI 30 and/or if base station 100 is not transmit buffer limited with respect to wireless terminal 200, base station processor 101 may proceed at block 1915 with operations according to embodiments of Figures 8A, 9, 10, 11, 12, 13, 14, 15, 16, 17, and/or 18 as discussed above. Otherwise, if the 1st MIMO TTI was a rank 2 or higher TTI and the base station process is

transmit buffer limited at blocks 1903 and 1905, base station processor 101 may proceed to block 1907.

[00179] At block 1907, if ACKs are received for all HARQ processes used in the 1st MIMO TTI, there is no need for retransmission and there is no data (or insufficient data) in the transmit buffer to schedule a new MIMO TTI for wireless terminal 200 (i.e., base station 100 was deemed to be transmit buffer limited with respect to wireless terminal 200 at block 1905). Accordingly, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling or traffic channels (e.g., HS-SCCH or HS-DPSCH) at block 1917 until further data is received in the transmit buffer for wireless terminal 200.

[00180] At block 1907, if a NACK is received for any HARQ process used in the 1st MIMO TTI, base station processor 101 may generate and transmit data indicators indicating retransmission of all transport data blocks that were originally transmitted during the 1st MIMO TTI. Moreover, the data indicators indicating retransmission may be transmitted over a downlink signaling channel (e.g., HS-SCCH). At block 1911, base station processor 101 may retransmit all of the previously transmitted data blocks from the 1st MIMO TTI even though some of the data blocks may have been successfully decoded by wireless terminal 200 and an ACK may have been received for one of the HARQ processes. Accordingly, as long as one NACK is received for a HARQ process used in the 1st TTI, all transport data blocks of the 1st MIMO TTI may be retransmitted (even though an ACK was received for another of the HARQ processes of the 1st MIMO TTI) when base station 101 is transmit buffer limited for wireless terminal 200.

[00181] Figure 20A is a retransmission table when the original transmission (1st MIMO TTI) is a rank 4 transmission. As shown in rows 2, 3, 6, 7, 10, 11, 14, and 15 of the table of Figure 20A, when the 1st MIMO TTI is rank 4, base station processor 101 may retransmit first, second, third, and fourth data blocks over the respective first, second, third, and fourth MIMO layers (maintaining rank 4 regardless of the UE rank selection/preference) to wireless terminal 200 during the 2nd MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK) at block 1911. Similarly, base station processor 101 may retransmit the first, second, third, and fourth data blocks (maintaining rank 4 regardless of the UE rank selection/preference) during the 2nd MIMO TTI when both of the ACK-NACK codewords are NACK at block 1911 as shown in rows 4, 8, 12, and 16 of Figure 20A. As shown in rows 1, 5, 9, and 13 of Figure 20A, there is no transmission/retransmission at block 1917 when all ACKs are received and base station 100

is buffer limited with respect to wireless terminal 200. When all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling and/or traffic channels (e.g., HS-SCCH and/or HS-DPSCH) until additional data is received in the transmit buffer

5 for wireless terminal 200.

[00182] Figure 20B is a retransmission table when the original transmission (1st MIMO TTI) is a rank 3 transmission. As shown in rows 2, 3, 6, 7, 10, 11, 14, and 15 of the table of Figure 20B, when the 1st MIMO TTI is rank 3, base station processor 101 may retransmit first, second, and third data blocks over the respective first, second, and third MIMO layers to wireless terminal 200 (maintaining rank 3 regardless of the UE rank selection/preference) during the 2nd MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK) at block 1911. Similarly, base station processor 101 may retransmit the first, second, and third data blocks (maintaining rank 3 regardless of the 10 UE rank selection/preference) during the 2nd MIMO TTI when both of the ACK-NACK codewords are NACK at block 1911 as shown in rows 4, 8, 12, and 16 of Figure 20B. As shown in rows 1, 5, 9, and 13 of Figure 20B, there is no transmission/retransmission at block 1917 when all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200. When all ACKs are received and base station 100 is buffer limited

15 with respect to wireless terminal 200, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling and/or traffic channels (e.g., HS-SCCH and/or HS-DPSCH) until additional data is received in the transmit buffer for wireless terminal 200.

[00183] Figure 20C is a retransmission table when the original transmission (1st MIMO TTI) is a rank 2 transmission. As shown in rows 2, 3, 6, 7, 10, 11, 14, and 15 of the table of Figure 20C, when the 1st MIMO TTI is rank 2, base station processor 101 may retransmit first and second data blocks over the respective first and second MIMO layers to wireless terminal 200 (maintaining rank 2 regardless of the UE rank selection/preference) during the 2nd MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK) at block 1911. Similarly, base station processor 101 may retransmit the first and second data blocks (maintaining rank 2 regardless of the UE rank selection/preference) during the 2nd MIMO TTI when both of the ACK-NACK codewords are NACK at block 1911 as shown in rows 4, 8, 12, and 16 of Figure 20C. As shown in rows 1, 20 5, 9, and 13 of Figure 20C, there is no transmission/retransmission at block 1917 when all

ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200. When all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling and/or traffic channels (e.g., HS-SCCH and/or HS-DPSCH) until 5 additional data is received in the transmit buffer for wireless terminal 200.

[00184] According to some embodiments illustrated in Figures 21 and 22A-C, when a NACK and an ACK are received from wireless terminal 200 at base station 100 for a rank 2 or higher downlink MIMO TTI and the base station 100 is transmit buffer limited with 10 respect to wireless terminal 200 (e.g., there is insufficient buffered data for a new transport data block or blocks for the MIMO layer or layers corresponding to the ACK), base station 200 may maintain the same rank for retransmission of the transport data block or blocks corresponding to the NACK during a second MIMO TTI. The transport data block or blocks corresponding to the NACK may thus be retransmitted during the second MIMO TTI over the same MIMO layer or layers used during the first MIMO TTI. Instead of retransmitting 15 the transport data block or blocks corresponding to the ACK during the second MIMO TTI, however, base station 200 may transmit an indication of discontinuous transmission (DTX) over the downlink signaling channel (e.g., HS-SCCH) informing wireless terminal 200 that no data will be transmitted over the MIMO layers corresponding to the ACK.

[00185] Figure 21 is a flow chart illustrating base station operations supporting 20 retransmission in response to a NACK or NACKs indicating failure decoding at wireless terminal 200. Operations of blocks 1899, 1901, 1903, 1905, and 1917 are the same as those discussed above with respect to Figure 19, and further discussion thereof may be omitted for the sake of conciseness. At block 1903 and/or at block 1905, if the 1st MIMO TTI was a rank 1 TTI and/or if base station 100 is not transmit buffer limited with respect to wireless 25 terminal 200, base station processor 101 may proceed at block 1915 with operations according to embodiments of Figures 8A, 9, 10, 11, 12, 13, 14, 15, 16, 17, and/or 18 as discussed above. Otherwise, if the 1st MIMO TTI was a rank 2 or higher TTI and the base station process is transmit buffer limited at blocks 1903 and 1905, base station processor 101 may proceed to block 2107.

[00186] At block 2107, if ACKs are received for all HARQ processes used in the 1st MIMO TTI, there is no need for retransmission and there is no data (or insufficient data) in the transmit buffer to schedule a new MIMO TTI for wireless terminal 200 (i.e., base station 100 was deemed to be transmit buffer limited with respect to wireless terminal 200 at block 1905). Accordingly, no downlink signaling or traffic is transmitted to wireless terminal 200

over downlink signaling or traffic channels (e.g., HS-SCCH or HS-DPSCH) at block 1917 until further data is received in the transmit buffer for wireless terminal 200.

[00187] At block 2107, if NACKs are received for all HARQ processes used in the 1st MIMO TTI, base station processor 101 may generate and transmit data indicators indicating retransmission (for a second MIMO TTI) of all transport data blocks that were originally transmitted during the 1st MIMO TTI at block 2109. Moreover, the data indicators indicating retransmission may be transmitted over a downlink signaling channel (e.g., HS-SCCH). At block 2111, base station processor 101 may retransmit all of the previously transmitted data blocks from the 1st MIMO TTI during a 2nd MIMO TTI over a downlink traffic channel (e.g., HS-DPSCH).

[00188] At block 2107, if a NACK is received for one HARQ process used in the 1st MIMO TTI and an ACK is received for another HARQ process used in the 1st MIMO TTI, base station processor 101 may generate and transmit a discontinuous transmission (DTX) indicator (indicating no transmission over MIMO layers corresponding to the ACK) and a data indicator indicating retransmission of the transport data block or blocks corresponding to the NACK for a 2nd MIMO TTI at block 2121. The DTX indicator and the data indicator indicating retransmission may be transmitted over a downlink signaling channel (e.g., HS-SCCH). At block 2123, base station processor 101 may retransmit the transport data block or blocks corresponding to the NACK over the MIMO TTI layers corresponding to the NACK during the 2nd MIMO TTI without retransmitting the transport data block or blocks corresponding to the ACK. More particularly, the transport data block or blocks corresponding to the NACK may be transmitted over a downlink traffic channel (e.g., HS-DPSCH) during the 2nd MIMO TTI. By providing the DTX indicator prior to the retransmission, wireless terminal 200 knows to disregard the MIMO layer layers corresponding to the ACK during the 2nd MIMO TTI.

[00189] Figure 22A is a retransmission table when the original transmission (1st MIMO TTI) is a rank 4 transmission. As shown in rows 2, 3, 6, 7, 10, 11, 14, and 15 of the table of Figure 22A, when the 1st MIMO TTI is rank 4, base station processor 101 may transmit a discontinuous transmission DTX indicator for MIMO layers corresponding to the ACK at block 2121, and base station processor 101 may retransmit only those transport data blocks corresponding to a NACK from the 1st MIMO TTI during the 2nd MIMO TTI as indicated by OT at block 2123. Moreover, base station processor 101 may maintain the MIMO rank of the 1st MIMO TTI (i.e., rank 4) during the 2nd MIMO TTI regardless of the rank suggested/requested by wireless terminal 200. In an alternative, base station processor

101 may allow rank 3 (as shown in rows 2, 6, 10, and 14 of Figure 22A) for the 2nd MIMO TTI if the ACK corresponds to the first HARQ process (mapped to layers 1 and 4) because rank 3 is sufficient to support retransmission of the HARQ-2 data blocks using MIMO layers 2 and 3. At rows 3, 7, 11, and 15, first and fourth transport data blocks may be retransmitted 5 over respective first and fourth MIMO layers at block 2123, and at rows 2, 6, 10, and 14, second and third transport data blocks may be retransmitted over respective second and third MIMO layers at block 2123. As shown in rows 4, 8, 12, and 16 of Figure 22A, base station processor 101 may retransmit all transport data blocks from the 1st MIMO TTI during the 2nd MIMO TTI at block 2111 because only NACKs are received for the first MIMO TTI. For 10 example, first, second, third, and fourth transport data blocks may be retransmitted over respective first, second, third, and fourth transport data blocks during the 2nd MIMO TTI. As shown in rows 1, 5, 9, and 13 of Figure 22A, there is no transmission/retransmission at block 1917 when all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200. When all ACKs are received and base station 100 is buffer limited 15 with respect to wireless terminal 200, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling and/or traffic channels (e.g., HS-SCCH and/or HS-DPSCH) until additional data is received in the transmit buffer for wireless terminal 200.

[00190] Figure 22B is a retransmission table when the original transmission (1st MIMO TTI) is a rank 3 transmission. As shown in rows 2, 3, 6, 7, 10, 11, 14, and 15 of the table of 20 Figure 22B, when the 1st MIMO TTI is rank 3, base station processor 101 may transmit a discontinuous transmission DTX indicator for MIMO layers corresponding to the ACK at block 2121, and base station processor 101 may retransmit only the transport data block or blocks corresponding to a NACK from the 1st MIMO TTI during the 2nd MIMO TTI as indicated by OT at block 2123. Moreover, base station processor 101 may maintain the 25 MIMO rank of the 1st MIMO TTI (i.e., rank 3) during the 2nd MIMO TTI regardless of the rank suggested/requested by wireless terminal 200. In an alternative, base station processor 101 may allow a different rank (as shown, for example, in parentheses at rows 2, 6, 11, or 15) provided that the different rank supports transmission/reception using the MIMO layers 30 corresponding to the NACK. At rows 3, 7, 11, and 15, the first transport data block may be retransmitted over the first MIMO layer at block 2123, and at rows 2, 6, 10, and 14, the second and third transport data blocks may be retransmitted over respective second and third MIMO layers at block 2123. As shown in rows 4, 8, 12, and 16 of Figure 22B, base station processor 101 may retransmit all transport data blocks from the 1st MIMO TTI during the 2nd MIMO TTI at block 2111 because only NACKs are received for the first MIMO TTI. For

example, first, second, and third transport data blocks may be retransmitted over respective first, second, and third MIMO layers during the 2nd MIMO TTI. As shown in rows 1, 5, 9, and 13 of Figure 22B, there is no transmission/retransmission at block 1917 when all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200.

5 When all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling and/or traffic channels (e.g., HS-SCCH and/or HS-DPSCH) until additional data is received in the transmit buffer for wireless terminal 200.

[00191] Figure 22C is a retransmission table when the original transmission (1st MIMO

10 TTI) is a rank 2 transmission. As shown in rows 2, 3, 6, 7, 10, 11, 14, and 15 of the table of Figure 22C, when the 1st MIMO TTI is rank 2, base station processor 101 may transmit a discontinuous transmission DTX indicator for a MIMO layer corresponding to the ACK at block 2121, and base station processor 101 may retransmit only the transport data block corresponding to the NACK from the 1st MIMO TTI during the 2nd MIMO TTI as indicated

15 by OT at block 2123. Moreover, base station processor 101 may maintain the MIMO rank of the 1st MIMO TTI (i.e., rank 2) during the 2nd MIMO TTI regardless of the rank suggested/requested by wireless terminal 200. In an alternative, base station processor 101 may allow a different rank (as shown, for example, in parentheses at rows 3, 7, and 15) provided that the different rank supports transmission/reception using the MIMO layers

20 corresponding to the NACK. At rows 3, 7, 11, and 15, the first transport data block may be retransmitted over the first MIMO layer at block 2123, and at rows 2, 6, 10, and 14, the second transport data block may be retransmitted over the second MIMO layer at block 2123. As shown in rows 4, 8, 12, and 16 of Figure 22C, base station processor 101 may retransmit all transport data blocks from the 1st MIMO TTI during the 2nd MIMO TTI at block 2111

25 because only NACKs are received for the first MIMO TTI. For example, first and second transport data blocks may be retransmitted over respective first and second MIMO layers during the 2nd MIMO TTI. As shown in rows 1, 5, 9, and 13 of Figure 22C, there is no transmission/retransmission at block 1917 when all ACKs are received and base station 100 is buffer limited with respect to wireless terminal 200. When all ACKs are received and base

30 station 100 is buffer limited with respect to wireless terminal 200, no downlink signaling or traffic is transmitted to wireless terminal 200 over downlink signaling and/or traffic channels (e.g., HS-SCCH and/or HS-DPSCH) until additional data is received in the transmit buffer for wireless terminal 200.

[00192] According to embodiments discussed above with respect to Figures 21 and 22A-C, the discontinuous transmission DTX indicator may be transmitted over a downlink signaling channel such as the HS-SCCH. For example, the DTX indicator may be transmitted as a currently unused bit pattern of a 5 bit modulation/rank field of the HS-SCCH, and/or as an unused bit pattern of a 6 bit transport block size field of the HS-SCCH.

5 **[00193]** Figure 23A is a block diagram illustrating a structure of an HS-SCCH slot for a four branch MIMO system (with 4 transmit and 4 receive antennas supporting up to 4 MIMO layers). Part 1 is used to carry information related to a channelization code set, precoding weight information, modulation scheme, and numbers of transport blocks preferred. Part 2 is used to carry information related to transport block size, HARQ process(es), and redundancy and constellation version. More particularly, Figure 23A 10 illustrates a Type 4 structure for HS-SCCH.

15 **[00194]** Figure 23B is a block diagram illustrating HS-SCCH part 1 for four branch MIMO. For four branch MIMO, Part 1 of HS-SCCH includes 16 bits as shown in Figure 23B regarding the following information: channelization code set CCS information (7 bits); modulation and rank information MR (5 bits); and precoding index PCI (4 bits). Rank 20 information (RI) may be implicitly informed through the five bits of the modulation and rank information. An identity of wireless terminal 200 may also be signaled in Part 1 through a UE-specific mask applied to the Part 1 encoded sequence. Accordingly, only 16 bits may be needed to the complete information of Part 1.

25 **[00195]** Figure 23C is a block diagram illustrating HS-SCCH part 2 for four branch MIMO. For four branch MIMO, Part 2 of HS-SCCH may include 36 bits as shown in Figure 23C regarding the following information: HARQ-1 Transport Block Size TBS-1 (6 bits); HARQ-2 Transport Block Size TBS-2 (6 bits); HARQ process (4 bits); Redundancy Version RV (4 bits) for the two streams/layers and/or HARQ processes; and wireless terminal 30 identification UEID (16 bits). For a single stream/layer (rank 1) transmission using only one HARQ process, Part 2 of HS-SCCH may be reduced to 28 bits.

35 **[00196]** Figure 23D is a block diagram illustrating a timing diagram for HS-PDSCH and HS-SCCH transmissions to wireless terminal 200. To allow wireless terminal 200 enough time to decode the part 1 portion of HS-SCCH (e.g., HS-SCCH 1) and then configure its receiver to receive the corresponding HS-DPSCH (e.g., HS-DPSCH 1), HS-SCCH 1 may be transmitted 2 slots in advance of the associated HS-DPSCH 1 subframe as shown in Figure 23D.

[00197] According to some embodiments, the DTX indicator may be transmitted as a currently unused bit pattern of a 5 bit modulation/rank MR field of the HS-SCCH. Figure 24 is a table illustrating 5 bit patterns used to communicate modulation and rank MR information in HS-SCCH Part 1 as shown in Figure 23B. In particular, 5 bits may be used to 5 identify 30 different combinations of modulations/ranks in a 4 layer MIMO system where two modulation schemes are mapped to the four layers, leaving 2 of the bit combinations (e.g., 11110 and 11111) unused. The first modulation (Modulation-1) may map to the first HARQ process (HARQ-1) and thus the first and fourth MIMO layers, and the second modulation (Modulation-2) may map to the second HARQ process (HARQ-2) and thus the 10 second and third MIMO layers.

[00198] Figure 25 is a table illustrating HS-SCCH combinations for modulation and transmission rank including use of the previously unused MR bit patterns (e.g., 11110 and 11111) to provide the DTX indicators discussed above with respect to Figures 21 and 22A-C. For example, the MR bit pattern 11110 may be used as a DTX indicator that the first HARQ 15 process will not be used for retransmission during the second MIMO TTI, and more particularly, that the first and fourth MIMO layers will not be used for transmission/retransmission during the second MIMO TTI. Similarly, the MR bit pattern 11111 may be used as a DTX indicator that the second HARQ process will not be used for retransmission during the second MIMO TTI, and more particularly, that the second and third 20 MIMO layers will not be used for transmission/retransmission during the second MIMO TTI. Because base station processor 101 may maintain the same transmit characteristics (e.g., including modulation, rank, and transport block size) from the first MIMO TTI during the second MIMO TTI used for retransmission, signaling of the rank and modulation for the retransmission is not required. Stated in other words, the DTX indicators may imply reuse of 25 the modulation and rank information from the first MIMO TTI during the retransmission MIMO TTI.

[00199] According to some other embodiments, the DTX indicator may be transmitted as a currently unused bit pattern of the transmit block size TBS of HS-SCCH for the unused HARQ process. As discussed above with respect to Figure 23C, HS-SCCH Part 2 includes a 30 6 bit TBS field (providing 64 bit combinations) for each HARQ process. Only 63 different transport block sizes are defined for a HARQ process, however, leaving one of the 64 bit combinations (e.g., 000000 or 111111) unused. By setting TBS-1 of the HS-SCCH Part 2 slot for the retransmission MIMO TTI to 111111 (or to 000000) as a DTX indicator for the first HARQ process, base station processor 101 may signal that the first HARQ process will

not be used for retransmission during the second MIMO TTI, and more particularly, that the first and fourth MIMO layers will not be used for transmission/retransmission during the second MIMO TTI. By setting TBS-2 of the HS-SCCH Part 2 slot for the retransmission MIMO TTI to 111111 (or to 000000) as a DTX indicator for the second HARQ process, base station processor 101 may signal that the second HARQ process will not be used for retransmission during the second MIMO TTI, and more particularly, that the second and third MIMO layers will not be used for transmission/retransmission during the second MIMO TTI.

5 [00200] Embodiments of present inventive concepts may thus provide significant gain without significantly compromising delay (e.g., avoiding/reducing Radio Link Protocol 10 retransmission).

10 [00201] For rank 2 and higher retransmissions when an ACK message is received for one HARQ process, when a NACK message is received for the other HARQ process, and when base station processor 101 is transmit buffer limited with respect to wireless terminal 200, base station processor 101 may thus transmit a DTX indicator to signal that no data is 15 being transmitted/retransmitted using the transmission layer/layers corresponding to the ACK message. According to some embodiments discussed above with respect to Figures 25B and 25, a first unique (and previously unused) Modulation and Transmission Rank (modulation-rank or MR) bit pattern (e.g., 11110) may be used to indicate discontinuous transmission DTX for a transmission layer/layers corresponding to a first HARQ process, and a second 20 unique (and previously unused) Modulation and Transmission Rank (modulation-rank or MR) bit pattern (e.g., 11111) may be used to indicate discontinuous transmission DTX for a transmission layer/layers corresponding to a second HARQ process. According to some other embodiments discussed above with respect to Figure 23C, a unique and previously 25 unused bit pattern (e.g., 111111) may be used for the respective transport block size TBS corresponding to the ACKed HARQ process to indicate discontinuous transmission DTX for a transmission layer/layers corresponding to the ACKed HARQ process. For example, the bit 30 pattern 111111 may be used for TBS-1 (for transmission/reception layers 1 and/or 4) when the first HARQ process is ACKed and the second HARQ process is NACKed, and the bit pattern 111111 may be used for TBS-2 (for transmission/reception layers 2 and/or 3) when the first HARQ process is NACKed and the second HARQ process is ACKed.

35 [00202] A DTX indicator can thus be transmitted by base station processor 101 over a downlink signaling channel (HS-SCCH) to indicate discontinuous transmission over a first MIMO layer/layers corresponding to an ACK message when retransmitting over a second MIMO layer/layers corresponding to a NACK message when base station processor 101 is

transmit buffer limited with respect to wireless terminal 200. In addition, base station processor 101 may transmit data indicators over the downlink signaling channel indicating new data transmission over the first MIMO layer/layers and indicating retransmission over the second MIMO layer/layers. More particularly, the data indicators may be provided in a 5 redundancy version (RV) field of the downlink signaling channel (HS-SCCH).

[00203] In response to receiving such a DTX indicator and data indicators for a retransmission (indicating retransmission for a data block/blocks corresponding to one HARQ process and DTX for a data block/blocks corresponding to another HARQ process), embodiments discussed below may provide wireless terminal processor 201 operations to 10 handle data received during the retransmission and to transmit feedback information related to the DTXed reception layer/layers.

[00204] In general, if a MIMO layer(s) is DTXed during a MIMO TTI (also referred to as a TTI and/or TFRE), then wireless terminal processor 201 may discard/disregard data/symbols associated with DTXed MIMO layer/layers for the TTI, and wireless terminal 15 processor 201 may clear the soft buffer/buffers for the DTXed MIMO layer/layers for the TTI.

[00205] When wireless terminal 200 receives a DTX indicator for a first MIMO layer/layers (e.g., as a unique code in a downlink signaling MR field or in a downlink signaling TBS field), a data indicator for an initial transmission of the first MIMO 20 layer/layers (e.g., in a downlink signaling RV field), and data indicator for a retransmission of a second MIMO layer/layers (e.g., in a downlink signaling RV field), then wireless terminal processor 201 may discard/disregard data/symbols received over the first MIMO layer/layers, and wireless terminal processor 201 may process retransmitted data received over the second MIMO layer/layers. More particularly, when wireless terminal processor 200 receives a 25 DTX indicator and a data indicator for an initial transmission for a MIMO layer/layers, wireless terminal processor 201 may generate and transmit a default HARQ message for the MIMO layer/layers corresponding to the DTX, discard any received symbols/data for the DTXed MIMO layer/layers, and assume that the data for the DTXed MIMO layer/layers was successfully decoded in a previous TTI. According to some embodiments, the default HARQ 30 message for a DTXed MIMO layer/layers may be an ACK message. According to some other embodiments, the default HARQ message for a DTXed MIMO layer/layers may be a NACK message. By discarding/disregarding symbols/data for a DTXed MIMO layer/layers, hardware resource utilization and/or processing overhead may be reduced.

[00206] According to some embodiments, the wireless terminal UE 200 discards data and flushes off the soft buffer for a DTXed codeword(s)/layer(s) and the wireless terminal UE 200 does not store data for a DTXed codeword(s)/layer(s) if a codeword(s)/layers(s) is DTXed. According to some embodiments:

- 5 1. Whenever a UE received 111111 along with a new data indicator (either explicit or implicit for example through RV indicator), then the UE should understand that the corresponding codeword is DTXed.
- 10 2. Whenever UE received 111111 along with new data indicator the UE should,
 1. Generate a positive acknowledgment (ACK) of the data in this HARQ process;
 2. Discard the received data;
 3. Assume the data had been successfully decoded.

As an alternative to operations 2.a. and 2.b., UE may: (2a) Generate a negative acknowledgment (NACK) of the data in this HARQ process, and (2b) discard the received data.

[00207] A HARQ process (e.g., HARQ-1 or HARQ-2) and a respective HARQ identification (e.g., H_a or H_b) may be used to support downlink transmissions/retransmissions from base station 100 to wireless terminal 200, and two HARQ processes and respective HARQ identifications may support HARQ ACK/NACK signaling for 4 antenna MIMO systems supporting up to 4 layer/stream downlink transmissions (and/or higher antenna systems supporting higher rank/layer transmissions). For rank 1 transmissions, first HARQ process/identification HARQ-1/H_a maps to a first transmission/reception layer (e.g., including TB1, CE1, IM1, DM1, SB1, and/or CD1). For rank 2 transmissions, first HARQ process/identification HARQ-1/H_a maps to the first transmission/reception layer, and second HARQ process/identification HARQ-2/H_a maps to a second transmission/reception layer (e.g., including TB2, CE2, IM2, DM2, SB2, and/or CD2). For rank 3 transmissions, first HARQ process/identification HARQ-1/H_a maps to the first transmission/reception layer, and second HARQ process/identification HARQ-2/H_b maps to the second transmission/reception layer and to a third transmission/reception layers (e.g., including TB3, CE3, IM3, DM3, SB3, and/or CD3). For rank 4 transmissions, first HARQ process/identification HARQ-1/H_a maps to the first transmission/reception layer and to a fourth transmission/reception layer (e.g., including TB4, CE4, IM4, DM4, SB4, and/or CD4), and second HARQ process/identification HARQ-2/H_b maps to the second and third transmission/reception layers.

35 **[00208]** Because of the delay between base station 100 transmitting a first data block(s) to wireless terminal 200 during a first downlink TTI/TFRE and receiving a HARQ

ACK/NACK response(s) for the first data block(s) from wireless terminal 200, second data block(s) may be transmitted to wireless terminal 200 during a second downlink TTI/TFRE before receiving the HARQ ACK/NACK response(s) for the first data block(s). Accordingly, HARQ process identifications may be used by base station 100 to distinguish between

5 different HARQ ACK/NACK responses for different data blocks of different downlink TTIs/TFREs transmitted to the same wireless terminal 200. Stated in other words, HARQ process identifications may be used to match HARQ ACK/NACK responses with the appropriate data block(s) and TTI/TFRE. HARQ process identifications may also be used by wireless terminal 100 to match the data block/blocks with the appropriate soft bits from

10 respective soft buffer/buffers.

[00209] A same HARQ process identification may thus be used for the initial transmission and for each retransmission of a data block/blocks to wireless terminal 200 until either the data block/blocks is/are successfully received/decoded by wireless terminal 200 (as indicated by an ACK) or until a maximum allowed number of retransmissions have occurred.

15 Once the data block/blocks have been successfully received/decoded or a maximum number of retransmissions has occurred, the HARQ process identification for the data block/blocks may be destroyed, meaning that the HARQ process identification may then be reused for a new data block/blocks.

[00210] Accordingly to some embodiments, a HARQ process identification may be selected from one of eight values (e.g., 1, 2, 3, 3, 5, 6, 7, or 8). For rank 1, 2, and 3 downlink transmissions to wireless terminal 200, HARQ process identification H_a is mapped to a first HARQ process HARQ-1 for layer 1 transmission using the first transmission/reception layer (e.g., including TB1, CE1, IM1, DM1, SB1, and/or CD1). For rank 4 downlink transmissions to wireless terminal, HARQ process identification H_a is mapped to the first HARQ process

25 HARQ-1 for layer 1 and 4 transmissions using the first and fourth transmission/reception layers. For rank 2 downlink transmissions to wireless terminal 200, HARQ process identification H_b is mapped to second HARQ process HARQ-2 for layer 2 transmission using the second transmission/reception layer. For rank 3 and 4 downlink transmissions to wireless terminal, HARQ process identification H_b is mapped to the second HARQ process

30 HARQ-2 for layer 2 and 3 transmissions using the second and third transmission/reception layers. Accordingly, HARQ process HARQ-1 and identification H_a are used for rank 1, 2, 3, and 4 transmissions, and HARQ process HARQ-2 and identification H_b are used for rank 2, 3, and 4 transmissions.

[00211] For an initial rank 1 transmission of a data block, a currently unused identification value (e.g., selected from 1-8) is assigned to H_a for HARQ process HARQ-1, and H_a is used to identify the instance of HARQ-1 that is applied to transmissions/retransmissions of the layer 1 data block and that is applied to HARQ

5 ACK/NACK responses corresponding to the layer 1 data block.

[00212] For an initial rank 2, 3, or 4 transmission of data blocks using both HARQ processes HARQ-1 and HARQ-2 during a same TTI/TFRE, a currently unused identification value (e.g., selected from 1-8) is assigned to H_a for HARQ process HARQ-1, and another identification value is assigned to H_b for process HARQ-2 (e.g., as a function of H_a).

10 Accordingly, H_a is used to identify the instance of HARQ-1 that is applied to transmissions/retransmissions of layer 1/4 data block/blocks (for layer 1 and/or 4 transmissions/retransmissions) and that is applied to HARQ ACK/NACK responses corresponding to the layer 1/4 data blocks, and H_b is used to identify the instance of HARQ-2 that is applied to transmissions/retransmissions of the layer 2/3 data block/blocks (for layer 15 2 and/or 3 transmissions/retransmissions) and that is applied to HARQ ACK/NACK responses corresponding to the layer 2/3 data block/blocks.

[00213] According to some embodiments, HARQ process identification H_b may be assigned as a function of HARQ process identification H_a. With eight different HARQ process identification values from one to eight, for example, identification H_b may be 20 assigned according to the following formula:

$$H_b = (H_a + N/2) \bmod(N),$$

where N is the number of HARQ processes (e.g., two for HARQ-1 and HARQ-2) as configured by higher layers and/or by the radio network controller. With two HARQ processes and eight different HARQ process identification values, identification H_b may be 25 selected as a function of H_a according to the following table:

H_a	H_b	H_a	H_b
1	5	5	1
2	6	6	2
3	7	7	3
30	8	8	4

Accordingly, only one of the HARQ process identifications (e.g., H_a) may need to be transmitted between base station 100 and wireless terminal 200, with the other HARQ process identification (e.g., H_b) being derived at the receiving device using H_a.

35 **[00214]** If the Node B (base station) schedules three transport blocks in any transmission (i.e., rank 3), for retransmissions, the second transport block and the third

transport block are retransmitted with the same HARQ process identifier (that was shared by the second and third transport blocks for the initial transmission) as discussed above. If the Node B schedules four transport blocks in any transmission, for retransmissions, the primary transport block and the fourth transport block are re-transmitted with the same HARQ

5 process identifier (that was shared by the primary and fourth transport blocks for the initial transmission), and the second and third transport blocks are re-transmitted with the same HARQ process identifier (that was shared by the second and third transport blocks for the initial transmission), as discussed above.

[00215] The following numbered embodiments are provided by way of example

10 without limiting the scope of the present application.

[00216] Embodiment 1. A method of transmitting data from a network node (100) to a wireless terminal (200), the method comprising:

transmitting (1899) first and second data blocks over respective first and second MIMO layers to the wireless terminal (200) during a first MIMO transmission time interval (TTI);

receiving (1901) feedback from the wireless terminal (200) for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords that map to the respective first and second MIMO layers; and

20 responsive to the network node being transmit buffer limited for the wireless terminal (200), retransmitting (1911) the first and second data blocks over the respective first and second MIMO layers to the wireless terminal (200) during a second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK).

[00217] Embodiment 2. The method of embodiment 1, further comprising:

25 transmitting (1899) a third data block over a third MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval (TTI), wherein the second ACK-NACK codeword maps to the second and third MIMO layers; and

30 responsive to the network node being transmit buffer limited for the wireless terminal (200), retransmitting (1911) the third data block over the third MIMO layer to the wireless terminal (200) during the second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK).

[00218] Embodiment 3. The method of embodiment 2, further comprising;

transmitting (1899) a fourth data block over a fourth MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval (TTI), wherein the first ACK-NACK codeword maps to the first and fourth MIMO layers; and

5 responsive to the network node being transmit buffer limited for the wireless terminal (200), retransmitting (1911) the fourth data block over the fourth MIMO layer to the wireless terminal (200) during the second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement (ACK) and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement (NACK).

[00219] Embodiment 4. The method of any one of embodiments 1-3, further 10 comprising:

responsive to the first and second ones of the ACK-NACK codewords being Negative-Acknowledgements (NACKs), retransmitting (1911) the first and second data blocks over the respective first and second MIMO layers to the wireless terminal (200) during a second MIMO TTI.

15 **[00220]** Embodiment 5. A method of transmitting data from a network node (100) to a wireless terminal (200), the method comprising:

transmitting (1899) first and second data blocks over respective first and second MIMO layers to the wireless terminal (200) during a first MIMO transmission time interval (TTI);

20 receiving (1901) feedback from the wireless terminal (200) for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords that map to the respective first and second MIMO layers; and

25 responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, transmitting (2121) a discontinuous transmission indicator for the first MIMO layer to the wireless terminal (200); and

30 responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, retransmitting (2123) the second data block over the second MIMO layer to the wireless terminal (200) during a second MIMO TTI after transmitting the discontinuous transmission indicator.

[00221] Embodiment 6. The method of embodiment 5 wherein transmitting the discontinuous transmission indicator comprises transmitting the discontinuous transmission

indicator over a downlink signaling channel, and wherein retransmitting the second data block comprises retransmitting the second data block over a downlink traffic channel.

[00222] Embodiment 7. The method of embodiment 6 wherein the downlink signaling channel comprises a High Speed Shared Control Channel (HS-SCCH), and wherein the 5 downlink traffic channel comprises a High Speed Physical Downlink Shared Channel (HS-PDSCH).

[00223] Embodiment 8. The method of embodiment 7 wherein transmitting the discontinuous transmission indicator comprises transmitting the discontinuous transmission indicator as a bit pattern in a modulation and transmission rank field of the HS-SCCH 10 downlink signaling channel.

[00224] Embodiment 9. The method of embodiment 8 wherein transmitting the discontinuous transmission indicator comprises transmitting one of a 11110 bit pattern or a 11111 bit pattern in the modulation and transmission rank field of the HS-SCCH downlink signaling channel.

15 **[00225]** Embodiment 10. The method of embodiment 7 wherein transmitting the discontinuous transmission indicator comprises transmitting the discontinuous transmission indicator as a bit pattern in a transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

20 **[00226]** Embodiment 11. The method of embodiment 8 wherein transmitting the discontinuous transmission indicator comprises transmitting a 000000 bit pattern in the transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

[00227] Embodiment 12. The method of any one of embodiments 5-11, further comprising:

25 transmitting (1899) a third data block over a third MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval (TTI), wherein the second ACK-NACK codeword maps to the second and third MIMO layers; and

30 responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK- NACK codeword being a NACK, retransmitting (2123) the third data block over the third MIMO layer to the wireless terminal (200) during the second MIMO TTI after transmitting the discontinuous transmission indicator.

[00228] Embodiment 13. The method of embodiment 12, further comprising;

transmitting (1899) a fourth data block over a fourth MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval (TTI), wherein the first ACK-NACK codeword maps to the first and fourth MIMO layers;

5 wherein retransmitting the second and third data blocks comprises retransmitting the second and third data blocks without retransmitting the first and fourth data blocks during the second MIMO TTI while maintaining a MIMI transmission rank of the first MIMO TTI for the second MIMO TTI.

[00229] Embodiment 14. The method of any one of embodiments 5-13, further comprising:

10 responsive to the first and second ones of the ACK-NACK codewords being Negative-Acknowledgements (NACKs), retransmitting (1911) the first and second data blocks over the respective first and second MIMO layers to the wireless terminal (200) during a second MIMO TTI.

15 **[00230]** Embodiment 15. The method of any one of embodiments 5-12 wherein retransmitting the second data block comprises retransmitting the second data block without retransmitting the first data block during the second MIMO TTI while maintaining a MIMI transmission rank of the first MIMO TTI for the second MIMO TTI.

[00231] Acronyms/Abbreviations:

	Tx	Transmitter
20	HSDPA	High Speed Downlink Packet Access
	HARQ	Hybrid Automatic Repeat Request
	CRC	Cyclic Redundancy Check
	NAK/NACK	Non-Acknowledgment or Negative-Acknowledgment
	ACK	Acknowledgment
25	CC	Chase Combining
	IR	Incremental Redundancy
	UE	User Equipment or Wireless Terminal
	CQI	Channel Quality Information
	MMSE	Minimum Mean Square Error
30	TTI	Transmit Time Interval
	PCI	Precoding Control Index

[00232] In the above-description of various embodiments of present inventive concepts, it is to be understood that the terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of present inventive

concepts. Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which present inventive concepts belong. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that 5 is consistent with their meaning in the context of this specification and the relevant art and will not be interpreted in an idealized or overly formal sense expressly so defined herein.

[00233] When an element is referred to as being "connected", "coupled", "responsive", or variants thereof to another element, it can be directly connected, coupled, or responsive to the other element or intervening elements may be present. In contrast, when an element is 10 referred to as being "directly connected", "directly coupled", "directly responsive", or variants thereof to another element, there are no intervening elements present. Like numbers refer to like elements throughout. Furthermore, "coupled", "connected", "responsive", or variants thereof as used herein may include wirelessly coupled, connected, or responsive. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, 15 unless the context clearly indicates otherwise. Well-known functions or constructions may not be described in detail for brevity and/or clarity. The term "and/or" includes any and all combinations of one or more of the associated listed items.

[00234] As used herein, the terms "comprise", "comprising", "comprises", "include", "including", "includes", "have", "has", "having", or variants thereof are open-ended, and 20 include one or more stated features, integers, elements, steps, components or functions but does not preclude the presence or addition of one or more other features, integers, elements, steps, components, functions or groups thereof. Furthermore, as used herein, the common abbreviation "e.g.", which derives from the Latin phrase "exempli gratia," may be used to introduce or specify a general example or examples of a previously mentioned item, and is 25 not intended to be limiting of such item. The common abbreviation "i.e.", which derives from the Latin phrase "id est," may be used to specify a particular item from a more general recitation.

[00235] Example embodiments are described herein with reference to block diagrams and/or flowchart illustrations of computer-implemented methods, apparatus (systems and/or 30 devices) and/or computer program products. It is understood that a block of the block diagrams and/or flowchart illustrations, and combinations of blocks in the block diagrams and/or flowchart illustrations, can be implemented by computer program instructions that are performed by one or more computer circuits. These computer program instructions may be provided to a processor circuit of a general purpose computer circuit, special purpose

computer circuit, and/or other programmable data processing circuit to produce a machine, such that the instructions, which execute via the processor of the computer and/or other programmable data processing apparatus, transform and control transistors, values stored in memory locations, and other hardware components within such circuitry to implement the 5 functions/acts specified in the block diagrams and/or flowchart block or blocks, and thereby create means (functionality) and/or structure for implementing the functions/acts specified in the block diagrams and/or flowchart block(s).

10 **[00236]** These computer program instructions may also be stored in a tangible computer-readable medium that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable medium produce an article of manufacture including instructions which implement the functions/acts specified in the block diagrams and/or flowchart block or blocks.

15 **[00237]** A tangible, non-transitory computer-readable medium may include an electronic, magnetic, optical, electromagnetic, or semiconductor data storage system, apparatus, or device. More specific examples of the computer-readable medium would include the following: a portable computer diskette, a random access memory (RAM) circuit, a read-only memory (ROM) circuit, an erasable programmable read-only memory (EPROM or Flash memory) circuit, a portable compact disc read-only memory (CD-ROM), and a portable digital video disc read-only memory (DVD/BlueRay).

20 **[00238]** The computer program instructions may also be loaded onto a computer and/or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer and/or other programmable apparatus to produce a computer-implemented process such that the instructions which execute on the computer or other programmable apparatus provide steps for implementing the functions/acts specified in the 25 block diagrams and/or flowchart block or blocks. Accordingly, embodiments of present inventive concepts may be embodied in hardware and/or in software (including firmware, resident software, micro-code, etc.) that runs on a processor such as a digital signal processor, which may collectively be referred to as "circuitry," "a module" or variants thereof.

30 **[00239]** It should also be noted that in some alternate implementations, the functions/acts noted in the blocks may occur out of the order noted in the flowcharts. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be executed in the reverse order, depending upon the functionality/acts involved. Moreover, the functionality of a given block of the flowcharts and/or block diagrams may be separated into multiple blocks and/or the functionality of two

or more blocks of the flowcharts and/or block diagrams may be at least partially integrated. Finally, other blocks may be added/inserted between the blocks that are illustrated, and/or blocks/operations may be omitted without departing from the scope of present inventive concepts. Moreover, although some of the diagrams include arrows on communication paths

5 to show a primary direction of communication, it is to be understood that communication may occur in the opposite direction to the depicted arrows.

[00240] Many different embodiments have been disclosed herein, in connection with the above description and the drawings. It will be understood that it would be unduly repetitious and obfuscating to literally describe and illustrate every combination and 10 subcombination of these embodiments. Accordingly, the present specification, including the drawings, shall be construed to constitute a complete written description of various example combinations and subcombinations of embodiments and of the manner and process of making and using them, and shall support claims to any such combination or subcombination.

[00241] Many variations and modifications can be made to the embodiments without 15 substantially departing from the principles of present inventive concepts. All such variations and modifications are intended to be included herein within the scope of present inventive concepts. Accordingly, the above disclosed subject matter is to be considered illustrative, and not restrictive, and the appended claims are intended to cover all such modifications, enhancements, and other embodiments, which fall within the spirit and scope of present 20 inventive concepts. Thus, to the maximum extent allowed by law, the scope of present inventive concepts is to be determined by the broadest permissible interpretation of the appended claims, and shall not be restricted or limited by the foregoing detailed description.

That Which Is Claimed Is:

1. A method of transmitting data from a network node (100) to a wireless terminal (200), the method comprising:

5 transmitting (1899) first and second data blocks over respective first and second multiple-input-multiple-output, MIMO, layers to the wireless terminal (200) during a first MIMO transmission time interval, TTI;

receiving (1901) feedback from the wireless terminal (200) for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords that map to the 10 respective first and second MIMO layers; and

responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, transmitting (2121) a discontinuous transmission indicator for the first MIMO layer to the wireless terminal (200); and

15 responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, retransmitting (2123) the second data block over the second MIMO layer to the wireless terminal (200) during a second MIMO TTI after transmitting the discontinuous transmission indicator.

20

2. The method of Claim 1 wherein transmitting the discontinuous transmission indicator comprises transmitting the discontinuous transmission indicator over a downlink signaling channel, and wherein retransmitting the second data block comprises retransmitting the second data block over a downlink traffic channel.

25

3. The method of Claim 2 wherein the downlink signaling channel comprises a High Speed Shared Control Channel, HS-SCCH, and wherein the downlink traffic channel comprises a High Speed Physical Downlink Shared Channel, HS-PDSCH.

30

4. The method of Claim 3 wherein transmitting the discontinuous transmission indicator comprises transmitting the discontinuous transmission indicator as a bit pattern in a transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

5. The method of Claim 4 wherein transmitting the discontinuous transmission indicator comprises transmitting a 111111 bit pattern in the transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

5 6. The method of Claim 3 wherein transmitting the discontinuous transmission indicator comprises transmitting the discontinuous transmission indicator as a bit pattern in a modulation and transmission rank field of the HS-SCCH downlink signaling channel.

10 7. The method of Claim 4 wherein transmitting the discontinuous transmission indicator comprises transmitting one of a 11110 bit pattern or a 11111 bit pattern in the modulation and transmission rank field of the HS-SCCH downlink signaling channel.

15 8. The method of any one of Claims 1-7, further comprising:
transmitting (1899) a third data block over a third MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval, TTI, wherein the second ACK-NACK codeword maps to the second and third MIMO layers; and
20 responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, retransmitting (2123) the third data block over the third MIMO layer to the wireless terminal (200) during the second MIMO TTI after transmitting the discontinuous transmission indicator.

25 9. The method of Claim 8, further comprising;
transmitting (1899) a fourth data block over a fourth MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval, TTI, wherein the first ACK-NACK codeword maps to the first and fourth MIMO layers;
30 wherein retransmitting the second and third data blocks comprises retransmitting the second and third data blocks without retransmitting the first and fourth data blocks during the second MIMO TTI while maintaining a MIMO transmission rank of the first MIMO TTI for the second MIMO TTI.

10. The method of any one of Claims 1-9, further comprising:
responsive to the first and second ones of the ACK-NACK codewords being Negative-Acknowledgements, NACKs, retransmitting (1911) the first and second data blocks

over the respective first and second MIMO layers to the wireless terminal (200) during a second MIMO TTI.

11. The method of any one of Claims 1-8 wherein retransmitting the second data
5 block comprises retransmitting the second data block without retransmitting the first data block during the second MIMO TTI while maintaining a MIMO transmission rank of the first MIMO TTI for the second MIMO TTI.

12. A base station (100) of a radio access network (60), the base station (100)
10 comprising:

a transceiver (109) configured to provide communications over a wireless channel (300) with a wireless terminal; and

a processor (201) coupled to the transceiver (209), wherein the processor is configured to,

15 transmit first and second data blocks through the transceiver over respective first and second multiple-input-multiple-output, MIMO, layers to the wireless terminal (200) during a first MIMO transmission time interval, TTI,

receive feedback through the transceiver from the wireless terminal (200) for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords 20 that map to the respective first and second MIMO layers,

transmit a discontinuous transmission indicator for the first MIMO layer through the transceiver to the wireless terminal (200) responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK, and

25 retransmit the second data block through the transceiver over the second MIMO layer to the wireless terminal (200) during a second MIMO TTI after transmitting the discontinuous transmission indicator responsive to the network node being transmit buffer limited for the wireless terminal (200) and responsive to the first ACK-NACK codeword being an ACK and the second ACK-NACK codeword being a NACK.

30

13. The base station of Claim 12 wherein the processor is configured to transmit the discontinuous transmission indicator by transmitting the discontinuous transmission indicator over a downlink signaling channel, and to retransmit the second data block by retransmitting the second data block over a downlink traffic channel.

14. The base station of Claim 13 wherein the downlink signaling channel comprises a High Speed Shared Control Channel, HS-SCCH, and wherein the downlink traffic channel comprises a High Speed Physical Downlink Shared Channel, HS-PDSCH.

5

15. The base station of Claim 14 wherein the processor is configured to transmit the discontinuous transmission indicator by transmitting the discontinuous transmission indicator as a bit pattern in a transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

10

16. The base station of Claim 15 wherein the processor is configured to transmit the discontinuous transmission indicator by transmitting a 111111 bit pattern in the transport block size field of the HS-SCCH downlink signaling channel for the first MIMO layer.

15

17. A method of transmitting data from a network node (100) to a wireless terminal (200), the method comprising:

transmitting (1899) first and second data blocks over respective first and second, multiple-input-multiple-output, MIMO, layers to the wireless terminal (200) during a first MIMO transmission time interval, TTI;

20

receiving (1901) feedback from the wireless terminal (200) for the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords that map to the respective first and second MIMO layers; and

25

responsive to the network node being transmit buffer limited for the wireless terminal (200), retransmitting (1911) the first and second data blocks over the respective first and second MIMO layers to the wireless terminal (200) during a second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement, ACK, and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement, NACK.

18. The method of Claim 17, further comprising:

30

transmitting (1899) a third data block over a third MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval, TTI, wherein the second ACK-NACK codeword maps to the second and third MIMO layers; and

responsive to the network node being transmit buffer limited for the wireless terminal (200), retransmitting (1911) the third data block over the third MIMO layer to the wireless

terminal (200) during the second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement, ACK, and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement, NACK.

5 19. The method of Claim 18, further comprising;
transmitting (1899) a fourth data block over a fourth MIMO layer to the wireless terminal (200) during the first MIMO transmission time interval, TTI, wherein the first ACK-NACK codeword maps to the first and fourth MIMO layers; and
responsive to the network node being transmit buffer limited for the wireless terminal
10 (200), retransmitting (1911) the fourth data block over the fourth MIMO layer to the wireless terminal (200) during the second MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement, ACK, and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement, NACK.

15 20. The method of any one of Claims 17-19, further comprising;
responsive to the first and second ones of the ACK-NACK codewords being
Negative-Acknowledgements, NACKs, retransmitting (1911) the first and second data blocks
over the respective first and second MIMO layers to the wireless terminal (200) during a
second MIMO TTI.

20 21. A base station (100) of a radio access network (60), the base station (100)
comprising:
a transceiver (109) configured to provide communications over a wireless channel
(300) with a wireless terminal; and
25 a processor (201) coupled to the transceiver (209), wherein the processor is
configured to,
 transmit first and second data blocks through the transceiver over respective
first and second MIMO layers to the wireless terminal (200) during a first multiple-input-
multiple-output, MIMO, transmission time interval, TTI,

30 receive feedback through the transceiver from the wireless terminal (200) for
the first MIMO TTI wherein the feedback includes first and second ACK-NACK codewords
that map to the respective first and second MIMO layers, and

 retransmit the first and second data blocks through the transceiver over the
respective first and second MIMO layers to the wireless terminal (200) during a second

MIMO TTI when one of the first and second ACK-NACK codewords is an Acknowledgement, ACK, and another of the first and second ACK-NACK codewords is a Negative-Acknowledgement, NACK, responsive to the network node being transmit buffer limited for the wireless terminal (200).

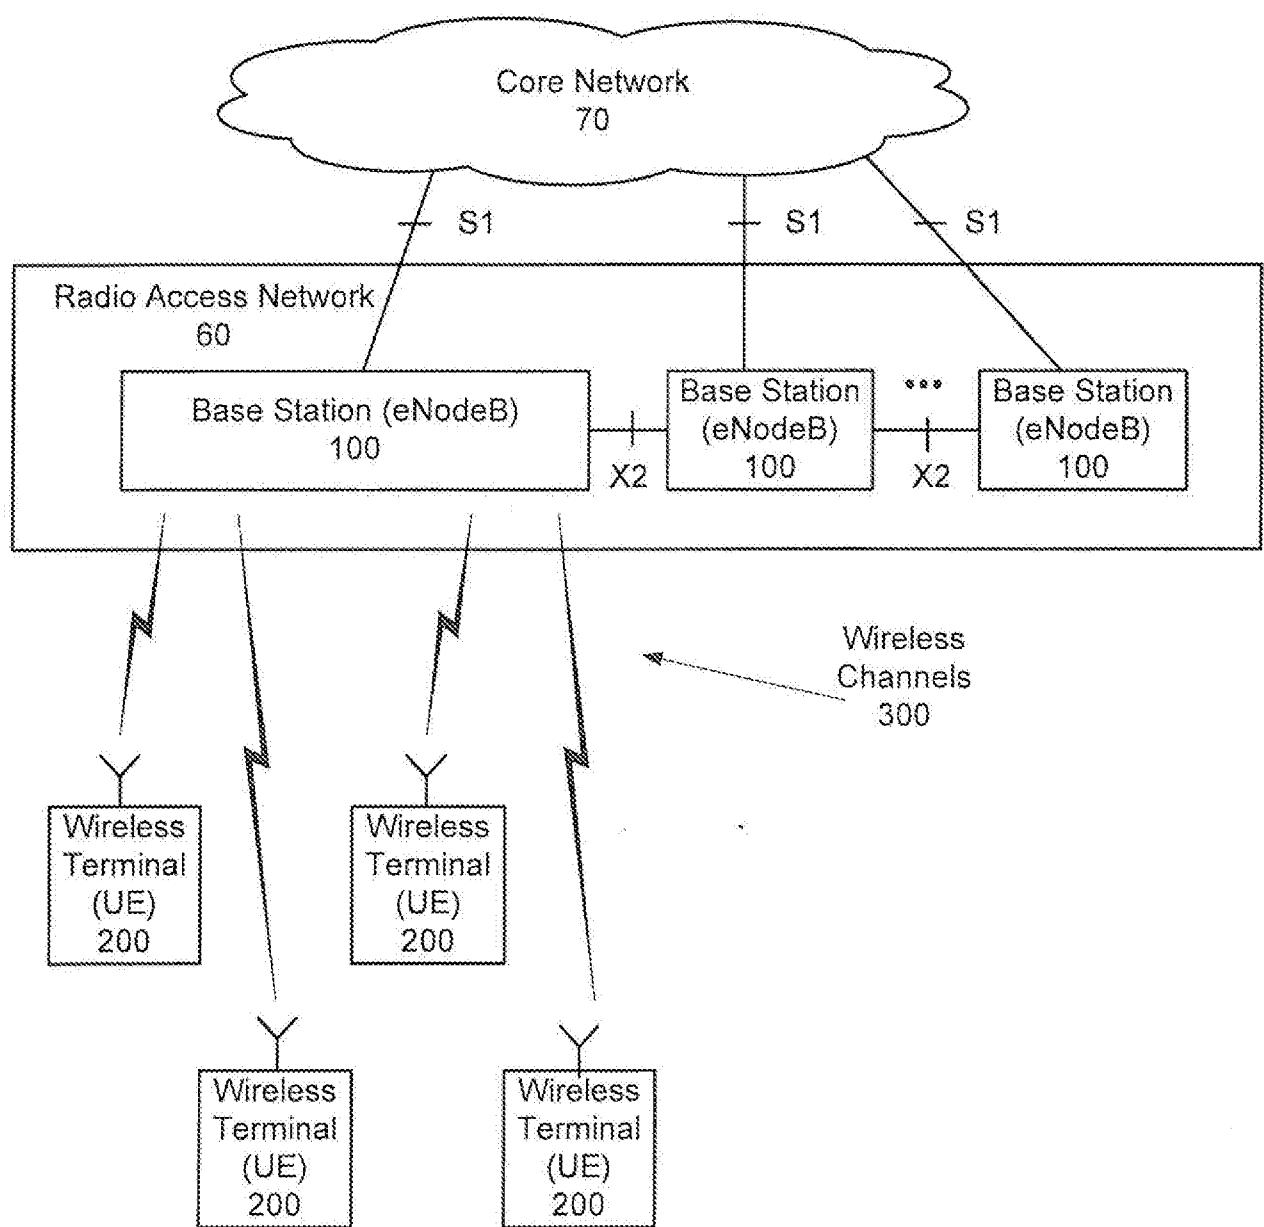
Figure 1

Figure 2

To/From Core Network(s)

To/From Other Base Station(s)

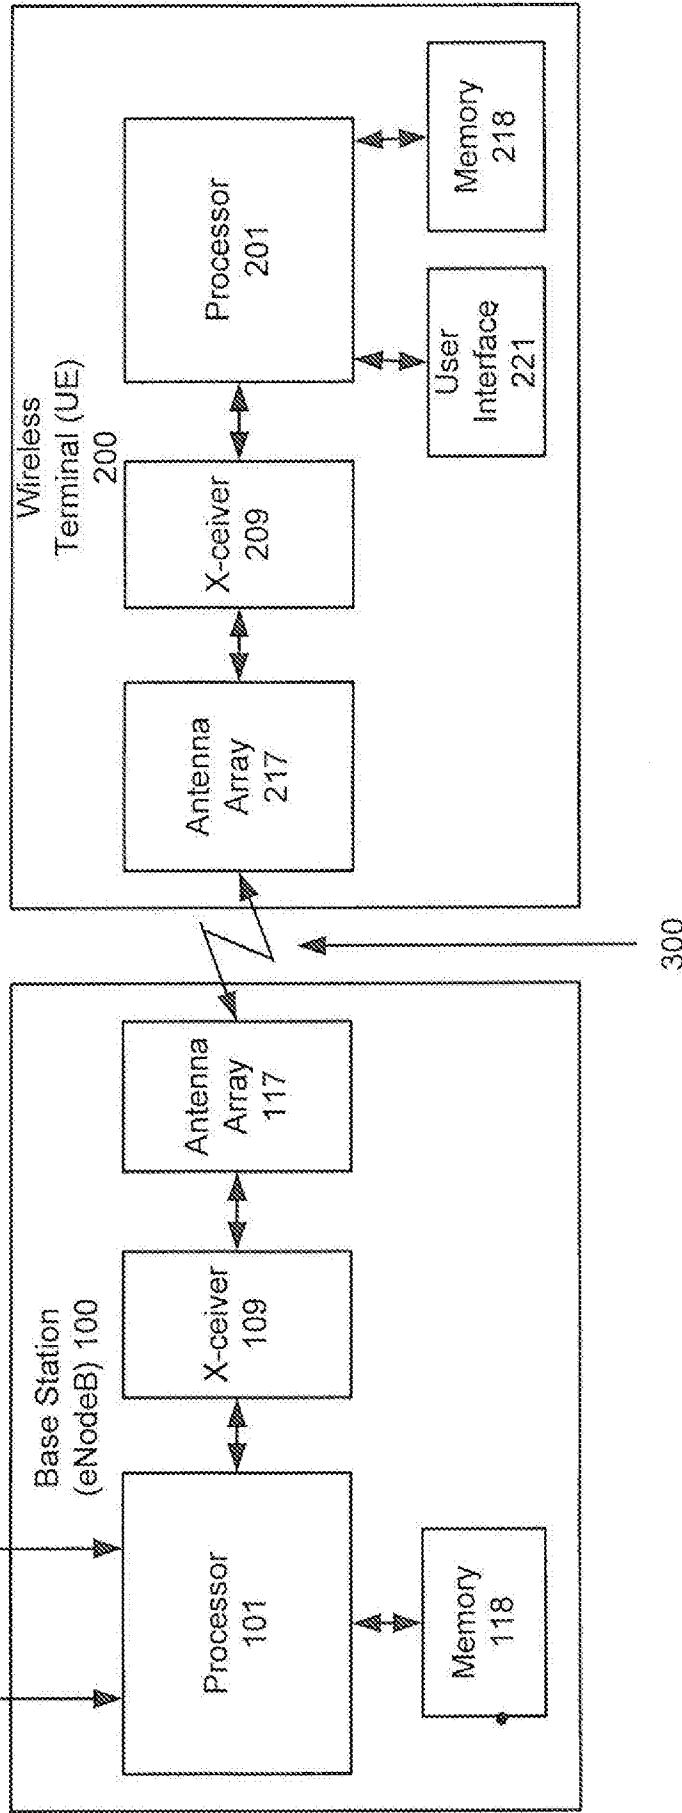


Figure 3A

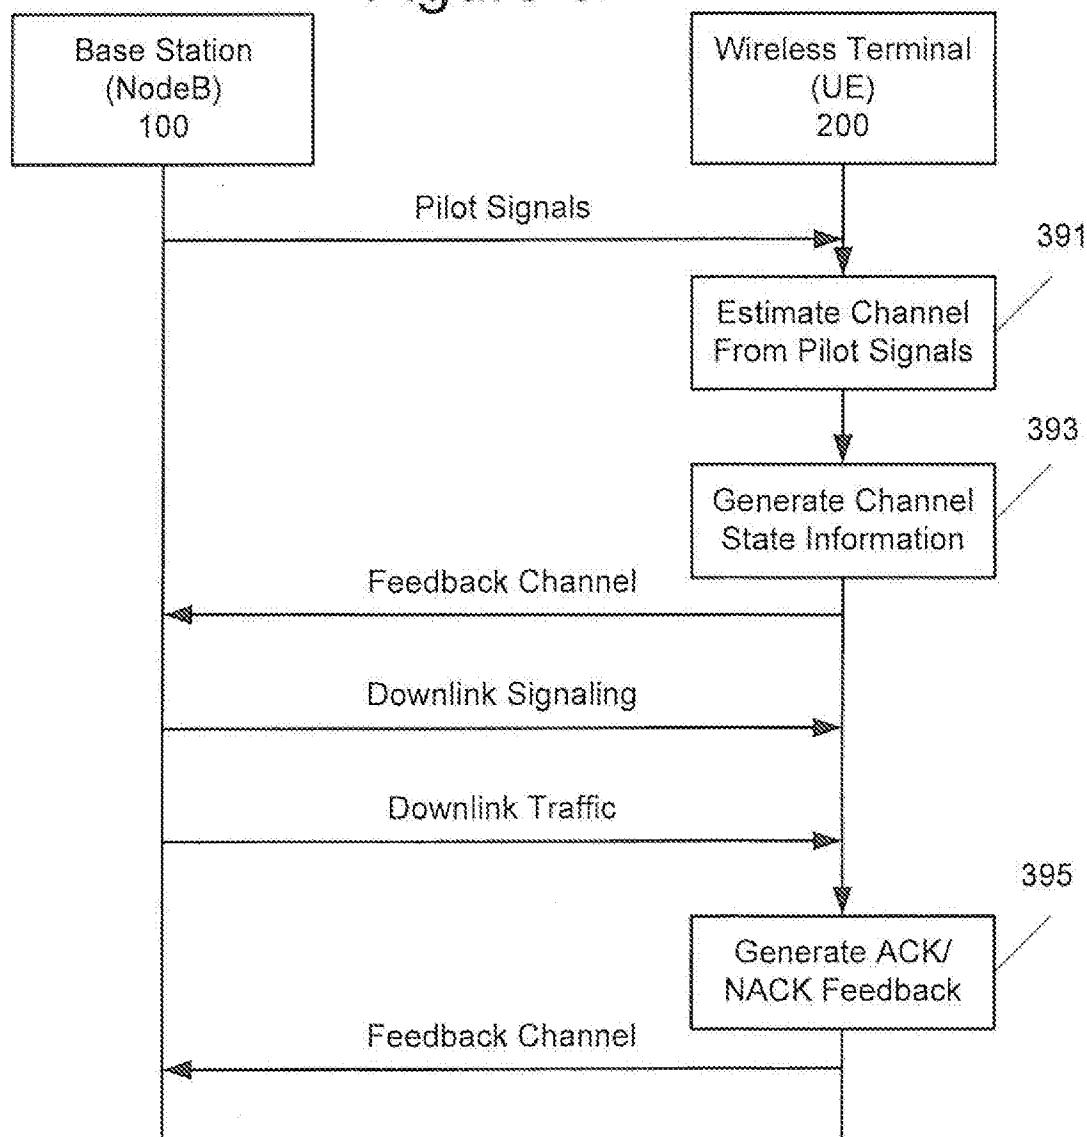


Figure 3B

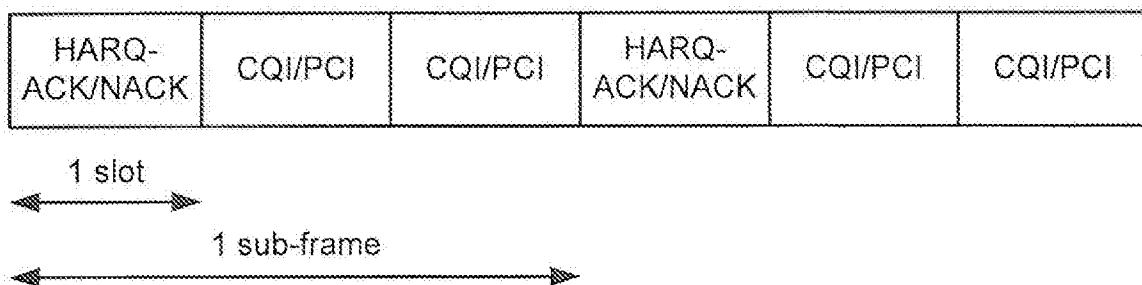


Figure 4

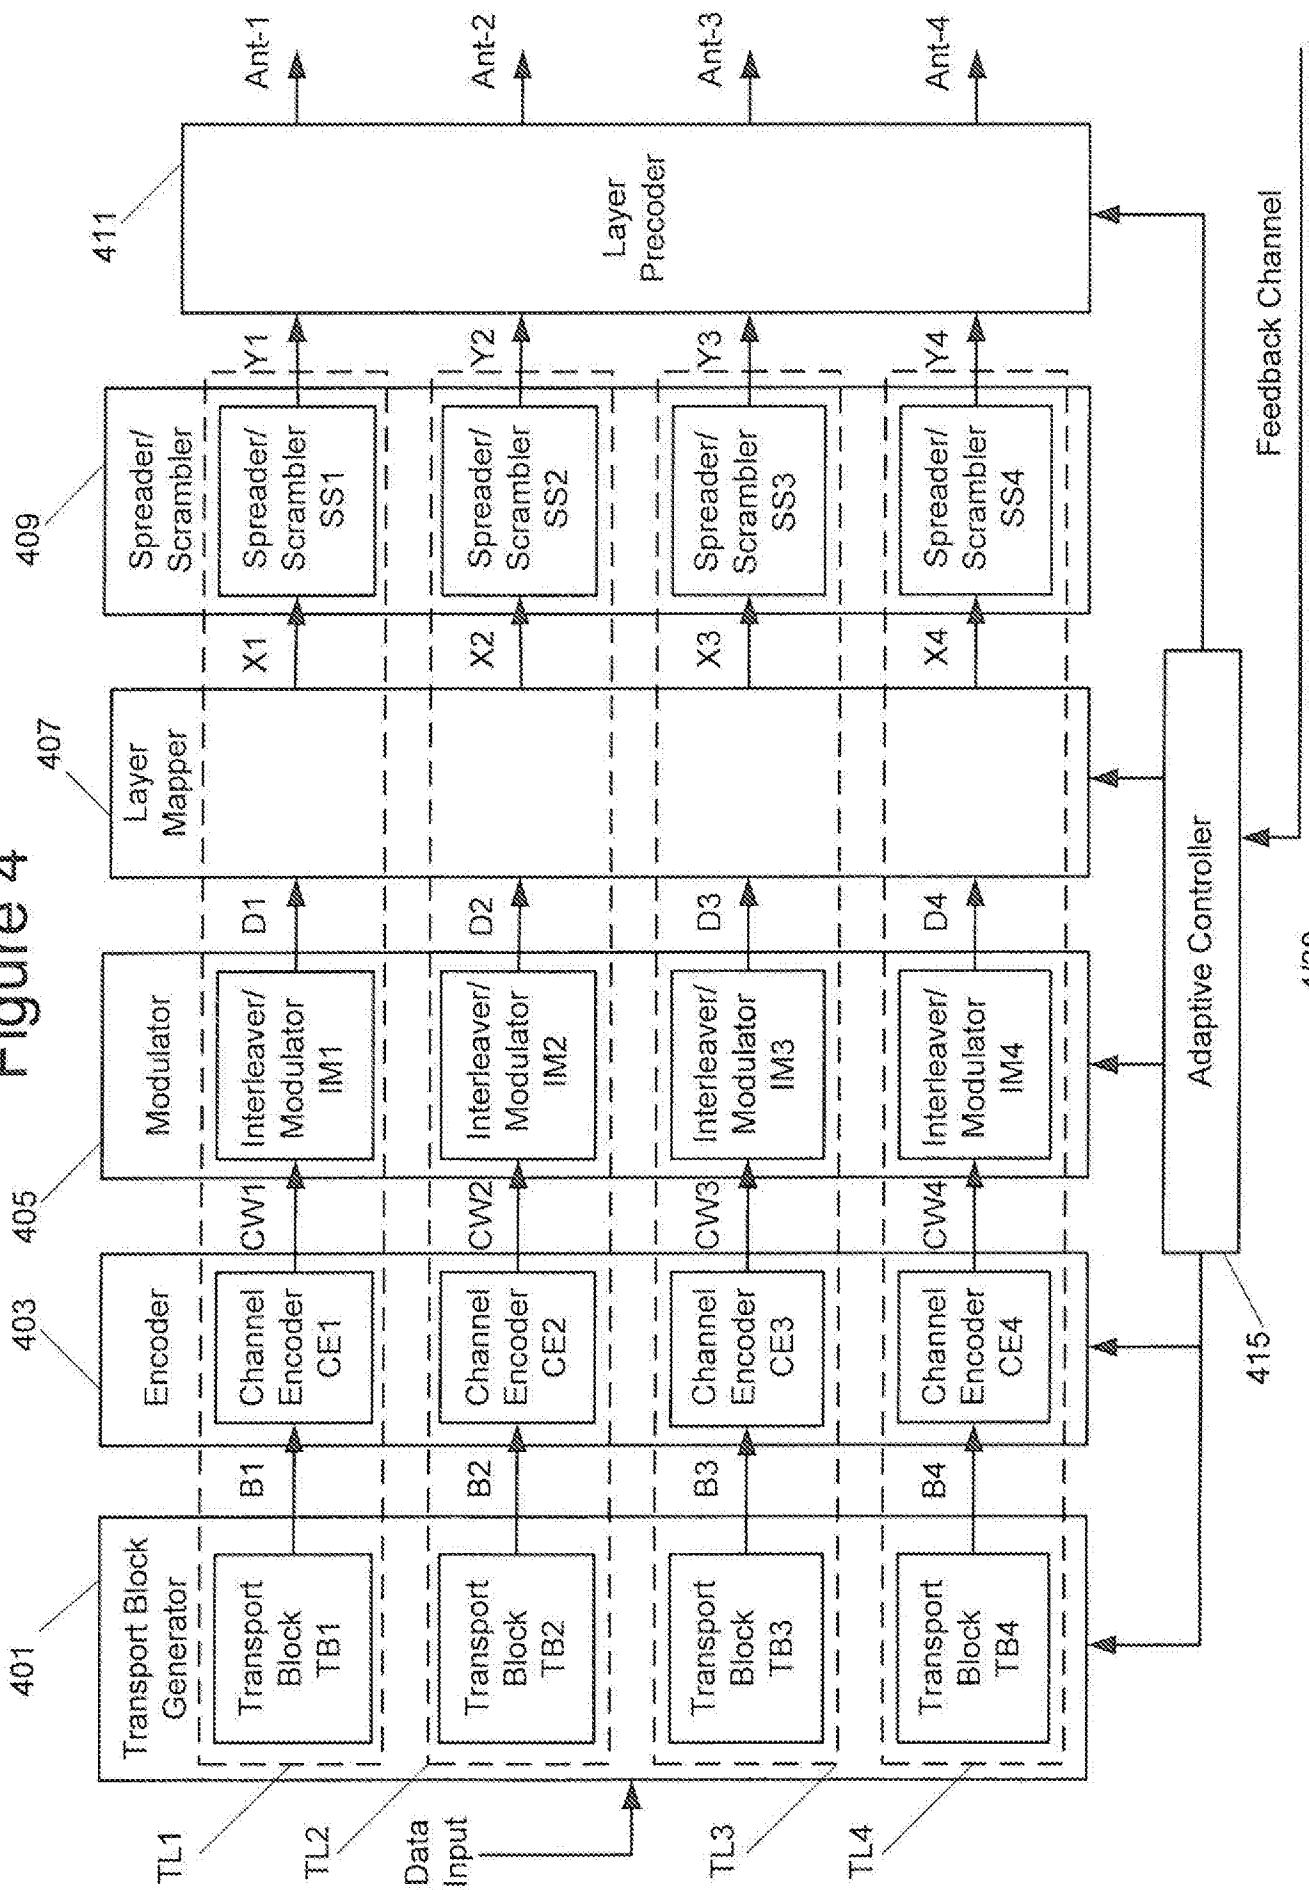


Figure 5

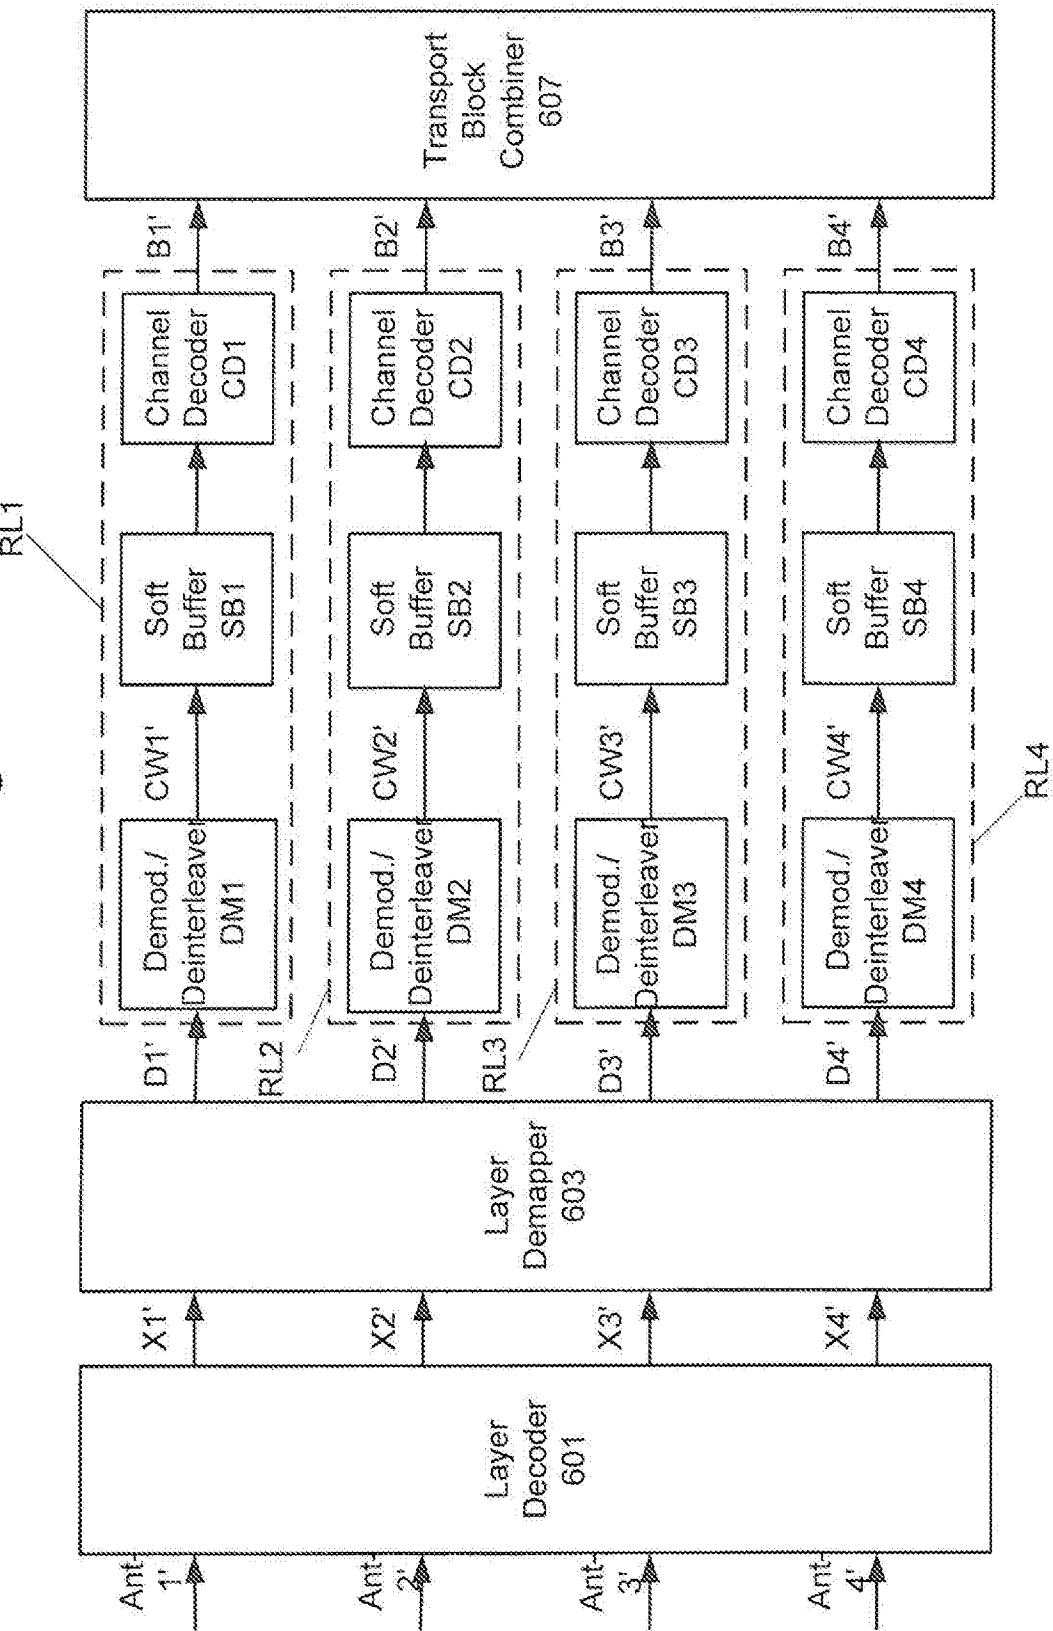


Figure 6

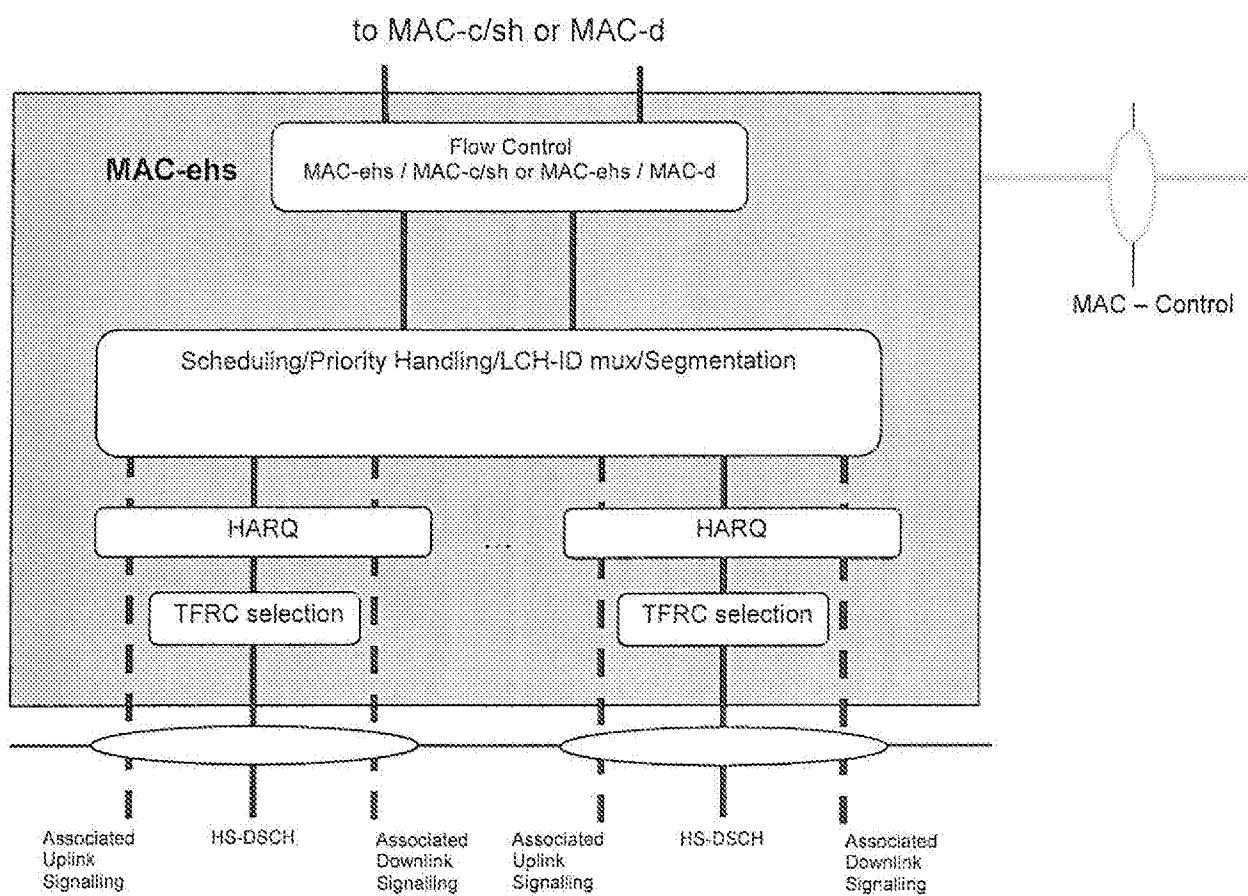


Figure 7A

		HARQ process	
		1 st HARQ	2 nd HARQ
4Tx Streams Combinations	Stream 1, Stream 2	Stream 3, Stream 4	
	Stream 1, Stream 3	Stream 2, Stream 4	
	Stream 1, Stream 4	Stream 2, Stream 3	

Figure 7B

		HARQ process	
		1 st HARQ	2 nd HARQ
3Tx Streams Combinations	Stream 1, Stream 2	Stream 3	
	Stream 1, Stream 3	Stream 2	
	Stream 1	Stream 2, Stream 3	

Figure 8A

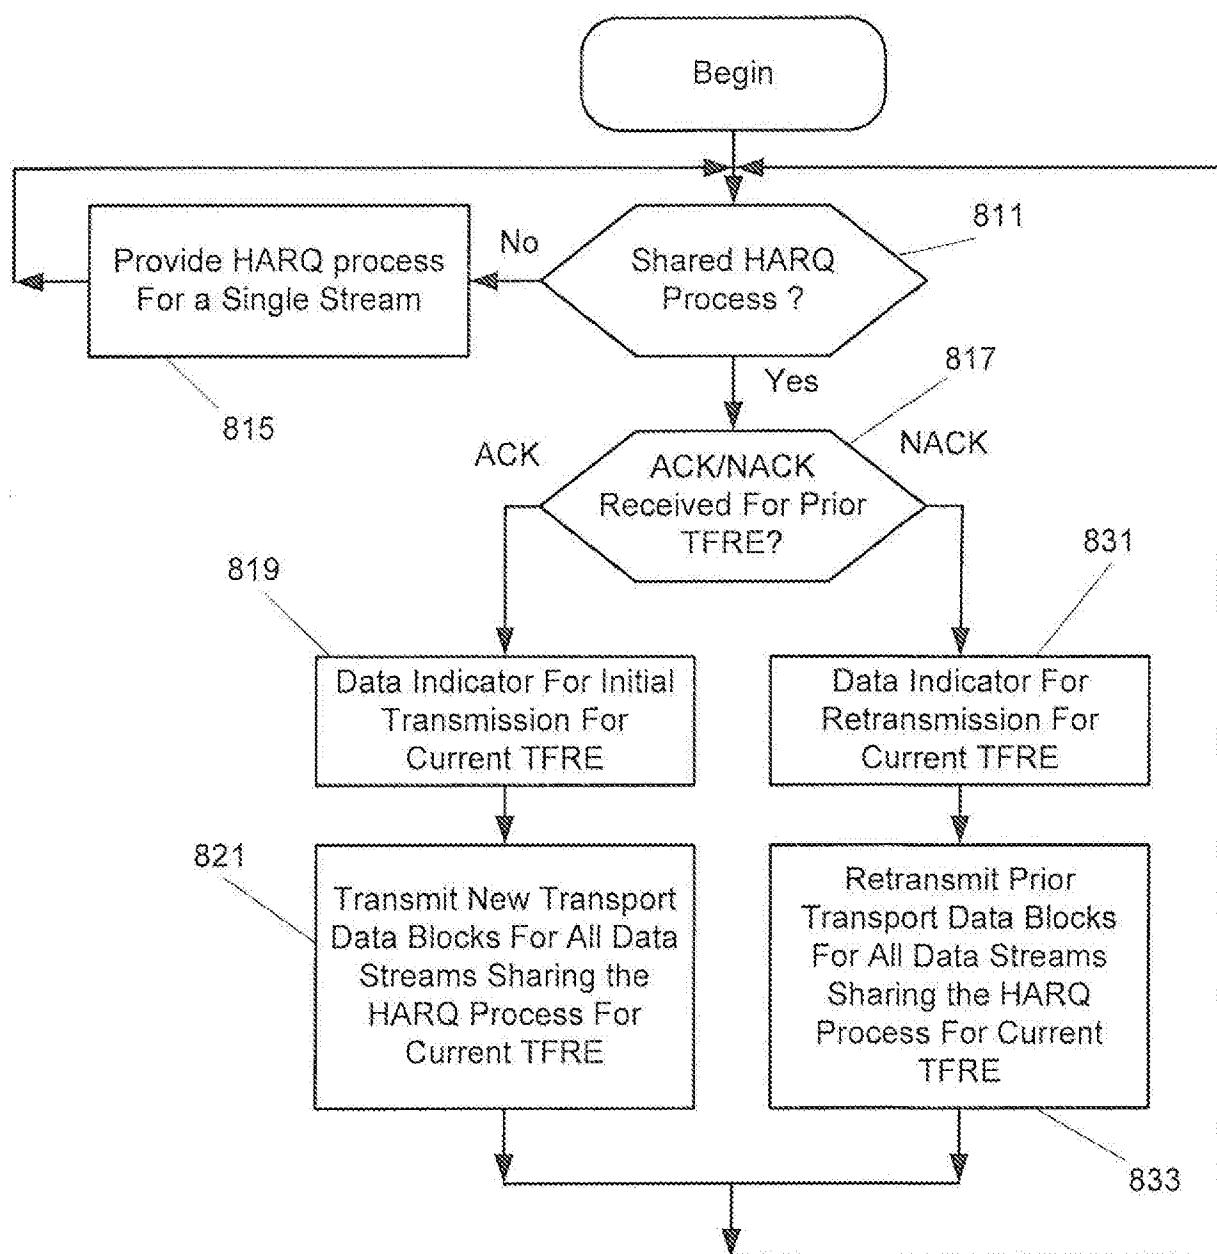


Figure 8B

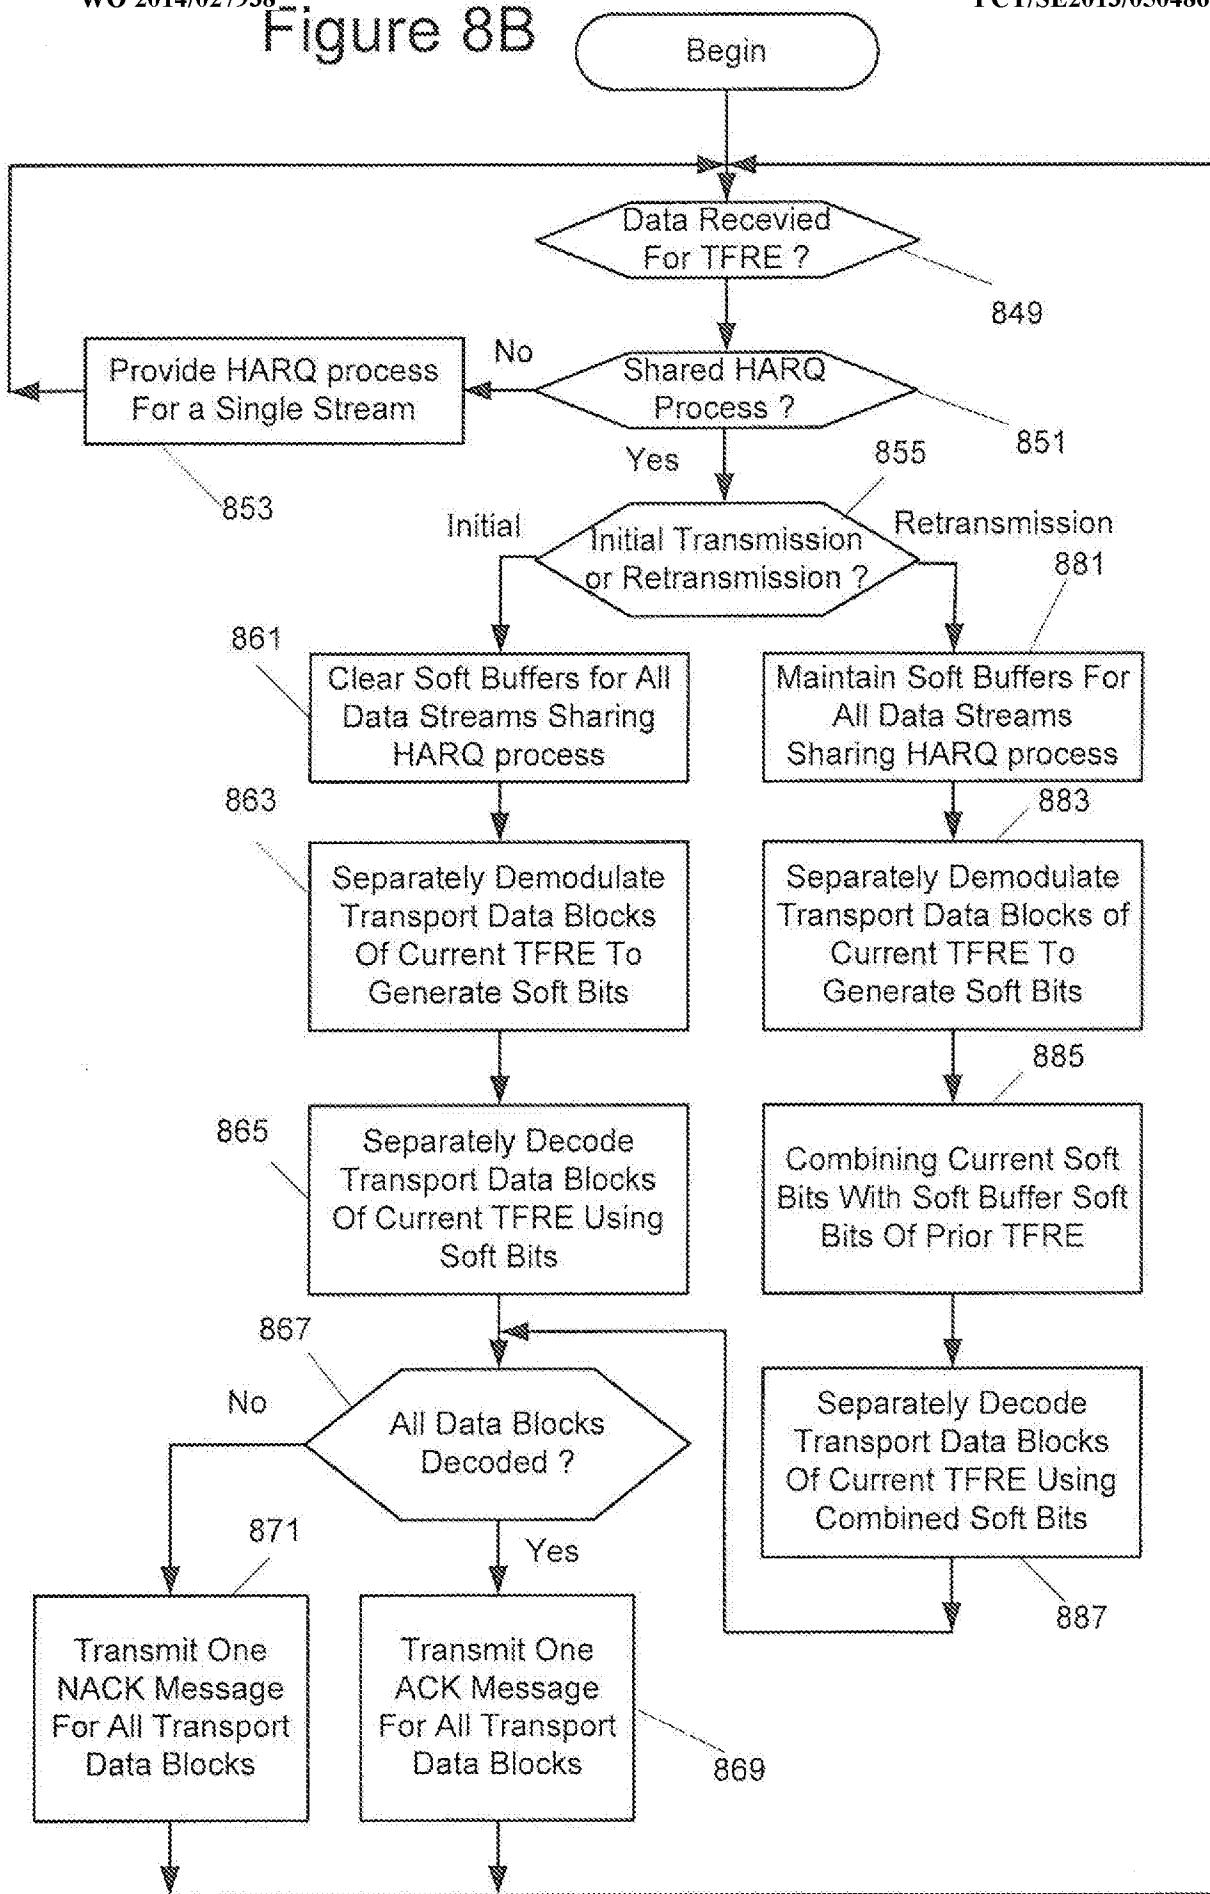


Figure 9

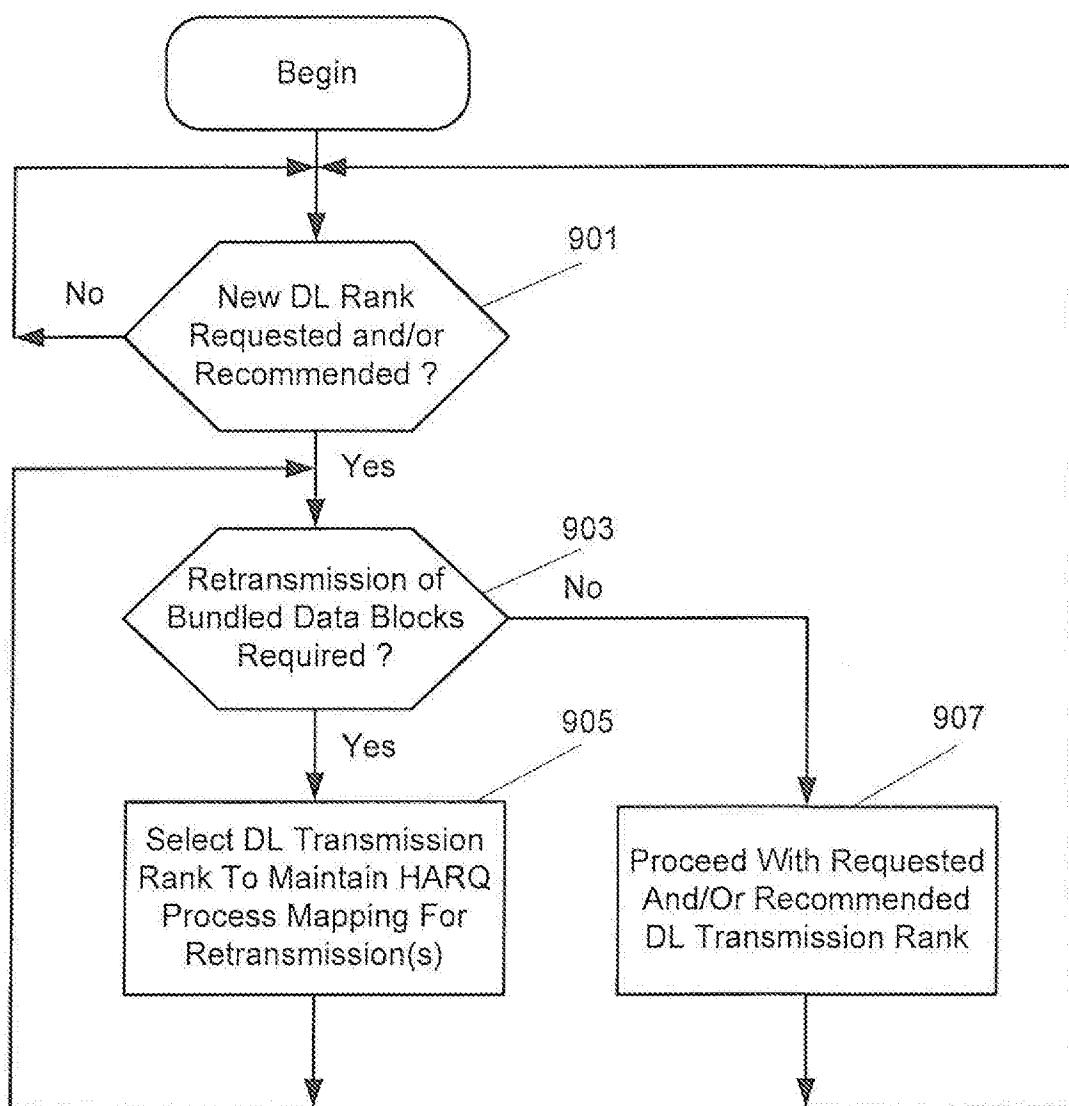


Figure 10

Initial Transmission (Rank 1)		Retransmission			
HARQ- 1	HARQ- 2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	--	4	4	NT	NT
F	--	4	2	OT	NT
P	--	3	3	NT	NT
F	--	3	2	OT	NT
P	--	2	2	NT	NT
F	--	2	2	OT	NT
P	--	1	1	NT	--
F	--	1	1	OT	--

Figure 11

Initial Transmission (Rank 2)		Retransmission			
HARQ-1	HARQ-2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	P	4	4	NT	NT
P	F	4	3	NT	OT
F	P	4	2	OT	NT
F	F	4	2	OT	OT
P	P	3	3	NT	NT
P	F	3	3	NT	OT
F	P	3	1 or 2	OT	--- (with R1) or NT (with R2)
F	F	3	2	OT	OT
P	P	2	2	NT	NT
P	F	2	2	NT	OT
F	P	2	2	OT	NT
F	F	2	2	OT	OT
P	P	1	1	NT	----
P	F	1	1	----	OT
F	P	1	1	OT	---
F	F	1	2	OT	OT

Figure 12

Initial Transmission (Rank 3)		Retransmission			
HARQ-1	HARQ-2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	P	3	3	NT	NT
P	F	3	3	NT	OT
F	P	3	3	OT	NT
F	F	3	3	OT	OT
P	P	4	4	NT	NT
P	F	4	3	NT	OT
F	P	4	4	OT	NT
F	F	4	3	OT	OT
P	P	2	2	NT	NT
P	F	2	2	NT	OT
F	P	2	3	OT	NT
F	F	2	3	OT	OT
P	P	1	1	NT	---
P	F	1	1	---	OT
F	P	1	3	OT	NT
F	F	1	3	OT	OT

Figure 13

Initial Transmission (Rank 4)		Retransmission			
HARQ-1	HARQ-2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	P	4	4	NT	NT
P	F	4	4	NT	OT
F	P	4	4	OT	NT
F	F	4	4	OT	OT
P	P	3	3	NT	NT
P	F	3	4	NT	OT
F	P	3	3	OT	NT
F	F	3	4	OT	OT
P	P	2	2	NT	NT
P	F	2	4	NT	OT
F	P	2	3	OT	NT
F	F	2	4	OT	OT
P	P	1	1	NT	---
P	F	1	4	NT	OT
F	P	1	3	OT	NT
F	F	1	4	OT	OT

Figure 14

Rank	Layer	HARQ Process
1	Layer 1 (CW1)	HARQ-1
2	Layer 1 (CW1)	HARQ-1
	Layer 2 (CW2)	HARQ-2
3	Layer 1 (CW1)	HARQ-1
	Layer 2 (CW2)	HARQ-2
	Layer 3 (CW3)	
4	Layer 1 (CW1)	HARQ-1
	Layer 4 (CW4)	
	Layer 2 (CW2)	HARQ-2
	Layer 3 (CW3)	

Figure 15

Initial Transmission (Rank 1)		Retransmission			
HARQ- 1	HARQ- 2	UE reported Rank	Scheduled Rank	HARQ- 1	HARQ-2
P	--	4	4	NT	NT
F	--	4	3	OT	NT
P	--	3	3	NT	NT
F	--	3	3	OT	NT
P	--	2	2	NT	NT
F	--	2	2	OT	NT
P	--	1	1	NT	---
F	--	1	1	OT	---

Figure 16

Initial Transmission (Rank 2)		Retransmission			
HARQ-1	HARQ-2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	P	4	4	NT	NT
P	F	4	2	NT	OT
F	P	4	3	OT	NT
F	F	4	2	OT	OT
P	P	3	3	NT	NT
P	F	3	2	NT	OT
F	P	3	3	OT	NT
F	F	3	2	OT	OT
P	P	2	2	NT	NT
P	F	2	2	NT	OT
F	P	2	2	OT	NT
F	F	2	2	OT	OT
P	P	1	1	NT	----
P	F	1	2	NT	OT
F	P	1	1	OT	----
F	F	1	2	OT	OT

Figure 17

Initial Transmission (Rank 3)		Retransmission			
HARQ-1	HARQ-2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	P	4	4	NT	NT
P	F	4	4	NT	OT
F	P	4	3	OT	NT
F	F	4	3	OT	OT
P	P	3	3	NT	NT
P	F	3	3	NT	OT
F	P	3	3	OT	NT
F	F	3	3	OT	OT
P	P	2	2	NT	NT
P	F	2	3	NT	OT
F	P	2	2	OT	NT
F	F	2	3	OT	OT
P	P	1	1	NT	---
P	F	1	3	NT	OT
F	P	1	1	OT	---
F	F	1	3	OT	OT

Figure 18

Initial Transmission (Rank 4)		Retransmission			
HARQ-1	HARQ-2	UE reported Rank	Scheduled Rank	HARQ-1	HARQ-2
P	P	4	4	NT	NT
P	F	4	4	NT	OT
F	P	4	4	OT	NT
F	F	4	4	OT	OT
P	P	3	3	NT	NT
P	F	3	3	NT	OT
F	P	3	4	OT	NT
F	F	3	4	OT	OT
P	P	2	2	NT	NT
P	F	2	4	NT	OT
F	P	2	4	OT	NT
F	F	2	4	OT	OT
P	P	1	1	NT	----
P	F	1	4	NT	OT
F	P	1	4	OT	NT
F	F	1	4	OT	OT

Figure 19

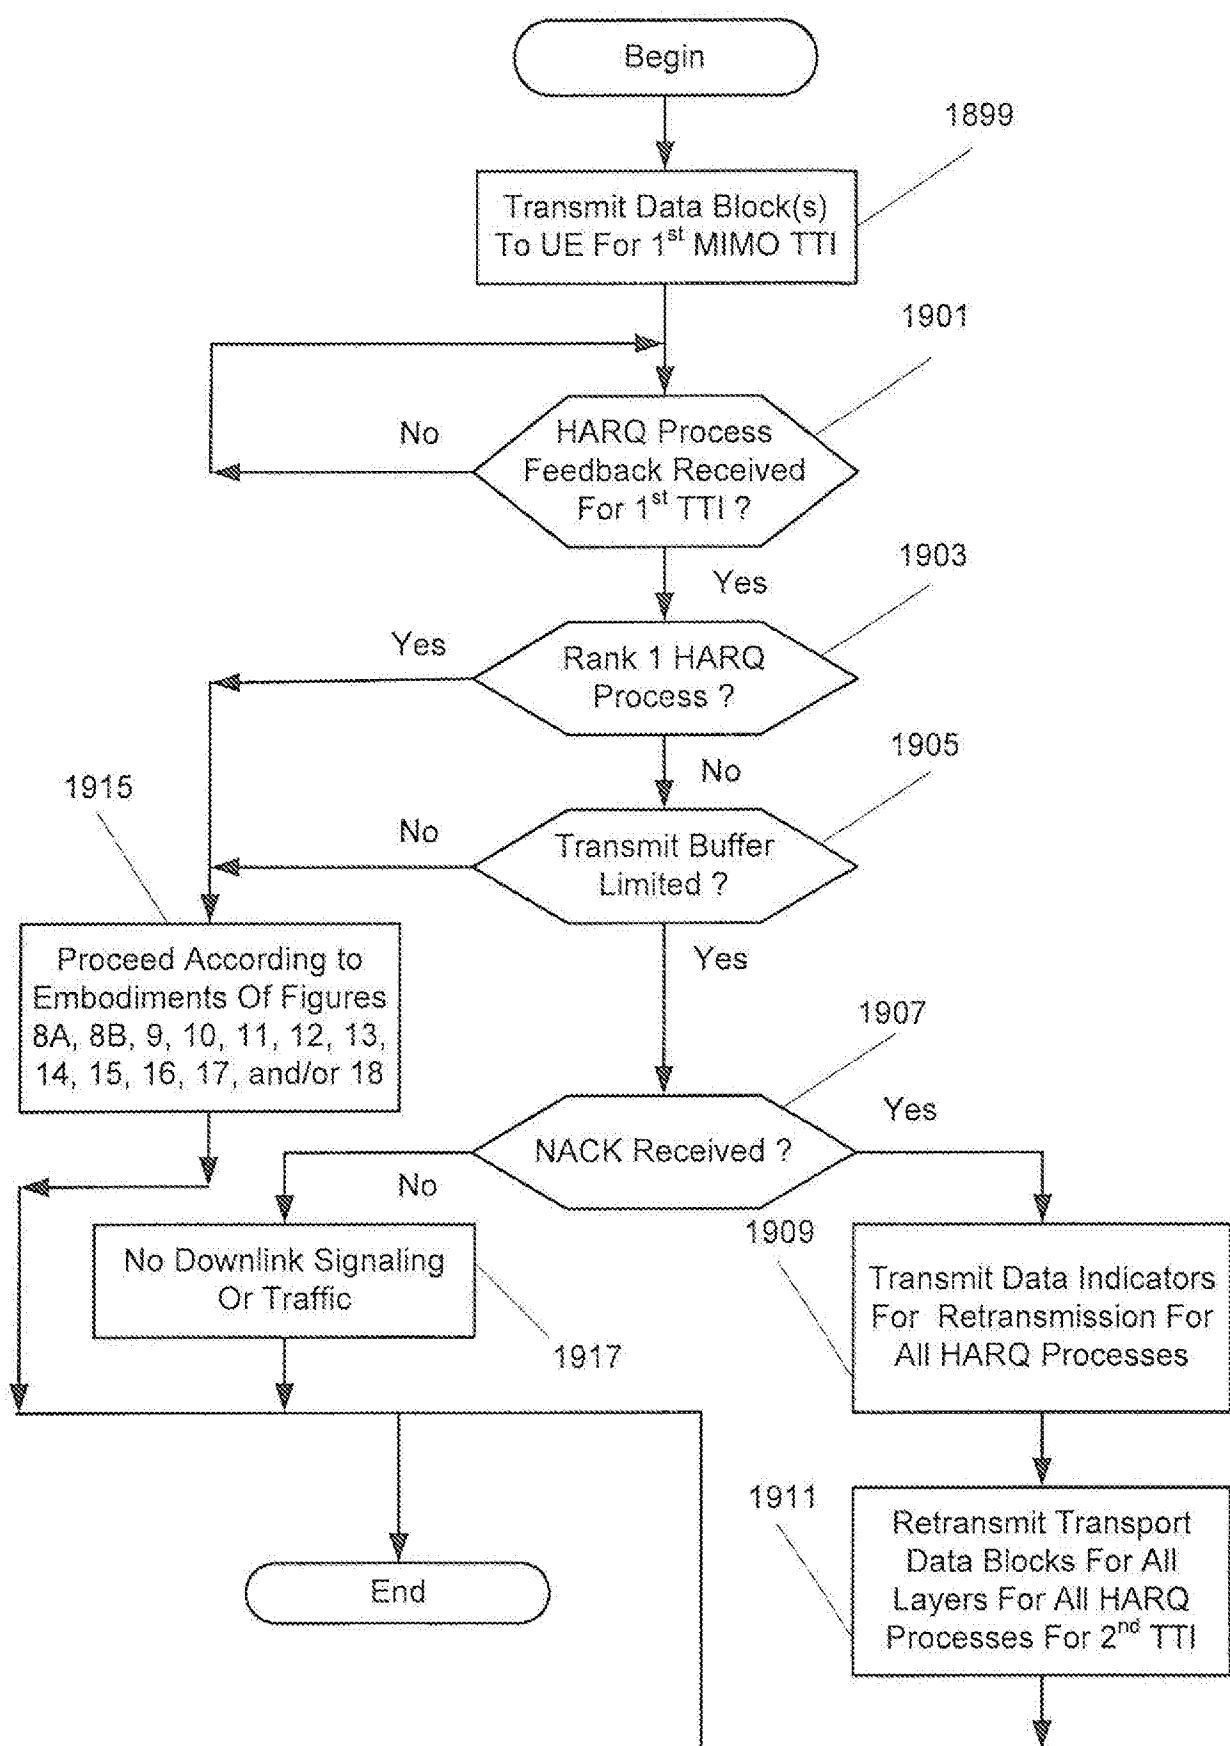


Figure 20A

ACK/NACK Indication For First Transmission (Rank 4)		UE Preferred Rank Indicator	NodeB Assigned Rank Indicator	Proposed Second Transmission	
				HARQ-1 (CW-1)	HARQ-2 (CW-2)
ACK (P)	HARQ-1 (CW-1)	ACK (P)	4	N/A	-----
ACK (P)	HARQ-2 (CW-2)				
ACK (P)	ACK (P)	4	4	OT	OT
NACK (F)	NACK (F)	4	4	OT	OT
NACK (F)	NACK (F)	4	4	OT	OT
ACK (P)	ACK (P)	3	N/A	-----	-----
ACK (P)	NACK (F)	3	4	OT	OT
NACK (F)	ACK (P)	3	4	OT	OT
NACK (F)	NACK (F)	3	4	OT	OT
ACK (P)	ACK (P)	2	N/A	-----	-----
ACK (P)	NACK (F)	2	4	OT	OT
NACK (F)	ACK (P)	2	4	OT	OT
NACK (F)	NACK (F)	2	4	OT	OT
ACK (P)	ACK (P)	1	N/A	-----	-----
ACK (P)	NACK (F)	1	4	OT	OT
NACK (F)	ACK (P)	1	4	OT	OT
NACK (F)	NACK (F)	1	4	OT	OT

Figure 20B

ACK/NACK Indication For First Transmission (Rank 3)		UE Preferred Rank Indicator	NodeB Assigned Rank Indicator	Proposed Second Transmission	
				HARQ-1 (CW-1)	HARQ-2 (CW-2)
ACK (P)	ACK (P)	4	N/A	----	----
ACK (P)	NACK (F)	4	3	OT	OT
NACK (F)	ACK (P)	4	3	OT	OT
NACK (F)	NACK (F)	4	3	OT	OT
ACK (P)	ACK (P)	3	N/A	----	----
ACK (P)	NACK (F)	3	3	OT	OT
NACK (F)	ACK (P)	3	3	OT	OT
NACK (F)	NACK (F)	3	3	OT	OT
ACK (P)	ACK (P)	2	N/A	----	----
ACK (P)	NACK (F)	2	3	OT	OT
NACK (F)	ACK (P)	2	3	OT	OT
NACK (F)	NACK (F)	2	3	OT	OT
ACK (P)	ACK (P)	1	N/A	----	----
ACK (P)	NACK (F)	1	3	OT	OT
NACK (F)	ACK (P)	1	3	OT	OT
NACK (F)	NACK (F)	1	3	OT	OT

Figure 20C

ACK/NACK Indication For First Transmission (Rank 2)		UE Preferred Rank Indicator	NodeB Assigned Rank Indicator	Proposed Second Transmission	
				HARQ-1 (CW-1)	HARQ-2 (CW-2)
ACK (P)	ACK (P)	4	N/A	----	----
ACK (P)	NACK (F)	4	2	OT	OT
NACK (F)	ACK (P)	4	2	OT	OT
NACK (F)	NACK (F)	4	2	OT	OT
ACK (P)	ACK (P)	3	N/A	----	----
ACK (P)	NACK (F)	3	2	OT	OT
NACK (F)	ACK (P)	3	2	OT	OT
NACK (F)	NACK (F)	3	2	OT	OT
ACK (P)	ACK (P)	2	N/A	----	----
ACK (P)	NACK (F)	2	2	OT	OT
NACK (F)	ACK (P)	2	2	OT	OT
NACK (F)	NACK (F)	2	2	OT	OT
ACK (P)	ACK (P)	1	N/A	----	----
ACK (P)	NACK (F)	1	2	OT	OT
NACK (F)	ACK (P)	1	2	OT	OT
NACK (F)	NACK (F)	1	2	OT	OT

Figure 21

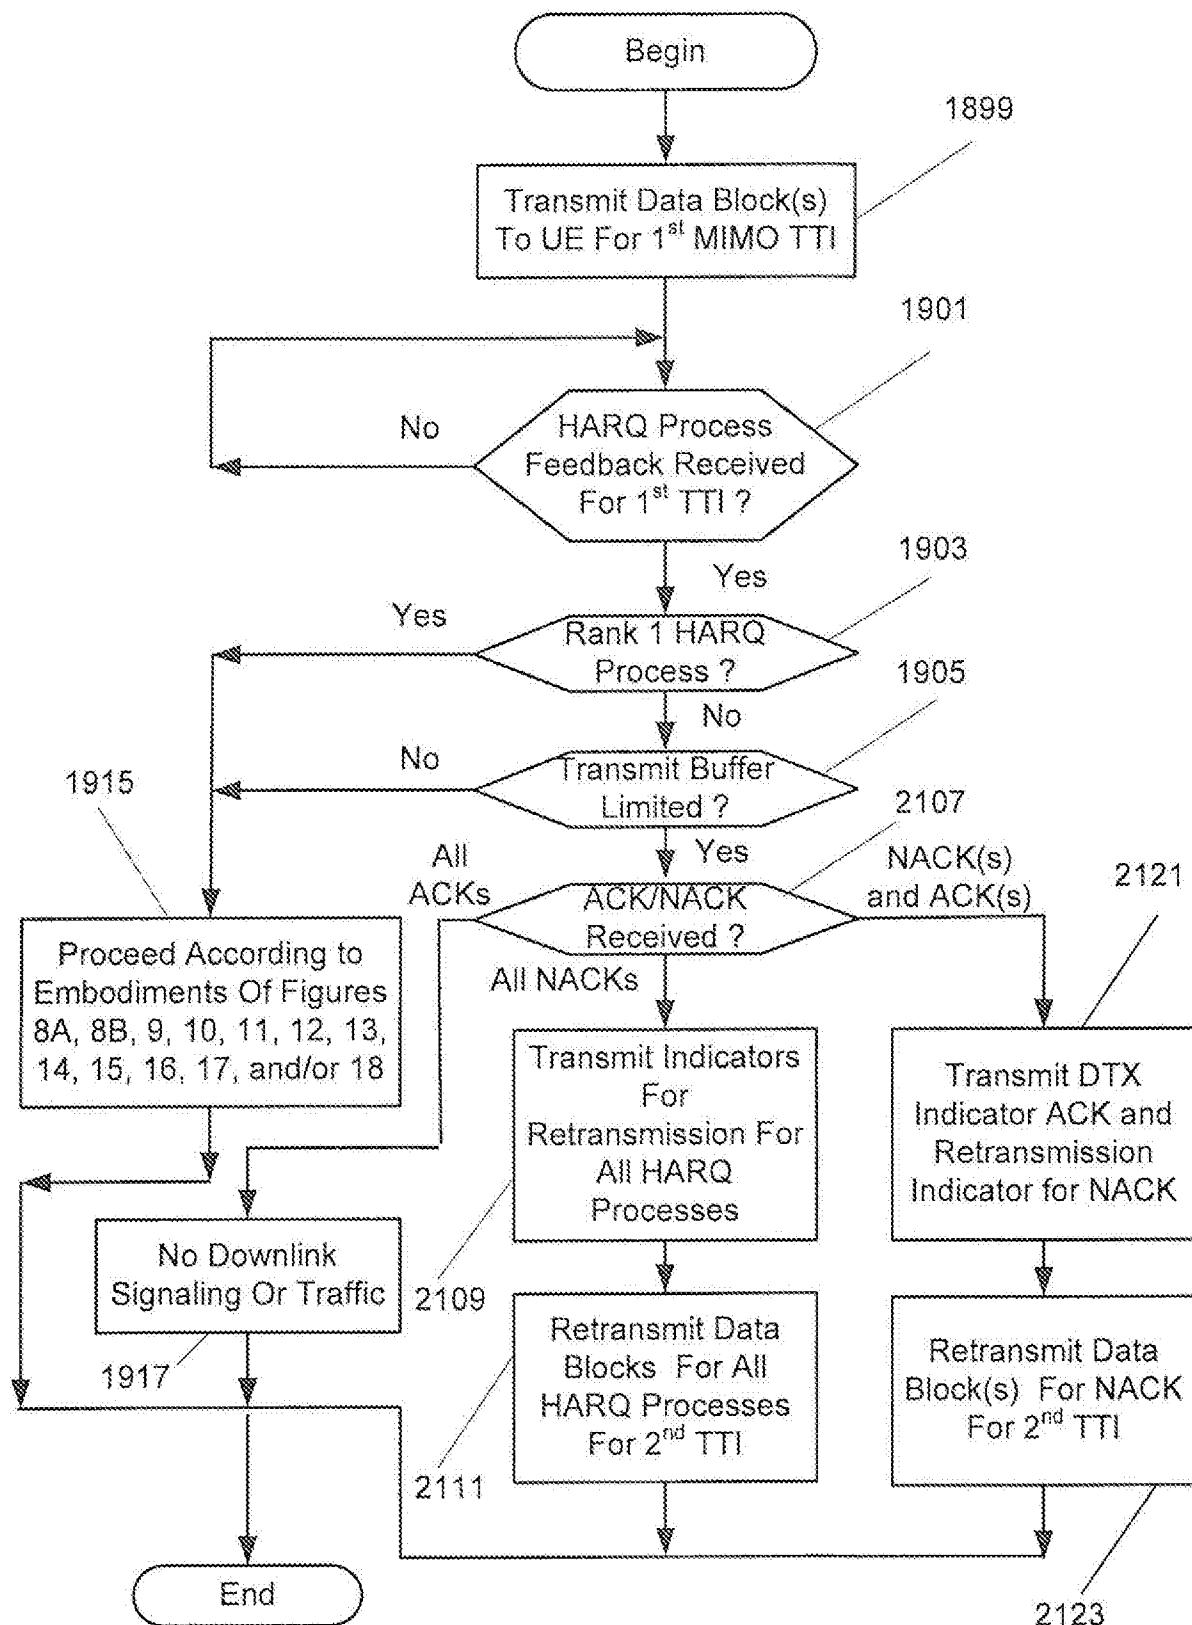


Figure 22A

ACK/NACK Indication For First Transmission (Rank 4)		UE Preferred Rank Indicator	NodeB Assigned Rank Indicator	Proposed Second Transmission	
				HARQ-1 (CW-1)	HARQ-2 (CW-2)
ACK (P)	ACK (P)	4	N/A	----	----
ACK (P)	NACK (F)	4	4 (or 3)	DTX	OT
NACK (F)	ACK (P)	4	4	OT	DTX
NACK (F)	NACK (F)	4	4	OT	OT
ACK (P)	ACK (P)	3	N/A	----	----
ACK (P)	NACK (F)	3	4 (or 3)	DTX	OT
NACK (F)	ACK (P)	3	4	OT	DTX
NACK (F)	NACK (F)	3	4	OT	OT
ACK (P)	ACK (P)	2	N/A	----	----
ACK (P)	NACK (F)	2	4 (or 3)	DTX	OT
NACK (F)	ACK (P)	2	4	OT	DTX
NACK (F)	NACK (F)	2	4	OT	OT
ACK (P)	ACK (P)	1	N/A	----	----
ACK (P)	NACK (F)	1	4 (or 3)	DTX	OT
NACK (F)	ACK (P)	1	4	OT	DTX
NACK (F)	NACK (F)	1	4	OT	OT

Figure 22B

ACK/NACK Indication For First Transmission (Rank 3)		UE Preferred Rank Indicator	NodeB Assigned Rank Indicator	Proposed Second Transmission	
				HARQ-1 (CW-1)	HARQ-2 (CW-2)
ACK (P)	ACK (P)	4	N/A	----	----
ACK (P)	NACK (F)	4	3 (or 4)	DTX	OT
NACK (F)	ACK (P)	4	3	OT	DTX
NACK (F)	NACK (F)	4	3	OT	OT
ACK (P)	ACK (P)	3	N/A	----	----
ACK (P)	NACK (F)	3	3 (or 4)	DTX	OT
NACK (F)	ACK (P)	3	3	OT	DTX
NACK (F)	NACK (F)	3	3	OT	OT
ACK (P)	ACK (P)	2	N/A	----	----
ACK (P)	NACK (F)	2	3	DTX	OT
NACK (F)	ACK (P)	2	3 (or 2)	OT	DTX
NACK (F)	NACK (F)	2	3	OT	OT
ACK (P)	ACK (P)	1	N/A	----	----
ACK (P)	NACK (F)	1	3	DTX	OT
NACK (F)	ACK (P)	1	3 (or 1)	OT	----
NACK (F)	NACK (F)	1	3	OT	OT

Figure 22C

ACK/NACK Indication For First Transmission (Rank 2)		UE Preferred Rank Indicator	NodeB Assigned Rank Indicator	Proposed Second Transmission	
HARQ-1 (CW-1)	HARQ-2 (CW-2)			HARQ-1 (CW-1)	HARQ-2 (CW-2)
ACK (P)	ACK (P)	4	N/A	-----	-----
ACK (P)	NACK (F)	4	2	DTX	OT
NACK (F)	ACK (P)	4	2 (or 3)	OT	DTX
NACK (F)	NACK (F)	4	2	OT	OT
ACK (P)	ACK (P)	3	N/A	-----	-----
ACK (P)	NACK (F)	3	2	DTX	OT
NACK (F)	ACK (P)	3	2 (or 3)	OT	DTX
NACK (F)	NACK (F)	3	2	OT	OT
ACK (P)	ACK (P)	2	N/A	-----	-----
ACK (P)	NACK (F)	2	2	DTX	OT
NACK (F)	ACK (P)	2	2	OT	DTX
NACK (F)	NACK (F)	2	2	OT	OT
ACK (P)	ACK (P)	1	N/A	-----	-----
ACK (P)	NACK (F)	1	2	DTX	OT
NACK (F)	ACK (P)	1	2 (or 1)	OT	-----
NACK (F)	NACK (F)	1	2	OT	OT

Figure 23A

Part 1 (16 bits)	Part 2 (36 bits)
------------------	------------------

Figure 23B

CCS (7 bits)	MR (5 bits)	PCI (4 bits)
--------------	-------------	--------------

Figure 23C

TBS-1 for HARQ-1 (6 bits)	TBS-2 for HARQ-2 (6 bits)	HARQ (4 bits)	RV (4 bits)	UEID (16 bits)
---------------------------	---------------------------	---------------	-------------	----------------

Figure 23D

HS-SCCH 1	HS-SCCH 2	HS-SCCH 3			
			HS-DPSCH 1	HS-DPSCH 2	HS-DPSCH 3

Figure 24

Bit Pattern	RI	Modulation-1	Modulation-II
00000	1	QPSK	NA
00001	1	16QAM	NA
00010	1	64 QAM	NA
00011	2	QPSK	QPSK
00100	2	QPSK	16QAM
00101	2	QPSK	64QAM
00110	2	16QAM	QPSK
00111	2	16QAM	16QAM
01000	2	16QAM	64QAM
01001	2	64QAM	QPSK
01010	2	64QAM	16QAM
01011	2	64QAM	64QAM
01100	3	QPSK	QPSK
01101	3	QPSK	16QAM
01110	3	QPSK	64QAM
01111	3	16QAM	QPSK
10000	3	16QAM	16QAM
10001	3	16QAM	64QAM
10010	3	64QAM	QPSK
10011	3	64QAM	16QAM
10100	3	64QAM	64QAM
10101	4	QPSK	QPSK
10110	4	QPSK	16QAM
10111	4	QPSK	64QAM
11000	4	16QAM	QPSK
11001	4	16QAM	16QAM
11010	4	16QAM	64QAM
11011	4	64QAM	QPSK
11100	4	64QAM	16QAM
11101	4	64 QAM	64QAM
11110	NA	NA	NA
11111	NA	NA	NA

Figure 25

Bit Pattern	RI	Modulation-I	Modulation-II
00000	1	QPSK	NA
00001	1	16QAM	NA
00010	1	64 QAM	NA
00011	2	QPSK	QPSK
00100	2	QPSK	16QAM
00101	2	QPSK	64QAM
00110	2	16QAM	QPSK
00111	2	16QAM	16QAM
01000	2	16QAM	64QAM
01001	2	64QAM	QPSK
01010	2	64QAM	16QAM
01011	2	64QAM	64QAM
01100	3	QPSK	QPSK
01101	3	QPSK	16QAM
01110	3	QPSK	64QAM
01111	3	16QAM	QPSK
10000	3	16QAM	16QAM
10001	3	16QAM	64QAM
10010	3	64QAM	QPSK
10011	3	64QAM	16QAM
10100	3	64QAM	64QAM
10101	4	QPSK	QPSK
10110	4	QPSK	16QAM
10111	4	QPSK	64QAM
11000	4	16QAM	QPSK
11001	4	16QAM	16QAM
11010	4	16QAM	64QAM
11011	4	64QAM	QPSK
11100	4	64QAM	16QAM
11101	4	64 QAM	64QAM
11110		First codeword is DTX	
11111		Second codeword DTX	

INTERNATIONAL SEARCH REPORT

International application No
PCT/SE2013/050486

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W76/04 H04L1/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>Nokia Siemens Networks: "Dual codeword retransmission", 3GPP DRAFT; R1-123819 RETRANSMISSIONS FOR 4-BRANCH MIMO, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE</p> <p>, vol. RAN WG1 6 August 2012 (2012-08-06), XP002711790, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL 1/TSGR1_70/Docs/ [retrieved on 2012-08-06] section 2 Scenarios section 3. Possible solutions section 4. Signaling options for empty code words</p> <p style="text-align: center;">-----</p> <p style="text-align: center;">-/-</p>	1-16

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
15 October 2013	28/10/2013
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Zembery, Peter

INTERNATIONAL SEARCH REPORT

International application No	
PCT/SE2013/050486	

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	<p>ERICSSON: "Transmission and Reception Procedures with DTX codeword in a Four branch MIMO System", 3GPP DRAFT; R1-124502 TRANSMISSION AND RECEPTION PROCEDURES WITH DTX CODEWORD IN A FOUR BRANCH MIMO SYSTEM, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLE , vol. RAN WG1, no. San Diego, USA; 20121008 - 20121012 29 September 2012 (2012-09-29), XP050662380, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL/1/TSGR1_70b/Docs/ [retrieved on 2012-09-29] section 2 Trabsmission Side Operations section 3 Receiver Side Operations</p> <p>-----</p>	1-16
X	<p>ALCATEL-LUCENT ET AL: "HARQ retransmission in UL MIMO", 3GPP DRAFT; R1-122464, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Prague, Czech Republic; 20120521 - 20120525, 12 May 2012 (2012-05-12), XP050601040, [retrieved on 2012-05-12] section 2 Discussions section 3 Conclusion</p> <p>-----</p>	1-16
A	<p>WO 2008/054313 A1 (ERICSSON TELEFON AB L M [SE]; GOERANSSON BO [SE]; TORSNER JOHAN [FI];) 8 May 2008 (2008-05-08) paragraphs [0011] - [0013], [0025], [0038] - paragraph [0048] paragraph [0062]</p> <p>-----</p> <p style="text-align: right;">-/-</p>	1-16

INTERNATIONAL SEARCH REPORT

International application No
PCT/SE2013/050486

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>HUAWEI ET AL: "Retransmissions for 4-branch MIMO", 3GPP DRAFT; R1-123819 RETRANSMISSIONS FOR 4-BRANCH MIMO, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE</p> <p>, vol. RAN WG1, no. Qingdao, China; 20120813 - 20120817</p> <p>5 August 2012 (2012-08-05), XP050661672, Retrieved from the Internet:</p> <p>URL:http://www.3gpp.org/ftp/tsg_ran/WG1_RL/1/TSGR1_70/Docs/</p> <p>[retrieved on 2012-08-05]</p> <p>page 2, line 1 - page 3, line 6</p> <p>table 1</p> <p>-----</p>	1-21

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2013/050486

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-16

a method and an associated apparatus for DTX-ing the MIMO layer corresponding to the acknowledged data block during retransmission of the non-acknowledged data block over the other MIMO layer

2. claims: 17-21

a method and an associated apparatus for retransmitting the acknowledged data block over a MIMO layer during retransmission of the non-acknowledged data block over the other MIMO layer

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/SE2013/050486

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
WO 2008054313	A1	08-05-2008	AU	2007314679 A1	08-05-2008
			CN	101529785 A	09-09-2009
			CN	103023629 A	03-04-2013
			CN	103067141 A	24-04-2013
			EP	2078368 A1	15-07-2009
			US	2010067459 A1	18-03-2010
			US	2012014328 A1	19-01-2012
			WO	2008054313 A1	08-05-2008
			ZA	200902542 A	28-07-2010