



(19) **United States**

(12) **Patent Application Publication**

Boorman et al.

(10) **Pub. No.: US 2004/0059474 A1**

(43) **Pub. Date: Mar. 25, 2004**

(54) **APPARATUSES AND METHODS FOR
DISPLAYING AUTOFLIGHT INFORMATION**

(57) **ABSTRACT**

(76) Inventors: **Daniel J. Boorman**, Woodinville, WA (US); **Peter D. Gunn**, Bellevue, WA (US); **John C. Griffin III**, University Place, WA (US)


Correspondence Address:
PERKINS COIE LLP
PATENT-SEA
P.O. BOX 1247
SEATTLE, WA 98111-1247 (US)

(21) Appl. No.: **10/251,493**
(22) Filed: **Sep. 20, 2002**

Publication Classification

(51) **Int. Cl.⁷ G06G 7/00**
(52) **U.S. Cl. 701/14; 701/11; 340/945**

Apparatuses and methods for displaying autoflight information and controlling autoflight systems. In one embodiment, a flight deck for an aircraft having an autoflight system includes at least one pilot seat, at least one window positioned forward of the pilot seat, and a forward instrument panel positioned forward of the pilot seat. In one aspect of this embodiment, the forward window provides a forward field of view out of the aircraft for a pilot seated in the pilot seat. In another aspect of this embodiment, the flight deck further includes a display device configured to provide information related to one or more autoflight modes. The display device can be positioned at least approximately between the forward instrument panel and the forward window to provide the pilot with autoflight information at least proximate to the forward field of view. In a further aspect of this embodiment, the display device can be configured to provide information related to one or more target flight parameters.

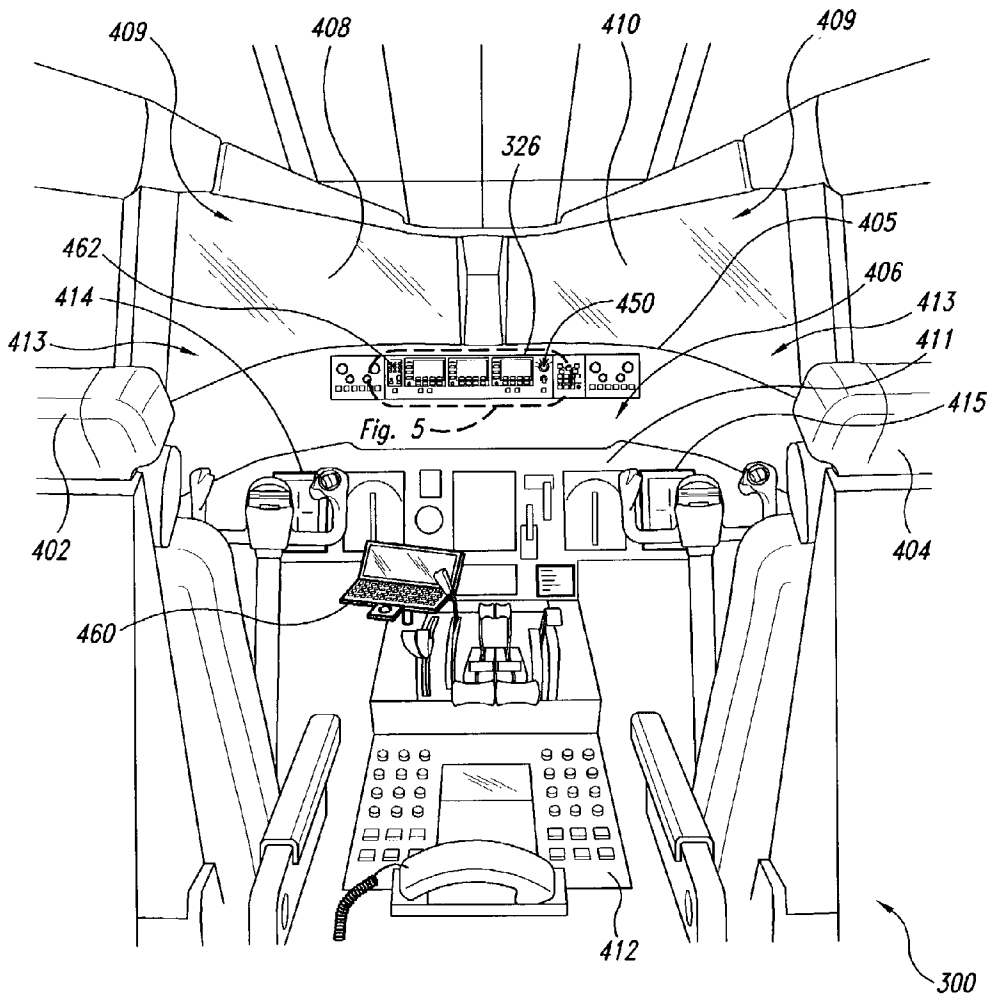

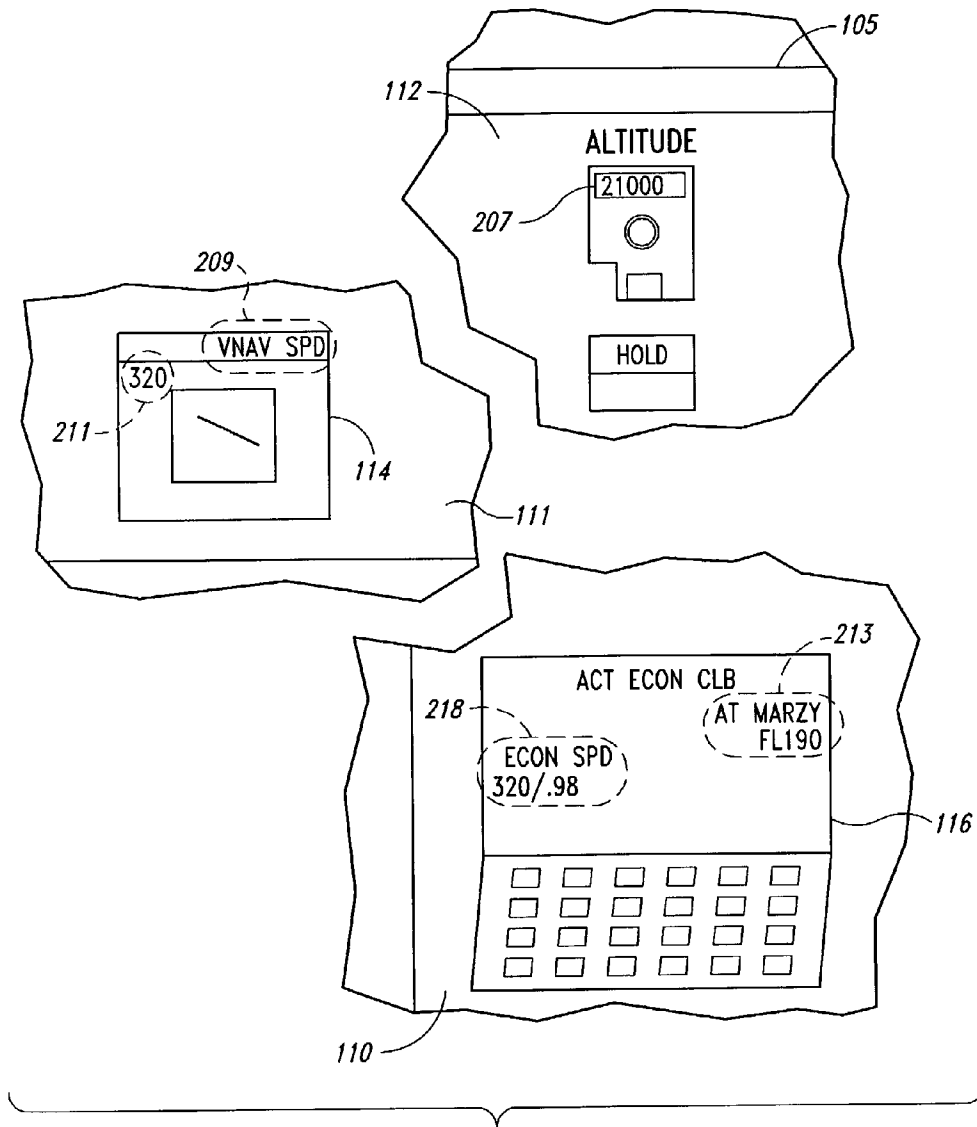


Fig. 2
(Prior Art)

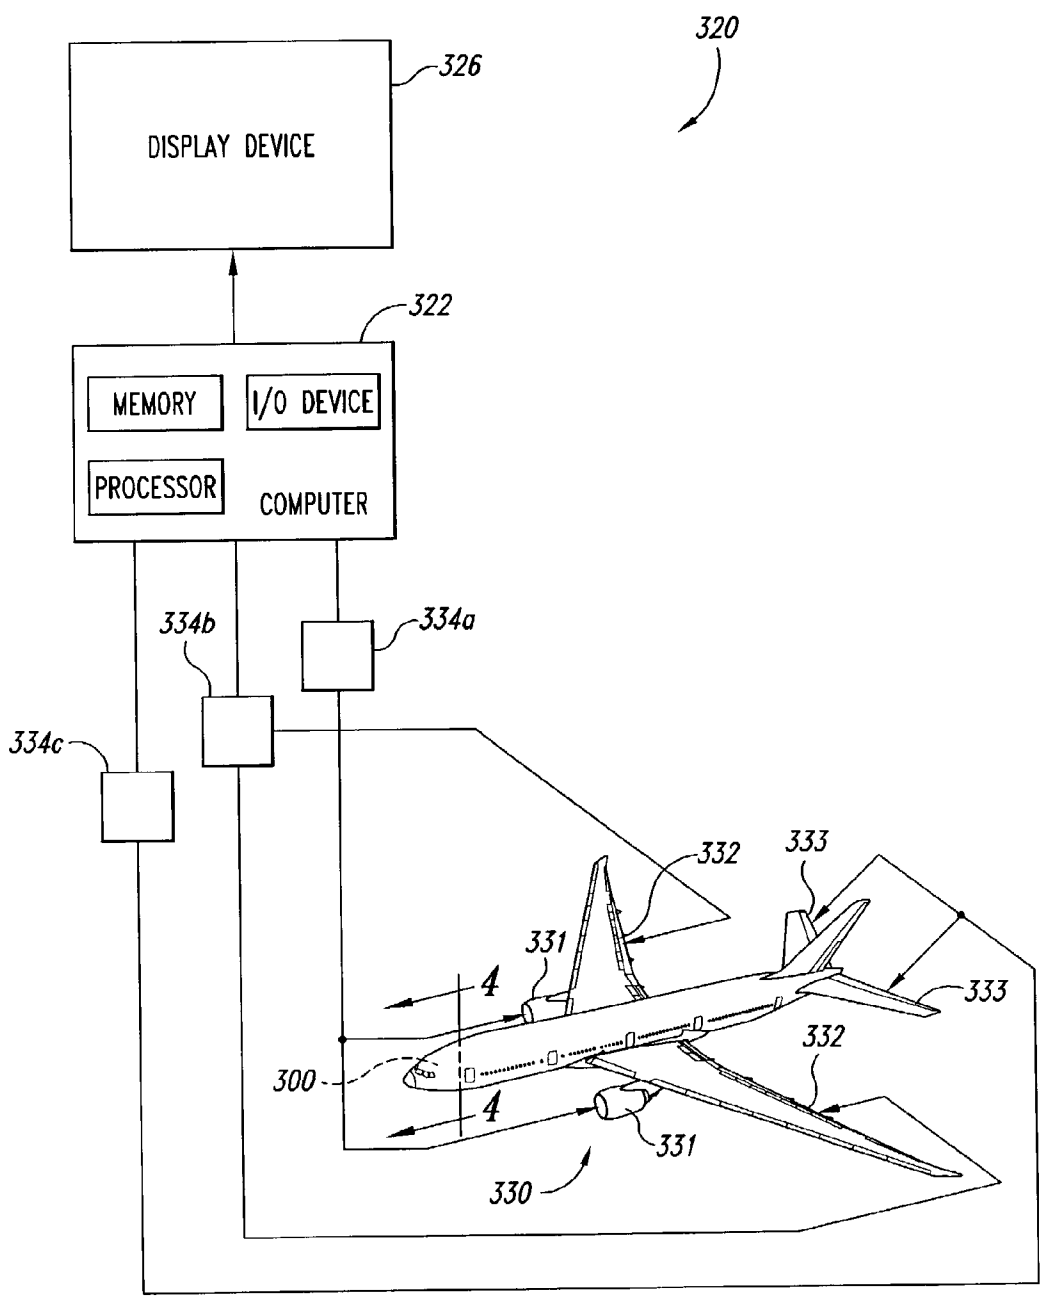


Fig. 3

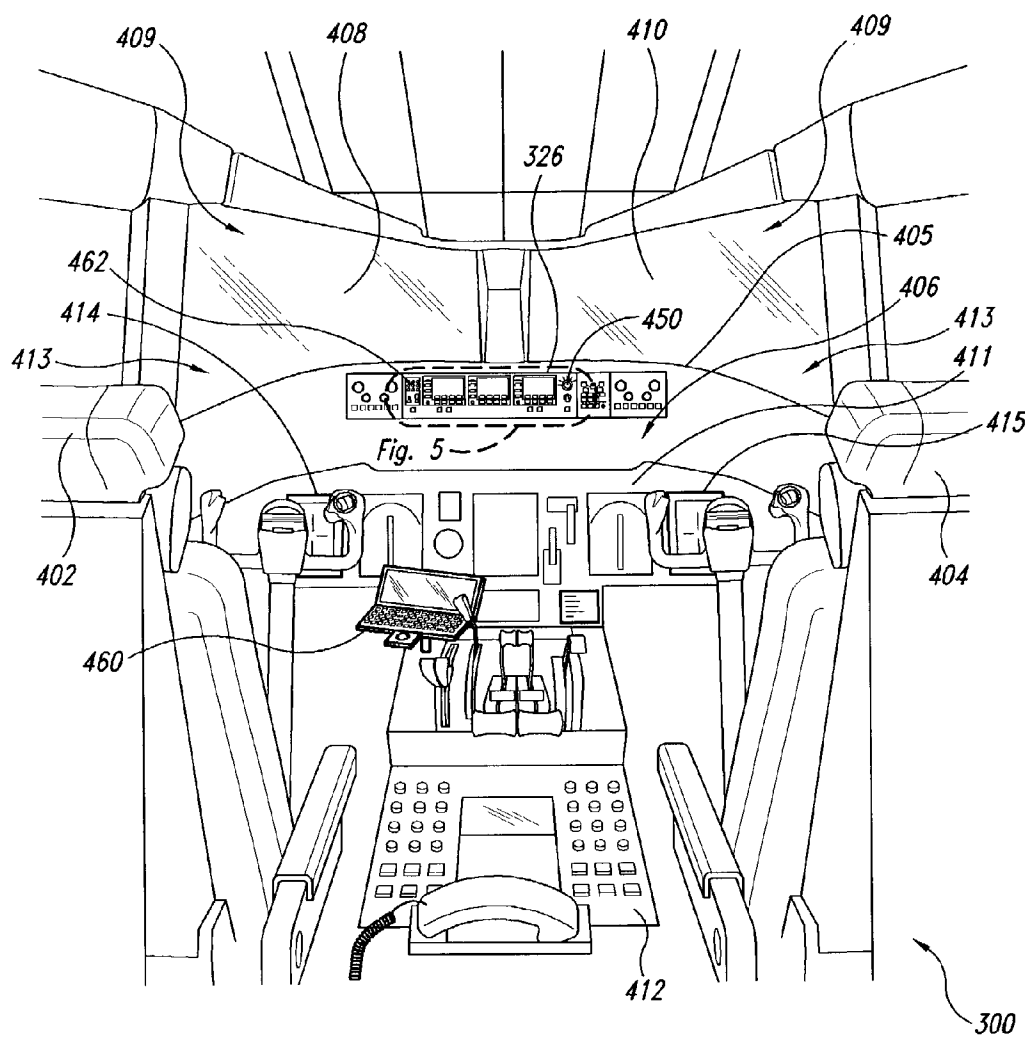


Fig. 4

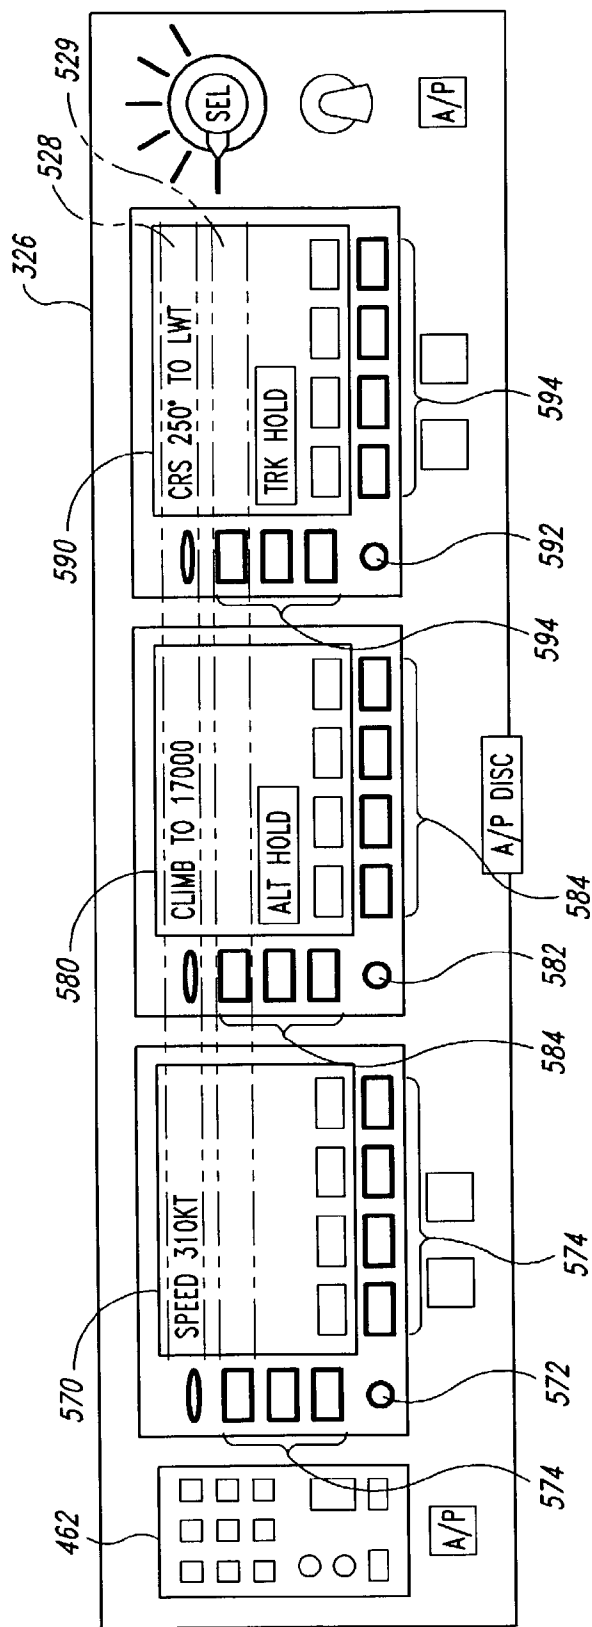


Fig. 5

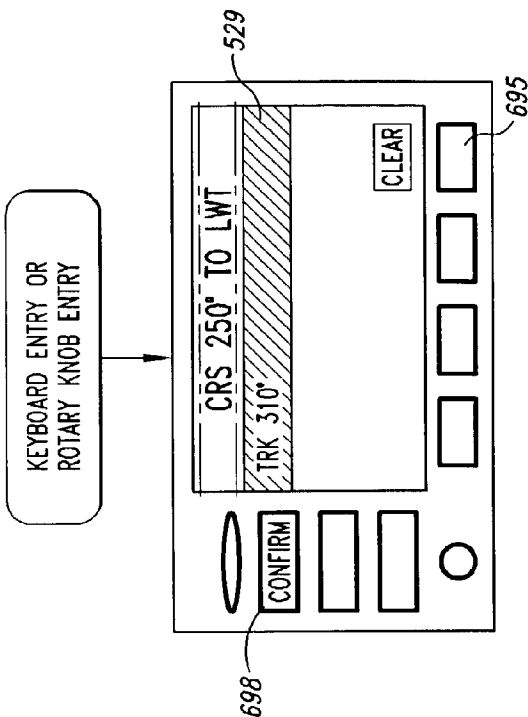


Fig. 6C

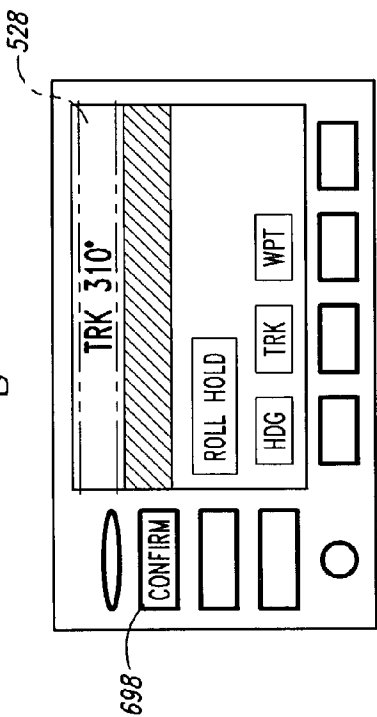


Fig. 6D

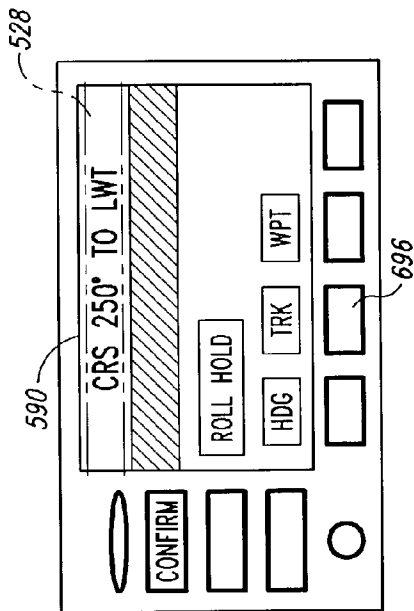


Fig. 6A

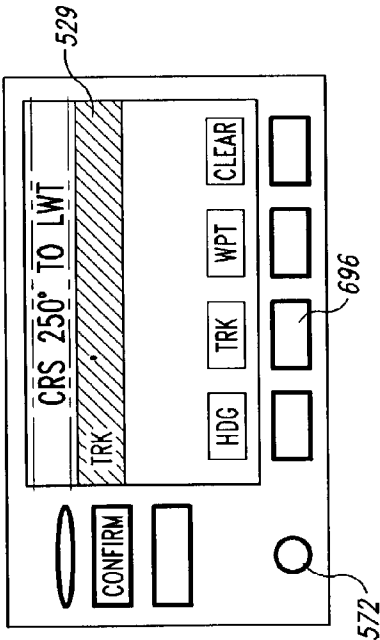


Fig. 6B

729 SITUATION	770 FIRST DISPLAY	780 SECOND DISPLAY	790 THIRD DISPLAY
CONSTANT HEADING OF 317°			HEADING 317°
CONSTANT TRACK OF 143°			TRACK 143°
COURSE 215° TO CHICAGO (ORD)			215° TO ORD
CLIMB AT 285kt TO FL250	SPEED 285KT	CLIMB TO FL250	
CLIMB AT 350kt TO THE CAS/MACH TRANSITION AND THEN CLIMB AT .98 TO FL410	SPEED 350KT/M.98	CLIMB TO FL410	
CRUISE AT .98 AT FL410	SPEED M.98	CRUISE AT FL419	
DESCEND AT .98 TO THE CAS/MACH TRANSITION AND THEN DESCEND AT 350kt TO 14000ft.	SPEED M.98/350KT	DESCEND TO 14000FT	
DESCEND ON GEOMETRIC PATH TO 7000ft AT SPEED BETWEEN 240 AND 255kt	SPEED 240-255KT	PROF DES TO 7000FT	
DESCEND AT 200kt TO 3000ft	SPEED 200KT	DESCEND TO 3000FT	
FOLLOW THE ILS AT APPROACH SPEED OF 155kt	SPEED 155KT	G/S	LOC

Fig. 7

728

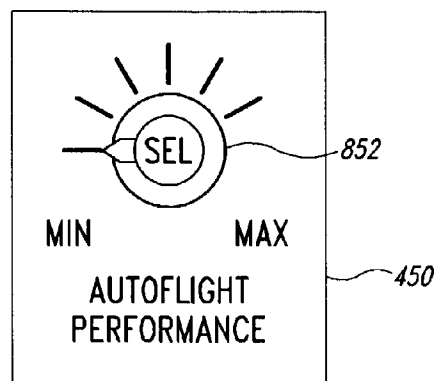


Fig. 8

APPARATUSES AND METHODS FOR DISPLAYING AUTOFLIGHT INFORMATION

TECHNICAL FIELD

[0001] The following disclosure relates generally to aircraft autoflight systems and, more particularly, to apparatuses and methods for displaying autoflight information and controlling autoflight systems.

BACKGROUND

[0002] Aircraft autoflight systems have evolved over the years from the traditional autopilots for basic flight path control to complex flight management systems capable of automatically flying aircraft over complicated routes without pilot intervention. Such flight management systems typically include an autopilot, an autothrottle, and a flight management computer (FMC) interfaced with the autopilot and autothrottle. Flight decks on aircraft utilizing such systems generally include a number of controls and displays allowing pilots to monitor the flight management system and change autoflight parameters if desired. As flight management systems have evolved, these controls and displays have been positioned in different locations around the flight deck. Over time, these locations have become somewhat standardized within the transport aircraft industry.

[0003] FIG. 1 illustrates a flight deck 100 of an aircraft having a flight management system in accordance with the prior art. The flight deck 100 includes a first pilot seat 102 and a second pilot seat 104 separated by a control pedestal 110. First and second forward windows 108 and 109 are positioned forward of the first and second pilot seats 102 and 104 and provide a forward field of view for first and second pilots (not shown) seated in the first and second pilot seats 102 and 104. A plurality of flight instruments 106 are positioned on a forward instrument panel 111 and the control pedestal 110 for access by the first and second pilots seated in the first and second pilot seats 102 and 104. A glare shield 105 is positioned below the first and second forward windows 108 and 109 to reduce glare on the flight instruments 106.

[0004] The flight instruments 106 can include a number of conventional autoflight controls and displays, such as a first control display unit (CDU) 116 positioned on the control pedestal 110 adjacent to the first pilot seat 102, and a second CDU 117 positioned on the control pedestal 110 adjacent to the second pilot seat 104. The first and second CDU's 116 and 117 allow the pilots to make data entries into a flight management computer (FMC) for controlling the flight management system. These entries can include flight plan information such as strategic navigation and flight profile parameters. The flight instruments 106 can also include a first primary flight display (PFD) 114 positioned on the forward instrument panel 111 in front of the first pilot seat 102, and a second PFD 115 positioned on the forward instrument panel 111 in front of the second pilot seat 104. The first and second PFD's 114 and 115 display actual flight parameters of the aircraft, such as airspeed, altitude, attitude and heading. In addition, the first and second PFD's 114 and 115 can also display conventional flight mode annunciators (FMA's). FMA's are textual shorthand codes indicating the current modes of the autothrottle and autopilot. The flight deck 100 can further include a mode control panel (MCP)

112 incorporated into the glare shield 105. The MCP 112 provides control input devices for the FMC, autothrottle, autopilot, flight director, and altitude alert systems.

[0005] FIG. 2 is an enlarged view of portions of the flight deck 100 of FIG. 1 including the MCP 112, the first PFD 114, and the first CDU 116 that illustrates a shortcoming of the prior art flight deck 100. Assume the current autoflight guidance instructions are to climb to a cruise altitude of FL210 at an economy airspeed with an intermediate altitude constraint of FL190 at navigation waypoint "MARZY." For a pilot (not shown) to ascertain these instructions, the pilot typically first looks at the first PFD 114 on the forward instrument panel 111 to determine an autoflight mode 209 and target airspeed 211. The autoflight mode 209 of "VNAV SPD" indicates the aircraft is climbing "speed-on-elevator." The target airspeed 211 of "320" indicates the aircraft is climbing at a target airspeed of 320 Kts. The pilot then typically looks at the MCP 112 on the glare shield 105 to determine an altitude 207. The altitude 207 indicates the final cleared altitude is 21,000 ft. (i.e., FL210). Next, the pilot typically looks at the first CDU 116 on the control pedestal 110 to see if there is any intermediate altitude constraint 213 or additional airspeed information 218. In this example, the intermediate altitude constraint 213 indicates a constraint at FL190 at navigation waypoint MARZY. The additional airspeed information 218 indicates that 320 Kts represents an "economy" airspeed with a transition to Mach 0.98 if the climb were sustained. As the foregoing example illustrates, the configuration of the prior art flight deck 100 encourages the pilot to look in three different locations to determine the current autoflight guidance instructions.

SUMMARY

[0006] Embodiments of the present invention are directed to apparatuses and methods for displaying autoflight information and controlling autoflight systems. In one embodiment, a flight deck for an aircraft having an autoflight system includes at least one pilot seat, at least one window positioned forward of the pilot seat, and at least one instrument panel positioned forward of the pilot seat. In one aspect of this embodiment, the forward window provides a forward field of view out of the aircraft for a pilot seated in the pilot seat. In another aspect of this embodiment, the flight deck further includes a display device configured to provide information related to one or more autoflight modes. The display device can be positioned at least approximately between the forward instrument panel and the forward window to provide the pilot with autoflight information at least proximate to the forward field of view. In a further aspect of this embodiment, the display device can be configured to provide information related to one or more target flight parameters.

[0007] In another embodiment, the flight deck includes a glare shield positioned adjacent to the lower portion of the forward window to reduce glare on one or more flight instruments positioned on the forward instrument panel. In another aspect of this embodiment, the flight deck further includes a display device configured to provide information related to one or more autoflight modes. The display device can be positioned at least proximate to the glare shield to provide the pilot with autoflight information at least proximate to the forward field of view.

[0008] In a further embodiment, a method for manufacturing a flight deck for an aircraft having an autoflight

system includes situating at least one pilot seat on the flight deck, installing at least one window forward of the pilot seat to provide a forward field of view out of the aircraft for a pilot seated in the pilot seat, and placing an instrument panel forward of the pilot seat. In one aspect of this embodiment, the method further includes providing a display device configured to provide information related to one or more autoflight modes, and positioning the display device at least approximately between the forward instrument panel and the forward window. In another aspect of this embodiment, providing the display device can include configuring the display device to include information related to one or more target flight parameters, and positioning the display device can include installing the display device at least proximate to the lower portion of the forward window.

[0009] In another embodiment, the method for manufacturing a flight deck includes positioning a glare shield adjacent to the lower portion of the forward window to reduce glare on one or more flight instruments positioned on the forward instrument panel. In one aspect of this embodiment, positioning the display device includes installing the display device at least proximate to the glare shield. In a further embodiment, the method includes positioning at least one PFD at least proximate to the forward instrument panel. In one aspect of this embodiment, positioning the display device includes installing the display device closer to the forward window than the PFD.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 illustrates a flight deck of an aircraft having a flight management system in accordance with the prior art.

[0011] FIG. 2 is an enlarged view of portions of the prior art flight deck of FIG. 1 showing a mode control panel (MCP), a first primary flight display (PFD), and a first control display unit (CDU).

[0012] FIG. 3 is a schematic illustration of an aircraft having an autoflight system with a display device in accordance with an embodiment of the invention.

[0013] FIG. 4 is a forward elevational view of a flight deck of the aircraft of FIG. 3 with the display device configured in accordance with an embodiment of the invention, taken along line 4-4 in FIG. 3.

[0014] FIG. 5 is an enlarged view of the display device of FIG. 4 in accordance with an embodiment of the invention.

[0015] FIGS. 6A-6D illustrate a sequence for changing current or tactical autoflight guidance instructions in accordance with embodiments of the invention.

[0016] FIG. 7 illustrates a table of naming conventions for flight modes or situations in accordance with embodiments of the invention.

[0017] FIG. 8 is a forward elevational view of an autoflight performance selector of FIG. 4 in accordance with embodiments of the invention.

DETAILED DESCRIPTION

[0018] The following disclosure describes apparatuses and methods for displaying autoflight information and controlling autoflight systems. Certain specific details are set forth in the following description and in FIGS. 3-8 to provide a

thorough understanding of various embodiments of the invention. Well-known structures and systems often associated with aircraft autoflight systems have not been shown or described in detail below to avoid unnecessarily obscuring the description of the various embodiments of the invention. In addition, those of ordinary skill in the relevant art will understand that additional embodiments of the present invention may be practiced without several of the details described below.

[0019] In the drawings, identical reference numbers identify identical or generally similar elements. To facilitate the discussion of any particular element, the most significant digit or digits in any reference number refer to the figure in which that element is first introduced. For example, element 322 is first introduced and discussed in reference to FIG. 3. In addition, any dimensions, angles, and other specifications shown in the figures are merely illustrative of particular embodiments of the invention. Accordingly, other embodiments of the invention can have other dimensions, angles, and specifications without departing from the spirit or scope of the present invention.

[0020] FIG. 3 is a schematic illustration of an aircraft 330 having an autoflight system 320 with a display device 326 in accordance with an embodiment of the invention. In one aspect of this embodiment, the autoflight system 320 can include a flight management computer 322 linked to one or more controllers 334, such as an engine controller or auto-throttle 334a, a roll controller 334b, and a pitch controller 334c. The engine controller 334a can be operatively coupled to engines 331 of the aircraft 330 to automatically control engine functions, such as engine thrust. The roll controller 334b can be operatively coupled to ailerons 332 of the aircraft 330, and the pitch controller 334c can be operatively coupled to elevators 333 of the aircraft 330. In one embodiment, the roll controller 334b and the pitch controller 334c can form a portion of an integrated autopilot device. In another embodiment, the roll controller 334b and the pitch controller 334c can be independent. In either embodiment, the controllers 334a-c can automatically control the aircraft thrust, roll, and pitch.

[0021] In a further aspect of this embodiment, the flight management computer 322 can also be linked to the display device 326 to provide the display device 326 with information relating to the operation of the controllers 334. In addition, the flight management computer 322 can also receive instructions for the autoflight system 320 via the display device 326. Pilot inputs and/or external sources, such as telemetry from the ground, a satellite, a datalink or a gatelink, can provide these instructions.

[0022] In another aspect of this embodiment, the display device 326 is centrally located in a forward field of view of a pilot (not shown) on a flight deck 300 of the aircraft 330. As is described in greater detail below, the display device 326 can include one or more input devices configured to receive pilot instructions for controlling the autoflight system 320. In addition, the display device 326 can include one or more display screens configured to provide the pilot with information about how the autoflight system 320 is flying the aircraft 330, such as information related to one or more autoflight modes and/or one or more target flight parameters.

[0023] The term "autoflight mode" as used herein can refer to the particular manner in which the autoflight system

320 is flying the aircraft **330**. For example, in one embodiment, autoflight modes can relate to airspeed (e.g., increasing, decreasing, or maintaining airspeed); vertical guidance (e.g., climbing, descending, or maintaining altitude); and/or lateral guidance (e.g., turning or maintaining a heading). In one aspect of this embodiment, these autoflight modes can be represented by conventional flight mode annunciators (FMA's). In other embodiments, these autoflight modes can be represented by other symbology, including other textual shorthands. The term "target flight parameter" as used herein can refer to the particular values of airspeed, altitude, heading, tracks and/or course to which the autoflight system **320** is actually instructed to fly.

[0024] For example, in one embodiment, the display device **326** can provide the following autoflight information: "DESCEND TO 14000 FT." Here, the autoflight mode "descend" indicates that the autoflight system **320** is instructed to cause the aircraft **330** to descend, and the target flight parameter "14000 FT" indicates that the autoflight system **320** is instructed to cause the aircraft **330** to descend to an altitude of 14000 feet. In other embodiments, the display device **326** can provide the pilot with other types of autoflight system information. Accordingly, the display device **326** can enable the pilot to quickly obtain current autoflight information and, if desired, change autoflight instructions, without having to refer to multiple locations around the flight deck **300**.

[0025] FIG. 4 is a forward elevational view of the flight deck **300** with the display device **326** configured in accordance with an embodiment of the invention, taken along line 4-4 in FIG. 3. In one aspect of this embodiment, the flight deck **300** includes first and second forward windows **408** and **410** providing a forward field of view out of the aircraft **330** (FIG. 3) for a first pilot (not shown) seated in a first pilot seat **402**, and a second pilot (also not shown) seated in a second pilot seat **404**. Each of the first and second forward windows **408** and **410** can include an upper portion **409** and a lower portion **413**. In other embodiments, the first and second forward windows **408** and **410** can be replaced by one or more external vision screens that include a visual display of a forward field of view out of the aircraft **330** similar to a window. Accordingly, throughout this disclosure, the term "window" can include such external vision screens. In another aspect of this embodiment, a glare shield **405** is positioned adjacent to the lower portions **413** of the forward windows **408** and **410** to reduce glare on one or more flight instruments **406** positioned on a control pedestal **412** and a forward instrument panel **411**. The flight instruments **406** can include first and second PFD's **414** and **415** that are at least generally similar to the first and second PFD's **114** and **115** discussed above with reference to FIGS. 1 and 2. In a further aspect of this embodiment, the first and second PFD's **414** and **415** can be utilized in conjunction with the display device **326** to provide the pilot with actual flight parameter information. In other embodiments, one or both of the first and second PFD's **414** and **415** can be omitted and other flight instruments can provide this information.

[0026] In one embodiment, the display device **326** is positioned at least adjacent to the first and second forward windows **408** and **410**. For example, in the illustrated embodiment, the display device **326** is positioned adjacent to the lower portions **413** of the first and second forward

windows **408** and **410** between the first and second PFD's **414** and **415** and the first and second forward windows **408** and **410**. In one aspect of this embodiment, the display device **326** is positioned at least proximate to the glare shield **405**. In other embodiments, the display device **326** can be positioned at other locations on the flight deck **300**. For example, in another embodiment, the display device **326** can be positioned above the first and second forward windows **408** and **410**. In yet other embodiments, the display device **326** can be positioned at other locations on the flight deck **300** without departing from the spirit or scope of the present invention.

[0027] The flight deck **300** can include a number of devices for entering flight guidance data into the flight management computer **322** (FIG. 3) in accordance with embodiments of the present invention. For example, in one embodiment, the flight deck **300** can include a first data entry device **460**, a second data entry device **462**, and an autoflight performance selector **450**. In one aspect of this embodiment, the first data entry device **460** can be accessibly positioned forward of the first pilot seat **402** and/or the second pilot seat **404**, and can include an alphanumeric keypad, a cursor control device (e.g., a track ball or touch screen), and/or a display screen for entry and/or manipulation of alphanumeric flight guidance data, such as strategic flight guidance data. In one embodiment, the first data entry device **460** can be used to input at least a portion of a flight plan or other strategic guidance information into the flight management computer **322** and/or the display device **326**. In other embodiments, the first data entry device **460** can be used to input other types of flight guidance information, such as tactical guidance information, into the flight management computer **322**.

[0028] In another aspect of this embodiment described in greater detail below, the second data entry device **462** can be accessibly positioned adjacent to the display device **326** and can include a small alphanumeric keypad device having a touch screen and/or hard buttons for entry and/or manipulation of alphanumeric flight guidance data, such as tactical flight guidance information. In a further aspect of this embodiment that will also be described in greater detail below, the autoflight performance selector **450** can be used in conjunction with the display device **326** to set the level at which the autoflight system **320** (FIG. 3) will respond to autoflight control inputs.

[0029] One feature of an embodiment shown in FIG. 4 is the placement of the display device **326** in the forward field of view. An advantage of this feature is that pilots can quickly ascertain autoflight guidance information without having to look at two or more places on the flight deck **300** outside the forward field of view. In contrast, conventional flight decks on aircraft having flight management systems (such as that shown in FIGS. 1 and 2) may require the pilot to refer to an MCP, a PFD, and a CDU to obtain current autoflight guidance information.

[0030] FIG. 5 is an enlarged view of the display device **326** of FIG. 4 in accordance with an embodiment of the invention. In one aspect of this embodiment, the display device **326** can include one or more displays for providing autoflight guidance information, such as an airspeed or first display **570**, a vertical guidance or second display **580**, and a lateral guidance or third display **590**. In another aspect of

this embodiment, the first, second, and third displays **570**, **580**, and **590** can collectively include an active situation line **528** and a next event line **529**. The active situation line **528** can extend across top portions of the displays **570**, **580**, and **590** and can provide guidance information describing the current manner in which the autoflight system **320** (**FIG. 3**) is controlling the aircraft **330** (**FIG. 3**). For example, in one embodiment, the active situation line **528** can include one or more autoflight modes and/or one or more target flight parameters. The next event line **529** similarly extends across the displays **570**, **580**, and **590** just below the active situation line **528**, and can include information describing the next sequence of instructions for the autoflight system **320**. In other embodiments, the display device **326** can include more or fewer displays configured to provide other types of autoflight guidance information without departing from the spirit or scope of the present invention.

[**0031**] In one embodiment, the portion of the active situation line **528** included in the first display **570** can include a target flight parameter and/or an autoflight mode relating to the current airspeed of the autoflight system **320** (**FIG. 3**). The guidance control from the autoflight system **320** to achieve and/or maintain this airspeed may include pitch changes (e.g., pitch up to slow down or pitch down to accelerate) as well as autothrottle changes (e.g., less thrust to slow down or more thrust to accelerate). In other embodiments, the first display **570** can include other autoflight information in addition to, or in place of, the target airspeed information described above.

[**0032**] In another embodiment, the portion of the active situation line **528** presented in the second display **580** can include a target flight parameter and/or an autoflight mode relating to the current vertical guidance of the autoflight system **320**. For example, in one aspect of this embodiment, the second display **580** can include information indicating whether the autoflight system **320** is providing guidance to the aircraft **330** (**FIG. 3**) causing the aircraft **330** to cruise in level flight, climb unrestricted, descend unrestricted, or descend on a geometric flight path. In another aspect of this embodiment, the second display **580** can include the current altitude target. In other embodiments, the second display **580** can include other autoflight guidance information in addition to, or in place of, the information described above.

[**0033**] In a further embodiment, the portion of the active situation line **528** included in the third display **590** can include a target flight parameter and/or an autoflight mode relating to the current lateral guidance of the autoflight system **320**. For example, in one aspect of this embodiment, the third display **590** can include information indicating whether the autoflight system **320** is providing guidance to the aircraft **330** causing the aircraft **330** to proceed along a preplanned course to a navigation point, or to proceed along an unrestricted heading or track vector. In the case where the lateral guidance is along a heading or track vector, the next event line **529** of the third display **590** can be blank, indicating that the vector in the active situation line **528** is not linked to a subsequent preplanned strategic lateral guidance plan. Conversely, in the case where the heading or track vector is linked to a subsequent preplanned course, the next event line **529** of the third display **590** can show the point where the track vector joins the preplanned course. In another aspect of this embodiment, the third display **590** can include the current lateral guidance target. In other embodi-

ments, the third display **590** can include other autoflight guidance information in addition to, or in place of, the information described above.

[**0034**] In one embodiment, the current autoflight guidance information provided in the active situation line **528** can include conventional FMA's. In other embodiments, the current autoflight guidance information can be provided using other naming conventions or symbology to describe the current autoflight "situation." For example, in the illustrated embodiment, the first display **570** shows the current target airspeed of the autoflight system **320** (**FIG. 3**) is **310** knots. The second display **580** shows the current target altitude of the autoflight system **320** is 17,000 feet, and the current vertical autoflight mode is "climb." The third display **590** shows the current target course of the autoflight system **320** is to maintain a course of 2500 to navigation waypoint LWT. From the foregoing description, those of ordinary skill in the relevant art will appreciate that embodiments of the present invention can provide in a single location much of the autoflight guidance information traditionally provided on remotely positioned MCP's, PFD's, and/or CDU's.

[**0035**] In one embodiment, the display device **326** can include an array of software-configurable controls for editing the active situation line **528** and/or the next event line **529** with new instructions (i.e., tactical data) for the autoflight system **320** (**FIG. 3**). These instructions can be received from the pilot and/or from a ground-based station, such as a telemetry uplink. For example, in one aspect of this embodiment, the display device **326** can include a first set of selector buttons **574** and a first rotary knob **572** adjacent to the first display **570** for implementing changes to the current airspeed guidance. In another aspect of this embodiment, the display device **326** can include a second set of selector buttons **584** and a second rotary knob **582** adjacent to the second display **580** for implementing changes to the current vertical guidance. In a further aspect of this embodiment, the display device **326** can include a third set of selector buttons **594** and a third rotary knob **592** adjacent to the third display **590** for implementing changes to the lateral guidance. In other embodiments, the display device **326** can include other features for implementing changes to the current flight guidance instructions or, conversely, one or more of the features described above can be omitted, without departing from the spirit or scope of the present invention.

[**0036**] In one embodiment described in greater detail below in reference to **FIGS. 6A-6D**, the pilot can use the selector buttons **574**, **584**, and/or **594** to select a desired data entry function, and the pilot can then use the rotary knobs **572**, **582**, and/or **592**, and/or the second data entry device **462**, to enter actual alphanumeric guidance data on the displays **570**, **580**, and **590**. As mentioned above in reference to **FIG. 4**, the second data entry device **462** can include a small alphanumeric keypad device having a touch screen and/or hard buttons for entry of such alphanumeric data. For example, in one embodiment, the pilot can use the secondary data entry device **462** to enter airspeeds on the first display **570**, altitudes on the second display **580**, and headings and/or track vectors on the third display **590**. In another embodiment, the pilot can enter other alphanumeric guidance data (e.g., strategic data) on the displays **570**, **580**, and/or **590** via the first data entry device **460** (**FIG. 4**).

[**0037**] **FIGS. 6A-6D** illustrate a sequence for changing current or tactical autoflight guidance instructions in accor-

dance with embodiments of the invention. In this example, the pilot changes the lateral guidance (as presented in the portion of the active situation line 528 shown in the third display 590) from “a course of 250° to navigation point LWT,” to “a constant track vector of 310°. Referring first to FIG. 6A, the pilot can begin by selecting a TRK button 696. Referring to FIG. 6B, selecting the TRK button 696 generates a “TRK” display in the next event line 529. At this point in the sequence, the pilot can enter a numeric value (e.g., “310”) for the new track instruction using either the first rotary knob 572, the second data entry device 462 (FIGS. 4 and 5), and/or the first data entry device 460 (FIG. 4). After doing so, the new track vector of “TRK 310°” is displayed in the next event line 529, as shown in FIG. 6C. The pilot can confirm the track vector of 310° by selecting a confirm button 698 or, alternatively, the pilot can delete this entry by selecting a clear button 695. Referring now to FIG. 6D, after the pilot selects the confirm button 698, the track vector of 310° is entered in the active situation line 528 and becomes the current or active lateral guidance instruction.

[0038] The sequence described above for inputting tactical guidance instructions into the flight management computer 322 (FIG. 3) via the display device 326 (FIGS. 4 and 5) is merely one example of the various methods possible with the present invention. Accordingly, those of ordinary skill in the relevant art will appreciate that other methods and features for performing this function can be used. For example, in another embodiment, a data entry device at least generally similar to a conventional CDU can be used to input such autoflight guidance instructions.

[0039] FIG. 7 illustrates a table 728 of naming conventions for various autoflight modes or “situations” that can be displayed in the active situation line 528 and the next event line 529 of FIGS. 5 and 6, in accordance with embodiments of the invention. In one aspect of these embodiments, the table 728 includes a situation column 729, a first display column 770, a second display column 780, and a third display column 790. The situation described in the situation column 729 corresponds to the set of naming conventions shown in the adjacent portions of the columns 770, 780, and 790. For example, as shown in row 727, if the first display 570 (FIG. 5) shows “Speed M.98/350KT,” and the second display 580 (FIG. 5) shows “Descend to 14,000 FT,” then the current autoflight guidance instruction is “Descend at 0.98 to the CAS/Mach Transition and then descend at 350 kt to 14000 ft.”

[0040] In one embodiment, the display device 326 (FIGS. 4 and 5) can utilize all or some of the naming conventions shown in FIG. 7 to describe one or more autoflight modes. In other embodiments, other naming conventions can be used to represent autoflight information via the display device 326. For example, in one embodiment as explained above, conventional FMA's can be used to represent autoflight information in one or more of the first, second and third displays 570, 580, and/or 590 of FIG. 5.

[0041] As discussed above, there are a number of methods for entering autoflight guidance instructions into the flight management computer 322 (FIG. 3) via the display device 326. Some embodiments include utilizing the first and second data entry devices 460 and 462 (FIG. 4). In other embodiments, flight guidance data, such as datalinked guid-

ance data, can be received via one or more ground-based stations and input into the flight management computer 322 via the display device 326. For example, in one embodiment, an air traffic control station can send the guidance data to the flight deck. In one aspect of this embodiment, the first data entry device 460 can provide this information to the pilot. In another embodiment, this guidance data can be displayed on the next event line 528 of the display device 326. In another embodiment, a CDU can provide this information to the pilot. In one aspect of this embodiment, after confirming the desirability of this guidance information, the pilot can input it into the flight management computer 322 by transferring it to the display device 326 and selecting the confirm button 698 (FIG. 6), which promotes this data to the active situation line 528 (FIGS. 5 and 6). In another embodiment, a ground-based station operated by an airline can send this flight guidance information to the flight deck. In other embodiments, this information can be transmitted to the flight deck in other ways without departing from the spirit or scope of the present invention.

[0042] FIG. 8 is an elevation view of the autoflight performance selector 450 of FIG. 4 in accordance with an embodiment of the invention. In one aspect of this embodiment, the autoflight performance selector 450 includes a rotary selector knob 852 for controlling the overall performance of the autoflight system 320 (FIG. 3) in all axes (i.e., pitch, roll, and yaw). In another embodiment, the autoflight performance selector can be used to control the performance of the autoflight system 320 in two or more axes (e.g., pitch and roll, pitch and yaw, or roll and yaw). In other embodiments, the autoflight performance selector 450 can include other features for controlling performance of the autoflight system 320 along individual axes by controlling discrete elements of the autoflight system 320.

[0043] In another aspect of this embodiment, the autoflight performance selector 450 provides the pilot with a way to limit or otherwise control the dynamic response of the autoflight system 320 to autoflight guidance inputs. The “min” and “max” positions of the rotary knob 852 provide an adjustable setting that can, for example, limit the amount of roll and/or pitch that is permitted, and/or the amount of vertical speed change that is possible. In one aspect of this embodiment, selecting the “min” position limits the aircraft to gentle maneuvers to maximize passenger comfort. In another aspect of this embodiment, selecting the “max” position allows the aircraft to make more aggressive maneuvers. One advantage of controlling the performance of the autoflight system 320 in two or more axes is that the pilot can select a single response level that applies to all relevant axes without having to provide further control inputs.

[0044] In another embodiment, the autoflight performance selector 450 can be equipped with an override function for those situations where aggressive movement of the aircraft is necessary in response to, for example, Air Traffic Control or an emergency situation. In one aspect of this embodiment, the override function enables the autoflight system 320 to override the autoflight performance selector 450 in such situations and permit aggressive movement of the aircraft.

[0045] Although the autoflight performance selector 450 of the embodiment described above is a rotary knob, in other embodiments, the autoflight performance selector can have other forms. For example, in another embodiment, the

autoflight performance selector **450** can include a rocker switch having at least two positions, such as an “on” position and an “off” position. In a further embodiment, the autoflight performance selector **450** can include a display (e.g., a computer screen) and a cursor control device (e.g., a mouse). The display can include at least two selections (e.g., buttons, icons or sliders) that can be activated using the cursor control device (e.g., by “clicking” the mouse on a button or icon or by “dragging” the slider). Accordingly, the performance selector **450** configured in accordance with embodiments of the present invention can take many forms in addition to those described above.

[0046] From the foregoing, it will be appreciated that specific embodiments of the invention have been described herein for purposes of illustration, but that various modifications may be made without deviating from the spirit or scope of the invention. For example, while the display device **326** has been described here with three displays, in other embodiments, the display device **326** can have more or fewer displays depending on the particular application. In addition, although the display device **326** is illustrated in **FIG. 4** positioned at least proximate to the glare shield **405**, in other embodiments, the display device **326** can assume other positions within the flight deck **300**. Accordingly, the invention is not limited except as by the appended claims.

We claim:

1. A flight deck for an aircraft having an autoflight system, the flight deck comprising:

at least one pilot seat;

at least one window positioned forward of the pilot seat, the forward window configured to provide a forward field of view out of the aircraft for a pilot seated in the pilot seat;

at least one instrument panel positioned forward of the pilot seat; and

a display device positioned at least approximately between the forward instrument panel and the forward window, the display device configured to provide information related to one or more autoflight modes.

2. The flight deck of claim 1, wherein the forward window has an upper portion and a lower portion, wherein the flight deck further comprises a glare shield positioned adjacent to the lower portion of the forward window, wherein the glare shield is configured to reduce glare on one or more flight instruments positioned on the forward instrument panel, and wherein the display device is positioned at least proximate to the glare shield.

3. The flight deck of claim 1, wherein the forward window has an upper portion and a lower portion, wherein the flight deck further comprises a glare shield positioned adjacent to the lower portion of the forward window, wherein the glare shield is configured to reduce glare on one or more flight instruments positioned on the forward instrument panel, and wherein the display device is incorporated into the glare shield.

4. The flight deck of claim 1, wherein the display device is configured to provide information related to one or more target flight parameters.

5. The flight deck of claim 1, wherein the forward window has an upper portion and a lower portion, and wherein the

display device is positioned at least proximate to the lower portion of the forward window.

6. The flight deck of claim 1, further comprising at least one primary flight display (PFD) positioned at least proximate to the forward instrument panel, wherein the display device is positioned closer to the forward window than the PFD is to the forward window.

7. The flight deck of claim 1, further comprising at least one primary flight display (PFD) positioned at least proximate to the forward instrument panel, wherein the display device is positioned closer to the forward field of view than the PFD is to the forward field of view.

8. The flight deck of claim 1, further comprising at least one primary flight display (PFD) positioned at least approximately forward of the pilot seat, wherein the display device is positioned at least approximately between the forward window and the PFD.

9. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, the data entry device being positioned at least approximately forward of the pilot seat.

10. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, the data entry device including an alphanumeric keyboard and a cursor control device, the data entry device being positioned at least approximately forward of the pilot seat.

11. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, the data entry device including a display screen, an alphanumeric keyboard and a cursor control device, the data entry device being positioned at least approximately forward of the pilot seat.

12. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, the data entry device including a control display unit (CDU), the data entry device being positioned at least approximately forward of the pilot seat.

13. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, wherein the data entry device is positioned at least proximate to the display device.

14. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, wherein the data entry device includes a keypad and is positioned at least proximate to the display device.

15. The flight deck of claim 1, further comprising a data entry device configured to receive input for controlling the autoflight system, wherein the data entry device includes a rotary knob and is positioned at least proximate to the display device.

16. The flight deck of claim 1, further comprising a data entry device configured to receive digital data for controlling the autoflight system from a ground-based source, the data entry device being positioned at least approximately forward of the pilot seat.

17. The flight deck of claim 1, further comprising a data entry device configured to receive digital data for controlling the autoflight system from an air traffic control station, the data entry device being positioned at least approximately forward of the pilot seat.

18. The flight deck of claim 1, further comprising a data entry device configured to receive digital data for controlling

the autoflight system from a ground-based source operated by an airline, the data entry device being positioned at least approximately forward of the pilot seat.

19. The flight deck of claim 1, wherein the autoflight system includes at least an autothrottle and an autopilot, and wherein the display device is configured to provide information related to the autothrottle and the autopilot.

20. The flight deck of claim 1, wherein the one or more autoflight modes are represented by a textual shorthand.

21. The flight deck of claim 1, wherein the one or more autoflight modes are represented by a flight mode annunciator (FMA).

22. The flight deck of claim 1, wherein the one or more autoflight modes are represented by clear text.

23. The flight deck of claim 1, wherein the one or more autoflight modes are graphically represented.

24. The flight deck of claim 1, wherein the one or more autoflight modes are related to one or more of airspeed, vertical guidance, and/or lateral guidance.

25. The flight deck of claim 1, wherein the display device is configured to provide information related to one or more target flight parameters, and wherein the one or more target flight parameters are one or more of airspeed, altitude, heading, track, and/or course.

26. The flight deck of claim 1, wherein the display device is configured to provide information related to one or more target flight parameters, wherein the one or more target flight parameters are one or more of airspeed, altitude, heading, track, and/or course, and wherein the one or more autoflight modes are related to one or more of airspeed, vertical guidance, and/or lateral guidance.

27. The flight deck of claim 1, wherein the display device includes an airspeed display screen configured to provide information related to airspeed of the aircraft.

28. The flight deck of claim 1, wherein the display device includes an airspeed display screen and at least one associated airspeed selector, wherein the airspeed display screen is configured to provide information related to the airspeed of the aircraft and the airspeed selector is configured for selecting an airspeed for the aircraft.

29. The flight deck of claim 1, wherein the display device includes a vertical guidance display screen configured to provide information related to altitude of the aircraft.

30. The flight deck of claim 1, wherein the display device includes a vertical guidance display screen and at least one associated vertical guidance selector, wherein the vertical guidance display screen is configured to provide information related to the altitude of the aircraft and the vertical guidance selector is configured for selecting an altitude for the aircraft.

31. The flight deck of claim 1, wherein the display device includes a lateral guidance display screen configured to provide information related to lateral direction of the aircraft.

32. The flight deck of claim 1, wherein the display device includes a lateral guidance display screen and at least one associated lateral guidance selector, wherein the lateral guidance display screen is configured to provide information related to the lateral direction of the aircraft and the lateral guidance selector is configured for selecting a lateral direction for the aircraft.

33. The flight deck of claim 1, further comprising an autoflight performance selector positioned at least generally

forward of the pilot seat, the autoflight performance selector configured to control the response of the autoflight system to autoflight guidance input.

34. A flight deck for an aircraft having an autoflight system, the flight deck comprising:

at least one pilot seat;

at least one window positioned forward of the pilot seat, the forward window configured to provide a forward field of view out of the aircraft for a pilot seated in the pilot seat;

at least one instrument panel positioned forward of the pilot seat; and

a display device positioned at least approximately between the forward instrument panel and the forward window, the display device having a first display screen configured to provide autoflight mode information related to airspeed, a second display screen configured to provide autoflight mode information related to vertical guidance, and a third display screen configured to provide autoflight mode information related to lateral guidance.

35. The flight deck of claim 34, wherein the forward window has an upper portion and a lower portion, wherein the flight deck further comprises a glare shield positioned adjacent to the lower portion of the forward window, wherein the glare shield is configured to reduce glare on one or more flight instruments positioned on the forward instrument panel, and wherein the display device is positioned at least proximate to the glare shield.

36. The flight deck of claim 34, wherein the forward window has an upper portion and a lower portion, and wherein the display device is positioned at least proximate to the lower portion of the forward window.

37. The flight deck of claim 34, further comprising a data entry device configured to receive input for controlling the autoflight system, the data entry device including a display screen, an alphanumeric keyboard and a cursor control device, the data entry device being positioned at least approximately forward of the pilot seat.

38. The flight deck of claim 34, further comprising a data entry device configured to receive input for controlling the autoflight system, wherein the data entry device includes a keypad and is positioned at least proximate to the display device.

39. The flight deck of claim 34, further comprising a data entry device configured to receive input for controlling the autoflight system, wherein the data entry device includes a rotary knob and is positioned at least proximate to the display device.

40. The flight deck of claim 34, further comprising a data entry device configured to receive digital data for controlling the autoflight system from a ground-based source, the data entry device being positioned at least approximately forward of the pilot seat.

41. The flight deck of claim 34, wherein the display device includes at least one airspeed selector, wherein the airspeed selector is configured for selecting an airspeed for the aircraft.

42. The flight deck of claim 34, wherein the display device includes at least one vertical guidance selector, wherein the vertical guidance selector is configured for selecting an altitude for the aircraft.

43. The flight deck of claim 34, wherein the display device includes at least one lateral guidance selector, wherein the lateral guidance selector is configured for selecting a lateral direction for the aircraft.

44. The flight deck of claim 34, wherein the first display screen is configured to provide target flight parameter information related to airspeed, wherein the second display screen is configured to provide target flight parameter information related to altitude, and wherein the third display screen is configured to provide target flight parameter information related to lateral direction.

45. The flight deck of claim 34, wherein the first, second, and third display screens are configured to collectively display an active situation line, wherein the active situation line includes information related to the manner in which the autoflight system is controlling the aircraft.

46. The flight deck of claim 34, wherein the first, second, and third display screens are configured to collectively display a next event line, wherein the next event line includes information related to the manner in which the autoflight system will be controlling the aircraft.

47. The flight deck of claim 34, wherein the first, second, and third display screens are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second information related to the manner in which the autoflight system will be controlling the aircraft.

48. The flight deck of claim 34, wherein the first, second, and third display screens are arranged in a horizontal line and are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second information related to the manner in which the autoflight system will be controlling the aircraft.

49. The flight deck of claim 34, wherein the first, second, and third display screens are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first autoflight mode and target flight parameter information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second autoflight mode and target flight parameter information related to the manner in which the autoflight system will be controlling the aircraft.

50. A display device for use with an aircraft having an autoflight system, the display device comprising:

- a first display screen configured to provide autoflight mode information related to airspeed;
- a second display screen positioned at least approximately adjacent to the first display screen, the second display screen configured to provide autoflight mode information related to vertical guidance; and
- a third display screen positioned at least approximately adjacent to at least one of the first and second display screens, the third display screen configured to provide autoflight mode information related to lateral guidance.

51. The flight deck of claim 50, wherein the first display screen is configured to provide target flight parameter information related to airspeed, wherein the second display

screen is configured to provide target flight parameter information related to altitude, and wherein the third display screen is configured to provide target flight parameter information related to lateral direction.

52. The flight deck of claim 50, further comprising a data entry device positioned at least proximate to at least one of the first, second, and third display screens, the data entry device configured to receive input for controlling the autoflight system.

53. The flight deck of claim 50, further comprising a data entry device positioned at least proximate to at least one of the first, second, and third display screens, the data entry device including a keypad configured to receive input for controlling the autoflight system.

54. The flight deck of claim 50, wherein the first, second, and third display screens are configured to collectively display a next event line, wherein the next event line includes information related to the manner in which the autoflight system will be controlling the aircraft.

55. The flight deck of claim 50, wherein the first, second, and third display screens are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second information related to the manner in which the autoflight system will be controlling the aircraft.

56. The flight deck of claim 50, wherein the first, second, and third display screens are arranged in a horizontal line and are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second information related to the manner in which the autoflight system will be controlling the aircraft.

57. The flight deck of claim 50, wherein the first, second, and third display screens are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first autoflight mode and target flight parameter information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second autoflight mode and target flight parameter information related to the manner in which the autoflight system will be controlling the aircraft.

58. The flight deck of claim 50, wherein the aircraft includes a flight management computer, and wherein the display device is operatively connected to the flight management computer and configured to exchange flight mode information with the flight management computer.

59. An autoflight system for use with an aircraft, the autoflight system comprising:

- an autothrottle;
- an autopilot;
- a flight management computer configured to control the autothrottle and the autopilot; and
- a display device operatively connected to the flight management computer and configured to exchange information with the flight management computer, the display device including:

- a first display screen configured to provide autoflight mode information related to airspeed;
- a second display screen positioned at least approximately adjacent to the first display screen, the second display screen configured to provide autoflight mode information related to vertical guidance; and
- a third display screen positioned at least approximately adjacent to at least one of the first and second display screens, the third display screen configured to provide autoflight mode information related to lateral guidance.

60. The autoflight system of claim 59, wherein the first display screen is configured to provide target flight parameter information related to airspeed, wherein the second display screen is configured to provide target flight parameter information related to altitude, and wherein the third display screen is configured to provide target flight parameter information related to lateral direction.

61. The autoflight system of claim 59, further comprising a data entry device positioned at least proximate to at least one of the first, second, and third display screens, the data entry device configured to receive input for the flight management computer.

62. The autoflight system of claim 59, further comprising a data entry device positioned at least proximate to at least one of the first, second, and third display screens, the data entry device configured to receive input for the flight management computer via a rotary knob.

63. The autoflight system of claim 59, wherein the first, second, and third display screens are configured to collectively display an active situation line, wherein the active situation line includes information related to the manner in which the autoflight system is controlling the aircraft.

64. The autoflight system of claim 59, wherein the first, second, and third display screens are configured to collectively display a next event line, wherein the next event line includes information related to the manner in which the autoflight system will be controlling the aircraft.

65. The autoflight system of claim 59, wherein the first, second, and third display screens are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first information related to the manner in which the autoflight system is currently controlling the aircraft, and wherein the next event line includes second information related to the manner in which the autoflight system will be controlling the aircraft.

66. The autoflight system of claim 59, wherein the first, second, and third display screens are arranged in a horizontal line and are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second information related to the manner in which the autoflight system will be controlling the aircraft.

67. The autoflight system of claim 59, wherein the first, second, and third display screens are configured to collectively display an active situation line and a next event line, wherein the active situation line includes first autoflight mode and target flight parameter information related to the manner in which the autoflight system is controlling the aircraft, and wherein the next event line includes second

autoflight mode and target flight parameter information related to the manner in which the autoflight system will be controlling the aircraft.

68. An aircraft having an autoflight system, the aircraft comprising:

a flight deck;

at least one pilot seat positioned on the flight deck;

at least one forward window positioned forward of the pilot seat, the forward window configured to provide a forward field of view out of the aircraft for a pilot seated in the pilot seat;

a forward instrument panel positioned forward of the pilot seat; and

a display device positioned at least approximately between the forward instrument panel and the forward window, the display device configured to provide information related to one or more autoflight modes.

69. The aircraft of claim 68, wherein the forward window has an upper portion and a lower portion, and wherein the display device is positioned at least proximate to the lower portion of the forward window.

70. The aircraft of claim 68, wherein the forward window has an upper portion and a lower portion, wherein the flight deck further comprises a glare shield positioned adjacent to the lower portion of the forward window, wherein the glare shield is configured to reduce glare on one or more flight instruments positioned on the forward instrument panel, and wherein the display device is positioned at least proximate to the glare shield.

71. The aircraft of claim 68, further comprising a data entry device configured to receive input for controlling the autoflight system, the data entry device being positioned at least approximately forward of the pilot seat.

72. The aircraft of claim 68, further comprising:

a flight management computer; and

a data entry device positioned at least approximately forward of the pilot seat, the data entry device configured to receive input for controlling the autoflight system and transmit the input to the flight management computer for controlling the autoflight system in response to the input.

73. The aircraft of claim 68, further comprising:

an autothrottle; and

an autopilot, wherein the display device is configured to provide information related to the autothrottle and the autopilot.

74. An apparatus for use with an aircraft having an autoflight system capable of controlling the attitude of the aircraft in pitch, roll and yaw axes, the apparatus comprising:

an autoflight performance selector configured to limit the response of the autoflight system to flight guidance instructions in at least two of the pitch, roll and yaw axes, the autoflight performance selector having at least a first selection and a second selection different than the first selection, wherein selecting the first selection causes the response of the autoflight system to flight guidance instructions to not exceed a first level in the at least two axes, and wherein selecting the second

selection causes the response of the autoflight system to the flight guidance instructions to not exceed a second level in the at least two axes different than the first level.

75. The apparatus of claim 74, wherein the autoflight performance selector includes a rotary knob having at least a min position and a max position, wherein selecting the min position limits the autoflight system to gentle maneuvers in the pitch and roll axes, and wherein selecting the max position allows the autoflight system to engage in more aggressive maneuvers in the pitch and roll axes.

76. The apparatus of claim 74, wherein the autoflight performance selector includes a rotary knob having at least a min position and a max position, wherein selecting the min position limits the autoflight system to a first angle about the pitch axis and a second angle about the roll axis, and wherein selecting the max position limits the autoflight system to a third angle about the pitch axis greater than the first angle, and a fourth angle about the roll axis greater than the second angle.

77. The apparatus of claim 74, wherein the autoflight performance selector includes a rotary knob having at least a min position and a max position, wherein selecting the min position limits the autoflight system to a first rate of pitch change about the pitch axis and a second rate of roll about the roll axis, and wherein selecting the max position limits the autoflight system to a third rate of pitch change about the pitch axis greater than the first rate, and a fourth rate of roll about the roll axis greater than the second rate.

78. The apparatus of claim 74 wherein the aircraft includes a center of gravity and the autoflight performance selector is configured to limit acceleration of the center of gravity relative to a vertical axis.

79. The apparatus of claim 74, further comprising an override capability selector, wherein activating the override capability selector disengages the autoflight performance selector.

80. The apparatus of claim 74, wherein the autoflight performance selector includes display and a cursor control device, wherein the display presents the first and second selections, and wherein the first and second selections can be selected using the cursor control device.

81. The apparatus of claim 74, wherein the autoflight performance selector includes a rocker switch having at least a first position and a second position, wherein selecting the first position limits the autoflight system to gentle maneuvers in the pitch and roll axes, and wherein selecting the second position allows the autoflight system to engage in more aggressive maneuvers in the pitch and roll axes.

82. A method for manufacturing a flight deck for an aircraft having an autoflight system, the method comprising:

situating at least one pilot seat on the flight deck;

installing at least one window forward of the pilot seat, the window configured to provide a forward field of view out of the aircraft for a pilot seated in the pilot seat;

placing an instrument panel forward of the pilot seat;

providing a display device configured to provide information related to one or more autoflight modes; and

positioning the display device at least approximately between the forward instrument panel and the forward window.

83. The method of claim 82, wherein providing the display device includes configuring the display device to include information related to one or more target flight parameters.

84. The method of claim 82, wherein the forward window has an upper portion and a lower portion, and wherein positioning the display device includes installing the display device at least proximate to the lower portion of the forward window.

85. The method of claim 82, wherein the forward window has an upper portion and a lower portion, and wherein the method further comprises positioning a glare shield adjacent to the lower portion of the forward window, wherein the glare shield is configured to reduce glare on one or more flight instruments positioned on the forward instrument panel, and wherein positioning the display device includes installing the display device at least proximate to the glare shield.

86. The method of claim 82, further comprising installing at least one primary flight display (PFD) at least proximate to the forward instrument panel, wherein positioning the display device includes installing the display device closer to the forward field of view than the PFD.

87. The method of claim 82, further comprising installing at least one primary flight display (PFD) at least approximately forward of the pilot seat, wherein positioning the display device includes installing the display device closer to the forward window than the PFD.

88. The method of claim 82, further comprising:

providing a data entry device configured to receive input for controlling the autoflight system; and

placing the data entry device at least approximately forward of the pilot seat.

89. The method of claim 82, further comprising:

providing a data entry device configured to receive input for controlling the autoflight system, the data entry device including an alphanumeric keyboard and a cursor control device; and

placing the data entry device at least approximately forward of the pilot seat.

90. The method of claim 82, further comprising:

providing a data entry device configured to receive digital data from a ground-based source for controlling the autoflight system; and

placing the data entry device at least approximately forward of the pilot seat.

91. The method of claim 82, wherein the autoflight system includes at least an autothrottle and an autopilot, and wherein providing the display device includes configuring the display device to provide information related to the autothrottle and the autopilot.

92. The method of claim 82, wherein providing a display device includes configuring the display device to provide the information related to the one or more autoflight modes in a textual shorthand.

93. The method of claim 82 wherein providing a display device includes configuring the display device to provide the information related to the one or more autoflight modes in a graphical representation.

94. The method of claim 82, wherein providing a display device includes configuring the display device to provide

autoflight mode information related to one or more of airspeed, vertical guidance, and/or lateral guidance.

95. The method of claim 82, wherein providing a display device includes configuring the display device to provide information related to one or more target flight parameters, and wherein the one or more target flight parameters are one or more of airspeed, altitude, heading, track, and/or course.

96. The method of claim 82, wherein providing a display device includes configuring the display device to provide autoflight mode information related to one or more of airspeed, vertical guidance, and/or lateral guidance, and one or more target flight parameters related to one or more of airspeed, altitude, heading, track, and/or course.

97. A method for providing autoflight information on the flight deck of an aircraft having an autoflight system, the flight deck providing a forward field of view through at least one forward window, the method comprising:

- receiving an autoflight control input;
- controlling the aircraft in response to the received autoflight control input; and
- displaying information related to one or more autoflight modes at least proximate to the forward field of view.

98. The method of claim 97, wherein the information related to one or more autoflight modes is first information,

and wherein the method further comprises presenting second information related to one or more target flight parameters at least proximate to the forward field of view.

99. The method of claim 97, wherein the flight deck has a glare shield positioned adjacent to the forward window, and wherein displaying the information related to one or more autoflight modes includes providing the information on a display screen positioned at least proximate to the glare shield.

100. The method of claim 97, wherein the autoflight system includes at least an autothrottle and an autopilot, and wherein displaying the information related to one or more autoflight modes includes providing information related to the autothrottle and the autopilot.

101. The method of claim 98, wherein the information related to one or more autoflight modes is first information, wherein the method further comprises presenting second information related to one or more target flight parameters at least proximate to the forward field of view, and wherein the one or more target flight parameters are one or more of airspeed, altitude, heading, track, and/or course.

* * * * *