

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



**(43) International Publication Date
8 May 2014 (08.05.2014)**



**(10) International Publication Number
WO 2014/071215 A1**

(51) International Patent Classification:

(74) **Agents:** SWANSON, Tait R. et al.; P.O. Box 692289, Houston, Texas 77269 (US).

(21) International Application Number: PCT/US2013/068113

(81) Designated States (unless otherwise indicated, for every

(22) International Filing Date: 1 November 2013 (01.11.2013)

1 November 2013 (01.11.2013)

(25) Filing Language: English

English

(26) Publication Language: English

English

(30) Priority Data:	61/722,118	2 November 2012 (02.11.2012)	US
	61/722,115	2 November 2012 (02.11.2012)	US
	61/722,114	2 November 2012 (02.11.2012)	US
	61/722,111	2 November 2012 (02.11.2012)	US
	14/067,563	30 October 2013 (30.10.2013)	US

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) **Applicants:** **GENERAL ELECTRIC COMPANY** [US/US]; 1 River Road, Schenectady, New York 12345 (US). **EXXONMOBIL UPSTREAM RESEARCH COMPANY** [US/US]; CORP-URC-SW 341, P.O. Box 2189, Houston, Texas 77252-2189 (US).

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(72) **Inventors:** HUNTINGTON, Richard A.; P.O. Box 2189, Houston, Texas 77252-2189 (US). DHANUKA, Sulabh K.; P.O. Box 2189, Houston, Texas 77252-2189 (US). SLOBODYANSKIY, Ilya Aleksandrovich; 300 Garlington Road, Greenville, South Carolina 29615 (US).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR LOAD CONTROL WITH DIFFUSION COMBUSTION IN A STOICHIOMETRIC EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM

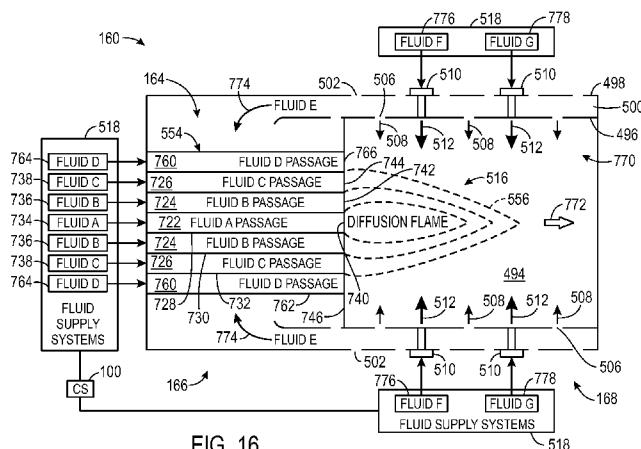


FIG. 16

(57) Abstract: A system is provided with a turbine combustor having a first diffusion fuel nozzle, wherein the first diffusion fuel nozzle is configured to produce a diffusion flame. The system includes a turbine driven by combustion products from the diffusion flame in the turbine combustor. The system also includes an exhaust gas compressor, wherein the exhaust gas compressor is configured to compress and route an exhaust gas from the turbine to the turbine combustor along an exhaust recirculation path. In addition, the system includes a control system configured to control flow rates of at least one oxidant and at least one fuel to the turbine combustor in a stoichiometric control mode and a non-stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least one fuel with the at least one oxidant, and the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.



- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

SYSTEM AND METHOD FOR LOAD CONTROL WITH
DIFFUSION COMBUSTION IN A STOICHIOMETRIC
EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and benefit of U.S. Non-Provisional Patent Application No. 14/067,563, entitled “SYSTEM AND METHOD FOR LOAD CONTROL WITH DIFFUSION COMBUSTION IN A STOICHIOMETRIC EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM,” filed on October 30, 2013, U.S. Provisional Patent Application No. 61/722,118, entitled “SYSTEM AND METHOD FOR DIFFUSION COMBUSTION IN A STOICHIOMETRIC EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM,” filed on November 2, 2012, U.S. Provisional Patent Application No. 61/722,115, entitled “SYSTEM AND METHOD FOR DIFFUSION COMBUSTION WITH FUEL-DILUENT MIXING IN A STOICHIOMETRIC EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM,” filed on November 2, 2012, U.S. Provisional Patent Application No. 61/722,114, entitled “SYSTEM AND METHOD FOR DIFFUSION COMBUSTION WITH OXIDANT-DILUENT MIXING IN A STOICHIOMETRIC EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM,” filed on November 2, 2012, and U.S. Provisional Patent Application No. 61/722,111, entitled “SYSTEM AND METHOD FOR LOAD CONTROL WITH DIFFUSION COMBUSTION IN A STOICHIOMETRIC EXHAUST GAS RECIRCULATION GAS TURBINE SYSTEM,” filed on November 2, 2012, all of which are herein incorporated by reference in their entirety for all purposes.

BACKGROUND OF THE INVENTION

[0002] The subject matter disclosed herein relates to gas turbine engines.

[0003] Gas turbine engines are used in a wide variety of applications, such as power generation, aircraft, and various machinery. Gas turbine engine generally combust a fuel with an oxidant (e.g., air) in a combustor section to generate hot combustion products, which then drive one or more turbine stages of a turbine

section. In turn, the turbine section drives one or more compressor stages of a compressor section, thereby compressing oxidant for intake into the combustor section along with the fuel. Again, the fuel and oxidant mix in the combustor section, and then combust to produce the hot combustion products. Gas turbine engines generally premix the fuel and oxidant along one or more flow paths upstream from a combustion chamber of the combustor section, and thus gas turbine engines generally operate with premix flames. Unfortunately, the premix flames may be difficult to control or maintain, which can impact various exhaust emission and power requirements. Furthermore, gas turbine engines typically consume a vast amount of air as the oxidant, and output a considerable amount of exhaust gas into the atmosphere. In other words, the exhaust gas is typically wasted as a byproduct of the gas turbine operation.

BRIEF DESCRIPTION OF THE INVENTION

[0004] Certain embodiments commensurate in scope with the originally claimed invention are summarized below. These embodiments are not intended to limit the scope of the claimed invention, but rather these embodiments are intended only to provide a brief summary of possible forms of the invention. Indeed, the invention may encompass a variety of forms that may be similar to or different from the embodiments set forth below.

[0005] In a first embodiment, a system is provided with a turbine combustor having a first diffusion fuel nozzle, wherein the first diffusion fuel nozzle is configured to produce a diffusion flame. The system includes a turbine driven by combustion products from the diffusion flame in the turbine combustor. The system also includes an exhaust gas compressor, wherein the exhaust gas compressor is configured to compress and route an exhaust gas from the turbine to the turbine combustor along an exhaust recirculation path. In addition, the system includes a control system configured to control flow rates of at least one oxidant and at least one fuel to the turbine combustor in a stoichiometric control mode and a non-stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least

one fuel with the at least one oxidant, and the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.

[0006] In a second embodiment, a method includes injecting at least one oxidant and at least one fuel into a chamber of a turbine combustor, wherein the at least one oxidant and the at least one fuel mix and combust as a diffusion flame to generate combustion products. The method further includes driving a turbine with the combustion products and outputting an exhaust gas. The method further includes recirculating the exhaust gas along an exhaust recirculation path to an exhaust gas compressor. The method further includes compressing and routing the exhaust gas to the turbine combustor. The method further includes controlling flow rates of the at least one oxidant and the at least one fuel to the turbine combustor in a stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least one fuel with the at least one oxidant. The method further includes controlling flow rates of the at least one oxidant and the at least one fuel to the turbine combustor in a non-stoichiometric control mode, wherein the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.

[0007] In a third embodiment, a method includes introducing an oxidant to at least one oxidant compressor to produce a compressed oxidant stream. The method further includes introducing a recirculated low oxygen content gas stream to a compressor section of a gas turbine engine to produce a compressed low oxygen content gas stream. The method further includes introducing a first portion of the compressed oxidant stream with a first compressed oxidant flow rate and a fuel stream with a first fuel flow rate in a substantially stoichiometric ratio to at least one turbine combustor and mixing the compressed oxidant stream and the fuel stream at the point of combustion and combusting the mixture of the compressed oxidant stream and the fuel stream. The method further includes introducing a first portion of the compressed low oxygen content gas stream with a low oxygen content gas flow rate to the at least one turbine combustor and mixing it with the combusting streams of

compressed oxidant and fuel after the point of combustion and producing a high temperature high pressure low oxygen content stream. The method further includes introducing the high temperature high pressure low oxygen content stream to an expander section of the gas turbine engine and expanding the high temperature high pressure low oxygen content stream to produce a first mechanical power and a recirculated low oxygen content gas stream at a first recirculated low oxygen content gas flow rate wherein the recirculated low oxygen content gas stream contains a first recirculated low oxygen content gas emissions level. The method further includes using a first portion of the first mechanical power to drive the compressor section of the gas turbine engine. The method further includes using a second portion of the first mechanical power to drive at least one of: a generator, the at least one oxidant compressor or at least one other mechanical device. The method further includes recirculating the recirculated low oxygen content gas stream in a recirculation loop from the outlet of the expander section to the inlet of the compressor section of the gas turbine engine. The method further includes extracting at least a second portion of the compressed low oxygen content gas stream from the gas turbine engine and delivering the at least a second portion of the compressed low oxygen content gas stream to the first at least one oxidation catalyst unit and producing a low oxygen content product stream comprising a first low oxygen content product emissions level that is within a target range. The method further includes reducing fuel stream flow rate to a second fuel stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a second compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a second mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising a second low oxygen content product emissions level that is within a target range. The method further includes reducing fuel stream flow rate to a third fuel stream flow rate that is less than the second fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a third compressed oxidant flow rate that is less than the second compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a third mechanical power that is less than the second mechanical power and

producing a low oxygen content product stream comprising a third low oxygen content product emissions level that is at the limit of a target range. The method further includes reducing fuel stream flow rate to a fourth fuel stream flow rate that is less than the third fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a fourth compressed oxidant flow rate that is less than the third compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a fourth mechanical power that is less than the third mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] These and other features, aspects, and advantages of the present invention will become better understood when the following detailed description is read with reference to the accompanying drawings in which like characters represent like parts throughout the drawings, wherein:

[0009] FIG. 1 is a diagram of an embodiment of a system having a turbine-based service system coupled to a hydrocarbon production system;

[0010] FIG. 2 is a diagram of an embodiment of the system of FIG. 1, further illustrating a control system and a combined cycle system;

[0011] FIG. 3 is a diagram of an embodiment of the system of FIGS. 1 and 2, further illustrating details of a gas turbine engine, exhaust gas supply system, and exhaust gas processing system;

[0012] FIG. 4 is a flow chart of an embodiment of a process for operating the system of FIGS. 1-3;

[0013] FIG. 5 is a diagram of an embodiment of the exhaust gas processing system of FIGS. 1-3;

[0014] FIG. 6 is a diagram of an embodiment of the exhaust gas supply system of FIGS. 1-3;

[0015] FIG. 7 is a diagram of an embodiment of the gas turbine engine of FIGS. 1-3, further illustrating details of the combustor, fuel nozzle, and flows of oxidant, fuel, and diluent;

[0016] FIG. 8 is a diagram of an embodiment of the fuel nozzle of FIG. 7, illustrating a premix fuel nozzle configuration;

[0017] FIG. 9 is a diagram of an embodiment of the fuel nozzle of FIG. 7, illustrating a premix fuel nozzle configuration;

[0018] FIG. 10 is a diagram of an embodiment of the fuel nozzle of FIG. 7, illustrating a premix fuel nozzle configuration;

[0019] FIG. 11 is a diagram of an embodiment of the fuel nozzle of FIG. 7, illustrating a diffusion fuel nozzle configuration;

[0020] FIG. 12 is a diagram of an embodiment of the fuel nozzle of FIG. 7, illustrating a diffusion fuel nozzle configuration;

[0021] FIG. 13 is a diagram of an embodiment of the fuel nozzle of FIG. 7, illustrating a diffusion fuel nozzle configuration;

[0022] FIG. 14 is a schematic cross-section of an embodiment of the fuel nozzle of FIG. 13, taken along line 14-14;

[0023] FIG. 15 is a schematic cross-section of an embodiment of the fuel nozzle of FIG. 13, taken along line 14-14;

[0024] FIG. 16 is a diagram of an embodiment of the combustor and fuel nozzle of FIG. 7, illustrating a diffusion fuel nozzle configuration and a diluent injection system;

[0025] FIG. 17 is a schematic cross-section of an embodiment of the combustor and fuel nozzles of FIG. 7, taken along line 17-17, illustrating a multi-nozzle configuration of the fuel nozzles; and

[0026] FIG. 18 is a graph of gas turbine load and exhaust gas recirculation (EGR) flow versus fuel/oxidant ratio for a diffusion flame configuration and a premix flame configuration.

DETAILED DESCRIPTION OF THE INVENTION

[0027] One or more specific embodiments of the present invention will be described below. In an effort to provide a concise description of these embodiments, all features of an actual implementation may not be described in the specification. It should be appreciated that in the development of any such actual implementation, as in any engineering or design project, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which may vary from one implementation to another. Moreover, it should be appreciated that such a development effort might be complex and time consuming, but would nevertheless be a routine undertaking of design, fabrication, and manufacture for those of ordinary skill having the benefit of this disclosure.

[0028] When introducing elements of various embodiments of the present invention, the articles "a," "an," "the," and "said" are intended to mean that there are one or more of the elements. The terms "comprising," "including," and "having" are intended to be inclusive and mean that there may be additional elements other than the listed elements.

[0029] As discussed in detail below, the disclosed embodiments relate generally to gas turbine systems with exhaust gas recirculation (EGR), and particularly stoichiometric operation of the gas turbine systems using EGR. For example, the gas turbine systems may be configured to recirculate the exhaust gas along an exhaust recirculation path, stoichiometrically combust fuel and oxidant along with at least some of the recirculated exhaust gas, and capture the exhaust gas for use in various

target systems. The recirculation of the exhaust gas along with stoichiometric combustion may help to increase the concentration level of carbon dioxide (CO₂) in the exhaust gas, which can then be post treated to separate and purify the CO₂ and nitrogen (N₂) for use in various target systems. The gas turbine systems also may employ various exhaust gas processing (e.g., heat recovery, catalyst reactions, etc.) along the exhaust recirculation path, thereby increasing the concentration level of CO₂, reducing concentration levels of other emissions (e.g., carbon monoxide, nitrogen oxides, and unburnt hydrocarbons), and increasing energy recovery (e.g., with heat recovery units). Furthermore, the gas turbine engines may be configured to combust the fuel and oxidant with one or more diffusion flames, rather than or in addition to premix flames. The diffusion flames may help to maintain stability and operation within certain limits for stoichiometric combustion, which in turn helps to increase production of CO₂. For example, as discussed below, a gas turbine system operating with diffusion flames may enable a greater quantity of EGR, as compared to a gas turbine system operating with premix flames. In turn, the increased quantity of EGR helps to increase CO₂ production. Possible target systems include pipelines, storage tanks, carbon sequestration systems, and hydrocarbon production systems, such as enhanced oil recovery (EOR) systems.

[0030] As general context, it is noteworthy to discuss the differences between a premix flame (i.e., premix combustion) versus a diffusion flame (i.e., diffusion combustion). Combustion (i.e., premix or diffusion combustion) is essentially an exothermic chemical reaction (e.g., combustion reaction) between a fuel and an oxidant, such as air, oxygen, oxygen-enriched air, oxygen reduced air, or mixtures of oxygen and nitrogen. The exothermic chemical reaction between the fuel and the oxidant may substantially impact (and control) the stability of the flame (e.g., the stability of the flame surface), and vice versa. For example, the heat release from the exothermic chemical reaction helps to sustain the flame, and thus higher flame temperatures generally lead to greater flame stability. In other words, higher temperatures associated with the exothermic chemical reaction may help to increase flame stability, whereas lower temperatures associated with the exothermic chemical reaction may reduce the flame stability. The flame temperature may be largely

dependent on the fuel/oxidant ratio. In particular, the flame temperature may be the greatest at a stoichiometric fuel/oxidant ratio, which, as discussed in detail below, generally involves an exothermic chemical reaction that consumes substantially all of the fuel and oxidant, thereby resulting in substantially no residual oxidant or unburnt fuel.

[0031] With premix combustion, the fuel and oxidant mix at one or more locations upstream from the premix flame, which is essentially a combustion of this pre-mixture of fuel and oxidant. In general, the exothermic chemical reaction of fuel and oxidant in the premix flame is constrained to the fuel/oxidant ratio of the pre-mixture, which is achieved upstream from the premix flame. In many configurations (particularly when one or more diluents are premixed with the fuel and oxidant), it may be more difficult to maintain a substantially stoichiometric fuel/oxidant ratio with a premix flame, and thus it may be more difficult to maximize the stability of the flame. In certain configurations, the premix flame may be achieved with a fuel-lean fuel/oxidant ratio, which reduces the flame temperature and, thus, helps to lower emissions of nitrogen oxides (NO_X), e.g., nitrogen monoxide (NO) and nitrogen dioxide (NO₂). While the reduced NO_X emissions is relevant for emissions regulations, the reduced flame temperature also causes a reduction in flame stability. In the disclosed embodiments, the system may be controlled to provide a substantially stoichiometric fuel/oxidant ratio (e.g., increasing flame temperature and flame stability), while using one or more diluents to reduce the temperature for purposes of emissions control (e.g., reducing NO_X emissions). In particular, as discussed below, the diluents may be provided separate from the fuel and oxidant (e.g., after the point of combustion and/or downstream from the premix flame), thereby enabling more precise control of the fuel/oxidant ratio to achieve stoichiometric combustion while also using the diluents to control the temperature and emissions (e.g., NO_X emissions). In other words, the fuel and oxidant flows may be controlled independently from one another and the diluent flow, thereby providing a more precisely controlled fuel/oxidant ratio in the pre-mixture delivered to the location of the premix flame.

[0032] With diffusion combustion, the fuel and oxidant generally do not mix upstream from the diffusion flame, but rather the fuel and oxidant mix and react directly at the flame surface and/or the flame surface exists at the location of mixing between the fuel and oxidant. In particular, the fuel and oxidant separately approach the flame surface (or diffusion boundary/interface), and then diffuse (e.g., via molecular and viscous diffusion) along the flame surface (or diffusion boundary/interface) to generate the diffusion flame. It is noteworthy that the fuel and oxidant may be at a substantially stoichiometric ratio along this flame surface (or diffusion boundary/interface), which may result in a greater flame temperature (e.g., a peak flame temperature) along this flame surface. Again, the stoichiometric fuel/oxidant ratio generally results in a greater flame temperature (e.g., a peak flame temperature), as compared with a fuel-lean or fuel-rich fuel/oxidant ratio. As a result, the diffusion flame may be substantially more stable than the premix flame, because the diffusion of fuel and oxidant helps to maintain a stoichiometric ratio (and greater temperature) along the flame surface. Although greater flame temperatures can also lead to greater exhaust emissions, such as NO_X emissions, the disclosed embodiments use one or more diluents to help control the temperature and emissions while still avoiding any premixing of the fuel and oxidant. For example, the disclosed embodiments may introduce one or more diluents separate from the fuel and oxidant (e.g., after the point of combustion and/or downstream from the diffusion flame), thereby helping to reduce the temperature and reduce the emissions (e.g., NO_X emissions) produced by the diffusion flame.

[0033] In the disclosed embodiments, the exhaust gas provided by the exhaust gas recirculation (EGR) serves as at least one of the diluents. The exhaust gas (as one of the diluents) is essentially decoupled from the flows of oxidant and fuel, thereby enabling independent control of the fuel, oxidant, and diluent (e.g., exhaust gas) flows. In certain embodiments, the exhaust gas may be injected into the turbine combustor after the point of combustion and/or downstream from the flame (e.g., premix flame and/or diffusion flame), thereby helping to reduce the temperature and reduce exhaust emissions, e.g., NO_X emissions. However, other diluents (e.g., steam, nitrogen, or other inert gases) also may be used for temperature and/or emissions

control, alone or in combination with the exhaust gas. Given the differences between premix flames and diffusion flames, the amount of EGR may vary considerably between a gas turbine system operating with premix fuel nozzles versus diffusion fuel nozzles. A premix flame may be constrained to the pre-mixture upstream from the premix flame (e.g., including mixing of the diluent with the fuel and oxidant), and thus, the premix flame may not be capable of maintaining flame stability above a certain level of EGR. In other words, in a premix flame configuration of the gas turbine system, an increasing amount of exhaust gas (e.g., EGR) that premixes with the fuel and oxidant may increasingly reduce the temperature and flame stability of the premix flame, and thus too much EGR may cause the premix flame to become unstable. However, in a diffusion flame configuration of the gas turbine system, it is now believed that an increasing amount of exhaust gas (e.g., EGR) can be used along with the diffusion flame, well beyond any limits associated with a premix flame configuration. For example, in a substantially stoichiometric EGR gas turbine system, the amount of exhaust gas (e.g., EGR) that may be used with a diffusion flame configuration may be at least approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, or 100 percent greater than the amount of exhaust gas (e.g., EGR) that may be used with a premix flame configuration. By further example, in a substantially stoichiometric EGR gas turbine system, the amount of exhaust gas (e.g., EGR) that may be used with a diffusion flame configuration may be greater than approximately 35, 40, 45, 50, 55, 60, 65, 70, or 75 percent by volume of the exhaust gas (e.g., EGR) relative to the total flow through the combustors and turbine section (e.g., total flow of oxidant, fuel, and diluents). As a result, a significant improvement in CO₂ production may be achieved by using diffusion flames (e.g., diffusion fuel nozzles) along with a substantially stoichiometric EGR gas turbine system.

[0034] Although the diffusion fuel nozzles may be particularly helpful in increasing quantities of EGR and CO₂ production, the disclosed embodiments employ various controls to help control the fuel/oxidant ratio, the stability of the flame, exhaust emissions, and power output, whether the system is operating with a premix flame, a diffusion flame, or a combination thereof. For example, the disclosed embodiments may include combustors with one or more diffusion fuel nozzles and

premix fuel nozzles, which may be independently controlled through different fluid supply circuits to provide benefits of both premix flame configurations and diffusion flame configurations.

[0035] FIG. 1 is a diagram of an embodiment of a system 10 having an hydrocarbon production system 12 associated with a turbine-based service system 14. As discussed in further detail below, various embodiments of the turbine-based service system 14 are configured to provide various services, such as electrical power, mechanical power, and fluids (e.g., exhaust gas), to the hydrocarbon production system 12 to facilitate the production or retrieval of oil and/or gas. In the illustrated embodiment, the hydrocarbon production system 12 includes an oil/gas extraction system 16 and an enhanced oil recovery (EOR) system 18, which are coupled to a subterranean reservoir 20 (e.g., an oil, gas, or hydrocarbon reservoir). The oil/gas extraction system 16 includes a variety of surface equipment 22, such as a Christmas tree or production tree 24, coupled to an oil/gas well 26. Furthermore, the well 26 may include one or more tubulars 28 extending through a drilled bore 30 in the earth 32 to the subterranean reservoir 20. The tree 24 includes one or more valves, chokes, isolation sleeves, blowout preventers, and various flow control devices, which regulate pressures and control flows to and from the subterranean reservoir 20. While the tree 24 is generally used to control the flow of the production fluid (e.g., oil or gas) out of the subterranean reservoir 20, the EOR system 18 may increase the production of oil or gas by injecting one or more fluids into the subterranean reservoir 20.

[0036] Accordingly, the EOR system 18 may include a fluid injection system 34, which has one or more tubulars 36 extending through a bore 38 in the earth 32 to the subterranean reservoir 20. For example, the EOR system 18 may route one or more fluids 40, such as gas, steam, water, chemicals, or any combination thereof, into the fluid injection system 34. For example, as discussed in further detail below, the EOR system 18 may be coupled to the turbine-based service system 14, such that the system 14 routes an exhaust gas 42 (e.g., substantially or entirely free of oxygen) to the EOR system 18 for use as the injection fluid 40. The fluid injection system 34 routes the fluid 40 (e.g., the exhaust gas 42) through the one or more tubulars 36 into

the subterranean reservoir 20, as indicated by arrows 44. The injection fluid 40 enters the subterranean reservoir 20 through the tubular 36 at an offset distance 46 away from the tubular 28 of the oil/gas well 26. Accordingly, the injection fluid 40 displaces the oil/gas 48 disposed in the subterranean reservoir 20, and drives the oil/gas 48 up through the one or more tubulars 28 of the hydrocarbon production system 12, as indicated by arrows 50. As discussed in further detail below, the injection fluid 40 may include the exhaust gas 42 originating from the turbine-based service system 14, which is able to generate the exhaust gas 42 on-site as needed by the hydrocarbon production system 12. In other words, the turbine-based system 14 may simultaneously generate one or more services (e.g., electrical power, mechanical power, steam, water (e.g., desalinated water), and exhaust gas (e.g., substantially free of oxygen)) for use by the hydrocarbon production system 12, thereby reducing or eliminating the reliance on external sources of such services.

[0037] In the illustrated embodiment, the turbine-based service system 14 includes a stoichiometric exhaust gas recirculation (SEGR) gas turbine system 52 and an exhaust gas (EG) processing system 54. The gas turbine system 52 may be configured to operate in a stoichiometric combustion mode of operation (e.g., a stoichiometric control mode) and a non-stoichiometric combustion mode of operation (e.g., a non-stoichiometric control mode), such as a fuel-lean control mode or a fuel-rich control mode. In the stoichiometric control mode, the combustion generally occurs in a substantially stoichiometric ratio of a fuel and oxidant, thereby resulting in substantially stoichiometric combustion. In particular, stoichiometric combustion generally involves consuming substantially all of the fuel and oxidant in the combustion reaction, such that the products of combustion are substantially or entirely free of unburnt fuel and oxidant. One measure of stoichiometric combustion is the equivalence ratio, or phi (ϕ), which is the ratio of the actual fuel/oxidant ratio relative to the stoichiometric fuel/oxidant ratio. An equivalence ratio of greater than 1.0 results in a fuel-rich combustion of the fuel and oxidant, whereas an equivalence ratio of less than 1.0 results in a fuel-lean combustion of the fuel and oxidant. In contrast, an equivalence ratio of 1.0 results in combustion that is neither fuel-rich nor fuel-lean, thereby substantially consuming all of the fuel and oxidant in the combustion

reaction. In context of the disclosed embodiments, the term stoichiometric or substantially stoichiometric may refer to an equivalence ratio of approximately 0.95 to approximately 1.05. However, the disclosed embodiments may also include an equivalence ratio of 1.0 plus or minus 0.01, 0.02, 0.03, 0.04, 0.05, or more. Again, the stoichiometric combustion of fuel and oxidant in the turbine-based service system 14 may result in products of combustion or exhaust gas (e.g., 42) with substantially no unburnt fuel or oxidant remaining. For example, the exhaust gas 42 may have less than 1, 2, 3, 4, or 5 percent by volume of oxidant (e.g., oxygen), unburnt fuel or hydrocarbons (e.g., HCs), nitrogen oxides (e.g., NO_x), carbon monoxide (CO), sulfur oxides (e.g., SO_x), hydrogen, and other products of incomplete combustion. By further example, the exhaust gas 42 may have less than approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 200, 300, 400, 500, 1000, 2000, 3000, 4000, or 5000 parts per million by volume (ppmv) of oxidant (e.g., oxygen), unburnt fuel or hydrocarbons (e.g., HCs), nitrogen oxides (e.g., NO_x), carbon monoxide (CO), sulfur oxides (e.g., SO_x), hydrogen, and other products of incomplete combustion. However, the disclosed embodiments also may produce other ranges of residual fuel, oxidant, and other emissions levels in the exhaust gas 42. As used herein, the terms emissions, emissions levels, and emissions targets may refer to concentration levels of certain products of combustion (e.g., NO_x, CO, SO_x, O₂, N₂, H₂, HCs, etc.), which may be present in recirculated gas streams, vented gas streams (e.g., exhausted into the atmosphere), and gas streams used in various target systems (e.g., the hydrocarbon production system 12).

[0038] Although the SEGR gas turbine system 52 and the EG processing system 54 may include a variety of components in different embodiments, the illustrated EG processing system 54 includes a heat recovery steam generator (HRSG) 56 and an exhaust gas recirculation (EGR) system 58, which receive and process an exhaust gas 60 originating from the SEGR gas turbine system 52. The HRSG 56 may include one or more heat exchangers, condensers, and various heat recovery equipment, which collectively function to transfer heat from the exhaust gas 60 to a stream of water, thereby generating steam 62. The steam 62 may be used in one or more steam turbines, the EOR system 18, or any other portion of the hydrocarbon production

system 12. For example, the HRSG 56 may generate low pressure, medium pressure, and/or high pressure steam 62, which may be selectively applied to low, medium, and high pressure steam turbine stages, or different applications of the EOR system 18. In addition to the steam 62, a treated water 64, such as a desalinated water, may be generated by the HRSG 56, the EGR system 58, and/or another portion of the EG processing system 54 or the SEGR gas turbine system 52. The treated water 64 (e.g., desalinated water) may be particularly useful in areas with water shortages, such as inland or desert regions. The treated water 64 may be generated, at least in part, due to the large volume of air driving combustion of fuel within the SEGR gas turbine system 52. While the on-site generation of steam 62 and water 64 may be beneficial in many applications (including the hydrocarbon production system 12), the on-site generation of exhaust gas 42, 60 may be particularly beneficial for the EOR system 18, due to its low oxygen content, high pressure, and heat derived from the SEGR gas turbine system 52. Accordingly, the HRSG 56, the EGR system 58, and/or another portion of the EG processing system 54 may output or recirculate an exhaust gas 66 into the SEGR gas turbine system 52, while also routing the exhaust gas 42 to the EOR system 18 for use with the hydrocarbon production system 12. Likewise, the exhaust gas 42 may be extracted directly from the SEGR gas turbine system 52 (i.e., without passing through the EG processing system 54) for use in the EOR system 18 of the hydrocarbon production system 12.

[0039] The exhaust gas recirculation is handled by the EGR system 58 of the EG processing system 54. For example, the EGR system 58 includes one or more conduits, valves, blowers, exhaust gas treatment systems (e.g., filters, particulate removal units, gas separation units, gas purification units, heat exchangers, heat recovery units, moisture removal units, catalyst units, chemical injection units, or any combination thereof), and controls to recirculate the exhaust gas along an exhaust gas circulation path from an output (e.g., discharged exhaust gas 60) to an input (e.g., intake exhaust gas 66) of the SEGR gas turbine system 52. In the illustrated embodiment, the SEGR gas turbine system 52 intakes the exhaust gas 66 into a compressor section having one or more compressors, thereby compressing the exhaust gas 66 for use in a combustor section along with an intake of an oxidant 68 and one or

more fuels 70. The oxidant 68 may include ambient air, pure oxygen, oxygen-enriched air, oxygen-reduced air, oxygen-nitrogen mixtures, or any suitable oxidant that facilitates combustion of the fuel 70. The fuel 70 may include one or more gas fuels, liquid fuels, or any combination thereof. For example, the fuel 70 may include natural gas, liquefied natural gas (LNG), syngas, methane, ethane, propane, butane, naphtha, kerosene, diesel fuel, ethanol, methanol, biofuel, or any combination thereof.

[0040] The SEGR gas turbine system 52 mixes and combusts the exhaust gas 66, the oxidant 68, and the fuel 70 in the combustor section, thereby generating hot combustion gases or exhaust gas 60 to drive one or more turbine stages in a turbine section. In certain embodiments, each combustor in the combustor section includes one or more premix fuel nozzles, one or more diffusion fuel nozzles, or any combination thereof. For example, each premix fuel nozzle may be configured to mix the oxidant 68 and the fuel 70 internally within the fuel nozzle and/or partially upstream of the fuel nozzle, thereby injecting an oxidant-fuel mixture from the fuel nozzle into the combustion zone for a premixed combustion (e.g., a premixed flame). By further example, each diffusion fuel nozzle may be configured to isolate the flows of oxidant 68 and fuel 70 within the fuel nozzle, thereby separately injecting the oxidant 68 and the fuel 70 from the fuel nozzle into the combustion zone for diffusion combustion (e.g., a diffusion flame). In particular, the diffusion combustion provided by the diffusion fuel nozzles delays mixing of the oxidant 68 and the fuel 70 until the point of initial combustion, i.e., the flame region. In embodiments employing the diffusion fuel nozzles, the diffusion flame may provide increased flame stability, because the diffusion flame generally forms at the point of stoichiometry between the separate streams of oxidant 68 and fuel 70 (i.e., as the oxidant 68 and fuel 70 are mixing). In certain embodiments, one or more diluents (e.g., the exhaust gas 60, steam, nitrogen, or another inert gas) may be pre-mixed with the oxidant 68, the fuel 70, or both, in either the diffusion fuel nozzle or the premix fuel nozzle. In addition, one or more diluents (e.g., the exhaust gas 60, steam, nitrogen, or another inert gas) may be injected into the combustor at or downstream from the point of combustion within each combustor. The use of these diluents may help temper the flame (e.g., premix flame or diffusion flame), thereby helping to reduce NO_x emissions, such as

nitrogen monoxide (NO) and nitrogen dioxide (NO₂). Regardless of the type of flame, the combustion produces hot combustion gases or exhaust gas 60 to drive one or more turbine stages. As each turbine stage is driven by the exhaust gas 60, the SEGR gas turbine system 52 generates a mechanical power 72 and/or an electrical power 74 (e.g., via an electrical generator). The system 52 also outputs the exhaust gas 60, and may further output water 64. Again, the water 64 may be a treated water, such as a desalinated water, which may be useful in a variety of applications on-site or off-site.

[0041] Exhaust extraction is also provided by the SEGR gas turbine system 52 using one or more extraction points 76. For example, the illustrated embodiment includes an exhaust gas (EG) supply system 78 having an exhaust gas (EG) extraction system 80 and an exhaust gas (EG) treatment system 82, which receive exhaust gas 42 from the extraction points 76, treat the exhaust gas 42, and then supply or distribute the exhaust gas 42 to various target systems. The target systems may include the EOR system 18 and/or other systems, such as a pipeline 86, a storage tank 88, or a carbon sequestration system 90. The EG extraction system 80 may include one or more conduits, valves, controls, and flow separations, which facilitate isolation of the exhaust gas 42 from the oxidant 68, the fuel 70, and other contaminants, while also controlling the temperature, pressure, and flow rate of the extracted exhaust gas 42. The EG treatment system 82 may include one or more heat exchangers (e.g., heat recovery units such as heat recovery steam generators, condensers, coolers, or heaters), catalyst systems (e.g., oxidation catalyst systems), particulate and/or water removal systems (e.g., gas dehydration units, inertial separators, coalescing filters, water impermeable filters, and other filters), chemical injection systems, solvent based treatment systems (e.g., absorbers, flash tanks, etc.), carbon capture systems, gas separation systems, gas purification systems, and/or a solvent based treatment system, exhaust gas compressors, any combination thereof. These subsystems of the EG treatment system 82 enable control of the temperature, pressure, flow rate, moisture content (e.g., amount of water removal), particulate content (e.g., amount of particulate removal), and gas composition (e.g., percentage of CO₂, N₂, etc.).

[0042] The extracted exhaust gas 42 is treated by one or more subsystems of the EG treatment system 82, depending on the target system. For example, the EG treatment system 82 may direct all or part of the exhaust gas 42 through a carbon capture system, a gas separation system, a gas purification system, and/or a solvent based treatment system, which is controlled to separate and purify a carbonaceous gas (e.g., carbon dioxide) 92 and/or nitrogen (N₂) 94 for use in the various target systems. For example, embodiments of the EG treatment system 82 may perform gas separation and purification to produce a plurality of different streams 95 of exhaust gas 42, such as a first stream 96, a second stream 97, and a third stream 98. The first stream 96 may have a first composition that is rich in carbon dioxide and/or lean in nitrogen (e.g., a CO₂ rich, N₂ lean stream). The second stream 97 may have a second composition that has intermediate concentration levels of carbon dioxide and/or nitrogen (e.g., intermediate concentration CO₂, N₂ stream). The third stream 98 may have a third composition that is lean in carbon dioxide and/or rich in nitrogen (e.g., a CO₂ lean, N₂ rich stream). Each stream 95 (e.g., 96, 97, and 98) may include a gas dehydration unit, a filter, a gas compressor, or any combination thereof, to facilitate delivery of the stream 95 to a target system. In certain embodiments, the CO₂ rich, N₂ lean stream 96 may have a CO₂ purity or concentration level of greater than approximately 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99 percent by volume, and a N₂ purity or concentration level of less than approximately 1, 2, 3, 4, 5, 10, 15, 20, 25, or 30 percent by volume. In contrast, the CO₂ lean, N₂ rich stream 98 may have a CO₂ purity or concentration level of less than approximately 1, 2, 3, 4, 5, 10, 15, 20, 25, or 30 percent by volume, and a N₂ purity or concentration level of greater than approximately 70, 75, 80, 85, 90, 95, 96, 97, 98, or 99 percent by volume. The intermediate concentration CO₂, N₂ stream 97 may have a CO₂ purity or concentration level and/or a N₂ purity or concentration level of between approximately 30 to 70, 35 to 65, 40 to 60, or 45 to 55 percent by volume. Although the foregoing ranges are merely non-limiting examples, the CO₂ rich, N₂ lean stream 96 and the CO₂ lean, N₂ rich stream 98 may be particularly well suited for use with the EOR system 18 and the other systems 84. However, any of these rich, lean, or intermediate concentration CO₂ streams 95 may be used, alone or in various combinations, with the EOR system 18 and the other systems 84. For example, the EOR system 18 and the other systems

84 (e.g., the pipeline 86, storage tank 88, and the carbon sequestration system 90) each may receive one or more CO₂ rich, N₂ lean streams 96, one or more CO₂ lean, N₂ rich streams 98, one or more intermediate concentration CO₂, N₂ streams 97, and one or more untreated exhaust gas 42 streams (i.e., bypassing the EG treatment system 82).

[0043] The EG extraction system 80 extracts the exhaust gas 42 at one or more extraction points 76 along the compressor section, the combustor section, and/or the turbine section, such that the exhaust gas 42 may be used in the EOR system 18 and other systems 84 at suitable temperatures and pressures. The EG extraction system 80 and/or the EG treatment system 82 also may circulate fluid flows (e.g., exhaust gas 42) to and from the EG processing system 54. For example, a portion of the exhaust gas 42 passing through the EG processing system 54 may be extracted by the EG extraction system 80 for use in the EOR system 18 and the other systems 84. In certain embodiments, the EG supply system 78 and the EG processing system 54 may be independent or integral with one another, and thus may use independent or common subsystems. For example, the EG treatment system 82 may be used by both the EG supply system 78 and the EG processing system 54. Exhaust gas 42 extracted from the EG processing system 54 may undergo multiple stages of gas treatment, such as one or more stages of gas treatment in the EG processing system 54 followed by one or more additional stages of gas treatment in the EG treatment system 82.

[0044] At each extraction point 76, the extracted exhaust gas 42 may be substantially free of oxidant 68 and fuel 70 (e.g., unburnt fuel or hydrocarbons) due to substantially stoichiometric combustion and/or gas treatment in the EG processing system 54. Furthermore, depending on the target system, the extracted exhaust gas 42 may undergo further treatment in the EG treatment system 82 of the EG supply system 78, thereby further reducing any residual oxidant 68, fuel 70, or other undesirable products of combustion. For example, either before or after treatment in the EG treatment system 82, the extracted exhaust gas 42 may have less than 1, 2, 3, 4, or 5 percent by volume of oxidant (e.g., oxygen), unburnt fuel or hydrocarbons (e.g., HCs), nitrogen oxides (e.g., NO_X), carbon monoxide (CO), sulfur oxides (e.g., SO_X), hydrogen, and other products of incomplete combustion. By further example,

either before or after treatment in the EG treatment system 82, the extracted exhaust gas 42 may have less than approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 200, 300, 400, 500, 1000, 2000, 3000, 4000, or 5000 parts per million by volume (ppmv) of oxidant (e.g., oxygen), unburnt fuel or hydrocarbons (e.g., HCs), nitrogen oxides (e.g., NO_X), carbon monoxide (CO), sulfur oxides (e.g., SO_X), hydrogen, and other products of incomplete combustion. Thus, the exhaust gas 42 is particularly well suited for use with the EOR system 18.

[0045] The EGR operation of the turbine system 52 specifically enables the exhaust extraction at a multitude of locations 76. For example, the compressor section of the system 52 may be used to compress the exhaust gas 66 without any oxidant 68 (i.e., only compression of the exhaust gas 66), such that a substantially oxygen-free exhaust gas 42 may be extracted from the compressor section and/or the combustor section prior to entry of the oxidant 68 and the fuel 70. The extraction points 76 may be located at interstage ports between adjacent compressor stages, at ports along the compressor discharge casing, at ports along each combustor in the combustor section, or any combination thereof. In certain embodiments, the exhaust gas 66 may not mix with the oxidant 68 and fuel 70 until it reaches the head end portion and/or fuel nozzles of each combustor in the combustor section. Furthermore, one or more flow separators (e.g., walls, dividers, baffles, or the like) may be used to isolate the oxidant 68 and the fuel 70 from the extraction points 76. With these flow separators, the extraction points 76 may be disposed directly along a wall of each combustor in the combustor section.

[0046] Once the exhaust gas 66, oxidant 68, and fuel 70 flow through the head end portion (e.g., through fuel nozzles) into the combustion portion (e.g., combustion chamber) of each combustor, the SEGR gas turbine system 52 is controlled to provide a substantially stoichiometric combustion of the exhaust gas 66, oxidant 68, and fuel 70. For example, the system 52 may maintain an equivalence ratio of approximately 0.95 to approximately 1.05. As a result, the products of combustion of the mixture of exhaust gas 66, oxidant 68, and fuel 70 in each combustor is substantially free of oxygen and unburnt fuel. Thus, the products of combustion (or exhaust gas) may be extracted from the turbine section of the SEGR gas turbine system 52 for use as the

exhaust gas 42 routed to the EOR system 18. Along the turbine section, the extraction points 76 may be located at any turbine stage, such as interstage ports between adjacent turbine stages. Thus, using any of the foregoing extraction points 76, the turbine-based service system 14 may generate, extract, and deliver the exhaust gas 42 to the hydrocarbon production system 12 (e.g., the EOR system 18) for use in the production of oil/gas 48 from the subterranean reservoir 20.

[0047] FIG. 2 is a diagram of an embodiment of the system 10 of FIG. 1, illustrating a control system 100 coupled to the turbine-based service system 14 and the hydrocarbon production system 12. In the illustrated embodiment, the turbine-based service system 14 includes a combined cycle system 102, which includes the SEGR gas turbine system 52 as a topping cycle, a steam turbine 104 as a bottoming cycle, and the HRSG 56 to recover heat from the exhaust gas 60 to generate the steam 62 for driving the steam turbine 104. Again, the SEGR gas turbine system 52 receives, mixes, and stoichiometrically combusts the exhaust gas 66, the oxidant 68, and the fuel 70 (e.g., premix and/or diffusion flames), thereby producing the exhaust gas 60, the mechanical power 72, the electrical power 74, and/or the water 64. For example, the SEGR gas turbine system 52 may drive one or more loads or machinery 106, such as an electrical generator, an oxidant compressor (e.g., a main air compressor), a gear box, a pump, equipment of the hydrocarbon production system 12, or any combination thereof. In some embodiments, the machinery 106 may include other drives, such as electrical motors or steam turbines (e.g., the steam turbine 104), in tandem with the SEGR gas turbine system 52. Accordingly, an output of the machinery 106 driven by the SEGR gas turbines system 52 (and any additional drives) may include the mechanical power 72 and the electrical power 74. The mechanical power 72 and/or the electrical power 74 may be used on-site for powering the hydrocarbon production system 12, the electrical power 74 may be distributed to the power grid, or any combination thereof. The output of the machinery 106 also may include a compressed fluid, such as a compressed oxidant 68 (e.g., air or oxygen), for intake into the combustion section of the SEGR gas turbine system 52. Each of these outputs (e.g., the exhaust gas 60, the mechanical power 72,

the electrical power 74, and/or the water 64) may be considered a service of the turbine-based service system 14.

[0048] The SEGR gas turbine system 52 produces the exhaust gas 42, 60, which may be substantially free of oxygen, and routes this exhaust gas 42, 60 to the EG processing system 54 and/or the EG supply system 78. The EG supply system 78 may treat and delivery the exhaust gas 42 (e.g., streams 95) to the hydrocarbon production system 12 and/or the other systems 84. As discussed above, the EG processing system 54 may include the HRSG 56 and the EGR system 58. The HRSG 56 may include one or more heat exchangers, condensers, and various heat recovery equipment, which may be used to recover or transfer heat from the exhaust gas 60 to water 108 to generate the steam 62 for driving the steam turbine 104. Similar to the SEGR gas turbine system 52, the steam turbine 104 may drive one or more loads or machinery 106, thereby generating the mechanical power 72 and the electrical power 74. In the illustrated embodiment, the SEGR gas turbine system 52 and the steam turbine 104 are arranged in tandem to drive the same machinery 106. However, in other embodiments, the SEGR gas turbine system 52 and the steam turbine 104 may separately drive different machinery 106 to independently generate mechanical power 72 and/or electrical power 74. As the steam turbine 104 is driven by the steam 62 from the HRSG 56, the steam 62 gradually decreases in temperature and pressure. Accordingly, the steam turbine 104 recirculates the used steam 62 and/or water 108 back into the HRSG 56 for additional steam generation via heat recovery from the exhaust gas 60. In addition to steam generation, the HRSG 56, the EGR system 58, and/or another portion of the EG processing system 54 may produce the water 64, the exhaust gas 42 for use with the hydrocarbon production system 12, and the exhaust gas 66 for use as an input into the SEGR gas turbine system 52. For example, the water 64 may be a treated water 64, such as a desalinated water for use in other applications. The desalinated water may be particularly useful in regions of low water availability. Regarding the exhaust gas 60, embodiments of the EG processing system 54 may be configured to recirculate the exhaust gas 60 through the EGR system 58 with or without passing the exhaust gas 60 through the HRSG 56.

[0049] In the illustrated embodiment, the SEGR gas turbine system 52 has an exhaust recirculation path 110, which extends from an exhaust outlet to an exhaust inlet of the system 52. Along the path 110, the exhaust gas 60 passes through the EG processing system 54, which includes the HRSG 56 and the EGR system 58 in the illustrated embodiment. The EGR system 58 may include one or more conduits, valves, blowers, gas treatment systems (e.g., filters, particulate removal units, gas separation units, gas purification units, heat exchangers, heat recovery units such as heat recovery steam generators, moisture removal units, catalyst units, chemical injection units, or any combination thereof) in series and/or parallel arrangements along the path 110. In other words, the EGR system 58 may include any flow control components, pressure control components, temperature control components, moisture control components, and gas composition control components along the exhaust recirculation path 110 between the exhaust outlet and the exhaust inlet of the system 52. Accordingly, in embodiments with the HRSG 56 along the path 110, the HRSG 56 may be considered a component of the EGR system 58. However, in certain embodiments, the HRSG 56 may be disposed along an exhaust path independent from the exhaust recirculation path 110. Regardless of whether the HRSG 56 is along a separate path or a common path with the EGR system 58, the HRSG 56 and the EGR system 58 intake the exhaust gas 60 and output either the recirculated exhaust gas 66, the exhaust gas 42 for use with the EG supply system 78 (e.g., for the hydrocarbon production system 12 and/or other systems 84), or another output of exhaust gas. Again, the SEGR gas turbine system 52 intakes, mixes, and stoichiometrically combusts the exhaust gas 66, the oxidant 68, and the fuel 70 (e.g., premixed and/or diffusion flames) to produce a substantially oxygen-free and fuel-free exhaust gas 60 for distribution to the EG processing system 54, the hydrocarbon production system 12, or other systems 84.

[0050] As noted above with reference to FIG. 1, the hydrocarbon production system 12 may include a variety of equipment to facilitate the recovery or production of oil/gas 48 from a subterranean reservoir 20 through an oil/gas well 26. For example, the hydrocarbon production system 12 may include the EOR system 18 having the fluid injection system 34. In the illustrated embodiment, the fluid injection

system 34 includes an exhaust gas injection EOR system 112 and a steam injection EOR system 114. Although the fluid injection system 34 may receive fluids from a variety of sources, the illustrated embodiment may receive the exhaust gas 42 and the steam 62 from the turbine-based service system 14. The exhaust gas 42 and/or the steam 62 produced by the turbine-based service system 14 also may be routed to the hydrocarbon production system 12 for use in other oil/gas systems 116.

[0051] The quantity, quality, and flow of the exhaust gas 42 and/or the steam 62 may be controlled by the control system 100. The control system 100 may be dedicated entirely to the turbine-based service system 14, or the control system 100 may optionally also provide control (or at least some data to facilitate control) for the hydrocarbon production system 12 and/or other systems 84. In the illustrated embodiment, the control system 100 includes a controller 118 having a processor 120, a memory 122, a steam turbine control 124, a SEGR gas turbine system control 126, and a machinery control 128. The processor 120 may include a single processor or two or more redundant processors, such as triple redundant processors for control of the turbine-based service system 14. The memory 122 may include volatile and/or non-volatile memory. For example, the memory 122 may include one or more hard drives, flash memory, read-only memory, random access memory, or any combination thereof. The controls 124, 126, and 128 may include software and/or hardware controls. For example, the controls 124, 126, and 128 may include various instructions or code stored on the memory 122 and executable by the processor 120. The control 124 is configured to control operation of the steam turbine 104, the SEGR gas turbine system control 126 is configured to control the system 52, and the machinery control 128 is configured to control the machinery 106. Thus, the controller 118 (e.g., controls 124, 126, and 128) may be configured to coordinate various sub-systems of the turbine-based service system 14 to provide a suitable stream of the exhaust gas 42 to the hydrocarbon production system 12.

[0052] In certain embodiments of the control system 100, each element (e.g., system, subsystem, and component) illustrated in the drawings or described herein includes (e.g., directly within, upstream, or downstream of such element) one or more industrial control features, such as sensors and control devices, which are

communicatively coupled with one another over an industrial control network along with the controller 118. For example, the control devices associated with each element may include a dedicated device controller (e.g., including a processor, memory, and control instructions), one or more actuators, valves, switches, and industrial control equipment, which enable control based on sensor feedback 130, control signals from the controller 118, control signals from a user, or any combination thereof. Thus, any of the control functionality described herein may be implemented with control instructions stored and/or executable by the controller 118, dedicated device controllers associated with each element, or a combination thereof.

[0053] In order to facilitate such control functionality, the control system 100 includes one or more sensors distributed throughout the system 10 to obtain the sensor feedback 130 for use in execution of the various controls, e.g., the controls 124, 126, and 128. For example, the sensor feedback 130 may be obtained from sensors distributed throughout the SEGR gas turbine system 52, the machinery 106, the EG processing system 54, the steam turbine 104, the hydrocarbon production system 12, or any other components throughout the turbine-based service system 14 or the hydrocarbon production system 12. For example, the sensor feedback 130 may include temperature feedback, pressure feedback, flow rate feedback, flame temperature feedback, combustion dynamics feedback, intake oxidant composition feedback, intake fuel composition feedback, exhaust composition feedback, the output level of mechanical power 72, the output level of electrical power 74, the output quantity of the exhaust gas 42, 60, the output quantity or quality of the water 64, or any combination thereof. For example, the sensor feedback 130 may include a composition of the exhaust gas 42, 60 to facilitate stoichiometric combustion in the SEGR gas turbine system 52. For example, the sensor feedback 130 may include feedback from one or more intake oxidant sensors along an oxidant supply path of the oxidant 68, one or more intake fuel sensors along a fuel supply path of the fuel 70, and one or more exhaust emissions sensors disposed along the exhaust recirculation path 110 and/or within the SEGR gas turbine system 52. The intake oxidant sensors, intake fuel sensors, and exhaust emissions sensors may include temperature sensors, pressure sensors, flow rate sensors, and composition sensors. The emissions sensors

may include sensors for nitrogen oxides (e.g., NO_X sensors), carbon oxides (e.g., CO sensors and CO₂ sensors), sulfur oxides (e.g., SO_X sensors), hydrogen (e.g., H₂ sensors), oxygen (e.g., O₂ sensors), unburnt hydrocarbons (e.g., HC sensors), or other products of incomplete combustion, or any combination thereof.

[0054] Using this feedback 130, the control system 100 may adjust (e.g., increase, decrease, or maintain) the intake flow of exhaust gas 66, oxidant 68, and/or fuel 70 into the SEGR gas turbine system 52 (among other operational parameters) to maintain the equivalence ratio within a suitable range, e.g., between approximately 0.95 to approximately 1.05, between approximately 0.95 to approximately 1.0, between approximately 1.0 to approximately 1.05, or substantially at 1.0. For example, the control system 100 may analyze the feedback 130 to monitor the exhaust emissions (e.g., concentration levels of nitrogen oxides, carbon oxides such as CO and CO₂, sulfur oxides, hydrogen, oxygen, unburnt hydrocarbons, and other products of incomplete combustion) and/or determine the equivalence ratio, and then control one or more components to adjust the exhaust emissions (e.g., concentration levels in the exhaust gas 42) and/or the equivalence ratio. The controlled components may include any of the components illustrated and described with reference to the drawings, including but not limited to, valves along the supply paths for the oxidant 68, the fuel 70, and the exhaust gas 66; an oxidant compressor, a fuel pump, or any components in the EG processing system 54; any components of the SEGR gas turbine system 52, or any combination thereof. The controlled components may adjust (e.g., increase, decrease, or maintain) the flow rates, temperatures, pressures, or percentages (e.g., equivalence ratio) of the oxidant 68, the fuel 70, and the exhaust gas 66 that combust within the SEGR gas turbine system 52. The controlled components also may include one or more gas treatment systems, such as catalyst units (e.g., oxidation catalyst units), supplies for the catalyst units (e.g., oxidation fuel, heat, electricity, etc.), gas purification and/or separation units (e.g., solvent based separators, absorbers, flash tanks, etc.), and filtration units. The gas treatment systems may help reduce various exhaust emissions along the exhaust recirculation path 110, a vent path (e.g., exhausted into the atmosphere), or an extraction path to the EG supply system 78.

[0055] In certain embodiments, the control system 100 may analyze the feedback 130 and control one or more components to maintain or reduce emissions levels (e.g., concentration levels in the exhaust gas 42, 60, 95) to a target range, such as less than approximately 10, 20, 30, 40, 50, 100, 200, 300, 400, 500, 1000, 2000, 3000, 4000, 5000, or 10000 parts per million by volume (ppmv). These target ranges may be the same or different for each of the exhaust emissions, e.g., concentration levels of nitrogen oxides, carbon monoxide, sulfur oxides, hydrogen, oxygen, unburnt hydrocarbons, and other products of incomplete combustion. For example, depending on the equivalence ratio, the control system 100 may selectively control exhaust emissions (e.g., concentration levels) of oxidant (e.g., oxygen) within a target range of less than approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 250, 500, 750, or 1000 ppmv; carbon monoxide (CO) within a target range of less than approximately 20, 50, 100, 200, 500, 1000, 2500, or 5000 ppmv; and nitrogen oxides (NO_X) within a target range of less than approximately 50, 100, 200, 300, 400, or 500 ppmv. In certain embodiments operating with a substantially stoichiometric equivalence ratio, the control system 100 may selectively control exhaust emissions (e.g., concentration levels) of oxidant (e.g., oxygen) within a target range of less than approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, or 100 ppmv; and carbon monoxide (CO) within a target range of less than approximately 500, 1000, 2000, 3000, 4000, or 5000 ppmv. In certain embodiments operating with a fuel-lean equivalence ratio (e.g., between approximately 0.95 to 1.0), the control system 100 may selectively control exhaust emissions (e.g., concentration levels) of oxidant (e.g., oxygen) within a target range of less than approximately 500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, or 1500 ppmv; carbon monoxide (CO) within a target range of less than approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 150, or 200 ppmv; and nitrogen oxides (e.g., NO_X) within a target range of less than approximately 50, 100, 150, 200, 250, 300, 350, or 400 ppmv. The foregoing target ranges are merely examples, and are not intended to limit the scope of the disclosed embodiments.

[0056] The control system 100 also may be coupled to a local interface 132 and a remote interface 134. For example, the local interface 132 may include a computer workstation disposed on-site at the turbine-based service system 14 and/or the

hydrocarbon production system 12. In contrast, the remote interface 134 may include a computer workstation disposed off-site from the turbine-based service system 14 and the hydrocarbon production system 12, such as through an internet connection. These interfaces 132 and 134 facilitate monitoring and control of the turbine-based service system 14, such as through one or more graphical displays of sensor feedback 130, operational parameters, and so forth.

[0057] Again, as noted above, the controller 118 includes a variety of controls 124, 126, and 128 to facilitate control of the turbine-based service system 14. The steam turbine control 124 may receive the sensor feedback 130 and output control commands to facilitate operation of the steam turbine 104. For example, the steam turbine control 124 may receive the sensor feedback 130 from the HRSG 56, the machinery 106, temperature and pressure sensors along a path of the steam 62, temperature and pressure sensors along a path of the water 108, and various sensors indicative of the mechanical power 72 and the electrical power 74. Likewise, the SEGR gas turbine system control 126 may receive sensor feedback 130 from one or more sensors disposed along the SEGR gas turbine system 52, the machinery 106, the EG processing system 54, or any combination thereof. For example, the sensor feedback 130 may be obtained from temperature sensors, pressure sensors, clearance sensors, vibration sensors, flame sensors, fuel composition sensors, exhaust gas composition sensors, or any combination thereof, disposed within or external to the SEGR gas turbine system 52. Finally, the machinery control 128 may receive sensor feedback 130 from various sensors associated with the mechanical power 72 and the electrical power 74, as well as sensors disposed within the machinery 106. Each of these controls 124, 126, and 128 uses the sensor feedback 130 to improve operation of the turbine-based service system 14.

[0058] In the illustrated embodiment, the SEGR gas turbine system control 126 may execute instructions to control the quantity and quality of the exhaust gas 42, 60, 95 in the EG processing system 54, the EG supply system 78, the hydrocarbon production system 12, and/or the other systems 84. For example, the SEGR gas turbine system control 126 may maintain a level of oxidant (e.g., oxygen) and/or unburnt fuel in the exhaust gas 60 below a threshold suitable for use with the exhaust

gas injection EOR system 112. In certain embodiments, the threshold levels may be less than 1, 2, 3, 4, or 5 percent of oxidant (e.g., oxygen) and/or unburnt fuel by volume of the exhaust gas 42, 60; or the threshold levels of oxidant (e.g., oxygen) and/or unburnt fuel (and other exhaust emissions) may be less than approximately 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 200, 300, 400, 500, 1000, 2000, 3000, 4000, or 5000 parts per million by volume (ppmv) in the exhaust gas 42, 60. By further example, in order to achieve these low levels of oxidant (e.g., oxygen) and/or unburnt fuel, the SEGR gas turbine system control 126 may maintain an equivalence ratio for combustion in the SEGR gas turbine system 52 between approximately 0.95 and approximately 1.05. The SEGR gas turbine system control 126 also may control the EG extraction system 80 and the EG treatment system 82 to maintain the temperature, pressure, flow rate, and gas composition of the exhaust gas 42, 60, 95 within suitable ranges for the exhaust gas injection EOR system 112, the pipeline 86, the storage tank 88, and the carbon sequestration system 90. As discussed above, the EG treatment system 82 may be controlled to purify and/or separate the exhaust gas 42 into one or more gas streams 95, such as the CO₂ rich, N₂ lean stream 96, the intermediate concentration CO₂, N₂ stream 97, and the CO₂ lean, N₂ rich stream 98. In addition to controls for the exhaust gas 42, 60, and 95, the controls 124, 126, and 128 may execute one or more instructions to maintain the mechanical power 72 within a suitable power range, or maintain the electrical power 74 within a suitable frequency and power range.

[0059] FIG. 3 is a diagram of embodiment of the system 10, further illustrating details of the SEGR gas turbine system 52 for use with the hydrocarbon production system 12 and/or other systems 84. In the illustrated embodiment, the SEGR gas turbine system 52 includes a gas turbine engine 150 coupled to the EG processing system 54. The illustrated gas turbine engine 150 includes a compressor section 152, a combustor section 154, and an expander section or turbine section 156. The compressor section 152 includes one or more exhaust gas compressors or compressor stages 158, such as 1 to 20 stages of rotary compressor blades disposed in a series arrangement. Likewise, the combustor section 154 includes one or more combustors 160, such as 1 to 20 combustors 160 distributed circumferentially about a rotational

axis 162 of the SEGR gas turbine system 52. Furthermore, each combustor 160 may include one or more fuel nozzles 164 configured to inject the exhaust gas 66, the oxidant 68, and/or the fuel 70. For example, a head end portion 166 of each combustor 160 may house 1, 2, 3, 4, 5, 6, or more fuel nozzles 164, which may inject streams or mixtures of the exhaust gas 66, the oxidant 68, and/or the fuel 70 into a combustion portion 168 (e.g., combustion chamber) of the combustor 160.

[0060] The fuel nozzles 164 may include any combination of premix fuel nozzles 164 (e.g., configured to premix the oxidant 68 and fuel 70 for generation of an oxidant/fuel premix flame) and/or diffusion fuel nozzles 164 (e.g., configured to inject separate flows of the oxidant 68 and fuel 70 for generation of an oxidant/fuel diffusion flame). Embodiments of the premix fuel nozzles 164 may include swirl vanes, mixing chambers, or other features to internally mix the oxidant 68 and fuel 70 within the nozzles 164. The premix fuel nozzles 164 also may receive at least some partially mixed oxidant 68 and fuel 70. In certain embodiments, each diffusion fuel nozzle 164 may isolate flows of the oxidant 68 and the fuel 70 until the point of injection, while also isolating flows of one or more diluents (e.g., the exhaust gas 66, steam, nitrogen, or another inert gas) until the point of injection. In other embodiments, each diffusion fuel nozzle 164 may isolate flows of the oxidant 68 and the fuel 70 until the point of injection, while partially mixing one or more diluents (e.g., the exhaust gas 66, steam, nitrogen, or another inert gas) with the oxidant 68 and/or the fuel 70 prior to the point of injection. In addition, one or more diluents (e.g., the exhaust gas 66, steam, nitrogen, or another inert gas) may be injected into the combustor (e.g., into the hot products of combustion) either at or downstream from the combustion zone, thereby helping to reduce the temperature of the hot products of combustion and reduce emissions of NO_x (e.g., NO and NO₂). Regardless of the type of fuel nozzle 164, the SEGR gas turbine system 52 may be controlled to provide substantially stoichiometric combustion of the oxidant 68 and fuel 70.

[0061] In operation, as illustrated, the compressor section 152 receives and compresses the exhaust gas 66 from the EG processing system 54, and outputs a compressed exhaust gas 170 to each of the combustors 160 in the combustor section

154. Upon combustion of the fuel 60, oxidant 68, and exhaust gas 170 within each combustor 160, additional exhaust gas or products of combustion 172 (i.e., combustion gas) is routed into the turbine section 156. Similar to the compressor section 152, the turbine section 156 includes one or more turbines or turbine stages 174, which may include a series of rotary turbine blades. These turbine blades are then driven by the products of combustion 172 generated in the combustor section 154, thereby driving rotation of a shaft 176 coupled to the machinery 106. Again, the machinery 106 may include a variety of equipment coupled to either end of the SEGR gas turbine system 52, such as machinery 106, 178 coupled to the turbine section 156 and/or machinery 106, 180 coupled to the compressor section 152. In certain embodiments, the machinery 106, 178, 180 may include one or more electrical generators, oxidant compressors for the oxidant 68, fuel pumps for the fuel 70, gear boxes, or additional drives (e.g. steam turbine 104, electrical motor, etc.) coupled to the SEGR gas turbine system 52. As illustrated, the turbine section 156 outputs the exhaust gas 60 to recirculate along the exhaust recirculation path 110 from an exhaust outlet 182 of the turbine section 156 to an exhaust inlet 184 into the compressor section 152. Along the exhaust recirculation path 110, the exhaust gas 60 passes through the EG processing system 54 (e.g., the HRSG 56 and/or the EGR system 58) as discussed in detail above.

[0062] Again, each combustor 160 in the combustor section 154 receives, mixes, and stoichiometrically combusts the compressed exhaust gas 170, the oxidant 68, and the fuel 70 to produce the additional exhaust gas or products of combustion 172 to drive the turbine section 156. In certain embodiments, the oxidant 68 is compressed by an oxidant compression system 186, such as a main air compression (MAC) system. The oxidant compression system 186 includes an oxidant compressor 188 coupled to a drive 190. For example, the drive 190 may include an electric motor, a combustion engine, or any combination thereof. In certain embodiments, the drive 190 may be a turbine engine, such as the gas turbine engine 150. Accordingly, the oxidant compression system 186 may be an integral part of the machinery 106. In other words, the compressor 188 may be directly or indirectly driven by the mechanical power 72 supplied by the shaft 176 of the gas turbine engine 150. In such

an embodiment, the drive 190 may be excluded, because the compressor 188 relies on the power output from the turbine engine 150. However, in the illustrated embodiment, the oxidant compression system 186 is separate from the machinery 106. In either embodiment, the compression system 186 compresses and supplies the oxidant 68 to the fuel nozzles 164 and the combustors 160. As discussed in further detail below, the oxidant 68 and the fuel 70 may be supplied to the gas turbine engine 150 at locations specifically selected to facilitate isolation and extraction of the compressed exhaust gas 170 without any oxidant 68 or fuel 70 degrading the quality of the exhaust gas 170.

[0063] The EG supply system 78, as illustrated in FIG. 3, is disposed between the gas turbine engine 150 and the target systems (e.g., the hydrocarbon production system 12 and the other systems 84). In particular, the EG supply system 78, e.g., the EG extraction system (EGES) 80, may be coupled to the gas turbine engine 150 at one or more extraction points 76 along the compressor section 152, the combustor section 154, and/or the turbine section 156. For example, the extraction points 76 may be located between adjacent compressor stages, such as 2, 3, 4, 5, 6, 7, 8, 9, or 10 interstage extraction points 76 between compressor stages. Each of these interstage extraction points 76 provides a different temperature and pressure of the extracted exhaust gas 42. Similarly, the extraction points 76 may be located between adjacent turbine stages, such as 2, 3, 4, 5, 6, 7, 8, 9, or 10 interstage extraction points 76 between turbine stages. Each of these interstage extraction points 76 provides a different temperature and pressure of the extracted exhaust gas 42. By further example, the extraction points 76 may be located at a multitude of locations throughout the combustor section 154, which may provide different temperatures, pressures, flow rates, and gas compositions. Each of these extraction points 76 may include an EG extraction conduit, one or more valves, sensors, and controls, which may be used to selectively control the flow of the extracted exhaust gas 42 to the EG supply system 78.

[0064] The extracted exhaust gas 42, which is distributed by the EG supply system 78, has a controlled composition suitable for the target systems (e.g., the hydrocarbon production system 12 and the other systems 84). For example, at each of these

extraction points 76, the exhaust gas 170 may be substantially isolated from injection points (or flows) of the oxidant 68 and the fuel 70. In other words, the EG supply system 78 may be specifically designed to extract the exhaust gas 170 from the gas turbine engine 150 without any added oxidant 68 or fuel 70. Furthermore, in view of the stoichiometric combustion in each of the combustors 160, the extracted exhaust gas 42 may be substantially free of oxygen and fuel. The EG supply system 78 may route the extracted exhaust gas 42 directly or indirectly to the hydrocarbon production system 12 and/or other systems 84 for use in various processes, such as enhanced oil recovery, carbon sequestration, storage, or transport to an offsite location. However, in certain embodiments, the EG supply system 78 includes the EG treatment system (EGTS) 82 for further treatment of the exhaust gas 42, prior to use with the target systems. For example, the EG treatment system 82 may purify and/or separate the exhaust gas 42 into one or more streams 95, such as the CO₂ rich, N₂ lean stream 96, the intermediate concentration CO₂, N₂ stream 97, and the CO₂ lean, N₂ rich stream 98. These treated exhaust gas streams 95 may be used individually, or in any combination, with the hydrocarbon production system 12 and the other systems 84 (e.g., the pipeline 86, the storage tank 88, and the carbon sequestration system 90).

[0065] Similar to the exhaust gas treatments performed in the EG supply system 78, the EG processing system 54 may include a plurality of exhaust gas (EG) treatment components 192, such as indicated by element numbers 194, 196, 198, 200, 202, 204, 206, 208, and 210. These EG treatment components 192 (e.g., 194 through 210) may be disposed along the exhaust recirculation path 110 in one or more series arrangements, parallel arrangements, or any combination of series and parallel arrangements. For example, the EG treatment components 192 (e.g., 194 through 210) may include any series and/or parallel arrangement, in any order, of: one or more heat exchangers (e.g., heat recovery units such as heat recovery steam generators, condensers, coolers, or heaters), catalyst systems (e.g., oxidation catalyst systems), particulate and/or water removal systems (e.g., inertial separators, coalescing filters, water impermeable filters, and other filters), chemical injection systems, solvent based treatment systems (e.g., absorbers, flash tanks, etc.), carbon capture systems, gas separation systems, gas purification systems, and/or a solvent based treatment

system, or any combination thereof. In certain embodiments, the catalyst systems may include an oxidation catalyst, a carbon monoxide reduction catalyst, a nitrogen oxides reduction catalyst, an aluminum oxide, a zirconium oxide, a silicone oxide, a titanium oxide, a platinum oxide, a palladium oxide, a cobalt oxide, or a mixed metal oxide, or a combination thereof. The disclosed embodiments are intended to include any and all permutations of the foregoing components 192 in series and parallel arrangements. As illustrated below, TABLE 1 depicts some non-limiting examples of arrangements of the components 192 along the exhaust recirculation path 110.

194	196	198	200	202	204	206	208	210
CU	HRU	BB	MRU	PRU				
CU	HRU	HRU	BB	MRU	PRU	DIL		
CU	HRSG	HRSG	BB	MRU	PRU			
OCU	HRU	OCU	HRU	OCU	BB	MRU	PRU	
HRU CU	HRU	BB	MRU	PRU				
HRSG OCU	HRSG	BB	MRU	PRU	DIL			
OCU	HRSG OCU	OCU	HRSG OCU	OCU	BB	MRU	PRU	DIL
OCU	HRSG ST	HRSG ST	BB	COND	INER	WFIL	CFIL	DIL
OCU HRSG ST	OCU HRSG ST	BB	COND	INER	FIL	DIL		
OCU	HRSG ST	HRSG ST	OCU	BB	MRU HE COND	MRU WFIL	PRU INER	PRU FIL CFIL
CU	HRU COND	HRU COND	HRU COND	BB	MRU HE COND WFIL	PRU INER	PRU FIL CFIL	DIL

TABLE 1

[0066] As illustrated above in TABLE 1, a catalyst unit is represented by CU, an oxidation catalyst unit is represented by OCU, a booster blower is represented by BB, a heat exchanger is represented by HX, a heat recovery unit is represented by HRU, a heat recovery steam generator is represented by HRSG, a condenser is represented by COND, a steam turbine is represented by ST, a particulate removal unit is represented by PRU, a moisture removal unit is represented by MRU, a filter is represented by FIL, a coalescing filter is represented by CFIL, a water impermeable filter is represented by WFIL, an inertial separator is represented by INER, and a diluent supply system (e.g., steam, nitrogen, or other inert gas) is represented by DIL. Although TABLE 1 illustrates the components 192 in sequence from the exhaust outlet 182 of the turbine section 156 toward the exhaust inlet 184 of the compressor section 152, TABLE 1 is also intended to cover the reverse sequence of the illustrated components 192. In TABLE 1, any cell including two or more components is intended to cover an integrated unit with the components, a parallel arrangement of the components, or any combination thereof. Furthermore, in context of TABLE 1, the HRU, the HRSG, and the COND are examples of the HE; the HRSG is an example of the HRU; the COND, WFIL, and CFIL are examples of the WRU; the INER, FIL, WFIL, and CFIL are examples of the PRU; and the WFIL and CFIL are examples of the FIL. Again, TABLE 1 is not intended to exclude any non-illustrated permutations of the components 192. In certain embodiments, the illustrated components 192 (e.g., 194 through 210) may be partially or completed integrated within the HRSG 56, the EGR system 58, or any combination thereof. These EG treatment components 192 may enable feedback control of temperature, pressure, flow rate, and gas composition, while also removing moisture and particulates from the exhaust gas 60. Furthermore, the treated exhaust gas 60 may be extracted at one or more extraction points 76 for use in the EG supply system 78 and/or recirculated to the exhaust inlet 184 of the compressor section 152.

[0067] As the treated, recirculated exhaust gas 66 passes through the compressor section 152, the SEGR gas turbine system 52 may bleed off a portion of the compressed exhaust gas along one or more lines 212 (e.g., bleed conduits or bypass conduits). Each line 212 may route the exhaust gas into one or more heat exchangers

214 (e.g., cooling units), thereby cooling the exhaust gas for recirculation back into the SEGR gas turbine system 52. For example, after passing through the heat exchanger 214, a portion of the cooled exhaust gas may be routed to the turbine section 156 along line 212 for cooling and/or sealing of the turbine casing, turbine shrouds, bearings, and other components. In such an embodiment, the SEGR gas turbine system 52 does not route any oxidant 68 (or other potential contaminants) through the turbine section 156 for cooling and/or sealing purposes, and thus any leakage of the cooled exhaust gas will not contaminate the hot products of combustion (e.g., working exhaust gas) flowing through and driving the turbine stages of the turbine section 156. By further example, after passing through the heat exchanger 214, a portion of the cooled exhaust gas may be routed along line 216 (e.g., return conduit) to an upstream compressor stage of the compressor section 152, thereby improving the efficiency of compression by the compressor section 152. In such an embodiment, the heat exchanger 214 may be configured as an interstage cooling unit for the compressor section 152. In this manner, the cooled exhaust gas helps to increase the operational efficiency of the SEGR gas turbine system 52, while simultaneously helping to maintain the purity of the exhaust gas (e.g., substantially free of oxidant and fuel).

[0068] FIG. 4 is a flow chart of an embodiment of an operational process 220 of the system 10 illustrated in FIGS 1-3. In certain embodiments, the process 220 may be a computer implemented process, which accesses one or more instructions stored on the memory 122 and executes the instructions on the processor 120 of the controller 118 shown in FIG. 2. For example, each step in the process 220 may include instructions executable by the controller 118 of the control system 100 described with reference to FIG. 2.

[0069] The process 220 may begin by initiating a startup mode of the SEGR gas turbine system 52 of FIGS. 1-3, as indicated by block 222. For example, the startup mode may involve a gradual ramp up of the SEGR gas turbine system 52 to maintain thermal gradients, vibration, and clearance (e.g., between rotating and stationary parts) within acceptable thresholds. For example, during the startup mode 222, the process 220 may begin to supply a compressed oxidant 68 to the combustors 160 and

the fuel nozzles 164 of the combustor section 154, as indicated by block 224. In certain embodiments, the compressed oxidant may include a compressed air, oxygen, oxygen-enriched air, oxygen-reduced air, oxygen-nitrogen mixtures, or any combination thereof. For example, the oxidant 68 may be compressed by the oxidant compression system 186 illustrated in FIG. 3. The process 220 also may begin to supply fuel to the combustors 160 and the fuel nozzles 164 during the startup mode 222, as indicated by block 226. During the startup mode 222, the process 220 also may begin to supply exhaust gas (as available) to the combustors 160 and the fuel nozzles 164, as indicated by block 228. For example, the fuel nozzles 164 may produce one or more diffusion flames, premix flames, or a combination of diffusion and premix flames. During the startup mode 222, the exhaust gas 60 being generated by the gas turbine engine 156 may be insufficient or unstable in quantity and/or quality. Accordingly, during the startup mode, the process 220 may supply the exhaust gas 66 from one or more storage units (e.g., storage tank 88), the pipeline 86, other SEGR gas turbine systems 52, or other exhaust gas sources.

[0070] The process 220 may then combust a mixture of the compressed oxidant, fuel, and exhaust gas in the combustors 160 to produce hot combustion gas 172, as indicated by block 230. In particular, the process 220 may be controlled by the control system 100 of FIG. 2 to facilitate stoichiometric combustion (e.g., stoichiometric diffusion combustion, premix combustion, or both) of the mixture in the combustors 160 of the combustor section 154. However, during the startup mode 222, it may be particularly difficult to maintain stoichiometric combustion of the mixture (and thus low levels of oxidant and unburnt fuel may be present in the hot combustion gas 172). As a result, in the startup mode 222, the hot combustion gas 172 may have greater amounts of residual oxidant 68 and/or fuel 70 than during a steady state mode as discussed in further detail below. For this reason, the process 220 may execute one or more control instructions to reduce or eliminate the residual oxidant 68 and/or fuel 70 in the hot combustion gas 172 during the startup mode.

[0071] The process 220 then drives the turbine section 156 with the hot combustion gas 172, as indicated by block 232. For example, the hot combustion gas 172 may drive one or more turbine stages 174 disposed within the turbine section 156.

Downstream of the turbine section 156, the process 220 may treat the exhaust gas 60 from the final turbine stage 174, as indicated by block 234. For example, the exhaust gas treatment 234 may include filtration, catalytic reaction of any residual oxidant 68 and/or fuel 70, chemical treatment, heat recovery with the HRSG 56, and so forth. The process 220 may also recirculate at least some of the exhaust gas 60 back to the compressor section 152 of the SEGR gas turbine system 52, as indicated by block 236. For example, the exhaust gas recirculation 236 may involve passage through the exhaust recirculation path 110 having the EG processing system 54 as illustrated in FIGS. 1-3.

[0072] In turn, the recirculated exhaust gas 66 may be compressed in the compressor section 152, as indicated by block 238. For example, the SEGR gas turbine system 52 may sequentially compress the recirculated exhaust gas 66 in one or more compressor stages 158 of the compressor section 152. Subsequently, the compressed exhaust gas 170 may be supplied to the combustors 160 and fuel nozzles 164, as indicated by block 228. Steps 230, 232, 234, 236, and 238 may then repeat, until the process 220 eventually transitions to a steady state mode, as indicated by block 240. Upon the transition 240, the process 220 may continue to perform the steps 224 through 238, but may also begin to extract the exhaust gas 42 via the EG supply system 78, as indicated by block 242. For example, the exhaust gas 42 may be extracted from one or more extraction points 76 along the compressor section 152, the combustor section 154, and the turbine section 156 as indicated in FIG. 3. In turn, the process 220 may supply the extracted exhaust gas 42 from the EG supply system 78 to the hydrocarbon production system 12, as indicated by block 244. The hydrocarbon production system 12 may then inject the exhaust gas 42 into the earth 32 for enhanced oil recovery, as indicated by block 246. For example, the extracted exhaust gas 42 may be used by the exhaust gas injection EOR system 112 of the EOR system 18 illustrated in FIGS. 1-3.

[0073] FIG. 5 is a block diagram of an embodiment of the EG processing system 54 as illustrated in FIGS. 1-3. In the illustrated embodiment, the EG processing system 54 has the control system 100 coupled to a plurality of gas treatment subsystems 300, valves 302, and sensors (S) 304 distributed along the exhaust

recirculation path 110. For example, each subsystem 300 and its components 192 may include one or more of the valves 302 and the sensors 304 disposed internally within, upstream, and/or downstream of the respective subsystem 300 or component 192. Although not illustrated in FIG. 5, one or more valves 302 may be located at or near the location of each sensor 304, thereby providing greater flow control through the EG processing system 54. In operation, the control system 100 may obtain sensor feedback 130 from the sensors 304 and provide control signals 306 to the valves 302, subsystems 300, and components 192 for control of the EG processing system 54. The sensor feedback 130 also may include various sensor feedback from the SEGR gas turbine system 52, the EG supply system 78, and other components of the turbine-based service system 14.

[0074] Each of the gas treatment subsystems 300 may include one or more components to control the temperature, pressure, gas composition, moisture content, particulate content, or any combination thereof. As illustrated in FIG. 5, the gas treatment subsystems 300 include a catalyst and heat recovery (CHR) system 308, a moisture removal system (MRS) 310, and a particulate removal system (PRS) 312. The gas treatment subsystems 300 also include one or more booster blowers 314 to help increase the flow and pressure of the exhaust gas 42 along the exhaust recirculation path 110. Although the CHR 308, the booster blower 314, the MRS 310, and the PRS 312 are arranged in series in the illustrated embodiment, other embodiments may rearrange these components in other series and/or parallel configurations.

[0075] The CHR system 308 includes one or more catalyst units 316 and heat exchangers (HX) 318 disposed in series, in parallel, or integrated with one another. For example, the CHR system 308 may include a series of catalysts units 316, such as catalyst units 320, 322, 324, 326, and 328. The CHR system 308 also may include a series of heat exchangers 318, such as heat exchangers 330 and 332. The catalyst units 316 may be the same or different from one another. For example, one or more of the catalyst units 316 may include an oxidation catalyst unit (OCU) 334, which uses an oxidant fuel 336 to drive an oxidizing reaction to convert carbon monoxide (CO) and unburnt hydrocarbons (HCs) into carbon dioxide (CO₂) and water vapor.

One or more of the catalyst units 316 also may drive a reduction reaction, which converts nitrogen oxides (NO_x) into carbon dioxide (CO₂), nitrogen (N₂), and water. In the illustrated embodiment, the catalyst unit 320 is disposed upstream of the heat exchanger 330, the catalyst unit 322 is integrated within the heat exchanger 330, the catalyst unit 324 is disposed between the heat exchanger 330 and the heat exchanger 332, the catalyst unit 326 is integrated within the heat exchanger 332, and the catalyst unit 328 is disposed downstream from the heat exchanger 332. However, various embodiments of the CHR system 308 may exclude or include any one or more of the catalyst units 316, or the catalyst units 316 may be disposed in other arrangements within the CHR system 308.

[0076] The heat exchangers 318 are configured to transfer heat away from the exhaust gas 42 into one or more gases, liquids, or other fluids, such as water. In the illustrated embodiment, each heat exchanger 318 includes a heat recovery unit (HRU) 338, which is configured to recover heat from the exhaust gas 42 for use in one or more other applications. For example, the illustrated heat recovery units 338 each include a heat recovery steam generator (HRSG) 340, which is configured to recover heat from the exhaust gas 42 for the generation of steam 342. The steam 342 may be used in a variety of processes within the EG processing system 54, the EOR system 18, or elsewhere within the turbine-based service system 14. In the illustrated embodiment, each HRSG 340 supplies the steam 342 to one or more steam turbines (ST) 344, which may drive one or more loads 346 to generate mechanical power 348 and/or electrical power 350. For example, the loads 346 may include electrical generators, which enable the generation of electrical power 350. Although the CHR system 308 illustrates the catalyst units 316 and the heat exchangers 318 in a series arrangement, other embodiments of the CHR system 308 may arrange two or more of the catalyst units 316 and the heat exchangers 318 in a parallel arrangement. After the exhaust gas 42 passes through the CHR system 308, the exhaust gas 42 may then flow through one or more booster blowers 314 before passing through the moisture removal system 310 and the particulate removal system 312.

[0077] The moisture removal system (MRS) 310 may include one or more moisture removal units (MRU) 352, such as MRUs 354 and 356. In the illustrated

embodiment, the MRU 354 includes a heat exchanger 358, which may be configured to transfer heat away from the exhaust gas 42 into another gas, liquid, or other fluid, thereby cooling the exhaust gas 42 for moisture removal. For example, the heat exchanger 358 may include or be configured as a condenser 360, which functions to cool the exhaust gas 42 sufficiently to condense moisture in the exhaust gas 42 and remove the condensate as water 362. However, the MRU 354 may include a variety of cooling units (e.g., 2, 3, 4, or more condensers, chillers, etc.) to condense the moisture from the exhaust 42, thereby producing the water 362. The MRS 310 also may include other water removal technology, such as filtration units. For example, the MRU 356 may include one or more moisture removal separators or filters 364, such as a water gas separator (WGS) 366, a water impermeable filter (WFIL) 368, and a coalescing filter (CFIL) 370, which may capture and remove moisture from the exhaust gas 42 to produce an output of water 372. Although the MRS 310 illustrates the MRU 354 upstream from the MRU 356, other embodiments of the MRS 310 may position the MRU 356 upstream or parallel with the MRU 354. Furthermore, the MRS 310 may include additional moisture removal filters 364, heat exchangers 358, or any other moisture removal component. After the exhaust gas 42 is treated by the MRS 310 to remove moisture, the exhaust gas 42 may then pass through the particular removal system 312.

[0078] The particulate removal system (PRS) 312 may include one or more particulate removal units (PRU) 374, which may be arranged in series, in parallel, or any combination thereof. For example, the PRS 312 may include a PRU 376 and a PRU 378 disposed in a series arrangement. The PRU 376 may include an inertial separator 380, a gravity separator 382, or any other type of separation unit, or any combination thereof, thereby forcing a particulate 384 to separate from a flow of the exhaust gas 42. For example, the inertial separator 380 may include a centrifugal separator, which uses centrifugal force to drive the particulate 384 out of the flow of the exhaust gas 42. Similarly, the gravity separator 382 may use the force of gravity to drive the particulate 384 out of the flow of the exhaust gas 42. The PRU 378 may include one or more particulate removal filters 386, such as a first stage filter 388 and a second stage filter 390. These staged filters 388 and 390 may include progressively

finer filter media, such as membrane filters. However, the staged filters 388 and 390 may include water impermeable filters (WFIL), coalescing filters (CFIL), membrane filters, or any combination thereof. As the exhaust gas 42 passes through the first and second stage filters 388 and 390, the filters 386 capture or remove a particulate 392 from the exhaust gas 42. Although the illustrated PRS 312 has the PRU 376 upstream of the PRU 378, other embodiments may position the PRU 378 upstream or parallel with the PRU 376. After the exhaust gas 42 is treated by the PRS 312, the exhaust gas 42 may then recirculate back into the SEGR gas turbine system 52, as indicated by arrow 110.

[0079] Along the exhaust recirculation path 110, the CHR system 308, the MRS 310, the PRS 312, and the booster blower 314 may be controlled by the control system 100 to adjust the temperature, pressure, flow rate, moisture level, particulate level, and gas composition of the exhaust gas 42 prior to entry back into the SEGR gas turbine system 52. For example, the control system 100 may receive the sensor feedback 130 from various sensors 304 disposed along the exhaust recirculation path 110, thereby providing feedback indicative of emissions (e.g. concentration levels) of oxygen, carbon monoxide, hydrogen, nitrogen oxides (NO_X), unburnt hydrocarbons (HCs), sulfur oxides (SO_X), moisture, or any combination thereof. In response to the sensor feedback 130, the control system 100 may adjust (e.g., increase, decrease, or maintain) the pressure, temperature, or flow rate of the exhaust gas 66, the oxidant 68, and the fuel 70 being delivered into the SEGR gas turbine system 52 for combustion. For example, the control system 100 may be responsive to the sensor feedback 130 to adjust the valves 302 along the exhaust recirculation path 110, inlet guide vanes within the compressor section 152 of the gas turbine engine 150, a vent valve 394 leading to a vent system 396, or any combination thereof, thereby adjusting the exhaust gas 42 flow into the combustor section 154 of the gas turbine engine 150.

[0080] In the CHR system 308, the control system 100 may be responsive to sensor feedback 130 to adjust the flow of oxidant fuel 336 into each of the catalyst units 316, thereby increasing or decreasing the oxidizing reaction within each catalyst unit 316 to change the gas composition of the exhaust gas 42 that recirculates back into the SEGR gas turbine system 52. For example, the control system 100 may

increase the flow of oxidant fuel 336 to increase the oxidizing reaction within each UCU 334, thereby decreasing levels of carbon monoxide (CO) and unburnt hydrocarbons (HCs) and increasing levels of carbon dioxide (CO₂). The control system 100 also may reduce the flow of oxidant fuel 336 into each of the UCUs 334, thereby decreasing the levels of carbon dioxide (CO₂) and increasing levels of carbon monoxide (CO) and unburnt hydrocarbons (HCs). The control system 100 also may selectively increase or decrease the amount of exhaust gas flow through each of the catalyst units 316, by pass one or more of the catalyst units 316, or any combination thereof. The control system 100 also may selectively route the exhaust gas 42 through, partially bypassing, or completely bypassing, one or more of the heat exchangers 318, such as the heat recovery units 338. In this manner, the control system 100 may increase or decrease the temperature of the exhaust gas 42, while also increasing or decreasing the amount of steam generation for driving the steam turbines 344.

[0081] In the MRS 310 and the PRS 312, the control system 100 may be responsive to the sensor feedback 130 to ensure sufficient removal of moisture and particulate. For example, in response to sensor feedback 130 indicative of moisture content, the control system 100 may control the MRUs 352 within the MRS 310 to increase or decrease the moisture removal from the exhaust gas 42. In response to sensor feedback 130 indicative of particulate content, the control system 100 may adjust the PRUs 374 within the PRS 312, thereby increasing or decreasing the amount of particulate removal from the exhaust gas 42. Each of these control actions by the control system 100 may be based on feedback 130 from within the EG processing system 54, the SEGR gas turbine system 52, or elsewhere within the turbine-based service system 14. In certain embodiments, the control system 100 is configured to maintain a temperature, a pressure, and/or a flow rate of the exhaust gas 42 along the exhaust recirculation path 110 within a respective target range (e.g., a target temperature range, a target pressure range, and a target flow rate range) within, upstream, or downstream of each subsystem and/or component, such as the CHR system 308, the MRS 310, the PRS 312, or any of their components (e.g., catalyst units 316, heat exchangers 318, MRUs 352, PRUs 374, etc.). The control system 100

may be configured to maintain the temperature, the pressure, and/or the flow rate within such target ranges during various controlled changes in the SEGR gas turbine system 52, including changes in the flow rates of oxidant 68, fuel 70, and diluent to the fuel nozzles 164 and combustors 160.

[0082] FIG. 6 is a diagram of an embodiment of a system 420 having the EG supply system 78 extracting, treating, and delivering the exhaust gas streams 95 to various target system 422. As discussed above, the EG supply system 78 includes the exhaust extraction system 80 and the EG treatment system 82. The exhaust extraction system 80 receives the exhaust gas 42 from one or more extraction points 76 along the SEGR gas turbine system 52, the EG processing system 54, or any other location within the turbine-based service system 14. The EG treatment system 82 then treats the extracted exhaust gas 42 with a plurality of treatment subsystems 424, such as a compression system 426, a moisture removal/dehydration system 428, a particulate removal/filtration system 430, a gas separation system 432, and a gas purification system 434.

[0083] The illustrated treatment subsystems 424 may be disposed in series, in parallel, or any combination thereof. The compression system 426 may include one or more rotary compressors, reciprocating compressors, or any combination thereof, in one or more compression stages. The moisture removal/dehydration system 428 may include one or more heat exchangers, heat recovery units such as heat recovery steam generators, condensers, water gas separators such as centrifugal water gas separators, filters, desiccants or other dehydration media, or any combination thereof. The particulate removal/filtration system 430 may include one or more inertial separators, gravity separators, filters, or any combination thereof. For example, the filters may include membrane filters, water impermeable filters, coalescing filters, or any combination thereof. The gas separation system 432 may include one or more solvent based separation systems, which may include one or more absorbers, flash tanks, or any combination thereof. For example, the gas separation system 432 may be configured to separate carbon dioxide (CO₂) and/or nitrogen (N₂) from the exhaust gas 42. By further example, the gas separation system 432 may include a CO₂/ N₂ separator and/or a carbon capture system. The gas purification system 432 also may

include one or more solvent based gas purifiers, and may further reduce impurities within the separated gases (e.g., CO₂ and/or N₂) from the gas separation system 432. For example, any separated carbon dioxide (CO₂) may be further purified by the gas purification system 434, thereby increasing purity levels of the separated carbon dioxide (CO₂). Similarly, the gas purification system 434 may further purify the separated nitrogen (N₂), thereby removing any impurities in the separated nitrogen (N₂). In certain embodiments, the separated carbon dioxide and the separated nitrogen may have purity levels of at least approximately 70, 80, 90, 95, 96, 97, 98, 99, or greater percentage purity by volume. In certain embodiments, the gas separation system 432 may generate the multiple exhaust gas streams 95, such as the first stream 96, the second stream 97, and the third stream 98. For example, the first stream 96 may include a CO₂ rich stream 436, the second stream 97 may include an intermediate concentration stream 438, and the third stream 98 may include a CO₂ lean stream 440.

[0084] One or more of these exhaust gas streams 95 may then pass to one or more secondary gas treatment systems 442 and/or energy recovery systems 444. For example, the first stream 96 may pass to a secondary gas treatment system 446, the second stream 97 may pass to a secondary gas treatment system 448, and the third stream 98 may pass to a secondary gas treatment system 450. Similarly, the first stream 96 may pass to an energy recovery system 452, the second stream 97 may pass to an energy recovery system 454, and the third stream 98 may pass to an energy recovery system 456. Each of the secondary gas treatment system 442 may include a compression system 458, a moisture removal/dehydration system 460, or any other suitable treatment components. Again, the compression system 458 may include one or more rotary compressors, reciprocating compressors, or any combination thereof, disposed in a series or parallel arrangement. The moisture removal/dehydration system 460 may include water gas separators, condensers, filters, or any combination thereof, thereby removing any moisture remaining in the streams 96, 97, or 98 after compression by the compression system 458. Again, each of the streams 96, 97, and 98 may pass through its own dedicated secondary gas treatment system 442, or two or more of these streams may share a common secondary gas treatment system 442.

After this secondary treatment in the system 442, the treated exhaust gas streams 96, 97, and 98 may then pass to one or more target systems 422, such as the hydrocarbon production system 12, the pipeline 86, the storage tank 88, and/or the carbon sequestration system 90. In other words, any one or more of the individual streams 96, 97, and 98 may be independently or collectively used by one or more of the target systems 422.

[0085] In the energy recovery systems 444, each of the streams 96, 97, and 98 may enable energy recovery in one or more turbines or expanders 462, which then drive one or more loads 464 to create mechanical power 466 and/or electrical power 468. For example, the load 464 may include one or more electrical generators to produce the electrical power 468. Again, each one of the streams 96, 97, and 98 may independently or collectively drive its own turbine or expander 462 in its own dedicated energy recovery system 452, 454, or 456. This recovered energy may be used to drive other equipment throughout the turbine-based service system 14.

[0086] FIG. 7 is a diagram of an embodiment of the combustor section 154 of the gas turbine engine 150. As illustrated, the combustor section 154 has a casing 490 disposed about one or more combustors 160, thereby defining a compressor discharge cavity 492 between the casing 490 and the combustor 160. Each combustor 160 includes the head end portion 166 and the combustion portion 168. The combustion portion 168 may include a chamber 494, a first wall or liner 496 disposed about the chamber 494, and a second wall or flow sleeve 498 disposed at an offset around the first wall 496. For example, the first and second walls 496 and 498 may be generally coaxial with one another to define a hollow circumferential space or flow passage 500 leading from the combustion portion 168 to the head end portion 166. The second wall or flow sleeve 498 may include a plurality of openings or perforations 502, which enables the compressed exhaust gas 170 from the compressor section 152 to enter into the flow passage 500. The exhaust gas 170 then flows through the passage 500 along the liner 496 toward the head end portion 166 as indicated by arrows 504, thereby cooling the liner 496 as the exhaust gas 170 flows toward the head end portion 166 for delivery into the chamber 494 (e.g. through one or more fuel nozzles 164).

[0087] In certain embodiments, the liner 496 also may include one or more openings or perforations 506, thereby enabling injection of a portion of the exhaust gas 170 directly into the chamber 494 as indicated by arrows 508. For example, the exhaust gas injection 508 may serve as a diluent injection, which may be configured to control the temperature, pressure, flow rate, gas composition (e.g., emissions levels), or any combination thereof, within the chamber 494. In particular, the exhaust gas injection 508 may help to control the temperature within the chamber 494, such that emissions of nitrogen oxides (NO_X) may be substantially reduced in the hot products of combustion. One or more additional diluents, such as nitrogen, steam, other inert gases, or additional exhaust gas, may be injected through one or more diluent injectors 510, as indicated by arrows 512. Together, the exhaust gas injection 508 and diluent injection 512 may be controlled to adjust the temperature, concentration levels of emissions, or other characteristics of the hot combustion gases flowing through the chamber 494.

[0088] In the head end portion 166, one or more fuel nozzles 164 may route the exhaust gas 170, the oxidant 68, the fuel 70, and one or more diluents 514 (e.g., exhaust gas, steam, nitrogen, other inert gases, or any combination thereof) into the chamber 494 for combustion. For example, each combustor 160 may include 1, 2, 3, 4, 5, 6, 7, 8, or more fuel nozzles 164, each configured as a diffusion fuel nozzle and/or a premix fuel nozzle. For example, each fuel nozzle 164 may deliver the oxidant 68, the fuel 70, the diluents 514, and/or the exhaust gas 170 as premixed or independent streams into the chamber 494, thereby generating a flame 516. The premixed streams of oxidant 68 and fuel 70 result in a premix flame, whereas separate streams of oxidant 68 and fuel 70 result in a diffusion flame.

[0089] The control system 100 is coupled to one or more fluid supply systems 518, which control the pressure, temperature, flow rate, and/or mixtures of the oxidant 68, the fuel 70, the diluents 514, and/or the exhaust gas 170. For example, the control system 100 may independently control flows of the oxidant 68, the fuel 70, the diluents 514, and/or the exhaust gas 170 in order to control the equivalence ratio, emissions levels (e.g. carbon monoxide, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, and/or oxygen), power output, or any combination thereof.

In operation, the control system 100 may control the fluid supply systems 518 to increase the flows of oxidant 68 and fuel 70 while maintaining substantially stoichiometric combustion, or the control system 100 may control the fluid supply systems 518 to decrease the flows of oxidant 68 and fuel 70 while maintaining substantially stoichiometric combustion. The control system 100 may perform each of these increases or decreases in flow rates of the oxidant 68 and the fuel 70 in incremental steps (e.g., 1, 2, 3, 4, 5, or more steps), continuously, or any combination thereof. Furthermore, the control system 100 may control the fluid supply systems 518 to increase or decrease the flows of oxidant 68 and fuel 70 in order to provide a fuel rich mixture, a fuel lean mixture, or any other mixture of the oxidant 68 and the fuel 70, into the chamber 494, thereby creating hot products of combustion or exhaust gas 520 with a low oxygen concentration, a high oxygen concentration, or any other suitable concentration of oxygen, unburnt hydrocarbons, carbon monoxide, nitrogen oxides, sulfur oxides, and so forth. While controlling the flows of oxidant 68 and fuel 70, the control system 100 also may control the fluid supply system 518 to increase or decrease flow of the diluents 514 (e.g., steam, exhaust gas, nitrogen, or any other inert gas), thereby helping to control the temperature, pressure, flow rate, and/or gas composition (e.g., emissions levels) of the hot products of combustion 520 passing through the chamber 494 toward the turbine section 156.

[0090] The control system 100 also may control the EG supply system 78, including the EG extraction system 80 and the EG treatment system 82. For example, the control system 100 may selectively open or close one or more valves 522 disposed along extraction lines 524 between the combustor section 154 and the EG extraction system 80. The control system 100 may selectively open or close these valves 522 to increase or decrease the flow of exhaust gas 42 to the EG extraction system 80, while also selectively extracting the exhaust gas from different locations resulting in different temperatures and/or pressures of the exhaust gas being delivered to the EG extraction system 80. The control system 100 also may control one or more valves 526 disposed along lines 528 leading to a vent system 530. For example, the control system 100 may selectively open the valve 526 to vent a portion of the exhaust gas

through the vent system 530 into the atmosphere, thereby reducing the pressure in the EG supply system 78.

[0091] As discussed above, each combustor 160 in the combustor section 154 may include one or more fuel nozzles 164, which may be configured as premix fuel nozzles and/or diffusion fuel nozzles. For example, FIGS. 8, 9, and 10 illustrate embodiments of the fuel nozzle 164 configured as a premix fuel nozzle 550 operable to generate a premix flame 516, 552, whereas FIGS. 11-16 illustrate embodiments of the fuel nozzle 164 configured as a diffusion fuel nozzle 554 operable to generate a diffusion flame 516, 556. These fuel nozzles 550 and 554 may be used alone or in any combination with one another in each of the combustors 160, as discussed in further detail below with reference to FIG. 17. For example, each combustor 160 may include only premix fuel nozzles 550, only diffusion fuel nozzles 554, or any combination of both premix fuel nozzles 550 and diffusion fuel nozzles 554.

[0092] The premix fuel nozzles 550 may have a variety of configurations to completely or partially premix the oxidant 68 and the fuel 70, while also optionally premixing one or more diluents 514 such as the exhaust gas 170, steam, nitrogen, or any other suitable inert gas. FIG. 8 is a diagram of an embodiment of the premix fuel nozzle 550 having a mixing portion 558 coupled to an injection portion 560. The mixing portion 558 includes at least one mixing chamber 562 surrounded by at least one enclosure 564, while the injection portion 560 includes at least one injection passage 566 surrounded by at least one conduit 568. For example, the enclosure 564 of the mixing portion 558 may include one or more conduits, injection holes, swirl vanes, flow interruptions, or other structures to facilitate mixing between the oxidant 68 and the fuel 70. The mixing portion 558 also may receive one or more flows of the diluents 514, such as exhaust gas 170, steam, nitrogen, or another inert gas, thereby mixing the diluent 514 along with the oxidant 68 and the fuel 70. Once the oxidant 68 and the fuel 70 are sufficiently mixed within the mixing chamber 562, the premix fuel nozzle 550 routes the fuel oxidant mixture through the injection passage 566 to at least one injection outlet 570. The exiting mixture of oxidant 68 and fuel 70 (and optionally one or more diluents 514) may then ignite to create the premix flame 552. In certain embodiments, the control system 100 may selectively control the fluid

supply system 518 to increase or decrease flows of the oxidant 68 and the fuel 70 (and optionally one or more diluents 514), thereby adjusting the equivalence ratio, emissions levels generated by the premix flame 552, power output of the gas turbine engine 150, or any combination thereof. In certain embodiments, the illustrated premix fuel nozzle 550 may not premix any diluent with the oxidant 68 and fuel 70, but rather one or more diluents (e.g., exhaust gas, steam, nitrogen, or another inert gas) may be provided after the point of combustion and/or downstream from the premix flame 552. In this manner, the flows of oxidant 68 and fuel 70 may be independently controlled to provide a more precise control of the fuel/oxidant ratio, thereby helping to achieve stoichiometric combustion for improved flame stability while also using the downstream diluents for control of the temperature and emissions (e.g., NO_x emissions).

[0093] FIG. 9 is a diagram of an embodiment of the premix fuel nozzle 550 having a multi-stage configuration of the mixing portion 558. As illustrated, the mixing portion 558 includes first and second mixing chambers 580 and 582, which are defined by first and second enclosure portions 584 and 586 of the enclosure 564. The first and second mixing chamber 580 and 582 are illustrated in a series configuration, although other embodiments of the mixing portion 558 may arrange the first and second mixing chambers 580 and 582 in a parallel configuration. The mixing portion 558 also may include additional mixing chambers in combination with the first and second mixing chambers 580 and 582. For example, the mixing portion 558 may include 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, or more mixing chambers in a series configuration, a parallel configuration, or a combination thereof. Each mixing chamber 580 and 582 may include one or more mixing devices, such as swirl vanes, flow interruptions, tortuous pathways, passages with increasing and decreasing diameters, or any combination thereof. In operation, the mixing portion 558 receives one or more flows of the oxidant 68, the fuel 70, and one or more diluents 514 from the fluid supply system 518. Again, the diluents 514 may include the exhaust gas 170, steam, nitrogen, or one or more other inert gases. Each mixing chamber 580 and 582 may receive and mix two or more different fluids from the fluid supply system 518. For example, the first mixing chamber 580 may receive and mix one or more streams of

the oxidant 68 and the fuel 70, while the second mixing chamber 582 may receive and mix one or more streams of the oxidant 68 and the diluents 514 or the fuel 70 and the diluents 514. In other words, the first and second mixing chambers 580 and 582 may receive and mix two or more of the same fluid streams, or two or more different fluid streams from the fluid supply system 518. In this manner, the first and second mixing chambers 580 and 582 may sequentially mix the various fluids from the fluid supply system 518, and then direct the mixture into the injection passage 566 for delivery into the chamber 494 of the combustor 160. As the mixture of oxidant 68, fuel 70, and one or more diluents 514 flows through the injection outlet 570 of the injection passage 566, the mixture ignites and forms the premix flame 552. Again, the control system 100 may selectively control the fluid supply system 518 to increase, decrease, or maintain flows of the oxidant 68, the fuel 70, and one or more diluents 514, thereby adjusting the equivalence ratio, emissions levels, power output of the gas turbine engine 150, or any combination thereof.

[0094] FIG. 10 is a diagram of an embodiment of the premix fuel nozzle 550 having a staged mixing portion 558 with a parallel mixing section 590 in series with a swirling section 592. The parallel mixing section 590 includes the first and second mixing chambers 580 and 582 as discussed above with reference to FIG. 9, wherein the first and second mixing chambers 580 and 582 are disposed parallel with one another upstream from the swirling section 592. The swirling section 592 includes an inner conduit or hub 594, an outer conduit 596 disposed about the inner conduit 594, and a plurality of swirl vanes 598 extending radially between the inner conduit 594 and the outer conduit 596. Each of the swirl vanes 598 may be angled or curved to force the fluid flow to swirl in a circumferential direction 600 about a longitudinal axis 602 of the premix fuel nozzle 550. The inner conduit 594 defines an inner passage 604, the outer conduit 596 defines an outer passage 606, and each swirl vane 598 defines a radial passage 608. One or more of the swirl vanes 598 also include a plurality of injection ports 610, which may be disposed directly on or upstream from a trailing edge of each swirl vane 598.

[0095] In the illustrated embodiment, the fluid supply system 518 routes one or more flows of the oxidant 68 and the diluent 514 into the first mixing chamber 580,

while also delivering one or more flows of the fuel 70 and the diluent 514 into the second mixing chamber 582. The first mixing chamber 580 substantially mixes the flows of oxidant 68 and diluent 514, and then routes the mixture into the outer passage 606 between the inner and outer conduits 594 and 596 as indicated by arrows 612. The mixture 614 of oxidant 68 and diluent 514 then flows toward the plurality of swirl vanes 598 in the swirling section 592, where the swirl vanes 598 force the mixture 614 to swirl about the axis 602 as indicated by arrow 600.

[0096] Simultaneously, the second mixing chamber 582 routes a premixed flow of the fuel 70 and the diluent 514 into the inner passage 604 defined by the inner conduit 594 as indicated by arrow 616. The mixture 618 of fuel 70 and diluent 514 then flows lengthwise along the inner passage 604, and then turns radially into the plurality of swirl vanes 598 as indicated by arrows 620. Upon reaching the plurality of injection ports 610, the mixture 618 of fuel 70 and diluent 514 then passes through the injection ports 610 into the outer passage 606 as indicated by arrows 622. The two mixtures (i.e., the premixed oxidant and diluent flow 614 and the premixed fuel and diluent flow 622) then further mix within the injection passage 566 as indicated by arrows 624. The mixture 624 of oxidant 68, fuel 70, and diluent 514 then exits the premix fuel nozzle 550 through the injection outlet 570, and subsequently ignites to form the premix flame 552. Again, the control system 100 may selectively control the fluid supply system 518 to independently control flows of the oxidant 68, the fuel 70, and the diluent 514, thereby increasing, decreasing, or maintaining the equivalence ratio, emissions levels, power output, or any combination thereof, of the gas turbine engine 150.

[0097] FIG. 11 is a diagram of an embodiment of the diffusion fuel nozzle 554 having a plurality of independent passages 640 for delivery of the oxidant 68 and the fuel 70 into the chamber 494 of the combustor 160. The independent passages 640 may include a plurality of concentric annular passages, a central passage surrounded by a plurality of peripheral passages, or any combination thereof. In the illustrated embodiment, the independent passages 640 include one or more fuel passages 642 and one or more oxidant passages 644. For example, the illustrated fuel passage 642 is a central fuel passage surrounded by an inner conduit 646, while the one or more

oxidant passages 644 are outer oxidant passages disposed between the inner conduit 646 and an outer conduit or structure 648. By further example, the oxidant passage 644 may include a single annular oxidant passage or a plurality of discrete oxidant passages disposed circumferentially about the fuel passage 642 between the inner and outer conduits 646 and 648. In these embodiments, the oxidant and fuel passages 642 and 644 remain isolated from one another along a full length of the diffusion fuel nozzle 554. The inner and outer conduits 646 and 648 may function as isolation walls, which maintain the separation between the oxidant 68 and fuel 70. The fuel passage 642 terminates at a fuel outlet 650 and the one or more oxidant passages 644 terminate at one or more oxidant outlet 652. These fuel and oxidant outlets 650 and 652 may be disposed along a common plane or downstream end 654 of the diffusion fuel nozzle 554, thereby delaying mixing of the oxidant 68 and the fuel 70 until after injection from the fuel nozzle 554 into the chamber 494 of the combustor 160.

[0098] As the oxidant 68 and the fuel 70 mix or diffuse with one another in the chamber 494, the diffusion flame 556 forms as indicated by an outline or border 656. The outline 656 may represent a diffusion wall or flame wall, where the oxidant 68 and the fuel 70 mix and combust in a substantially stoichiometric manner (e.g., substantially stoichiometric combustion). In other words, the outline or border 656 may represent a stable flame wall of the diffusion flame 556, wherein the equivalence ratio is approximately 1.0 or between approximately 0.95 to 1.05. Similar to the premix fuel nozzles 550 discussed above with reference to FIGS. 8-10, the diffusion fuel nozzle 554 may be controlled by the control system 100 to vary the equivalence ratio, exhaust emissions, power output of the gas turbine engine 150, or any combination thereof. For example, the illustrated control system 100 selectively controls the fluid supply system 518 to increase, decrease, or maintain flows of the oxidant 68 and the fuel 70 in response to the sensor feedback 130.

[0099] FIG. 12 is a diagram of an embodiment of the diffusion fuel nozzle 554 having a plurality of independent passages 670 with an injection portion 672 and a mixing portion 674. The mixing portion 674 may include one or more inner mixing chambers 676 and one or more outer mixing chambers 678. For example, the inner mixing chambers 676 may be fuel/diluent mixing chambers, which are configured to

mix one or more streams of the fuel 70 and the diluent 514. The outer mixing chambers 676 may include one or more oxidant/diluent mixing chambers, which are configured to mix one or more streams of the oxidant 68 and the diluent 514. Each of these mixing chambers may include a surrounding structure, such as an outer enclosure or conduit. For example, the mixing chambers 676 may be surrounded by an inner conduit or enclosure 680, while the mixing chambers 678 may be surrounded by an outer conduit or enclosure 682. In certain embodiments, the mixing chamber 678 may be enclosed between the inner and outer conduits 680 and 682.

[00100] Similarly, the injection portion 672 includes one or more fuel-diluent passages 684 and one or more oxidant-diluent passages 686. Each fuel-diluent passage 684 is fluidly coupled to one or more of the mixing chambers 678, while each of the oxidant-diluent passages 686 is fluidly coupled to one or more of the mixing chambers 678. The fuel-diluent passage 684 may be surrounded by an inner conduit 688, while the one or more oxidant-diluent passages 686 may be surrounded by an outer conduit 690. For example, the illustrated fuel-diluent passage 684 may be a central fuel-diluent passage 684, which is surrounded by one or more outer oxidant-diluent passages 686. For example, the inner and outer conduits 688 and 690 may be concentric annular conduits, which define the passages 684 and 686 in a coaxial or concentric annular arrangement. However, the fuel-diluent passage 684 may represent a single central passage or a plurality of separate passages disposed within the inner conduit 688. Likewise, the oxidant-diluent passages 686 may represent a single annular passage or a plurality of discrete passages spaced apart from one another circumferentially around the fuel-diluent passage 684, while remaining isolated from one another by the inner and outer conduits 688 and 690. In certain embodiments, the inner conduits 680 and 688 form a single continuous inner conduit, and the outer conduits 682 and 690 form a single continuous outer conduit.

[00101] In operation, the control system 100 selectively controls the fluid supply system 518 to increase, decrease, or maintain flows of the fuel 70 and the diluent 514 into the mixing chamber 676, which mixes the fuel 70 and diluent 514 before passing the mixture into the fuel-diluent passage 684. Similarly, the control system 100 selectively controls the fluid supply system 518 to increase, decrease, or maintain

flows of the oxidant 68 and the diluent 514 into the one or more mixing chambers 678, which mix the oxidant 68 and the diluent 514 before delivering the mixture into the one or more oxidant-diluent passages 686. The diffusion fuel nozzle 554 then separately flows the fuel-diluent mixture 698 along the passage 684 to an outlet 692, while simultaneously flowing the oxidant-diluent mixture 700 along the passages 686 to one or more outlets 694. Similar to the embodiment of FIG. 11, the outlets 692 and 694 may be arranged along a common plane or downstream end 696 of the diffusion fuel nozzle 554, thereby maintaining isolation between the oxidant-diluent mixture 700 in the passage 686 and the fuel-diluent mixture 698 in the passage 684. This isolation delays mixing between the oxidant 68 and the fuel 70 until downstream of the common plane 696.

[00102] As the fuel-diluent mixture 698 and the oxidant-diluent mixture 700 flow from the diffusion fuel nozzle 554 into the chamber 494 of the combustor 160, the mixtures 698 and 700 generally diffuse with one another and combust along an outline or border 702, which may define a diffusion wall or flame wall of the diffusion flame 556. Again, the control system 100 may selectively control the fluid supply system 518 to independently control flows of the oxidant 68, the fuel 70, and the diluent 514 to each of the mixing chambers 676 and 678, thereby controlling mixing within each of the mixing chambers 676 and 678 while also controlling the diffusion and combustion within the chamber 494 of the combustor 160. For example, the control system 100 may selectively control the fluid supply system 518 to adjust the ratio of the oxidant 68 relative to the fuel 70, the ratio of the diluent 514 relative to the combined flow of the oxidant 68 and the fuel 70, the ratio of the oxidant 68 relative to the diluent 514 in each of the one or more mixing chambers 678 and corresponding passages 686, and the ratio of the fuel 70 relative to the diluent 514 in each of the one or more mixing chambers 676 and corresponding passages 684. Thus, the control system 100 may adjust each of these ratios, flow rates, temperatures, and fluid compositions (e.g., compositions of the oxidant 68, the fuel 70, and the diluent 514) to adjust the equivalence ratio, the exhaust emissions, and the power output of the gas turbine engine 150.

[00103] FIG. 13 is a diagram of an embodiment of the diffusion fuel nozzle 554, illustrating a plurality of independent passages 720. The illustrated passages 640 include a fluid A passage 722, one or more fluid B passages 724, and one or more fluid C passages 726. The fluid A passage 722 may be separated or isolated from the one or more fluid B passages 724 by a conduit or structure 728, the one or more fluid B passages 724 may be separated from the one or more fluid C passages 726 by a conduit or structure 730, and the one or more fluid C passages 726 may be surrounded or supported by an outer conduit or structure 732.

[00104] For example, as illustrated in FIG. 14, the fluid passages 722, 724, and 726 may be disposed in a concentric arrangement, wherein the conduit 728 surrounds the fluid A passage 722 as a central fluid passage, the fluid B passage 724 is disposed between the conduits 728 and 730, and fluid C passage 726 is disposed between the conduits 730 and 732. Again, the conduits 728, 730, and 732 may be disposed in a concentric arrangement, such that the fluid B passage 724 and fluid C passage 726 each represent a continuous annular passage.

[00105] However, the diffusion fuel nozzle 554 may arrange the passages 722, 724, and 726 in other arrangements, such as discrete passages as illustrated in FIG. 15. In the embodiment of FIG. 15, the fluid A passage 722 represents a central fluid passage, while the fluid B passages 724 and the fluid C passages 726 represent a plurality of discrete passages that are spaced apart from one another within the fuel nozzle 554. For example, the fluid B passages 724 may include 2, 3, 4, 5, 6, 7, 8, or more discrete fluid passages that are spaced apart from one another circumferentially about the central fluid A passage 722. Likewise, the fluid C passages 726 may include a plurality of discrete passages that are spaced apart from one another circumferentially about the fluid B passages 724. For example, the fluid B passages 724 may be arranged in a first ring or circular pattern of the passages 724, while the fluid C passages 726 may be arranged in a second ring or circular pattern of the passages 726.

[00106] In either of these configurations, the diffusion fuel nozzle 554 of FIG. 13 is configured to separately flow a fluid A 734 through the fluid A passage 722, a fluid B 736 through the one or more fluid B passages 724, and a fluid C 738 through the one

or more fluid C passages 726. Each of these fluids 734, 736, and 738 may include one or more fluids, such as the oxidant 68, the fuel 70, and the diluents 514. However, the fluids 734, 736, and 738 may not mix any of the oxidant 68 and the fuel 70 within the diffusion fuel nozzle 554, thereby delaying mixing between the oxidant 68 and the fuel 70 until the fluids eject from openings 740, 742, and 744 into the chamber 494 of the combustor 160. Again, these openings 740, 742, and 744 may be disposed along a common plane or downstream end 746 of the diffusion fuel nozzle 554. The various fluids then mix and combust to form the diffusion flame 556, as discussed above. The following TABLE 2 illustrates some possible non-limiting examples of fluids A, B, and C, which may be used with the diffusion fuel nozzle 554 of FIGS. 13-15.

FLUID A (722)	FLUID B (724)	FLUID C (726)
FUEL	OXIDANT	DILUENT
FUEL	DILUENT	OXIDANT
FUEL	OXIDANT + DILUENT	OXIDANT
FUEL	OXIDANT	OXIDANT + DILUENT
FUEL + DILUENT	FUEL	OXIDANT
FUEL	FUEL + DILUENT	OXIDANT
FUEL + DILUENT	OXIDANT + DILUENT	OXIDANT
FUEL + DILUENT	OXIDANT	OXIDANT + DILUENT
FUEL	OXIDANT + DILUENT	OXIDANT + DILUENT

TABLE 2

[00107] As indicated above, the diffusion fuel nozzle 554 may flow a variety of combinations of fluids (e.g., oxidant 68, fuel 70, and diluent 514) through the passages 722, 724, and 726 for generation of a diffusion flame 556. Again, the oxidant 68 may include oxygen, ambient air, oxygen enriched air, oxygen reduced air, mixtures of nitrogen and oxygen, or any combination thereof. The fuel 70 may include liquid fuel and/or gas fuel, such as natural gas, syngas, or any other fuel described herein. The diluent 514 may include the exhaust gas 170, steam, nitrogen, or another inert gas, or any combination thereof. Although TABLE 2 depicts some possible examples of the fluids, any combination of fluids may be used with the

diffusion fuel nozzle 554 of FIGS. 13-15. In addition, although the depicted embodiment does not mix any fuel 70 with oxidant 68 within the diffusion fuel nozzle 554, other embodiments may mix a small amount (e.g., less than 1, 2, 3, 4, 5, 6, 7, 8, 9, or 10 percent by volume) of oxidant 68 with fuel 70 or a small amount (e.g., less than 1, 2, 3, 4, 5, 6, 7, 8, 9, or 10 percent by volume) of fuel 70 with oxidant 68.

[00108] FIG. 16 is a diagram of an embodiment of the combustor section 154 having one of the diffusion fuel nozzles 554 disposed within the combustor 160. Similar to the diffusion fuel nozzle 554 illustrated in FIGS. 13-15, the diffusion fuel nozzle 554 of FIG. 16 includes the fluid A passage 724 surrounded by the conduit 728, the fluid B passage 724 surrounded by the conduit 730, the fluid C passage 726 surrounded by the conduit 732, and a fluid D passage 760 surrounded by an outer conduit or structure 762. The fluid D passage 760 is configured to receive a fluid D 764 from the fluid supply system 518, and route the fluid D 764 into the chamber 494 through one or more outlets 766. The passages 722, 724, 726, and 760 may have the respective outlets 740, 742, 744, and 766 disposed along the common plane or downstream end 746 of the diffusion fuel nozzle 554, thereby isolating the flows of the fluids 734, 736, 738, and 764 until the fluids reach the chamber 494. In this manner, the diffusion fuel nozzle 554 facilitates the formation of the diffusion flame 556. Each of the fluids 734, 736, 738, and 764 may include the oxidant 68, the fuel 70, and one or more diluents 514, such as the exhaust gas 170, steam, nitrogen, and/or one or more other inert gases. However, the fluid passages 722, 724, 726, and 760 may not mix any of the oxidant 68 and the fuel 70 within the diffusion fuel nozzle 554, thereby facilitating isolation of the oxidant 68 and fuel 70 until the fluids reach the chamber 494. The oxidant 68 and the fuel 70 may flow through each of the independent fluid passages 722, 724, 726, and 760, either separately or partially premixed with one or more of the diluents 514. Similar to the previous embodiments, the control system 100 may selectively control the fluid supply system 518 to increase, decrease, or maintain the flows of each fluid 734, 736, 738, and 764, thereby adjusting the fluid flow ratios among the fluids, the equivalence ratio, the emissions level, the power output of the gas turbine engine 150, or any combination thereof.

[00109] The illustrated combustor 160 of FIG. 16 also includes a diluent injection system 770 disposed along the combustion portion 168 of the combustor 160, such that one or more diluents (e.g., exhaust gas 170, steam, nitrogen, or other inert gases) may be injected into the chamber 494 to control the temperature, pressure, flow rate, gas composition (e.g., emissions levels), or any combination thereof, of the hot products of combustion 772 formed by the diffusion flame 556. For example, the diluent injection system 770 may include the openings of perforations 506 disposed in the first wall or liner 496, and a plurality of the diluent injectors 510 extending through the first and second walls 496 and 498 to the chamber 494 of the combustor 160. In operation, the openings or perforations 506 may be configured to inject a fluid E 774, such as the exhaust gas 170, as indicated by arrows 508. The diluent injectors 510 may be configured to inject a fluid F 776 and/or a fluid G 778 into the chamber 494, as indicated by arrows 512. For example, the fluid F 776 and the fluid G 778 may include additional exhaust gas 170, steam, nitrogen, one or more other inert gases, or any combination thereof. These injected diluents 508 and 512 may be configured to control the temperature, pressure, flow rate, gas composition (e.g., emissions levels), or any combination thereof, of the hot products of combustion 772 resulting from the diffusion flame 556. In certain embodiments, the control system 100 may selectively control the fluid supply systems 518 to increase, decrease, or maintain flows of the various fluids 734, 736, 738, 764, 774, 776, and 778, thereby controlling the ratio of the oxidant 68 to fuel 70, the ratio of one or more diluents 514 relative to the oxidant 68 and the fuel 70, or any combination thereof. In turn, these control adjustments of the fluids may alter the equivalence ratio, emissions levels, and power output of the gas turbine engine 150. The following TABLE 3 illustrates some possible non-limiting examples of fluids A, B, C, D, E, F, and G, which may be used with the diffusion fuel nozzle 554 and combustor 160 of FIG. 16.

FLUID A (722)	FLUID B (724)	FLUID C (726)	FLUID D (764)	FLUID E (774)	FLUID F (776)	FLUID G (778)
FUEL	FUEL	OXIDANT	OXIDANT	DILUENT	DILUENT	DILUENT
FUEL	OXIDANT	FUEL	OXIDANT	DILUENT	DILUENT	DILUENT
OXIDANT	FUEL	OXIDANT	FUEL	DILUENT	DILUENT	DILUENT
FUEL + DILUENT	FUEL + DILUENT	OXIDANT + DILUENT	OXIDANT + DILUENT	DILUENT	DILUENT	DILUENT
FUEL + DILUENT	OXIDANT + DILUENT	FUEL + DILUENT	OXIDANT + DILUENT	DILUENT	DILUENT	DILUENT
OXIDANT + DILUENT	FUEL + DILUENT	OXIDANT + DILUENT	FUEL + DILUENT	DILUENT	DILUENT	DILUENT
DILUENT	FUEL	FUEL + DILUENT	OXIDANT + DILUENT	DILUENT	OXIDANT	DILUENT
DILUENT	OXIDANT	OXIDANT + DILUENT	FUEL + DILUENT	DILUENT	FUEL	DILUENT
FUEL	OXIDANT	FUEL	OXIDANT	DILUENT	FUEL	DILUENT

TABLE 3

[00110] As indicated above, the diffusion fuel nozzle 554 and combustor 160 may flow a variety of combinations of fluids (e.g., oxidant 68, fuel 70, and diluent 514) through the passages 722, 724, 726, and 760, openings 506, and diluent injectors 510 for generation of a diffusion flame 556. Again, the oxidant 68 may include oxygen, ambient air, oxygen enriched air, oxygen reduced air, mixtures of nitrogen and oxygen, or any combination thereof. The fuel 70 may include liquid fuel and/or gas fuel, such as natural gas, syngas, or any other fuel described herein. The diluent 514 may include the exhaust gas 170, steam, nitrogen, or another inert gas, or any combination thereof. Although TABLE 3 depicts some possible examples of the fluids, any combination of fluids may be used with the diffusion fuel nozzle 554 and combustor 160 of FIG. 16. In addition, although the depicted embodiment does not

mix any fuel 70 with oxidant 68 within the diffusion fuel nozzle 554, other embodiments may mix a small amount (e.g., less than 1, 2, 3, 4, 5, 6, 7, 8, 9, or 10 percent by volume) of oxidant 68 with fuel 70 or a small amount (e.g., less than 1, 2, 3, 4, 5, 6, 7, 8, 9, or 10 percent by volume) of fuel 70 with oxidant 68.

[00111] FIG. 17 is a schematic cross-section of the combustor 160 taken along line 17-17 of FIG. 7, further illustrating a multi-nozzle arrangement of the fuel nozzles 164 and a multi-injector arrangement of the diluent injectors 510. The illustrated fuel nozzles 164 include a fuel nozzle A 790, a fuel nozzle B 792, a fuel nozzle C 794, a fuel nozzle D 796, a fuel nozzle E 798, a fuel nozzle F 800, and a fuel nozzle G 802. In the illustrated embodiment, the nozzle 790 is a central fuel nozzle, which is surrounded by the remaining fuel nozzles 792, 794, 796, 798, 800 and 802 as outer or peripheral fuel nozzles. Although the illustrated embodiment includes a single central fuel nozzle 164 and six outer fuel nozzles 164, other embodiments may include any number of central and outer fuel nozzles. The illustrated fuel nozzles 164 may include one or more of the premix fuel nozzles 550 and/or the diffusion fuel nozzles 554 shown and described with reference to FIGS. 8-16. For example, all of the fuel nozzles 164 may be configured as premix fuel nozzles 550, all of the fuel nozzles 164 may be configured as diffusion fuel nozzles 554, or the fuel nozzles 164 may include one or more of both the premix fuel nozzles 550 and the diffusion fuel nozzles 554. The fluid flows to the fuel nozzles 164 may be independently controlled for each fuel nozzle 164, or the fluid flows may be controlled in groups of fuel nozzles 164. For example, the central fuel nozzle 790 may be controlled independently from one or more groups of the outer fuel nozzles 792, 794, 796, 798, 800, and 802. By further example, one or more premix fuel nozzles 550 may be controlled independently from one or more diffusion fuel nozzles 554. These different control schemes may facilitate different operations modes, which may be useful in providing stoichiometric combustion and reducing emissions in the exhaust gas 42.

[00112] As further illustrated in FIG. 17, the fuel nozzles 164 and diluent injectors 510 may be coupled to the fluid supply system 518 through a plurality of fluid supply circuits 810, such as one or more diluent supply circuits 812 and one or more fuel nozzle supply circuits 814. For example, the diluent supply circuits 812 may include

1, 2, 3, 4, 5, 6, 7, 8, or more independent diluent supply circuits 812, thereby enabling a variety of diluent injection modes for the diluent injectors 510. Similarly, the fuel nozzle supply circuits 814 may include 1, 2, 3, 4, 5, 6, 7, 8, or more independent fuel nozzle supply circuits 814, thereby enabling a variety of fluid supply modes for the fuel nozzles 164. For example, the fuel nozzle supply circuits 814 may include a first nozzle circuit 816, a second nozzle circuit 818, and a third nozzle circuit 820. Each of these fuel nozzle supply circuits 814 (e.g., 816, 818, and 820) may include one or more fuel lines, oxidant lines, and/or diluent lines (e.g., exhaust lines, steam lines, nitrogen lines, and/or other inert gas lines), which are fluidly coupled to at least one fuel nozzle 164. In the illustrated embodiment, the first nozzle circuit 816 is coupled to a first set of fuel nozzles 164 (e.g., the central fuel nozzle 790), the second nozzle circuit 818 is coupled to a second set of fuel nozzles 164 (e.g., outer fuel nozzles 794, 798, and 802), and the third nozzle circuit 820 is coupled to a third set of fuel nozzles 164 (e.g., outer fuel nozzles 792, 796, and 800). In some embodiments, each set of fuel nozzles 164 coupled to one of the nozzle supply circuits 814 may be entirely diffusion fuel nozzles, entirely premix fuel nozzles, or any combination of diffusion fuel nozzles and premix fuel nozzles. However, any number or configuration of fuel nozzles 164 may be coupled to each fuel nozzle supply circuit 814, and any number of nozzle supply circuits 814 may be coupled to the fuel nozzles 164. Again, the fuel nozzle supply circuits 814 are coupled to the fluid supply system 518, which may include valves, flow regulators, and other flow controls to control the flow rate and pressure of the flows to the fuel nozzles 164.

[00113] In turn, the fluid supply system 518 is coupled to the control system 100, which may use the controller 118 to receive the sensor feedback 130 and provide controls signals 306 to the fluid supply system 518 to control operation of the circuits 812 and 814. In the illustrated embodiment, the controller 118 of the system 100 may store and execute (e.g., computer instructions or code relating to) a stoichiometric control mode 822 and a non-stoichiometric control mode 824, which may further include a fuel-lean control mode 826 and a fuel-rich control mode 828. The controller 118 of the system 100 also may store and execute (e.g., computer instructions or code relating to) a fluid supply control 830, including a first fluid circuit control 832, a

second fluid circuit control 834, and a third fluid circuit control 836. For example, the first fluid circuit control 832 may be configured to control various flow rates (e.g., oxidant 68, fuel 70, and/or diluent 514) to the first nozzle circuit 816, the second fluid circuit control 834 may be configured to control various flow rates (e.g., oxidant 68, fuel 70, and/or diluent 514) to the second nozzle circuit 818, and the third fluid circuit control 836 may be configured to control various flow rates (e.g., oxidant 68, fuel 70, and/or diluent 514) to the third nozzle circuit 820.

[00114] In certain embodiments, the stoichiometric control mode 822 is configured to change the flow rates of at least one fuel 70 and at least one oxidant 68 and provide a substantially stoichiometric ratio of the fuel 70 with the oxidant 68, whereas the non-stoichiometric control mode 824 is configured to change the flow rates and provide a non-stoichiometric ratio of the fuel 70 with the oxidant 68. For example, the stoichiometric control mode 822 may be configured to provide the substantially stoichiometric ratio with an equivalence ratio of approximately 1.0, or between approximately 0.95 and approximately 1.05. In contrast, the non-stoichiometric control mode 824 may be configured to provide the non-stoichiometric ratio with an equivalence ratio of less than approximately 0.95 or greater than approximately 1.05. In some embodiments, the control system 100 may be configured to change the flow rates from a first set of flow rates to a second set of flow rates, wherein the first and second flow rates are different from one another (e.g., greater or lesser than one another). The controlled change in flow rates may also involve a transition between the stoichiometric control mode 822 and the non-stoichiometric control mode 824, or the controlled change in flow rates may involve maintaining the substantially stoichiometric ratio. The controlled change in flow rates also may involve a change in power output (or load) of the SEGR gas turbine system 52 from a first power output (or first load) to a second power output (or second load), wherein the first and second power outputs (e.g., loads) are different from one another (e.g., lesser or greater than one another). For example, the controlled change in power outputs may involve a controlled change in turbine load, e.g., a reduction from a rated or normal load (e.g., 100 percent) to a partial load (e.g., 50 percent). The controlled change in flow rates also may involve maintaining emissions in the exhaust gas within one or

more target emissions ranges, wherein the emissions may include carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof. In certain embodiments, the one or more target emissions ranges may include an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv. In other embodiments, the one or more target emissions ranges comprise an oxygen range of less than approximately 10 ppmv and/or a carbon monoxide range of less than approximately 1000 ppmv.

[00115] In some embodiments, the control system 100 in the stoichiometric control mode 822 is configured to maintain the substantially stoichiometric ratio while progressively reducing the flow rates (e.g., oxidant 68 and fuel 70) among a plurality of sets of flow rates, progressively reducing a power output (e.g., load) of the SEGR gas turbine system 52 among a plurality of power outputs (e.g., full load, first partial load, second partial load, etc.), and maintaining emissions in the exhaust gas within one or more target emissions ranges. The control system 100 also may be configured to transition from the stoichiometric control mode 822 to the non-stoichiometric control mode 824 after progressively reducing the flow rates, progressively reducing the power output, and maintaining emissions. After the transition from the stoichiometric control mode 822 to the non-stoichiometric control mode 824, the control system 100 also may be configured to operate in a fuel-rich control mode or a fuel-lean control mode of the non-stoichiometric control mode 824. The control system 100 also may be configured to maintain emissions in the exhaust gas within a first set of target emissions ranges (e.g., while operating in the stoichiometric control mode 822) and a second set of target emissions ranges (e.g., while operating in the non-stoichiometric control mode 824), wherein the first and second sets of target emissions ranges are different from one another. Although the foregoing examples provide a number of control scenarios for the SEGR gas turbine engine 52, it should be understood that any number of control scenarios may be executed by the control system 100 using diffusion fuel nozzles, premix fuel nozzles, or any combination thereof.

[00116] FIG. 18 is a graph of exhaust gas recirculation (EGR) flow rate and gas turbine load 840 versus fuel/oxidant ratio 842 for the SEGR gas turbine system 52, illustrating a diffusion flame operability curve 844 and a premix flame operability curve 846. The EGR flow rate through the SEGR gas turbine system 52 is generally proportionally to the load on the gas turbine engine 150, and thus the Y-axis 840 generally indicates both EGR flow rate and gas turbine load. In general, the areas above and to the left of each curve 844 and 846 represent unstable regions for each flame configuration of the SEGR gas turbine system 52. It is noteworthy that the diffusion flame operability curve 844 substantially exceeds the premix flame operability curve 846, indicating a substantially greater EGR flow rate and load range for the SEGR gas turbine system 52 operating with diffusion combustion. As illustrated in FIG. 18, the diffusion flame operability curve 844 may correspond to a combustor 160 equipped with a diffusion fuel nozzle 554, wherein exhaust gas (e.g., diluent) is injected downstream from the diffusion fuel nozzle 554 after the point of combustion and/or downstream from the diffusion flame 556 generated by the nozzle 554. One example of such a diffusion combustion configuration is illustrated in FIG. 16. In contrast, the premix flame operability curve 846 may correspond to a combustor 160 equipped with a premix fuel nozzle 550, wherein the oxidant 68, the fuel 70, and the diluent 514 (e.g., exhaust gas) are premixed prior to the point of combustion (i.e., upstream from the premix flame 552). Again, the diffusion flame operability curves 844 indicates much greater EGR flow rates through the SEGR gas turbine system 52, which also means a greater production of CO₂ for use in the target systems 422. The SEGR gas turbine system 52 operating with the foregoing diffusion combustion configuration also may have substantially reduced emissions of oxygen and carbon monoxide. These emissions reductions may be at least partially due to the independent control of the flows of oxidant 68, fuel 70, and diluent 514 (e.g., exhaust gas). It is believed that various configurations of diffusion fuel nozzles 554 and diluent injection (e.g., diluent injection system 770 of FIG. 16) may substantially increase the operable range of gas turbine loads, throughput of exhaust gas, and output of the exhaust gas 42 (e.g., streams 95) for use in the target systems 422, such as the hydrocarbon production system 12.

ADDITIONAL DESCRIPTION

[00117] By way of example, the following clauses are offered as further description of the present disclosure:

[00118] Embodiment 1. A system, comprising: a turbine combustor comprising a first diffusion fuel nozzle, wherein the first diffusion fuel nozzle is configured to produce a diffusion flame; a turbine driven by combustion products from the diffusion flame in the turbine combustor; an exhaust gas compressor, wherein the exhaust gas compressor is configured to compress and route an exhaust gas from the turbine to the turbine combustor along an exhaust recirculation path; and a control system configured to control flow rates of at least one oxidant and at least one fuel to the turbine combustor in a stoichiometric control mode and a non-stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least one fuel with the at least one oxidant, and the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.

[00119] Embodiment 2. The system of embodiment 1, wherein the stoichiometric control mode is configured to provide the substantially stoichiometric ratio with an equivalence ratio of approximately 1.0.

[00120] Embodiment 3. The system of any preceding embodiment, wherein the stoichiometric control mode is configured to provide the substantially stoichiometric ratio with an equivalence ratio of between approximately 0.95 and approximately 1.05.

[00121] Embodiment 4. The system of any preceding embodiment, wherein the non-stoichiometric control mode is configured to provide the non-stoichiometric ratio with an equivalence ratio of less than approximately 0.95 or greater than approximately 1.05.

[00122] Embodiment 5. The system of any preceding embodiment, wherein the control system is configured to change the flow rates from a first set of flow rates to a second set of flow rates and transition between the stoichiometric control mode and the non-stoichiometric control mode.

[00123] Embodiment 6. The system of any preceding embodiment, wherein the second set of flow rates is less than the first set of flow rates.

[00124] Embodiment 7. The system of any preceding embodiment, wherein the second set of flow rates is greater than the first set of flow rates.

[00125] Embodiment 8. The system of any preceding embodiment, wherein the control system in the stoichiometric control mode is configured to change the flow rates from a first set of flow rates to a second set of flow rates while maintaining the substantially stoichiometric ratio.

[00126] Embodiment 9. The system of any preceding embodiment, wherein the second set of flow rates is less than the first set of flow rates.

[00127] Embodiment 10. The system of any preceding embodiment, wherein the second set of flow rates is greater than the first set of flow rates.

[00128] Embodiment 11. The system of any preceding embodiment, wherein the control system in the stoichiometric control mode is configured to change a power output of the turbine from a first power output to a second power output by changing the flow rates from the first set of flow rates to the second set of flow rates, respectively.

[00129] Embodiment 12. The system of any preceding embodiment, wherein the second set of flow rates is less than the first set of flow rates, and the second power output is less than the first power output.

[00130] Embodiment 13. The system of any preceding embodiment, wherein the second set of flow rates is greater than the first set of flow rates, and the second power output is greater than the first power output.

[00131] Embodiment 14. The system of any preceding embodiment, wherein the control system in the stoichiometric control mode is configured to maintain emissions in the exhaust gas within one or more target emissions ranges while changing the flow rates from the first set of flow rates to the second set of flow rates.

[00132] Embodiment 15. The system of any preceding embodiment, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

[00133] Embodiment 16. The system of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

[00134] Embodiment 17. The system of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

[00135] Embodiment 18. The system of any preceding embodiment, wherein the control system in the stoichiometric control mode is configured to progressively change the flow rates among a plurality of sets of flow rates while maintaining the substantially stoichiometric ratio.

[00136] Embodiment 19. The system of any preceding embodiment, wherein the plurality of sets of flow rates comprise at least three sets of flow rates.

[00137] Embodiment 20. The system of any preceding embodiment, wherein the plurality of sets of flow rates comprise at least four sets of flow rates.

[00138] Embodiment 21. The system of any preceding embodiment, wherein the control system in the stoichiometric control mode is configured to maintain the substantially stoichiometric ratio while: progressively reducing the flow rates among the plurality of sets of flow rates; progressively reducing a power output of the

turbine among a plurality of power outputs; and maintaining emissions in the exhaust gas within one or more target emissions ranges.

[00139] Embodiment 22. The system of any preceding embodiment, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

[00140] Embodiment 23. The system of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

[00141] Embodiment 24. The system of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

[00142] Embodiment 25. The system of any preceding embodiment, wherein the control system is configured to transition from the stoichiometric control mode to the non-stoichiometric control mode after progressively reducing the flow rates, progressively reducing the power output, and maintaining emissions.

[00143] Embodiment 26. The system of any preceding embodiment, wherein, after the transition from the stoichiometric control mode to the non-stoichiometric control mode, the control system is configured to operate in a fuel rich control mode of the non-stoichiometric control mode.

[00144] Embodiment 27. The system of any preceding embodiment, wherein, after the transition from the stoichiometric control mode to the non-stoichiometric control mode, the control system is configured to operate in a fuel lean control mode of the non-stoichiometric control mode.

[00145] Embodiment 28. The system of any preceding embodiment, wherein the control system is configured to maintain emissions in the exhaust gas within a first set of target emissions ranges while operating in the stoichiometric control mode, the

control system is configured to maintain emissions in the exhaust gas within a second set of target emissions ranges while operating in the non-stoichiometric control mode, and the first and second sets of target emissions ranges are different from one another.

[00146] Embodiment 29. The system of any preceding embodiment, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of oxygen emissions that is at least approximately 1000 parts per million by volume (ppmv).

[00147] Embodiment 30. The system of any preceding embodiment, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 100 parts per million by volume (ppmv).

[00148] Embodiment 31. The system of any preceding embodiment, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 20 parts per million by volume (ppmv).

[00149] Embodiment 32. The system of any preceding embodiment, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 200 parts per million by volume (ppmv).

[00150] Embodiment 33. The system of any preceding embodiment, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 100 parts per million by volume (ppmv).

[00151] Embodiment 34. The system of any preceding embodiment, wherein the control system is configured to: progressively change the flow rates among a plurality of sets of flow rates; progressively change a power output of the turbine among a plurality of power outputs in response to the changes in flow rates; maintain emissions in the exhaust gas within one or more target emissions ranges before and

after the changes in flow rates; maintain a temperature of the exhaust gas along the exhaust recirculation path within a target temperature range before and after the changes in flow rates; and maintain a pressure of the exhaust gas along the exhaust recirculation path within a target pressure range before and after the changes in flow rates.

[00152] Embodiment 35. The system of any preceding embodiment, wherein the control system is configured to maintain the temperature within the target temperature range downstream from at least one catalyst unit along the exhaust recirculation path.

[00153] Embodiment 36. The system of any preceding embodiment, wherein the control system is configured to maintain the pressure by adjusting at least one of an exhaust extraction valve, an exhaust vent valve, an operating speed of the exhaust gas compressor or an oxidant compressor, a position of an inlet guide vane of the exhaust gas compressor, a recycle valve of the exhaust gas compressor, or any combination thereof.

[00154] Embodiment 37. The system of any preceding embodiment, wherein the turbine combustor comprises a first set of fuel nozzles coupled to a first fluid supply circuit and a second set of fuel nozzles coupled to a second fluid supply circuit, the first diffusion nozzle is part of either the first or second set of fuel nozzles, and the control system is configured to independently control fluid flows through the first and second fluid supply circuits.

[00155] Embodiment 38. The system of any preceding embodiment, wherein the first set of fuel nozzles comprises a single fuel nozzle, and the second set of fuel nozzles comprises a plurality of fuel nozzles.

[00156] Embodiment 39. The system of any preceding embodiment, wherein the first set of fuel nozzles comprises a first plurality of fuel nozzle, and the second set of fuel nozzles comprises a second plurality of fuel nozzles.

[00157] Embodiment 40. The system of any preceding embodiment, wherein the turbine combustor comprises a third set of fuel nozzles coupled to a third fluid supply

circuit, and the control system is configured to independently control fluid flows through the first, second, and third fluid supply circuits.

[00158] Embodiment 41. The system of any preceding embodiment, wherein the control system is configured to independently change the fluid flows through the first and second fluid supply circuits at different rates.

[00159] Embodiment 42. The system of any preceding embodiment, wherein the control system is configured to independently change the fluid flows through the first and second fluid supply circuits at equal rates.

[00160] Embodiment 43. The system of any preceding embodiment, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a second diffusion fuel nozzle.

[00161] Embodiment 44. The system of any preceding embodiment, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a first premix fuel nozzle.

[00162] Embodiment 45. The system of any preceding embodiment, comprising a first catalyst unit disposed along the exhaust recirculation path.

[00163] Embodiment 46. The system of any preceding embodiment, wherein the first catalyst unit is configured to control concentration levels of oxygen, carbon monoxide, carbon dioxide, nitrogen oxides, unburnt hydrocarbons, or any combination thereof, in the exhaust gas.

[00164] Embodiment 47. The system of any preceding embodiment, wherein the first catalyst unit comprises an oxidation catalyst, a carbon monoxide reduction catalyst, a nitrogen oxides reduction catalyst, an aluminum oxide, a zirconium oxide, a silicone oxide, a titanium oxide, a platinum oxide, a palladium oxide, a cobalt oxide, or a mixed metal oxide, or a combination thereof.

[00165] Embodiment 48. The system of any preceding embodiment, wherein the first catalyst unit is configured to drive an oxidizing reaction with the exhaust gas and an oxidant fuel.

[00166] Embodiment 49. The system of any preceding embodiment, wherein the control system is configured to adjust a flow of the oxidant fuel to control the oxidizing reaction.

[00167] Embodiment 50. The system of any preceding embodiment, wherein the control system is configured to adjust the flow of the oxidant fuel in response to sensor feedback, and the sensor feedback comprises gas composition feedback indicative of oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

[00168] Embodiment 51. The system of any preceding embodiment, comprising a first heat recovery unit, a second heat recovery unit, or a combination thereof, disposed along the exhaust recirculation path.

[00169] Embodiment 52. The system of any preceding embodiment, comprising a first catalyst unit, a second catalyst unit, or a combination thereof, disposed along the exhaust recirculation path.

[00170] Embodiment 53. The system of any preceding embodiment, wherein the first or second catalyst unit is disposed upstream, downstream, or integrated with the first or second heat recovery unit.

[00171] Embodiment 54. The system of any preceding embodiment, comprising the first heat recovery unit having a first heat recovery steam generator.

[00172] Embodiment 55. The system of any preceding embodiment, comprising a first steam turbine coupled to the first heat recovery steam generator.

[00173] Embodiment 56. The system of any preceding embodiment, comprising the second heat recovery unit having a second heat recovery steam generator, a first

steam turbine coupled to the first heat recovery steam generator, and a second steam turbine coupled to the second heat recovery steam generator.

[00174] Embodiment 57. The system of any preceding embodiment, comprising a moisture removal system and/or a particulate removal system disposed along the exhaust recirculation path.

[00175] Embodiment 58. The system of any preceding embodiment, wherein the moisture removal system comprises a heat exchanger, a condenser, a water gas separator, a first filter, or any combination thereof, wherein the particulate removal system comprises an inertial separator, a gravity separator, a second filter, or any combination thereof.

[00176] Embodiment 59. The system of any preceding embodiment, comprising a booster blower disposed along the exhaust recirculation path.

[00177] Embodiment 60. The system of any preceding embodiment, comprising a heat recovery unit, a booster blower, a moisture removal unit, and a particulate removal unit disposed along the exhaust recirculation path.

[00178] Embodiment 61. The system of any preceding embodiment, wherein the first diffusion fuel nozzle comprises a first fuel passage and a first oxidant passage that are isolated from one another along the first diffusion fuel nozzle.

[00179] Embodiment 62. The system of any preceding embodiment, wherein the first diffusion fuel nozzle comprises a first diluent passage.

[00180] Embodiment 63. The system of any preceding embodiment, wherein the first diluent passage is configured to flow a portion of the exhaust gas through the first diffusion fuel nozzle.

[00181] Embodiment 64. The system of any preceding embodiment, wherein the first diluent passage is configured to flow a portion of the exhaust gas, steam, nitrogen, another inert gas, or a combination thereof, through the first diffusion fuel nozzle.

[00182] Embodiment 65. The system of any preceding embodiment, wherein the turbine combustor comprises a diluent injection system disposed downstream from the first diffusion fuel nozzle.

[00183] Embodiment 66. The system of any preceding embodiment, wherein the diluent injection system is configured to inject a portion of the exhaust gas, steam, nitrogen, or another inert gas, or a combination thereof, into a chamber of the turbine combustor downstream from the first diffusion fuel nozzle.

[00184] Embodiment 67. The system of any preceding embodiment, wherein the diluent injection system comprises a plurality of openings in a liner of the turbine combustor, and the plurality of openings is configured to inject the portion of the exhaust gas into the chamber of the turbine combustor.

[00185] Embodiment 68. The system of any preceding embodiment, wherein the turbine combustor comprises a first wall disposed about the chamber, a second wall disposed about the first wall, and an exhaust passage disposed between the first and second walls, wherein the diluent injection system comprises a plurality of diluent injectors extending through the first and second walls of the turbine combustor.

[00186] Embodiment 69. The system of any preceding embodiment, wherein the plurality of diluent injectors is configured to inject the portion of the exhaust gas, steam, nitrogen, or another inert gas into the chamber of the turbine combustor.

[00187] Embodiment 70. The system of any preceding embodiment, comprising an exhaust gas extraction system configured to extract a portion of the exhaust gas.

[00188] Embodiment 71. The system of any preceding embodiment, comprising an exhaust gas treatment system configured to treat the portion of the exhaust gas.

[00189] Embodiment 72. The system of any preceding embodiment, wherein the exhaust gas treatment system comprises a gas separation system configured to separate the portion of the exhaust gas into a plurality of gas streams.

[00190] Embodiment 73. The system of any preceding embodiment, wherein the plurality of gas streams comprises a first stream that is carbon dioxide (CO₂) rich and a second stream that is carbon dioxide (CO₂) lean.

[00191] Embodiment 74. The system of any preceding embodiment, wherein the exhaust gas treatment system comprises a gas compression system, a moisture removal system, a particulate removal system, or a combination thereof, configured to receive at least one of the first or second streams.

[00192] Embodiment 75. The system of any preceding embodiment, wherein the exhaust gas treatment system comprises a gas purification system configured to purify at least one of the plurality of gas streams.

[00193] Embodiment 76. The system of any preceding embodiment, comprising a target system configured to receive at least one of the plurality of streams, wherein the target system comprises a hydrocarbon production system, a subterranean reservoir, a carbon sequestration system, a pipeline, a storage tank, or any combination thereof.

[00194] Embodiment 77. The system of any preceding embodiment, wherein the exhaust gas treatment system comprises a compression system configured to compress the portion of the exhaust gas.

[00195] Embodiment 78. The system of any preceding embodiment, wherein the exhaust gas treatment system comprises a moisture removal system and/or a particulate removal system.

[00196] Embodiment 79. The system of any preceding embodiment, comprising a control system responsive to sensor feedback to adjust one or more operating parameters to control an equivalence ratio or emissions levels in the exhaust gas.

[00197] Embodiment 80. The system of any preceding embodiment, wherein the one or more operating parameters comprise an oxidant flow rate and/or a fuel flow rate to the turbine combustor.

[00198] Embodiment 81. The system of any preceding embodiment, wherein the control system is configured to maintain the equivalence ratio between approximately 0.95 and 1.05.

[00199] Embodiment 82. The system of any preceding embodiment, wherein the sensor feedback comprises gas composition feedback relating to oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

[00200] Embodiment 83. The system of any preceding embodiment, wherein the control system is coupled to a plurality of sensors configured to obtain the sensor feedback, and the plurality of sensors are disposed along the exhaust recirculation path, the turbine combustor, the turbine, the exhaust gas compressor, or a combination thereof.

[00201] Embodiment 84. The system of any preceding embodiment, comprising a bypass line from the exhaust gas compressor to the turbine, wherein the bypass line comprises a heat exchanger configured to cool a bypass flow of the exhaust gas from the exhaust gas compressor to the turbine.

[00202] Embodiment 85. The system of any preceding embodiment, comprising a gas turbine engine having the turbine combustor, the turbine, and the exhaust gas compressor, wherein the gas turbine engine is a stoichiometric exhaust gas recirculation (SEGR) gas turbine engine.

[00203] Embodiment 86. The system of any preceding embodiment, comprising an exhaust gas extraction system coupled to the gas turbine engine, an exhaust gas treatment system coupled to the exhaust gas extraction system, and a hydrocarbon production system coupled to the exhaust gas treatment system.

[00204] Embodiment 87. A method, comprising: injecting at least one oxidant and at least one fuel into a chamber of a turbine combustor, wherein the at least one oxidant and the at least one fuel mix and combust as a diffusion flame to generate combustion products; driving a turbine with the combustion products and outputting

an exhaust gas; recirculating the exhaust gas along an exhaust recirculation path to an exhaust gas compressor; compressing and routing the exhaust gas to the turbine combustor; controlling flow rates of the at least one oxidant and the at least one fuel to the turbine combustor in a stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least one fuel with the at least one oxidant; and controlling flow rates of the at least one oxidant and the at least one fuel to the turbine combustor in a non-stoichiometric control mode, wherein the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.

[00205] Embodiment 88. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises providing the substantially stoichiometric ratio with an equivalence ratio of approximately 1.0.

[00206] Embodiment 89. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises providing the substantially stoichiometric ratio with an equivalence ratio of between approximately 0.95 and approximately 1.05.

[00207] Embodiment 90. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises providing the non-stoichiometric ratio with an equivalence ratio of less than approximately 0.95 or greater than approximately 1.05.

[00208] Embodiment 91. The method of any preceding embodiment, comprising changing the flow rates from a first set of flow rates to a second set of flow rates and transitioning between the stoichiometric control mode and the non-stoichiometric control mode.

[00209] Embodiment 92. The method of any preceding embodiment, wherein the second set of flow rates is less than the first set of flow rates.

[00210] Embodiment 93. The method of any preceding embodiment, wherein the second set of flow rates is greater than the first set of flow rates.

[00211] Embodiment 94. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises changing the flow rates from a first set of flow rates to a second set of flow rates while maintaining the substantially stoichiometric ratio.

[00212] Embodiment 95. The method of any preceding embodiment, wherein the second set of flow rates is less than the first set of flow rates.

[00213] Embodiment 96. The method of any preceding embodiment, wherein the second set of flow rates is greater than the first set of flow rates.

[00214] Embodiment 97. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises changing a power output of the turbine from a first power output to a second power output by changing the flow rates from the first set of flow rates to the second set of flow rates, respectively.

[00215] Embodiment 98. The method of any preceding embodiment, wherein the second set of flow rates is less than the first set of flow rates, and the second power output is less than the first power output.

[00216] Embodiment 99. The method of any preceding embodiment, wherein the second set of flow rates is greater than the first set of flow rates, and the second power output is greater than the first power output.

[00217] Embodiment 100. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises changing maintaining emissions in the exhaust gas within one or more target emissions ranges while changing the flow rates from the first set of flow rates to the second set of flow rates.

[00218] Embodiment 101. The method of any preceding embodiment, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

[00219] Embodiment 102. The method of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

[00220] Embodiment 103. The method of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

[00221] Embodiment 104. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises progressively changing the flow rates among a plurality of sets of flow rates while maintaining the substantially stoichiometric ratio.

[00222] Embodiment 105. The method of any preceding embodiment, wherein the plurality of sets of flow rates comprise at least three sets of flow rates.

[00223] Embodiment 106. The method of any preceding embodiment, wherein the plurality of sets of flow rates comprise at least four sets of flow rates.

[00224] Embodiment 107. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises maintaining the substantially stoichiometric ratio while: progressively reducing the flow rates among the plurality of sets of flow rates; progressively reducing a power output of the turbine among a plurality of power outputs; and maintaining emissions in the exhaust gas within one or more target emissions ranges.

[00225] Embodiment 108. The method of any preceding embodiment, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

[00226] Embodiment 109. The method of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than

approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

[00227] Embodiment 110. The method of any preceding embodiment, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

[00228] Embodiment 111. The method of any preceding embodiment, comprising transitioning from the stoichiometric control mode to the non-stoichiometric control mode after progressively reducing the flow rates, progressively reducing the power output, and maintaining emissions.

[00229] Embodiment 112. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel rich control mode after the transition from the stoichiometric control mode to the non-stoichiometric control mode.

[00230] Embodiment 113. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode after the transition from the stoichiometric control mode to the non-stoichiometric control mode.

[00231] Embodiment 114. The method of any preceding embodiment, wherein controlling in the stoichiometric control mode comprises maintaining emissions in the exhaust gas within a first set of target emissions ranges, wherein controlling in the non-stoichiometric control mode comprises maintaining emissions in the exhaust gas within a second set of target emissions ranges, wherein the first and second sets of target emissions ranges are different from one another.

[00232] Embodiment 115. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of oxygen emissions that is at least approximately 1000 parts per million by volume (ppmv).

[00233] Embodiment 116. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 100 parts per million by volume (ppmv).

[00234] Embodiment 117. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 20 parts per million by volume (ppmv).

[00235] Embodiment 118. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 200 parts per million by volume (ppmv).

[00236] Embodiment 119. The method of any preceding embodiment, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 100 parts per million by volume (ppmv).

[00237] Embodiment 120. The method of any preceding embodiment, comprising controlling one or more operational parameters for: progressively changing the flow rates among a plurality of sets of flow rates; progressively changing a power output of the turbine among a plurality of power outputs in response to changing the flow rates; maintaining emissions in the exhaust gas within one or more target emissions ranges before and after changing the flow rates; maintaining a temperature of the exhaust gas along the exhaust recirculation path within a target temperature range before and after changing the flow rates; and maintaining a pressure of the exhaust gas along the exhaust recirculation path within a target pressure range before and after changing the flow rates.

[00238] Embodiment 121. The method of any preceding embodiment, wherein controlling comprises maintaining the temperature within the target temperature range downstream from at least one catalyst unit along the exhaust recirculation path.

[00239] Embodiment 122. The method of any preceding embodiment, comprising controlling comprises maintaining the pressure by adjusting at least one of an exhaust extraction valve, an exhaust vent valve, an operating speed of the exhaust gas compressor or an oxidant compressor, a position of an inlet guide vane of the exhaust gas compressor, a recycle valve of the exhaust gas compressor, or any combination thereof.

[00240] Embodiment 123. The method of any preceding embodiment, comprising independently controlling fluid flows through first and second fluid supply circuits, wherein the turbine combustor comprises a first set of fuel nozzles coupled to the first fluid supply circuit and a second set of fuel nozzles coupled to the second fluid supply circuit, wherein at least one of the first or second set of fuel nozzles comprises a first diffusion fuel nozzle configured to generate the diffusion flame.

[00241] Embodiment 124. The method of any preceding embodiment, wherein the first set of fuel nozzles comprises a single fuel nozzle, and the second set of fuel nozzles comprises a plurality of fuel nozzles.

[00242] Embodiment 125. The method of any preceding embodiment, wherein the first set of fuel nozzles comprises a first plurality of fuel nozzle, and the second set of fuel nozzles comprises a second plurality of fuel nozzles.

[00243] Embodiment 126. The method of any preceding embodiment, comprising independently controlling fluid flows through the first fluid supply circuit, the second fluid supply circuit, and a third fluid supply circuit, wherein the turbine combustor comprises a third set of fuel nozzles coupled to the third fluid supply circuit.

[00244] Embodiment 127. The method of any preceding embodiment, comprising independently changing the fluid flows through the first and second fluid supply circuits at different rates.

[00245] Embodiment 128. The method of any preceding embodiment, comprising independently changing the fluid flows through the first and second fluid supply circuits at equal rates.

[00246] Embodiment 129. The method of any preceding embodiment, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a second diffusion fuel nozzle.

[00247] Embodiment 130. The method of any preceding embodiment, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a first premix fuel nozzle.

[00248] Embodiment 131. The method of any preceding embodiment, wherein injecting comprises separately injecting the at least one oxidant and the at least one fuel from respective first and second passages that are isolated from one another along a first diffusion fuel nozzle.

[00249] Embodiment 132. The method of any preceding embodiment, wherein the first and second passages are disposed in a concentric arrangement.

[00250] Embodiment 133. The method of any preceding embodiment, wherein the first passage extends around the second passage.

[00251] Embodiment 134. The method of any preceding embodiment, wherein the second passage extends around the first passage.

[00252] Embodiment 135. The method of any preceding embodiment, comprising injecting at least one diluent into the chamber.

[00253] Embodiment 136. The method of any preceding embodiment, wherein the at least one diluent comprises a portion of the exhaust gas, steam, nitrogen, another inert gas, or a combination thereof.

[00254] Embodiment 137. The method of any preceding embodiment, comprising separately injecting the at least one oxidant and the at least one fuel from respective first and second passages that are isolated from one another along a first diffusion fuel nozzle, and routing a diluent flow through the first diffusion fuel nozzle.

[00255] Embodiment 138. The method of any preceding embodiment, comprising routing a diluent flow into the chamber downstream from a first diffusion fuel nozzle.

[00256] Embodiment 139. The method of any preceding embodiment, comprising injecting the diluent flow through a plurality of openings in a liner of the turbine combustor, and the diluent flow comprises a portion of the exhaust gas.

[00257] Embodiment 140. The method of any preceding embodiment, comprising injecting the diluent flow through a plurality of diluent injectors extending through at least one wall of the turbine combustor, and the diluent flow comprises a portion of the exhaust gas, steam, nitrogen, or another inert gas.

[00258] Embodiment 141. The method of any preceding embodiment, comprising treating the exhaust gas with a first catalyst unit along the exhaust recirculation path.

[00259] Embodiment 142. The method of any preceding embodiment, wherein treating comprises controlling concentration levels of carbon monoxide, carbon dioxide, and unburnt hydrocarbons in the exhaust gas.

[00260] Embodiment 143. The method of any preceding embodiment, wherein treating comprises driving an oxidizing reaction with the exhaust gas and an oxidant fuel.

[00261] Embodiment 144. The method of any preceding embodiment, comprising controlling a flow of the oxidant fuel to the first catalyst unit to control the oxidizing reaction.

[00262] Embodiment 145. The method of any preceding embodiment, comprising controlling the flow of the oxidant fuel in response to sensor feedback, and the sensor feedback comprises gas composition feedback indicative of oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

[00263] Embodiment 146. The method of any preceding embodiment, comprising recovering heat from the exhaust gas along the exhaust recirculation path using a first heat recovery unit, a second heat recovery unit, or a combination thereof.

[00264] Embodiment 147. The method of any preceding embodiment, comprising driving a first catalytic reaction with a first catalyst unit within, upstream, or downstream of the first or second heat recovery unit.

[00265] Embodiment 148. The method of any preceding embodiment, comprising driving a second catalytic reaction with a second catalyst unit within, upstream, or downstream of the first or second heat recovery unit.

[00266] Embodiment 149. The method of any preceding embodiment, comprising generating a first steam with a first heat recovery steam generator of the first heat recovery unit, generating a second steam with a second heat recovery steam generator of the second heat recovery unit, or a combination thereof.

[00267] Embodiment 150. The method of any preceding embodiment, comprising driving a first steam turbine with the first steam or driving a second steam turbine with the second steam.

[00268] Embodiment 151. The method of any preceding embodiment, comprising removing moisture from the exhaust gas with a moisture removal system disposed along the exhaust recirculation path.

[00269] Embodiment 152. The method of any preceding embodiment, wherein the moisture removal system comprises a heat exchanger, a condenser, a water gas separator, a filter, or any combination thereof.

[00270] Embodiment 153. The method of any preceding embodiment, comprising removing particulate from the exhaust gas with a particulate removal system disposed along the exhaust recirculation path.

[00271] Embodiment 154. The method of any preceding embodiment, wherein the particulate removal system comprises an inertial separator, a gravity separator, a filter, or any combination thereof.

[00272] Embodiment 155. The method of any preceding embodiment, comprising boosting a flow of the exhaust gas with a booster blower disposed along the exhaust recirculation path.

[00273] Embodiment 156. The method of any preceding embodiment, comprising a heat recovery unit, a booster blower, a moisture removal unit, and a particulate removal unit disposed along the exhaust recirculation path.

[00274] Embodiment 157. The method of any preceding embodiment, comprising extracting a portion of the exhaust gas with an exhaust gas extraction system.

[00275] Embodiment 158. The method of any preceding embodiment, comprising treating the portion of the exhaust gas with an exhaust gas treatment system.

[00276] Embodiment 159. The method of any preceding embodiment, wherein treating the portion of the exhaust gas comprises separating the portion of the exhaust gas into a plurality of gas streams.

[00277] Embodiment 160. The method of any preceding embodiment, wherein the plurality of gas streams comprises a first stream that is carbon dioxide (CO₂) rich and a second stream that is carbon dioxide (CO₂) lean.

[00278] Embodiment 161. The method of any preceding embodiment, wherein treating the portion of the exhaust gas comprises compressing the portion of the exhaust gas, the first stream, or the second stream with a gas compression system.

[00279] Embodiment 162. The method of any preceding embodiment, wherein treating the portion of the exhaust gas comprises removing moisture from the portion of the exhaust gas, the first stream, or the second stream with a moisture removal system.

[00280] Embodiment 163. The method of any preceding embodiment, wherein treating the portion of the exhaust gas comprises removing particulate from the portion of the exhaust gas, the first stream, or the second stream with a particulate removal system.

[00281] Embodiment 164. The method of any preceding embodiment, comprising routing the portion of the exhaust gas, the first stream, or the second steam to a target system, wherein the target system comprises a hydrocarbon production system, a subterranean reservoir, a carbon sequestration system, a pipeline, a storage tank, or any combination thereof.

[00282] Embodiment 165. The method of any preceding embodiment, comprising adjusting one or more operating parameters in response to sensor feedback to control an equivalence ratio or emissions levels in the exhaust gas.

[00283] Embodiment 166. The method of any preceding embodiment, comprising obtaining the sensor feedback by monitoring a gas composition of the exhaust gas relating to oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

[00284] Embodiment 167. The method of any preceding embodiment, wherein obtaining the sensor feedback comprises monitoring a plurality of sensors disposed along the exhaust recirculation path, the turbine combustor, the turbine, the exhaust gas compressor, or a combination thereof.

[00285] Embodiment 168. The method of any preceding embodiment, comprising routing a bypass flow of the exhaust gas along a bypass line from the exhaust gas compressor to the turbine.

[00286] Embodiment 169. The method of any preceding embodiment, comprising cooling the bypass flow of the exhaust gas along the bypass line, and cooling the turbine using the bypass flow of the exhaust gas.

[00287] Embodiment 170. The method of any preceding embodiment, comprising operating a gas turbine engine having the turbine combustor, the turbine, and the exhaust gas compressor to achieve substantially stoichiometric combustion based on sensor feedback during the stoichiometric control mode.

[00288] Embodiment 171. The method of any preceding embodiment, comprising extracting a portion of the exhaust gas with an exhaust gas extraction system coupled

to the gas turbine engine, and routing the portion of the exhaust gas to a hydrocarbon production system, a carbon sequestration system, a pipeline, a storage tank, or any combination thereof.

[00289] Embodiment 172. A method, comprising: introducing an oxidant to at least one oxidant compressor to produce a compressed oxidant stream; introducing a recirculated low oxygen content gas stream to a compressor section of a gas turbine engine to produce a compressed low oxygen content gas stream; introducing a first portion of the compressed oxidant stream with a first compressed oxidant flow rate and a fuel stream with a first fuel flow rate in a substantially stoichiometric ratio to at least one turbine combustor and mixing the compressed oxidant stream and the fuel stream at the point of combustion and combusting the mixture of the compressed oxidant stream and the fuel stream; introducing a first portion of the compressed low oxygen content gas stream with a low oxygen content gas flow rate to the at least one turbine combustor and mixing it with the combusting streams of compressed oxidant and fuel after the point of combustion and producing a high temperature high pressure low oxygen content stream; introducing the high temperature high pressure low oxygen content stream to an expander section of the gas turbine engine and expanding the high temperature high pressure low oxygen content stream to produce a first mechanical power and a recirculated low oxygen content gas stream at a first recirculated low oxygen content gas flow rate wherein the recirculated low oxygen content gas stream contains a first recirculated low oxygen content gas emissions level; using a first portion of the first mechanical power to drive the compressor section of the gas turbine engine; using a second portion of the first mechanical power to drive at least one of: a generator, the at least one oxidant compressor or at least one other mechanical device; recirculating the recirculated low oxygen content gas stream in a recirculation loop from the outlet of the expander section to the inlet of the compressor section of the gas turbine engine; extracting at least a second portion of the compressed low oxygen content gas stream from the gas turbine engine and delivering the at least a second portion of the compressed low oxygen content gas stream to the first at least one oxidation catalyst unit and producing a low oxygen content product stream comprising a first low oxygen content product emissions level

that is within a target range; reducing fuel stream flow rate to a second fuel stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a second compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a second mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising a second low oxygen content product emissions level that is within a target range; reducing fuel stream flow rate to a third fuel stream flow rate that is less than the second fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a third compressed oxidant flow rate that is less than the second compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a third mechanical power that is less than the second mechanical power and producing a low oxygen content product stream comprising a third low oxygen content product emissions level that is at the limit of a target range; and reducing fuel stream flow rate to a fourth fuel stream flow rate that is less than the third fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a fourth compressed oxidant flow rate that is less than the third compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a fourth mechanical power that is less than the third mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level.

[00290] Embodiment 173. The method of any preceding embodiment, wherein the first recirculated low oxygen content gas emissions comprises at least one of oxygen, carbon monoxide, hydrogen, oxides of nitrogen, unburned hydrocarbons or similar products of incomplete combustion.

[00291] Embodiment 174. The method of any preceding embodiment, wherein the first, second and third low oxygen content product emissions comprises at least one of oxygen, carbon monoxide, hydrogen, oxides of nitrogen, unburned hydrocarbons or similar products of incomplete combustion.

[00292] Embodiment 175. The method of any preceding embodiment, wherein the high oxygen content product emissions comprises at least one of oxygen, carbon monoxide, hydrogen, oxides of nitrogen, unburned hydrocarbons or similar products of incomplete combustion.

[00293] Embodiment 176. The method of any preceding embodiment, wherein the limit of the low oxygen content product emissions level is at least one of 50 ppmv oxygen and 5000 ppmv carbon monoxide.

[00294] Embodiment 177. The method of any preceding embodiment, wherein the limit of the low oxygen content product emissions level is at least one of 10 ppmv oxygen and 1000 ppmv carbon monoxide.

[00295] Embodiment 178. The method of any preceding embodiment, wherein the high oxygen content product emissions level comprises at least 1000 ppmv oxygen.

[00296] Embodiment 179. The method of any preceding embodiment, wherein the high oxygen content product emissions level comprises less than 100 ppmv carbon monoxide.

[00297] Embodiment 180. The method of any preceding embodiment, wherein the high oxygen content product emissions level comprises less than 20 ppmv carbon monoxide.

[00298] Embodiment 181. The method of any preceding embodiment, wherein the high oxygen content product emissions level comprises less than 200 ppmv nitrogen oxides.

[00299] Embodiment 182. The method of any preceding embodiment, wherein the high oxygen content product emissions level comprises less than 100 ppmv nitrogen oxides.

[00300] Embodiment 183. The method of any preceding embodiment, comprising introducing a second portion of the compressed oxidant stream to the first at least one oxidation catalyst unit to oxidize at least a portion of the at least one of carbon

monoxide, hydrogen, unburned hydrocarbons or similar products of incomplete combustion contained in the second portion of the compressed low oxygen content stream.

[00301] Embodiment 184. The method of any preceding embodiment, comprising introducing an oxidation fuel to the first at least one oxidation catalyst unit and reducing at least a portion of the residual oxygen contained in the second portion of the compressed low oxygen content stream.

[00302] Embodiment 185. The method of any preceding embodiment, wherein the oxidant consists of essentially ambient air and the recirculated low oxygen content gas stream comprising comprises nitrogen.

[00303] Embodiment 186. The method of any preceding embodiment, wherein the equivalence ratio (phi, ϕ) is equal to (mol% fuel/mol% oxidant)actual / (mol% fuel/mol% oxidant)stoichiometric.

[00304] Embodiment 187. The method of any preceding embodiment, comprising controlling the flow rate of at least one of the first portion of the compressed oxidant stream and the fuel stream to achieve a combustion equivalence ratio of about 1 and producing a substantially stoichiometric ratio of the first portion of the compressed oxidant stream and the fuel stream.

[00305] Embodiment 188. The method of any preceding embodiment, comprising sensors installed in the recirculation loop and measuring the constituents within the recirculated low oxygen content stream.

[00306] Embodiment 189. The method of any preceding embodiment, wherein the measured constituents are at least one of: oxygen, carbon monoxide, hydrogen, nitrogen oxides, and unburned hydrocarbons.

[00307] Embodiment 190. The method of any preceding embodiment, comprising determining the equivalence ratio by analyzing the constituent measurements.

[00308] Embodiment 191. The method of any preceding embodiment, comprising at least one sensor installed and measuring the constituents within the extracted second portion of the compressed low oxygen content gas stream upstream of the first at least one oxidation catalyst unit, downstream of the first at least one oxidation catalyst unit or both.

[00309] Embodiment 192. The method of any preceding embodiment, wherein the measured constituents are at least one of: oxygen, carbon monoxide, hydrogen, nitrogen oxides, and unburned hydrocarbons.

[00310] Embodiment 193. The method of any preceding embodiment, comprising at least one controller adjusting at least one of the combustion equivalence ratio, the flow rate of the second portion of the compressed oxidant stream or the flow rate of the oxidation fuel and achieving a desired level of at least one of the measured constituents downstream of the first at least one oxidation catalyst unit.

[00311] Embodiment 194. The method of any preceding embodiment, comprising a first heat recovery unit downstream of the first at least one oxidation catalyst unit.

[00312] Embodiment 195. The method of any preceding embodiment, wherein the first heat recovery unit comprises a steam generator.

[00313] Embodiment 196. The method of any preceding embodiment, comprising producing steam by the steam generator that is delivered to at least one steam turbine and driving at least one of a generator to produce electrical power or another mechanical device.

[00314] Embodiment 197. The method of any preceding embodiment, comprising a second heat recovery unit in the recirculation loop between the outlet of the expander section and the inlet to the compressor section of the gas turbine engine and removing heat from the recirculated low oxygen content gas stream.

[00315] Embodiment 198. The method of any preceding embodiment, wherein the second heat recovery unit comprises a steam generator.

[00316] Embodiment 199. The method of any preceding embodiment, comprising producing steam by the steam generator that is delivered to at least one steam turbine and driving at least one of a generator to produce electrical power or another mechanical device.

[00317] Embodiment 200. The method of any preceding embodiment, comprising a secondary flow path delivering a third portion of the compressed low oxygen content gas stream from the compressor section of the gas turbine engine to the turbine as a secondary flow and after cooling and sealing the turbine delivering the third portion of the compressed low oxygen content gas stream into the recirculation loop.

[00318] Embodiment 201. The method of any preceding embodiment, comprising a booster blower in the recirculation loop increasing the pressure of the recirculated low oxygen content gas stream downstream of the second heat recovery unit.

[00319] Embodiment 202. The method of any preceding embodiment, comprising a heat exchanger within the recirculation loop upstream of the compressor section of the gas turbine engine cooling the recirculated low oxygen content gas stream before entering the inlet of the compressor section of the gas turbine engine.

[00320] Embodiment 203. The method of any preceding embodiment, comprising condensing and removing water from the recirculated low oxygen content gas stream with the heat exchanger.

[00321] Embodiment 204. The method of any preceding embodiment, comprising delivering at least a portion of the low oxygen content product stream to a subterranean reservoir for enhanced hydrocarbon recovery.

[00322] Embodiment 205. The method of any preceding embodiment, comprising compressing the at least a portion of the low oxygen content product stream with at least one inert gas product compressor prior to delivering the at least a portion of the low oxygen content product stream to a subterranean reservoir for enhanced hydrocarbon recovery.

[00323] Embodiment 206. The method of any preceding embodiment, comprising cooling the low oxygen content product stream by the first heat recovery unit.

[00324] Embodiment 207. The method of any preceding embodiment, comprising delivering the at least a portion of the low oxygen content product stream to a gas dehydration unit.

[00325] Embodiment 208. The method of any preceding embodiment, comprising delivering at least a portion of the low oxygen content product stream to a carbon dioxide separation unit to produce a lean carbon dioxide stream and a rich carbon dioxide stream.

[00326] Embodiment 209. The method of any preceding embodiment, comprising delivering at least a portion of the lean carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.

[00327] Embodiment 210. The method of any preceding embodiment, comprising delivering at least a portion of the rich carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.

[00328] Embodiment 211. The method of any preceding embodiment, comprising delivering at least a portion of the rich carbon dioxide stream to a carbon sequestration unit.

[00329] Embodiment 212. The method of any preceding embodiment, comprising compressing the at least a portion of the lean carbon dioxide stream to at least one lean product compressor prior to delivering the lean carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.

[00330] Embodiment 213. The method of any preceding embodiment, comprising compressing the at least a portion of the rich carbon dioxide stream to at least one rich product compressor prior to delivering the rich carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.

[00331] Embodiment 214. The method of any preceding embodiment, comprising compressing the at least a portion of the rich carbon dioxide stream to at least one rich product compressor prior to delivering the rich carbon dioxide stream to a carbon sequestration unit.

[00332] Embodiment 215. The method of any preceding embodiment, comprising delivering at least a portion of the lean carbon dioxide stream to a gas dehydration unit.

[00333] Embodiment 216. The method of any preceding embodiment, comprising delivering at least a portion of the rich carbon dioxide stream to a gas dehydration unit.

[00334] Embodiment 217. The method of any preceding embodiment, comprising introducing at least a portion of the low oxygen content product stream to an expander and expanding the at least a portion of the low oxygen content product stream, driving at least one of a generator or another mechanical device and producing a vent stream.

[00335] Embodiment 218. The method of any preceding embodiment, comprising introducing at least a portion of the lean carbon dioxide stream to an expander and expanding the at least a portion of the lean carbon dioxide stream, driving at least one of a generator or another mechanical device and producing a vent stream.

[00336] Embodiment 219. The method of any preceding embodiment, comprising a second at least one oxidation catalyst unit located within the recirculation loop and oxidizing at least a portion of the at least one of carbon monoxide, hydrogen, unburned hydrocarbons or similar products of incomplete combustion contained in the recirculated low oxygen content gas stream.

[00337] Embodiment 220. The method of any preceding embodiment, wherein the second at least one oxidation catalyst unit is located upstream of the second heat recovery unit.

[00338] Embodiment 221. The method of any preceding embodiment, wherein the second at least one oxidation catalyst unit is located downstream of the second heat recovery unit.

[00339] Embodiment 222. The method of any preceding embodiment, wherein the second at least one oxidation catalyst unit is located within the second heat recovery unit at a location providing a suitable operating temperature and providing a suitable heat sink for the heat generated by the catalytic reactions.

[00340] Embodiment 223. The method of any preceding embodiment, comprising controlling the flow rate of the at least a second portion of the compressed low oxygen content gas stream.

[00341] Embodiment 224. The method of any preceding embodiment, wherein the flow rate of the at least a second portion of the compressed low oxygen content gas stream is adjusted to maintain the pressure at a location within the recirculation loop within a desired range.

[00342] Embodiment 225. The method of any preceding embodiment, wherein the flow rate of the at least a second portion of the compressed low oxygen content gas stream is adjusted by means of at least one of an extraction valve, extraction vent valve, product compressor operating speed, product compressor inlet guide vane position or product compressor recycle valve.

[00343] Embodiment 226. The method of any preceding embodiment, wherein each of the at least one turbine combustor is comprising a plurality of burners and at least two separately controlled fuel circuits supplying a fuel stream separately to at least one of two individual burners, one individual burner and one group of burners, two groups of burners, and combinations thereof.

[00344] Embodiment 227. The method of any preceding embodiment, wherein the percentage reduction of fuel flow rate from at least one of the first fuel flow rate to the second fuel flow rate, the second fuel flow rate to the third fuel flow rate and the third

fuel flow rate to the fourth fuel flow rate is not equal among the at least two separately controlled fuel circuits.

[00345] Embodiment 228. The method of any preceding embodiment, comprising: reducing fuel stream flow rate to a fifth stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a fifth compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a fifth mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising a fifth low oxygen content product emissions level that is within a target range and a first heat release from the second at least one oxidation catalyst unit resulting in a temperature of the recirculated low oxygen content gas stream downstream of the second at least one oxidation catalyst unit that is within a target range; reducing fuel stream flow rate to a sixth fuel stream flow rate that is less than the fifth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a sixth compressed oxidant flow rate that is less than the fifth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a sixth mechanical power that is less than the fifth mechanical power and producing a low oxygen content product stream comprising a sixth low oxygen content product emissions level that is within a target range and a second heat release from the second at least one oxidation catalyst unit resulting in a temperature of the recirculated low oxygen content gas stream downstream of the second at least one oxidation catalyst unit that is at the limit of a target range; reducing fuel stream flow rate to a seventh fuel stream flow rate that is less than the sixth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a seventh compressed oxidant flow rate that is less than the sixth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a seventh mechanical power that is less than the sixth mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level and a third heat release from the second at least one oxidation catalyst unit resulting in a temperature of the recirculated low oxygen content gas

stream downstream of the second at least one oxidation catalyst unit that is within a target range.

[00346] Embodiment 229. The method of any preceding embodiment, comprising: reducing fuel stream flow rate to an eighth stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to an eighth compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing an eighth mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising an eighth low oxygen content product emissions level that is within a target range and a fourth heat release from the first at least one oxidation catalyst unit resulting in a temperature of the low oxygen content product stream downstream of the first at least one oxidation catalyst unit that is within a target range; reducing fuel stream flow rate to a ninth fuel stream flow rate that is less than the eighth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a ninth compressed oxidant flow rate that is less than the eighth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a ninth mechanical power that is less than the eighth mechanical power and producing a low oxygen content product stream comprising a ninth low oxygen content product emissions level that is within a target range and a fifth heat release from the first at least one oxidation catalyst unit resulting in a temperature of the low oxygen content product stream downstream of the first at least one oxidation catalyst unit that is at the limit of a target range; reducing fuel stream flow rate to a tenth fuel stream flow rate that is less than the ninth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a tenth compressed oxidant flow rate that is less than the ninth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a tenth mechanical power that is less than the ninth mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level and a sixth heat release from the first at least one oxidation catalyst

unit resulting in a temperature of the high oxygen content product stream downstream of the first at least one oxidation catalyst unit that is within a target range.

[00347] Embodiment 230. The method of any preceding embodiment, comprising a first at least one nitrogen oxide reduction catalyst unit as part of the first at least one oxidation catalyst unit.

[00348] Embodiment 231. The method of any preceding embodiment, comprising a second at least one nitrogen oxide reduction catalyst unit as part of the second at least one oxidation catalyst unit.

[00349] Embodiment 232. The method of any preceding embodiment, comprising at least one of an inertial separator, coalescing filter and a water impermeable filter downstream of the heat exchanger and improving the effectiveness of removing the condensed water.

[00350] This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

CLAIMS:

1. A system, comprising:
 - a turbine combustor comprising a first diffusion fuel nozzle, wherein the first diffusion fuel nozzle is configured to produce a diffusion flame;
 - a turbine driven by combustion products from the diffusion flame in the turbine combustor;
 - an exhaust gas compressor, wherein the exhaust gas compressor is configured to compress and route an exhaust gas from the turbine to the turbine combustor along an exhaust recirculation path; and
 - a control system configured to control flow rates of at least one oxidant and at least one fuel to the turbine combustor in a stoichiometric control mode and a non-stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least one fuel with the at least one oxidant, and the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.
2. The system of claim 1, wherein the stoichiometric control mode is configured to provide the substantially stoichiometric ratio with an equivalence ratio of approximately 1.0.
3. The system of claim 1, wherein the stoichiometric control mode is configured to provide the substantially stoichiometric ratio with an equivalence ratio of between approximately 0.95 and approximately 1.05.
4. The system of claim 1, wherein the non-stoichiometric control mode is configured to provide the non-stoichiometric ratio with an equivalence ratio of less than approximately 0.95 or greater than approximately 1.05.

5. The system of claim 1, wherein the control system is configured to change the flow rates from a first set of flow rates to a second set of flow rates and transition between the stoichiometric control mode and the non-stoichiometric control mode.
6. The system of claim 5, wherein the second set of flow rates is less than the first set of flow rates.
7. The system of claim 5, wherein the second set of flow rates is greater than the first set of flow rates.
8. The system of claim 1, wherein the control system in the stoichiometric control mode is configured to change the flow rates from a first set of flow rates to a second set of flow rates while maintaining the substantially stoichiometric ratio.
9. The system of claim 8, wherein the second set of flow rates is less than the first set of flow rates.
10. The system of claim 8, wherein the second set of flow rates is greater than the first set of flow rates.
11. The system of claim 8, wherein the control system in the stoichiometric control mode is configured to change a power output of the turbine from a first power output to a second power output by changing the flow rates from the first set of flow rates to the second set of flow rates, respectively.
12. The system of claim 11, wherein the second set of flow rates is less than the first set of flow rates, and the second power output is less than the first power output.
13. The system of claim 11, wherein the second set of flow rates is greater than the first set of flow rates, and the second power output is greater than the first power output.

14. The system of claim 11, wherein the control system in the stoichiometric control mode is configured to maintain emissions in the exhaust gas within one or more target emissions ranges while changing the flow rates from the first set of flow rates to the second set of flow rates.
15. The system of claim 14, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.
16. The system of claim 14, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.
17. The system of claim 14, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.
18. The system of claim 1, wherein the control system in the stoichiometric control mode is configured to progressively change the flow rates among a plurality of sets of flow rates while maintaining the substantially stoichiometric ratio.
19. The system of claim 18, wherein the plurality of sets of flow rates comprise at least three sets of flow rates.
20. The system of claim 18, wherein the plurality of sets of flow rates comprise at least four sets of flow rates.
21. The system of claim 18, wherein the control system in the stoichiometric control mode is configured to maintain the substantially stoichiometric ratio while:
 - progressively reducing the flow rates among the plurality of sets of flow rates;
 - progressively reducing a power output of the turbine among a plurality of power outputs; and

maintaining emissions in the exhaust gas within one or more target emissions ranges.

22. The system of claim 21, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

23. The system of claim 21, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

24. The system of claim 21, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

25. The system of claim 21, wherein the control system is configured to transition from the stoichiometric control mode to the non-stoichiometric control mode after progressively reducing the flow rates, progressively reducing the power output, and maintaining emissions.

26. The system of claim 25, wherein, after the transition from the stoichiometric control mode to the non-stoichiometric control mode, the control system is configured to operate in a fuel rich control mode of the non-stoichiometric control mode.

27. The system of claim 25, wherein, after the transition from the stoichiometric control mode to the non-stoichiometric control mode, the control system is configured to operate in a fuel lean control mode of the non-stoichiometric control mode.

28. The system of claim 25, wherein the control system is configured to maintain emissions in the exhaust gas within a first set of target emissions ranges while operating in the stoichiometric control mode, the control system is configured to maintain emissions in the exhaust gas within a second set of target emissions ranges

while operating in the non-stoichiometric control mode, and the first and second sets of target emissions ranges are different from one another.

29. The system of claim 28, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of oxygen emissions that is at least approximately 1000 parts per million by volume (ppmv).

30. The system of claim 28, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 100 parts per million by volume (ppmv).

31. The system of claim 28, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 20 parts per million by volume (ppmv).

32. The system of claim 28, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 200 parts per million by volume (ppmv).

33. The system of claim 28, wherein the non-stoichiometric control mode comprises a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 100 parts per million by volume (ppmv).

34. The system of claim 1, wherein the control system is configured to:

- progressively change the flow rates among a plurality of sets of flow rates;
- progressively change a power output of the turbine among a plurality of power outputs in response to the changes in flow rates;
- maintain emissions in the exhaust gas within one or more target emissions ranges before and after the changes in flow rates;

maintain a temperature of the exhaust gas along the exhaust recirculation path within a target temperature range before and after the changes in flow rates; and

maintain a pressure of the exhaust gas along the exhaust recirculation path within a target pressure range before and after the changes in flow rates.

35. The system of claim 34, wherein the control system is configured to maintain the temperature within the target temperature range downstream from at least one catalyst unit along the exhaust recirculation path.

36. The system of claim 34, wherein the control system is configured to maintain the pressure by adjusting at least one of an exhaust extraction valve, an exhaust vent valve, an operating speed of the exhaust gas compressor or an oxidant compressor, a position of an inlet guide vane of the exhaust gas compressor, a recycle valve of the exhaust gas compressor, or any combination thereof.

37. The system of claim 1, wherein the turbine combustor comprises a first set of fuel nozzles coupled to a first fluid supply circuit and a second set of fuel nozzles coupled to a second fluid supply circuit, the first diffusion nozzle is part of either the first or second set of fuel nozzles, and the control system is configured to independently control fluid flows through the first and second fluid supply circuits.

38. The system of claim 37, wherein the first set of fuel nozzles comprises a single fuel nozzle, and the second set of fuel nozzles comprises a plurality of fuel nozzles.

39. The system of claim 37, wherein the first set of fuel nozzles comprises a first plurality of fuel nozzle, and the second set of fuel nozzles comprises a second plurality of fuel nozzles.

40. The system of claim 37, wherein the turbine combustor comprises a third set of fuel nozzles coupled to a third fluid supply circuit, and the control system is configured to independently control fluid flows through the first, second, and third fluid supply circuits.

41. The system of claim 37, wherein the control system is configured to independently change the fluid flows through the first and second fluid supply circuits at different rates.
42. The system of claim 37, wherein the control system is configured to independently change the fluid flows through the first and second fluid supply circuits at equal rates.
43. The system of claim 37, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a second diffusion fuel nozzle.
44. The system of claim 37, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a first premix fuel nozzle.
45. The system of claim 1, comprising a first catalyst unit disposed along the exhaust recirculation path.
46. The system of claim 45, wherein the first catalyst unit is configured to control concentration levels of oxygen, carbon monoxide, carbon dioxide, nitrogen oxides, unburnt hydrocarbons, or any combination thereof, in the exhaust gas.
47. The system of claim 45, wherein the first catalyst unit comprises an oxidation catalyst, a carbon monoxide reduction catalyst, a nitrogen oxides reduction catalyst, an aluminum oxide, a zirconium oxide, a silicone oxide, a titanium oxide, a platinum oxide, a palladium oxide, a cobalt oxide, or a mixed metal oxide, or a combination thereof.
48. The system of claim 45, wherein the first catalyst unit is configured to drive an oxidizing reaction with the exhaust gas and an oxidant fuel.

49. The system of claim 48, wherein the control system is configured to adjust a flow of the oxidant fuel to control the oxidizing reaction.
50. The system of claim 49, wherein the control system is configured to adjust the flow of the oxidant fuel in response to sensor feedback, and the sensor feedback comprises gas composition feedback indicative of oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.
51. The system of claim 1, comprising a first heat recovery unit, a second heat recovery unit, or a combination thereof, disposed along the exhaust recirculation path.
52. The system of claim 51, comprising a first catalyst unit, a second catalyst unit, or a combination thereof, disposed along the exhaust recirculation path.
53. The system of claim 52, wherein the first or second catalyst unit is disposed upstream, downstream, or integrated with the first or second heat recovery unit.
54. The system of claim 53, comprising the first heat recovery unit having a first heat recovery steam generator.
55. The system of claim 54, comprising a first steam turbine coupled to the first heat recovery steam generator.
56. The system of claim 54, comprising the second heat recovery unit having a second heat recovery steam generator, a first steam turbine coupled to the first heat recovery steam generator, and a second steam turbine coupled to the second heat recovery steam generator.
57. The system of claim 1, comprising a moisture removal system and/or a particulate removal system disposed along the exhaust recirculation path.

58. The system of claim 57, wherein the moisture removal system comprises a heat exchanger, a condenser, a water gas separator, a first filter, or any combination thereof, wherein the particulate removal system comprises an inertial separator, a gravity separator, a second filter, or any combination thereof.

59. The system of claim 1, comprising a booster blower disposed along the exhaust recirculation path.

60. The system of claim 1, comprising a heat recovery unit, a booster blower, a moisture removal unit, and a particulate removal unit disposed along the exhaust recirculation path.

61. The system of claim 1, wherein the first diffusion fuel nozzle comprises a first fuel passage and a first oxidant passage that are isolated from one another along the first diffusion fuel nozzle.

62. The system of claim 61, wherein the first diffusion fuel nozzle comprises a first diluent passage.

63. The system of claim 62, wherein the first diluent passage is configured to flow a portion of the exhaust gas through the first diffusion fuel nozzle.

64. The system of claim 63, wherein the first diluent passage is configured to flow a portion of the exhaust gas, steam, nitrogen, another inert gas, or a combination thereof, through the first diffusion fuel nozzle.

65. The system of claim 1, wherein the turbine combustor comprises a diluent injection system disposed downstream from the first diffusion fuel nozzle.

66. The system of claim 65, wherein the diluent injection system is configured to inject a portion of the exhaust gas, steam, nitrogen, or another inert gas, or a

combination thereof, into a chamber of the turbine combustor downstream from the first diffusion fuel nozzle.

67. The system of claim 66, wherein the diluent injection system comprises a plurality of openings in a liner of the turbine combustor, and the plurality of openings is configured to inject the portion of the exhaust gas into the chamber of the turbine combustor.

68. The system of claim 66, wherein the turbine combustor comprises a first wall disposed about the chamber, a second wall disposed about the first wall, and an exhaust passage disposed between the first and second walls, wherein the diluent injection system comprises a plurality of diluent injectors extending through the first and second walls of the turbine combustor.

69. The system of claim 68, wherein the plurality of diluent injectors is configured to inject the portion of the exhaust gas, steam, nitrogen, or another inert gas into the chamber of the turbine combustor.

70. The system of claim 1, comprising an exhaust gas extraction system configured to extract a portion of the exhaust gas.

71. The system of claim 70, comprising an exhaust gas treatment system configured to treat the portion of the exhaust gas.

72. The system of claim 71, wherein the exhaust gas treatment system comprises a gas separation system configured to separate the portion of the exhaust gas into a plurality of gas streams.

73. The system of claim 72, wherein the plurality of gas streams comprises a first stream that is carbon dioxide (CO₂) rich and a second stream that is carbon dioxide (CO₂) lean.

74. The system of claim 73, wherein the exhaust gas treatment system comprises a gas compression system, a moisture removal system, a particulate removal system, or a combination thereof, configured to receive at least one of the first or second streams.

75. The system of claim 72, wherein the exhaust gas treatment system comprises a gas purification system configured to purify at least one of the plurality of gas streams.

76. The system of claim 72, comprising a target system configured to receive at least one of the plurality of streams, wherein the target system comprises a hydrocarbon production system, a subterranean reservoir, a carbon sequestration system, a pipeline, a storage tank, or any combination thereof.

77. The system of claim 71, wherein the exhaust gas treatment system comprises a compression system configured to compress the portion of the exhaust gas.

78. The system of claim 71, wherein the exhaust gas treatment system comprises a moisture removal system and/or a particulate removal system.

79. The system of claim 1, comprising a control system responsive to sensor feedback to adjust one or more operating parameters to control an equivalence ratio or emissions levels in the exhaust gas.

80. The system of claim 79, wherein the one or more operating parameters comprise an oxidant flow rate and/or a fuel flow rate to the turbine combustor.

81. The system of claim 79, wherein the control system is configured to maintain the equivalence ratio between approximately 0.95 and 1.05.

82. The system of claim 79, wherein the sensor feedback comprises gas composition feedback relating to oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

83. The system of claim 79, wherein the control system is coupled to a plurality of sensors configured to obtain the sensor feedback, and the plurality of sensors are disposed along the exhaust recirculation path, the turbine combustor, the turbine, the exhaust gas compressor, or a combination thereof.

84. The system of claim 1, comprising a bypass line from the exhaust gas compressor to the turbine, wherein the bypass line comprises a heat exchanger configured to cool a bypass flow of the exhaust gas from the exhaust gas compressor to the turbine.

85. The system of claim 1, comprising a gas turbine engine having the turbine combustor, the turbine, and the exhaust gas compressor, wherein the gas turbine engine is a stoichiometric exhaust gas recirculation (SEGR) gas turbine engine.

86. The system of claim 85, comprising an exhaust gas extraction system coupled to the gas turbine engine, an exhaust gas treatment system coupled to the exhaust gas extraction system, and a hydrocarbon production system coupled to the exhaust gas treatment system.

87. A method, comprising:

- injecting at least one oxidant and at least one fuel into a chamber of a turbine combustor, wherein the at least one oxidant and the at least one fuel mix and combust as a diffusion flame to generate combustion products;
- driving a turbine with the combustion products and outputting an exhaust gas;
- recirculating the exhaust gas along an exhaust recirculation path to an exhaust gas compressor;
- compressing and routing the exhaust gas to the turbine combustor;
- controlling flow rates of the at least one oxidant and the at least one fuel to the turbine combustor in a stoichiometric control mode, wherein the stoichiometric control mode is configured to change the flow rates and provide a substantially stoichiometric ratio of the at least one fuel with the at least one oxidant; and

controlling flow rates of the at least one oxidant and the at least one fuel to the turbine combustor in a non-stoichiometric control mode, wherein the non-stoichiometric control mode is configured to change the flow rates and provide a non-stoichiometric ratio of the at least one fuel with the at least one oxidant.

88. The method of claim 87, wherein controlling in the stoichiometric control mode comprises providing the substantially stoichiometric ratio with an equivalence ratio of approximately 1.0.

89. The method of claim 87, wherein controlling in the stoichiometric control mode comprises providing the substantially stoichiometric ratio with an equivalence ratio of between approximately 0.95 and approximately 1.05.

90. The method of claim 87, wherein controlling in the non-stoichiometric control mode comprises providing the non-stoichiometric ratio with an equivalence ratio of less than approximately 0.95 or greater than approximately 1.05.

91. The method of claim 87, comprising changing the flow rates from a first set of flow rates to a second set of flow rates and transitioning between the stoichiometric control mode and the non-stoichiometric control mode.

92. The method of claim 91, wherein the second set of flow rates is less than the first set of flow rates.

93. The method of claim 91, wherein the second set of flow rates is greater than the first set of flow rates.

94. The method of claim 87, wherein controlling in the stoichiometric control mode comprises changing the flow rates from a first set of flow rates to a second set of flow rates while maintaining the substantially stoichiometric ratio.

95. The method of claim 94, wherein the second set of flow rates is less than the first set of flow rates.

96. The method of claim 94, wherein the second set of flow rates is greater than the first set of flow rates.

97. The method of claim 94, wherein controlling in the stoichiometric control mode comprises changing a power output of the turbine from a first power output to a second power output by changing the flow rates from the first set of flow rates to the second set of flow rates, respectively.

98. The method of claim 97, wherein the second set of flow rates is less than the first set of flow rates, and the second power output is less than the first power output.

99. The method of claim 97, wherein the second set of flow rates is greater than the first set of flow rates, and the second power output is greater than the first power output.

100. The method of claim 97, wherein controlling in the stoichiometric control mode comprises changing maintaining emissions in the exhaust gas within one or more target emissions ranges while changing the flow rates from the first set of flow rates to the second set of flow rates.

101. The method of claim 100, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

102. The method of claim 100, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

103. The method of claim 100, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

104. The method of claim 87, wherein controlling in the stoichiometric control mode comprises progressively changing the flow rates among a plurality of sets of flow rates while maintaining the substantially stoichiometric ratio.

105. The method of claim 104, wherein the plurality of sets of flow rates comprise at least three sets of flow rates.

106. The method of claim 104, wherein the plurality of sets of flow rates comprise at least four sets of flow rates.

107. The method of claim 104, wherein controlling in the stoichiometric control mode comprises maintaining the substantially stoichiometric ratio while:

progressively reducing the flow rates among the plurality of sets of flow rates;

progressively reducing a power output of the turbine among a plurality of power outputs; and

maintaining emissions in the exhaust gas within one or more target emissions ranges.

108. The method of claim 107, wherein the emissions comprise carbon monoxide, oxygen, nitrogen oxides, sulfur oxides, unburnt hydrocarbons, hydrogen, or any combination thereof.

109. The method of claim 107, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 50 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 5000 ppmv.

110. The method of claim 107, wherein the one or more target emissions ranges comprise an oxygen range of less than approximately 10 parts per million by volume (ppmv) and/or a carbon monoxide range of less than approximately 1000 ppmv.

111. The method of claim 107, comprising transitioning from the stoichiometric control mode to the non-stoichiometric control mode after progressively reducing the flow rates, progressively reducing the power output, and maintaining emissions.

112. The method of claim 111, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel rich control mode after the transition from the stoichiometric control mode to the non-stoichiometric control mode.

113. The method of claim 111, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode after the transition from the stoichiometric control mode to the non-stoichiometric control mode.

114. The method of claim 111, wherein controlling in the stoichiometric control mode comprises maintaining emissions in the exhaust gas within a first set of target emissions ranges, wherein controlling in the non-stoichiometric control mode comprises maintaining emissions in the exhaust gas within a second set of target emissions ranges, wherein the first and second sets of target emissions ranges are different from one another.

115. The method of claim 114, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of oxygen emissions that is at least approximately 1000 parts per million by volume (ppmv).

116. The method of claim 114, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 100 parts per million by volume (ppmv).

117. The method of claim 114, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of carbon monoxide emissions that is less than approximately 20 parts per million by volume (ppmv).

118. The method of claim 114, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 200 parts per million by volume (ppmv).

119. The method of claim 114, wherein controlling in the non-stoichiometric control mode comprises operating in a fuel lean control mode having a target emissions range of nitrogen oxides emissions that is less than approximately 100 parts per million by volume (ppmv).

120. The method of claim 87, comprising controlling one or more operational parameters for:

progressively changing the flow rates among a plurality of sets of flow rates;

progressively changing a power output of the turbine among a plurality of power outputs in response to changing the flow rates;

maintaining emissions in the exhaust gas within one or more target emissions ranges before and after changing the flow rates;

maintaining a temperature of the exhaust gas along the exhaust recirculation path within a target temperature range before and after changing the flow rates; and

maintaining a pressure of the exhaust gas along the exhaust recirculation path within a target pressure range before and after changing the flow rates.

121. The method of claim 120, wherein controlling comprises maintaining the temperature within the target temperature range downstream from at least one catalyst unit along the exhaust recirculation path.

122. The method of claim 120, comprising controlling comprises maintaining the pressure by adjusting at least one of an exhaust extraction valve, an exhaust vent valve, an operating speed of the exhaust gas compressor or an oxidant compressor, a position of an inlet guide vane of the exhaust gas compressor, a recycle valve of the exhaust gas compressor, or any combination thereof.

123. The method of claim 87, comprising independently controlling fluid flows through first and second fluid supply circuits, wherein the turbine combustor comprises a first set of fuel nozzles coupled to the first fluid supply circuit and a second set of fuel nozzles coupled to the second fluid supply circuit, wherein at least one of the first or second set of fuel nozzles comprises a first diffusion fuel nozzle configured to generate the diffusion flame.

124. The method of claim 123, wherein the first set of fuel nozzles comprises a single fuel nozzle, and the second set of fuel nozzles comprises a plurality of fuel nozzles.

125. The method of claim 123, wherein the first set of fuel nozzles comprises a first plurality of fuel nozzle, and the second set of fuel nozzles comprises a second plurality of fuel nozzles.

126. The method of claim 123, comprising independently controlling fluid flows through the first fluid supply circuit, the second fluid supply circuit, and a third fluid supply circuit, wherein the turbine combustor comprises a third set of fuel nozzles coupled to the third fluid supply circuit.

127. The method of claim 123, comprising independently changing the fluid flows through the first and second fluid supply circuits at different rates.

128. The method of claim 123, comprising independently changing the fluid flows through the first and second fluid supply circuits at equal rates.

129. The method of claim 123, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a second diffusion fuel nozzle.

130. The method of claim 123, wherein the first set of fuel nozzles comprises at least the first diffusion fuel nozzle, and the second set of fuel nozzles comprises a first premix fuel nozzle.

131. The method of claim 87, wherein injecting comprises separately injecting the at least one oxidant and the at least one fuel from respective first and second passages that are isolated from one another along a first diffusion fuel nozzle.

132. The method of claim 131, wherein the first and second passages are disposed in a concentric arrangement.

133. The method of claim 131, wherein the first passage extends around the second passage.

134. The method of claim 131, wherein the second passage extends around the first passage.

135. The method of claim 87, comprising injecting at least one diluent into the chamber.

136. The method of claim 135, wherein the at least one diluent comprises a portion of the exhaust gas, steam, nitrogen, another inert gas, or a combination thereof.

137. The method of claim 135, comprising separately injecting the at least one oxidant and the at least one fuel from respective first and second passages that are isolated from one another along a first diffusion fuel nozzle, and routing a diluent flow through the first diffusion fuel nozzle.

138. The method of claim 135, comprising routing a diluent flow into the chamber downstream from a first diffusion fuel nozzle.

139. The method of claim 138, comprising injecting the diluent flow through a plurality of openings in a liner of the turbine combustor, and the diluent flow comprises a portion of the exhaust gas.

140. The method of claim 138, comprising injecting the diluent flow through a plurality of diluent injectors extending through at least one wall of the turbine combustor, and the diluent flow comprises a portion of the exhaust gas, steam, nitrogen, or another inert gas.

141. The method of claim 87, comprising treating the exhaust gas with a first catalyst unit along the exhaust recirculation path.

142. The method of claim 141, wherein treating comprises controlling concentration levels of carbon monoxide, carbon dioxide, and unburnt hydrocarbons in the exhaust gas.

143. The method of claim 141, wherein treating comprises driving an oxidizing reaction with the exhaust gas and an oxidant fuel.

144. The method of claim 143, comprising controlling a flow of the oxidant fuel to the first catalyst unit to control the oxidizing reaction.

145. The method of claim 144, comprising controlling the flow of the oxidant fuel in response to sensor feedback, and the sensor feedback comprises gas composition feedback indicative of oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

146. The method of claim 87, comprising recovering heat from the exhaust gas along the exhaust recirculation path using a first heat recovery unit, a second heat recovery unit, or a combination thereof.

147. The method of claim 146, comprising driving a first catalytic reaction with a first catalyst unit within, upstream, or downstream of the first or second heat recovery unit.

148. The method of claim 147, comprising driving a second catalytic reaction with a second catalyst unit within, upstream, or downstream of the first or second heat recovery unit.

149. The method of claim 146, comprising generating a first steam with a first heat recovery steam generator of the first heat recovery unit, generating a second steam with a second heat recovery steam generator of the second heat recovery unit, or a combination thereof.

150. The method of claim 149, comprising driving a first steam turbine with the first steam or driving a second steam turbine with the second steam.

151. The method of claim 87, comprising removing moisture from the exhaust gas with a moisture removal system disposed along the exhaust recirculation path.

152. The method of claim 151, wherein the moisture removal system comprises a heat exchanger, a condenser, a water gas separator, a filter, or any combination thereof.

153. The method of claim 87, comprising removing particulate from the exhaust gas with a particulate removal system disposed along the exhaust recirculation path.

154. The method of claim 153, wherein the particulate removal system comprises an inertial separator, a gravity separator, a filter, or any combination thereof.

155. The method of claim 87, comprising boosting a flow of the exhaust gas with a booster blower disposed along the exhaust recirculation path.

156. The method of claim 87, comprising a heat recovery unit, a booster blower, a moisture removal unit, and a particulate removal unit disposed along the exhaust recirculation path.

157. The method of claim 87, comprising extracting a portion of the exhaust gas with an exhaust gas extraction system.

158. The method of claim 157, comprising treating the portion of the exhaust gas with an exhaust gas treatment system.

159. The method of claim 158, wherein treating the portion of the exhaust gas comprises separating the portion of the exhaust gas into a plurality of gas streams.

160. The method of claim 159, wherein the plurality of gas streams comprises a first stream that is carbon dioxide (CO₂) rich and a second stream that is carbon dioxide (CO₂) lean.

161. The method of claim 160, wherein treating the portion of the exhaust gas comprises compressing the portion of the exhaust gas, the first stream, or the second stream with a gas compression system.

162. The method of claim 160, wherein treating the portion of the exhaust gas comprises removing moisture from the portion of the exhaust gas, the first stream, or the second stream with a moisture removal system.

163. The method of claim 160, wherein treating the portion of the exhaust gas comprises removing particulate from the portion of the exhaust gas, the first stream, or the second stream with a particulate removal system.

164. The method of claim 160, comprising routing the portion of the exhaust gas, the first stream, or the second stream to a target system, wherein the target system comprises a hydrocarbon production system, a subterranean reservoir, a carbon sequestration system, a pipeline, a storage tank, or any combination thereof.

165. The method of claim 160, comprising adjusting one or more operating parameters in response to sensor feedback to control an equivalence ratio or emissions levels in the exhaust gas.

166. The method of claim 165, comprising obtaining the sensor feedback by monitoring a gas composition of the exhaust gas relating to oxygen, carbon monoxide, hydrogen, nitrogen oxides, unburnt hydrocarbons, or any combination thereof.

167. The method of claim 166, wherein obtaining the sensor feedback comprises monitoring a plurality of sensors disposed along the exhaust recirculation path, the turbine combustor, the turbine, the exhaust gas compressor, or a combination thereof.

168. The method of claim 87, comprising routing a bypass flow of the exhaust gas along a bypass line from the exhaust gas compressor to the turbine.

169. The method of claim 168, comprising cooling the bypass flow of the exhaust gas along the bypass line, and cooling the turbine using the bypass flow of the exhaust gas.

170. The method of claim 87, comprising operating a gas turbine engine having the turbine combustor, the turbine, and the exhaust gas compressor to achieve substantially stoichiometric combustion based on sensor feedback during the stoichiometric control mode.

171. The method of claim 170, comprising extracting a portion of the exhaust gas with an exhaust gas extraction system coupled to the gas turbine engine, and routing

the portion of the exhaust gas to a hydrocarbon production system, a carbon sequestration system, a pipeline, a storage tank, or any combination thereof.

172. A method, comprising:

introducing an oxidant to at least one oxidant compressor to produce a compressed oxidant stream;

introducing a recirculated low oxygen content gas stream to a compressor section of a gas turbine engine to produce a compressed low oxygen content gas stream;

introducing a first portion of the compressed oxidant stream with a first compressed oxidant flow rate and a fuel stream with a first fuel flow rate in a substantially stoichiometric ratio to at least one turbine combustor and mixing the compressed oxidant stream and the fuel stream at the point of combustion and combusting the mixture of the compressed oxidant stream and the fuel stream;

introducing a first portion of the compressed low oxygen content gas stream with a low oxygen content gas flow rate to the at least one turbine combustor and mixing it with the combusting streams of compressed oxidant and fuel after the point of combustion and producing a high temperature high pressure low oxygen content stream;

introducing the high temperature high pressure low oxygen content stream to an expander section of the gas turbine engine and expanding the high temperature high pressure low oxygen content stream to produce a first mechanical power and a recirculated low oxygen content gas stream at a first recirculated low oxygen content gas flow rate wherein the recirculated low oxygen content gas stream contains a first recirculated low oxygen content gas emissions level;

using a first portion of the first mechanical power to drive the compressor section of the gas turbine engine;

using a second portion of the first mechanical power to drive at least one of: a generator, the at least one oxidant compressor or at least one other mechanical device;

recirculating the recirculated low oxygen content gas stream in a recirculation loop from the outlet of the expander section to the inlet of the compressor section of the gas turbine engine;

extracting at least a second portion of the compressed low oxygen content gas stream from the gas turbine engine and delivering the at least a second portion of the compressed low oxygen content gas stream to the first at least one oxidation catalyst unit and producing a low oxygen content product stream comprising a first low oxygen content product emissions level that is within a target range;

reducing fuel stream flow rate to a second fuel stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a second compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a second mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising a second low oxygen content product emissions level that is within a target range;

reducing fuel stream flow rate to a third fuel stream flow rate that is less than the second fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a third compressed oxidant flow rate that is less than the second compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a third mechanical power that is less than the second mechanical power and producing a low oxygen content product stream comprising a third low oxygen content product emissions level that is at the limit of a target range; and

reducing fuel stream flow rate to a fourth fuel stream flow rate that is less than the third fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a fourth compressed oxidant flow rate that is less than the third compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a fourth mechanical power that is less than the third mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level.

173. The method of claim 172, wherein the first recirculated low oxygen content gas emissions comprises at least one of oxygen, carbon monoxide, hydrogen, oxides of nitrogen, unburned hydrocarbons or similar products of incomplete combustion.

174. The method of claim 172, wherein the first, second and third low oxygen content product emissions comprises at least one of oxygen, carbon monoxide, hydrogen, oxides of nitrogen, unburned hydrocarbons or similar products of incomplete combustion.

175. The method of claim 172, wherein the high oxygen content product emissions comprises at least one of oxygen, carbon monoxide, hydrogen, oxides of nitrogen, unburned hydrocarbons or similar products of incomplete combustion.

176. The method of claim 172, wherein the limit of the low oxygen content product emissions level is at least one of 50 ppmv oxygen and 5000 ppmv carbon monoxide.

177. The method of claim 172, wherein the limit of the low oxygen content product emissions level is at least one of 10 ppmv oxygen and 1000 ppmv carbon monoxide.

178. The method of claim 172, wherein the high oxygen content product emissions level comprises at least 1000 ppmv oxygen.

179. The method of claim 172, wherein the high oxygen content product emissions level comprises less than 100 ppmv carbon monoxide.

180. The method of claim 172, wherein the high oxygen content product emissions level comprises less than 20 ppmv carbon monoxide.

181. The method of claim 172, wherein the high oxygen content product emissions level comprises less than 200 ppmv nitrogen oxides.

182. The method of claim 172, wherein the high oxygen content product emissions level comprises less than 100 ppmv nitrogen oxides.

183. The method of claim 172, comprising introducing a second portion of the compressed oxidant stream to the first at least one oxidation catalyst unit to oxidize at

least a portion of the at least one of carbon monoxide, hydrogen, unburned hydrocarbons or similar products of incomplete combustion contained in the second portion of the compressed low oxygen content stream.

184. The method of claim 172, comprising introducing an oxidation fuel to the first at least one oxidation catalyst unit and reducing at least a portion of the residual oxygen contained in the second portion of the compressed low oxygen content stream.

185. The method of claim 172, wherein the oxidant consists of essentially ambient air and the recirculated low oxygen content gas stream comprising comprises nitrogen.

186. The method of claim 172, wherein the equivalence ratio (phi, ϕ) is equal to (mol% fuel/mol% oxidant)actual / (mol% fuel/mol% oxidant)stoichiometric.

187. The method of claim 186, comprising controlling the flow rate of at least one of the first portion of the compressed oxidant stream and the fuel stream to achieve a combustion equivalence ratio of about 1 and producing a substantially stoichiometric ratio of the first portion of the compressed oxidant stream and the fuel stream.

188. The method of claim 187, comprising sensors installed in the recirculation loop and measuring the constituents within the recirculated low oxygen content stream.

189. The method of claim 188, wherein the measured constituents are at least one of: oxygen, carbon monoxide, hydrogen, nitrogen oxides, and unburned hydrocarbons.

190. The method of claim 189, comprising determining the equivalence ratio by analyzing the constituent measurements.

191. The method of claim 172, comprising at least one sensor installed and measuring the constituents within the extracted second portion of the compressed low oxygen content gas stream upstream of the first at least one oxidation catalyst unit, downstream of the first at least one oxidation catalyst unit or both.

192. The method of claim 191, wherein the measured constituents are at least one of: oxygen, carbon monoxide, hydrogen, nitrogen oxides, and unburned hydrocarbons.

193. The method of claim 192, comprising at least one controller adjusting at least one of the combustion equivalence ratio, the flow rate of the second portion of the compressed oxidant stream or the flow rate of the oxidation fuel and achieving a desired level of at least one of the measured constituents downstream of the first at least one oxidation catalyst unit.

194. The method of claim 172, comprising a first heat recovery unit downstream of the first at least one oxidation catalyst unit.

195. The method of claim 194, wherein the first heat recovery unit comprises a steam generator.

196. The method of claim 195, comprising producing steam by the steam generator that is delivered to at least one steam turbine and driving at least one of a generator to produce electrical power or another mechanical device.

197. The method of claim 172, comprising a second heat recovery unit in the recirculation loop between the outlet of the expander section and the inlet to the compressor section of the gas turbine engine and removing heat from the recirculated low oxygen content gas stream.

198. The method of claim 197, wherein the second heat recovery unit comprises a steam generator.

199. The method of claim 198, comprising producing steam by the steam generator that is delivered to at least one steam turbine and driving at least one of a generator to produce electrical power or another mechanical device.

200. The method of claim 172, comprising a secondary flow path delivering a third portion of the compressed low oxygen content gas stream from the compressor section of the gas turbine engine to the turbine as a secondary flow and after cooling and sealing the turbine delivering the third portion of the compressed low oxygen content gas stream into the recirculation loop.

201. The method of claim 197, comprising a booster blower in the recirculation loop increasing the pressure of the recirculated low oxygen content gas stream downstream of the second heat recovery unit.

202. The method of claim 197, comprising a heat exchanger within the recirculation loop upstream of the compressor section of the gas turbine engine cooling the recirculated low oxygen content gas stream before entering the inlet of the compressor section of the gas turbine engine.

203. The method of claim 202, comprising condensing and removing water from the recirculated low oxygen content gas stream with the heat exchanger.

204. The method of claim 172, comprising delivering at least a portion of the low oxygen content product stream to a subterranean reservoir for enhanced hydrocarbon recovery.

205. The method of claim 204, comprising compressing the at least a portion of the low oxygen content product stream with at least one inert gas product compressor prior to delivering the at least a portion of the low oxygen content product stream to a subterranean reservoir for enhanced hydrocarbon recovery.

206. The method of claim 204, comprising cooling the low oxygen content product stream by the first heat recovery unit.
207. The method of claim 204, comprising delivering the at least a portion of the low oxygen content product stream to a gas dehydration unit.
208. The method of claim 172, comprising delivering at least a portion of the low oxygen content product stream to a carbon dioxide separation unit to produce a lean carbon dioxide stream and a rich carbon dioxide stream.
209. The method of claim 208, comprising delivering at least a portion of the lean carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.
210. The method of claim 208, comprising delivering at least a portion of the rich carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.
211. The method of claim 208, comprising delivering at least a portion of the rich carbon dioxide stream to a carbon sequestration unit.
212. The method of claim 209, comprising compressing the at least a portion of the lean carbon dioxide stream to at least one lean product compressor prior to delivering the lean carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.
213. The method of claim 210, comprising compressing the at least a portion of the rich carbon dioxide stream to at least one rich product compressor prior to delivering the rich carbon dioxide stream to a subterranean reservoir for enhanced hydrocarbon recovery.
214. The method of claim 211, comprising compressing the at least a portion of the rich carbon dioxide stream to at least one rich product compressor prior to delivering the rich carbon dioxide stream to a carbon sequestration unit.

215. The method of claim 208, comprising delivering at least a portion of the lean carbon dioxide stream to a gas dehydration unit.
216. The method of claim 208, comprising delivering at least a portion of the rich carbon dioxide stream to a gas dehydration unit.
217. The method of claim 172, comprising introducing at least a portion of the low oxygen content product stream to an expander and expanding the at least a portion of the low oxygen content product stream, driving at least one of a generator or another mechanical device and producing a vent stream.
218. The method of claim 208, comprising introducing at least a portion of the lean carbon dioxide stream to an expander and expanding the at least a portion of the lean carbon dioxide stream, driving at least one of a generator or another mechanical device and producing a vent stream.
219. The method of claim 172, comprising a second at least one oxidation catalyst unit located within the recirculation loop and oxidizing at least a portion of the at least one of carbon monoxide, hydrogen, unburned hydrocarbons or similar products of incomplete combustion contained in the recirculated low oxygen content gas stream.
220. The method of claim 219, wherein the second at least one oxidation catalyst unit is located upstream of the second heat recovery unit.
221. The method of claim 219, wherein the second at least one oxidation catalyst unit is located downstream of the second heat recovery unit.
222. The method of claim 219, wherein the second at least one oxidation catalyst unit is located within the second heat recovery unit at a location providing a suitable operating temperature and providing a suitable heat sink for the heat generated by the catalytic reactions.

223. The method of claim 172, comprising controlling the flow rate of the at least a second portion of the compressed low oxygen content gas stream.

224. The method of claim 223, wherein the flow rate of the at least a second portion of the compressed low oxygen content gas stream is adjusted to maintain the pressure at a location within the recirculation loop within a desired range.

225. The method of claim 223, wherein the flow rate of the at least a second portion of the compressed low oxygen content gas stream is adjusted by means of at least one of an extraction valve, extraction vent valve, product compressor operating speed, product compressor inlet guide vane position or product compressor recycle valve.

226. The method of claim 172, wherein each of the at least one turbine combustor is comprising a plurality of burners and at least two separately controlled fuel circuits supplying a fuel stream separately to at least one of two individual burners, one individual burner and one group of burners, two groups of burners, and combinations thereof.

227. The method of claim 226, wherein the percentage reduction of fuel flow rate from at least one of the first fuel flow rate to the second fuel flow rate, the second fuel flow rate to the third fuel flow rate and the third fuel flow rate to the fourth fuel flow rate is not equal among the at least two separately controlled fuel circuits.

228. The method of claim 172, comprising:

reducing fuel stream flow rate to a fifth stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a fifth compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a fifth mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising a fifth low oxygen content product emissions level that is within a target range and a first heat

release from the second at least one oxidation catalyst unit resulting in a temperature of the recirculated low oxygen content gas stream downstream of the second at least one oxidation catalyst unit that is within a target range;

reducing fuel stream flow rate to a sixth fuel stream flow rate that is less than the fifth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a sixth compressed oxidant flow rate that is less than the fifth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a sixth mechanical power that is less than the fifth mechanical power and producing a low oxygen content product stream comprising a sixth low oxygen content product emissions level that is within a target range and a second heat release from the second at least one oxidation catalyst unit resulting in a temperature of the recirculated low oxygen content gas stream downstream of the second at least one oxidation catalyst unit that is at the limit of a target range;

reducing fuel stream flow rate to a seventh fuel stream flow rate that is less than the sixth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a seventh compressed oxidant flow rate that is less than the sixth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a seventh mechanical power that is less than the sixth mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level and a third heat release from the second at least one oxidation catalyst unit resulting in a temperature of the recirculated low oxygen content gas stream downstream of the second at least one oxidation catalyst unit that is within a target range.

229. The method of claim 172, comprising:

reducing fuel stream flow rate to an eighth stream flow rate that is less than the first fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to an eighth compressed oxidant flow rate that is less than the first compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing an eighth mechanical power that is less than the first mechanical power and producing a low oxygen content product stream comprising an

eighth low oxygen content product emissions level that is within a target range and a fourth heat release from the first at least one oxidation catalyst unit resulting in a temperature of the low oxygen content product stream downstream of the first at least one oxidation catalyst unit that is within a target range;

reducing fuel stream flow rate to a ninth fuel stream flow rate that is less than the eighth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a ninth compressed oxidant flow rate that is less than the eighth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is maintained, producing a ninth mechanical power that is less than the eighth mechanical power and producing a low oxygen content product stream comprising a ninth low oxygen content product emissions level that is within a target range and a fifth heat release from the first at least one oxidation catalyst unit resulting in a temperature of the low oxygen content product stream downstream of the first at least one oxidation catalyst unit that is at the limit of a target range;

reducing fuel stream flow rate to a tenth fuel stream flow rate that is less than the ninth fuel stream flow rate and reducing the first portion of the compressed oxidant stream flow rate to a tenth compressed oxidant flow rate that is less than the ninth compressed oxidant flow rate, wherein the substantially stoichiometric ratio is not maintained and fuel lean combustion is achieved, producing a tenth mechanical power that is less than the ninth mechanical power and producing a high oxygen content product stream comprising a high oxygen content product emissions level and a sixth heat release from the first at least one oxidation catalyst unit resulting in a temperature of the high oxygen content product stream downstream of the first at least one oxidation catalyst unit that is within a target range.

230. The method of claim 172, comprising a first at least one nitrogen oxide reduction catalyst unit as part of the first at least one oxidation catalyst unit.

231. The method of claim 219, comprising a second at least one nitrogen oxide reduction catalyst unit as part of the second at least one oxidation catalyst unit.

232. The method of claim 203, comprising at least one of an inertial separator, coalescing filter and a water impermeable filter downstream of the heat exchanger and improving the effectiveness of removing the condensed water.

1/13

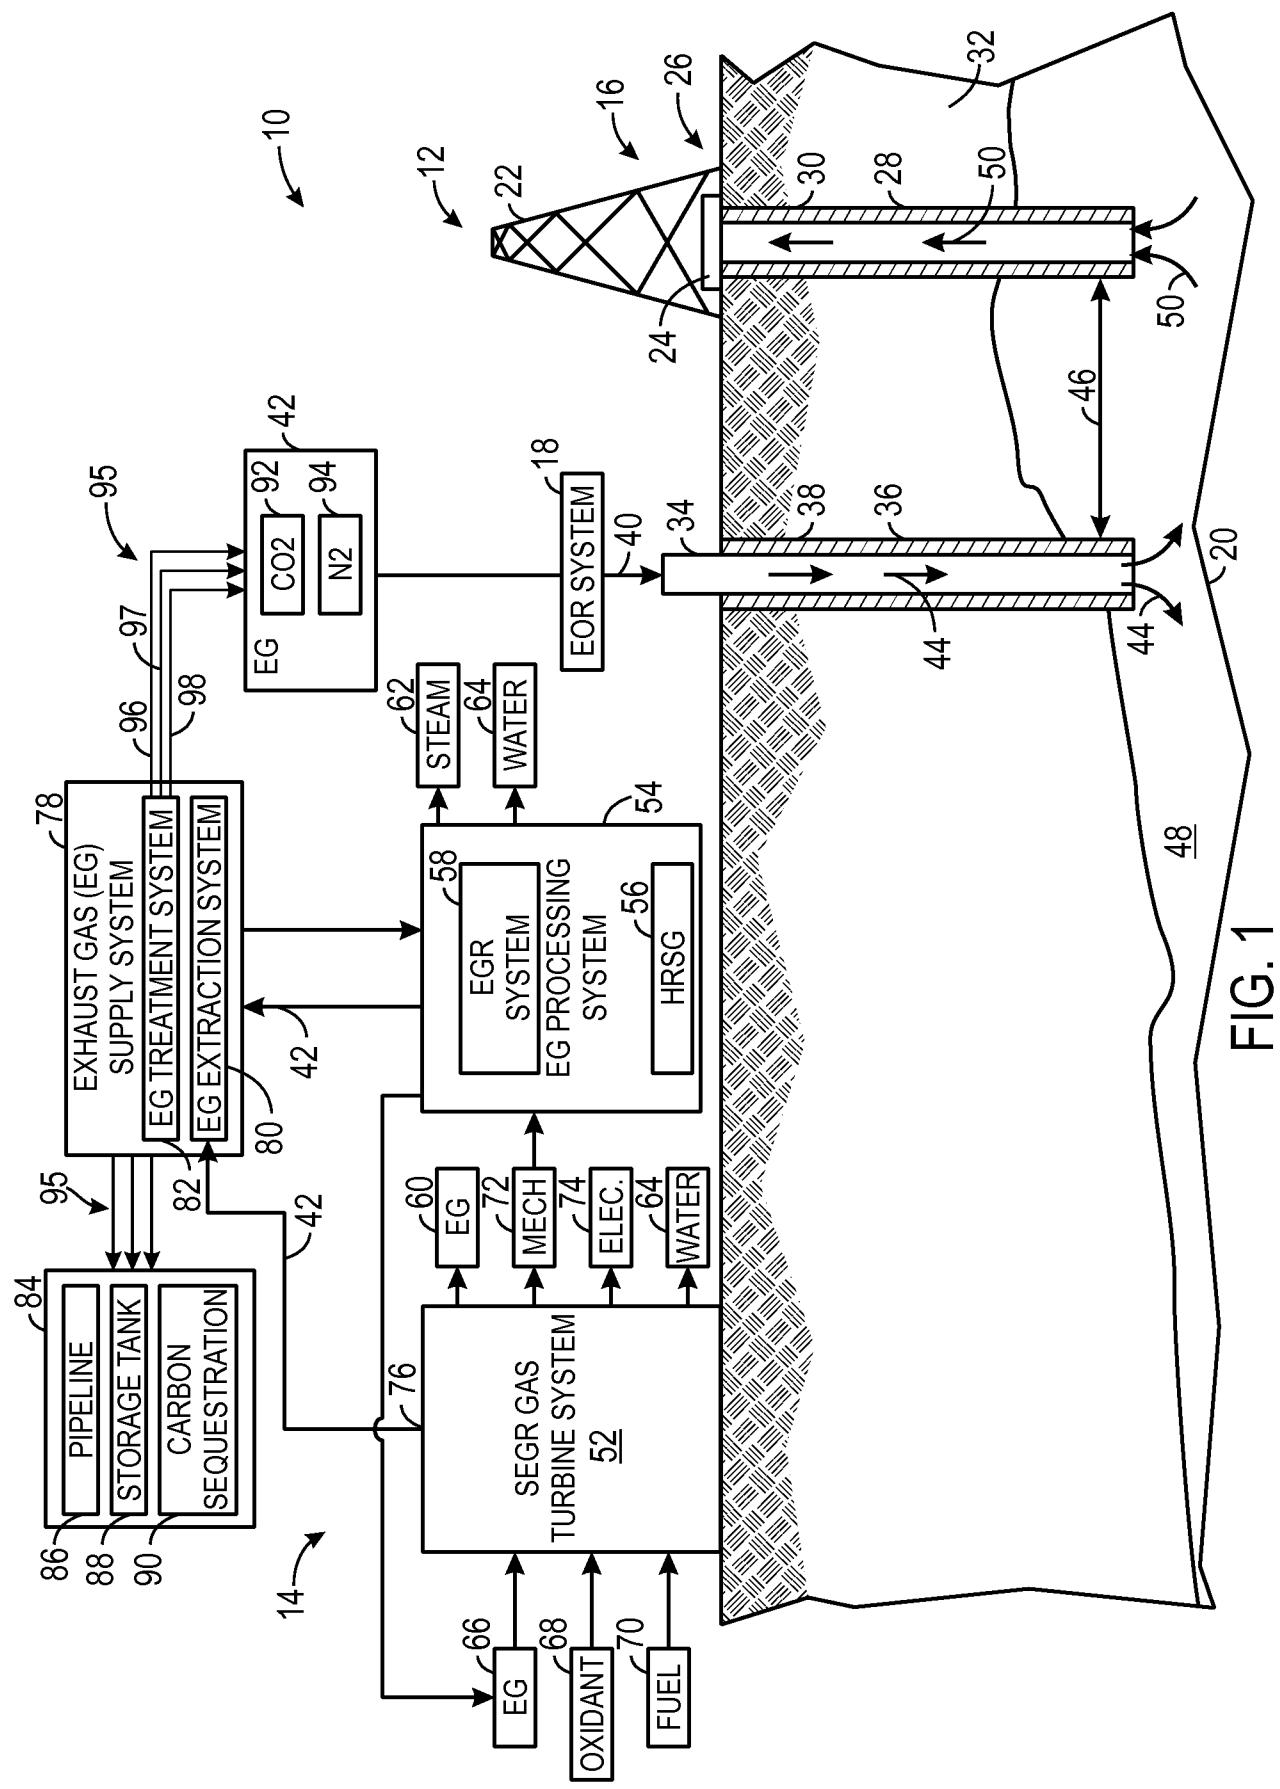


FIG. 1

2/13

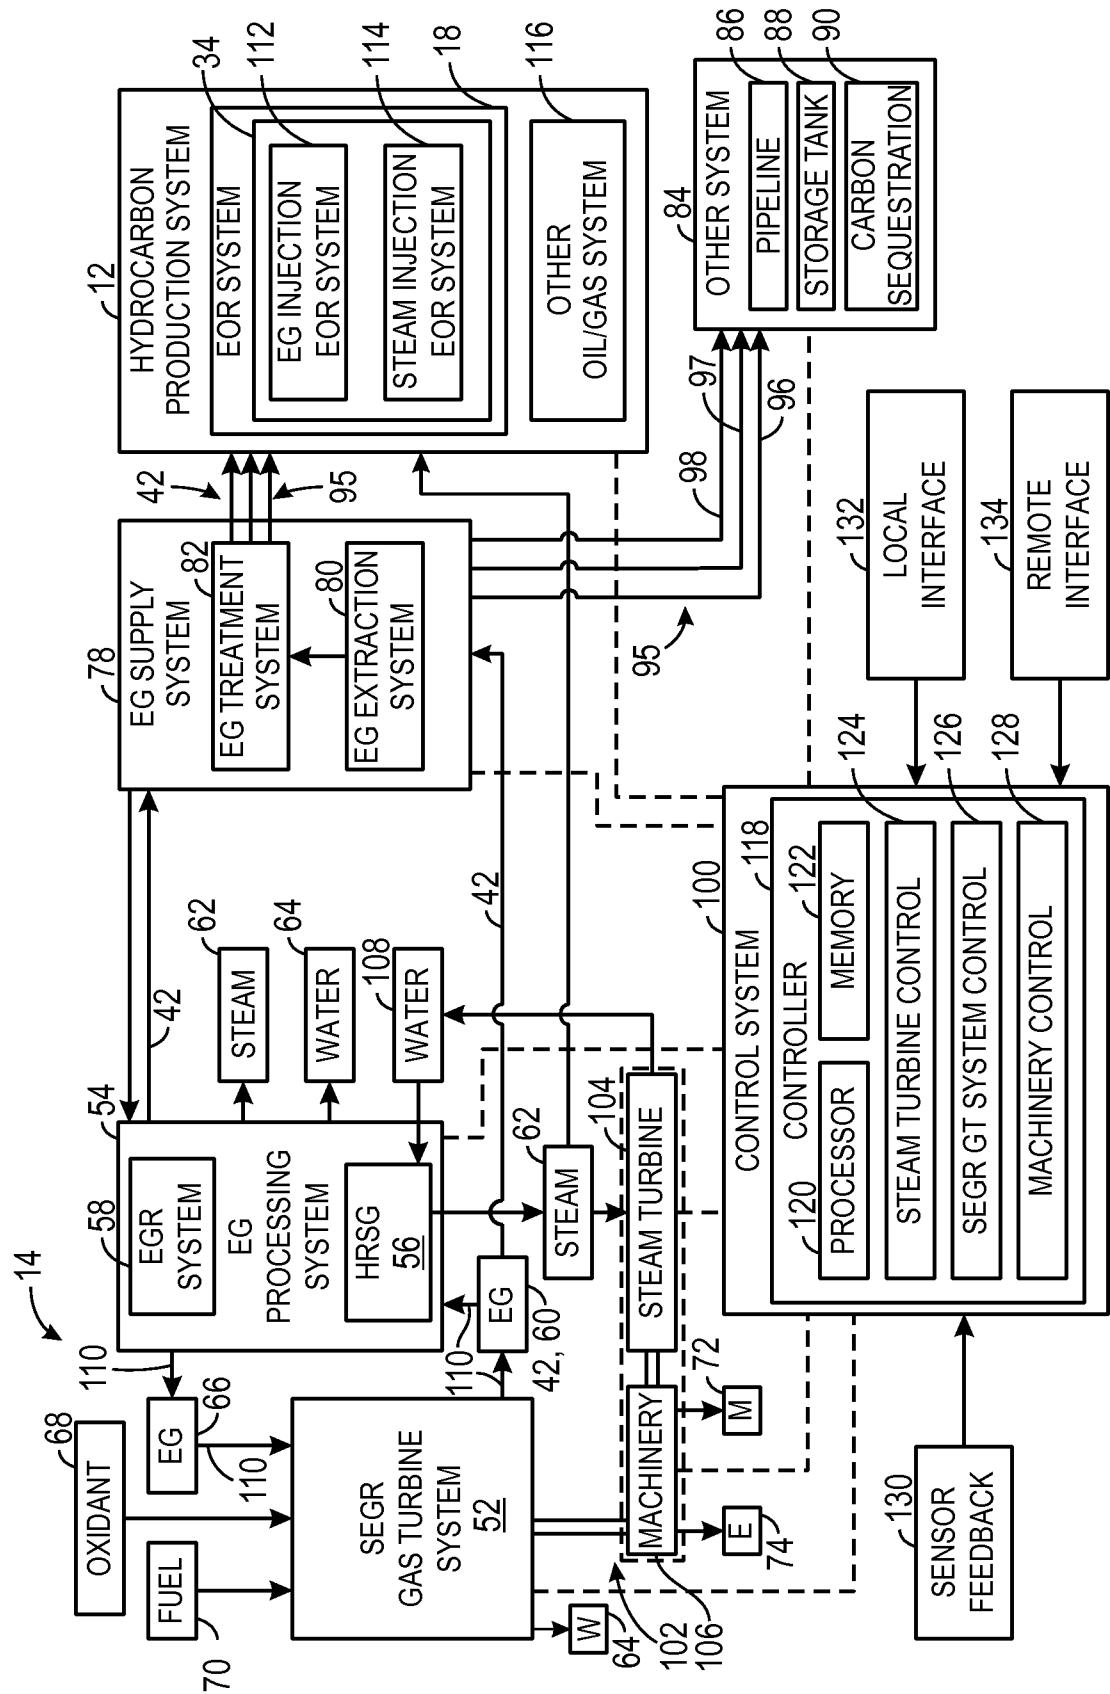


FIG. 2

3/13

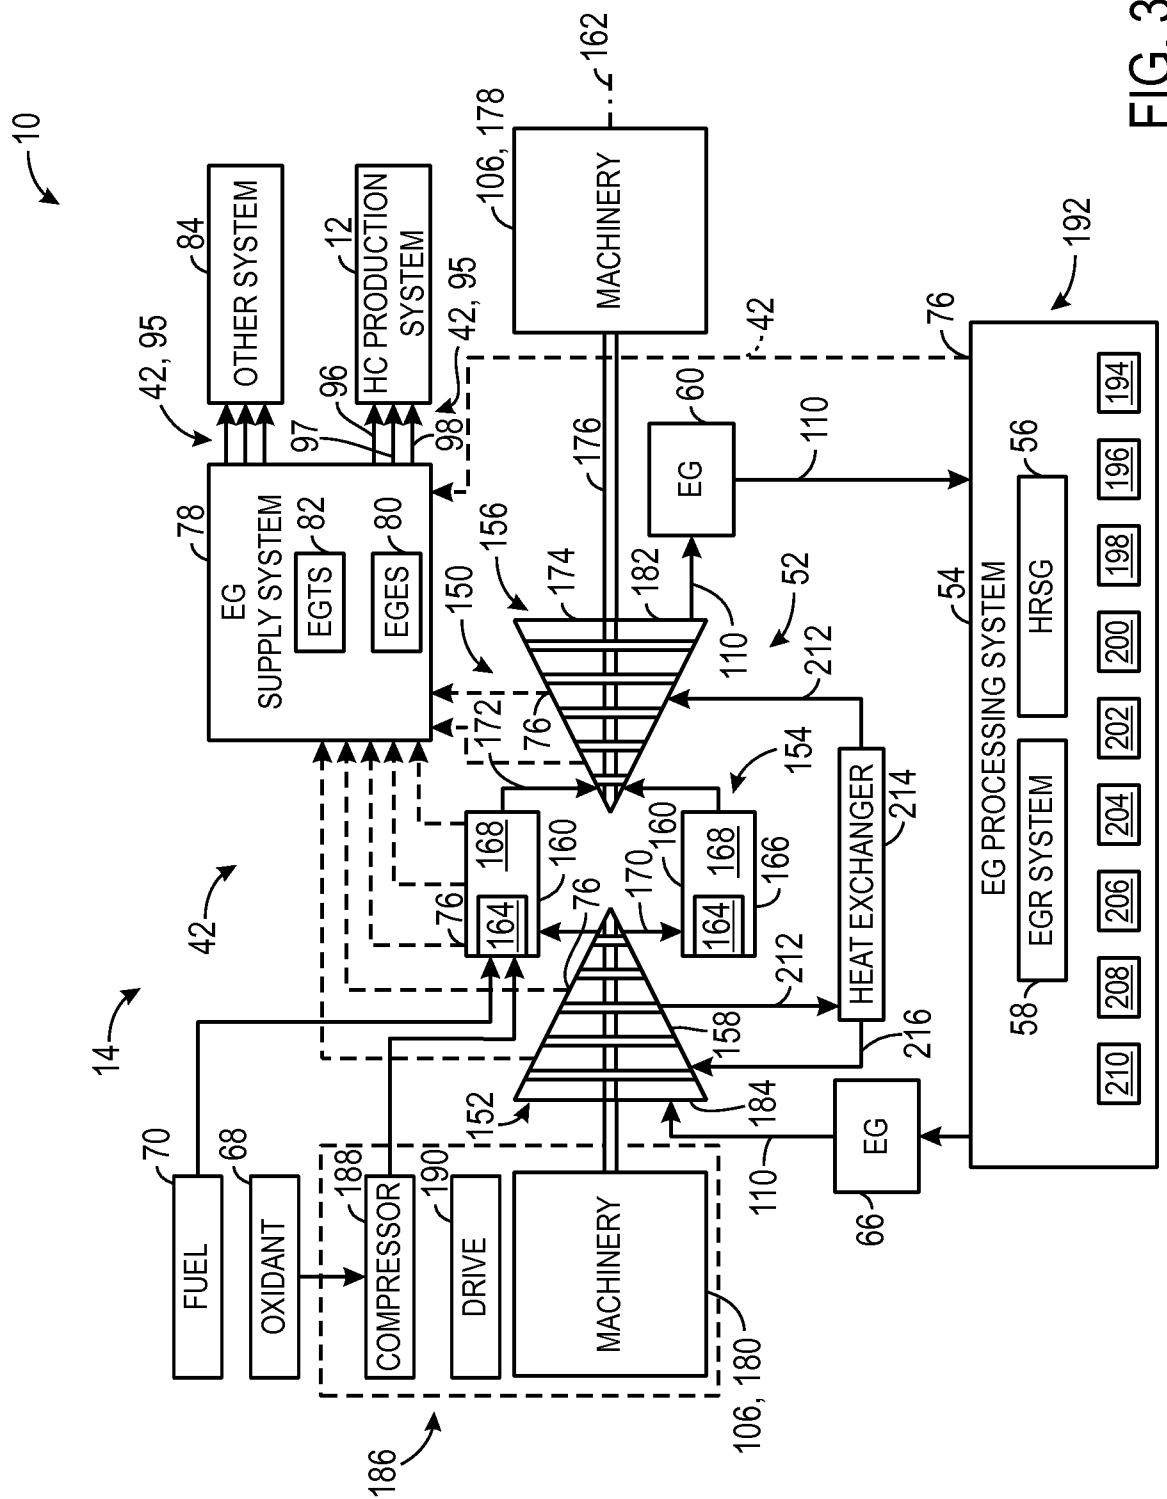


FIG. 3

4/13

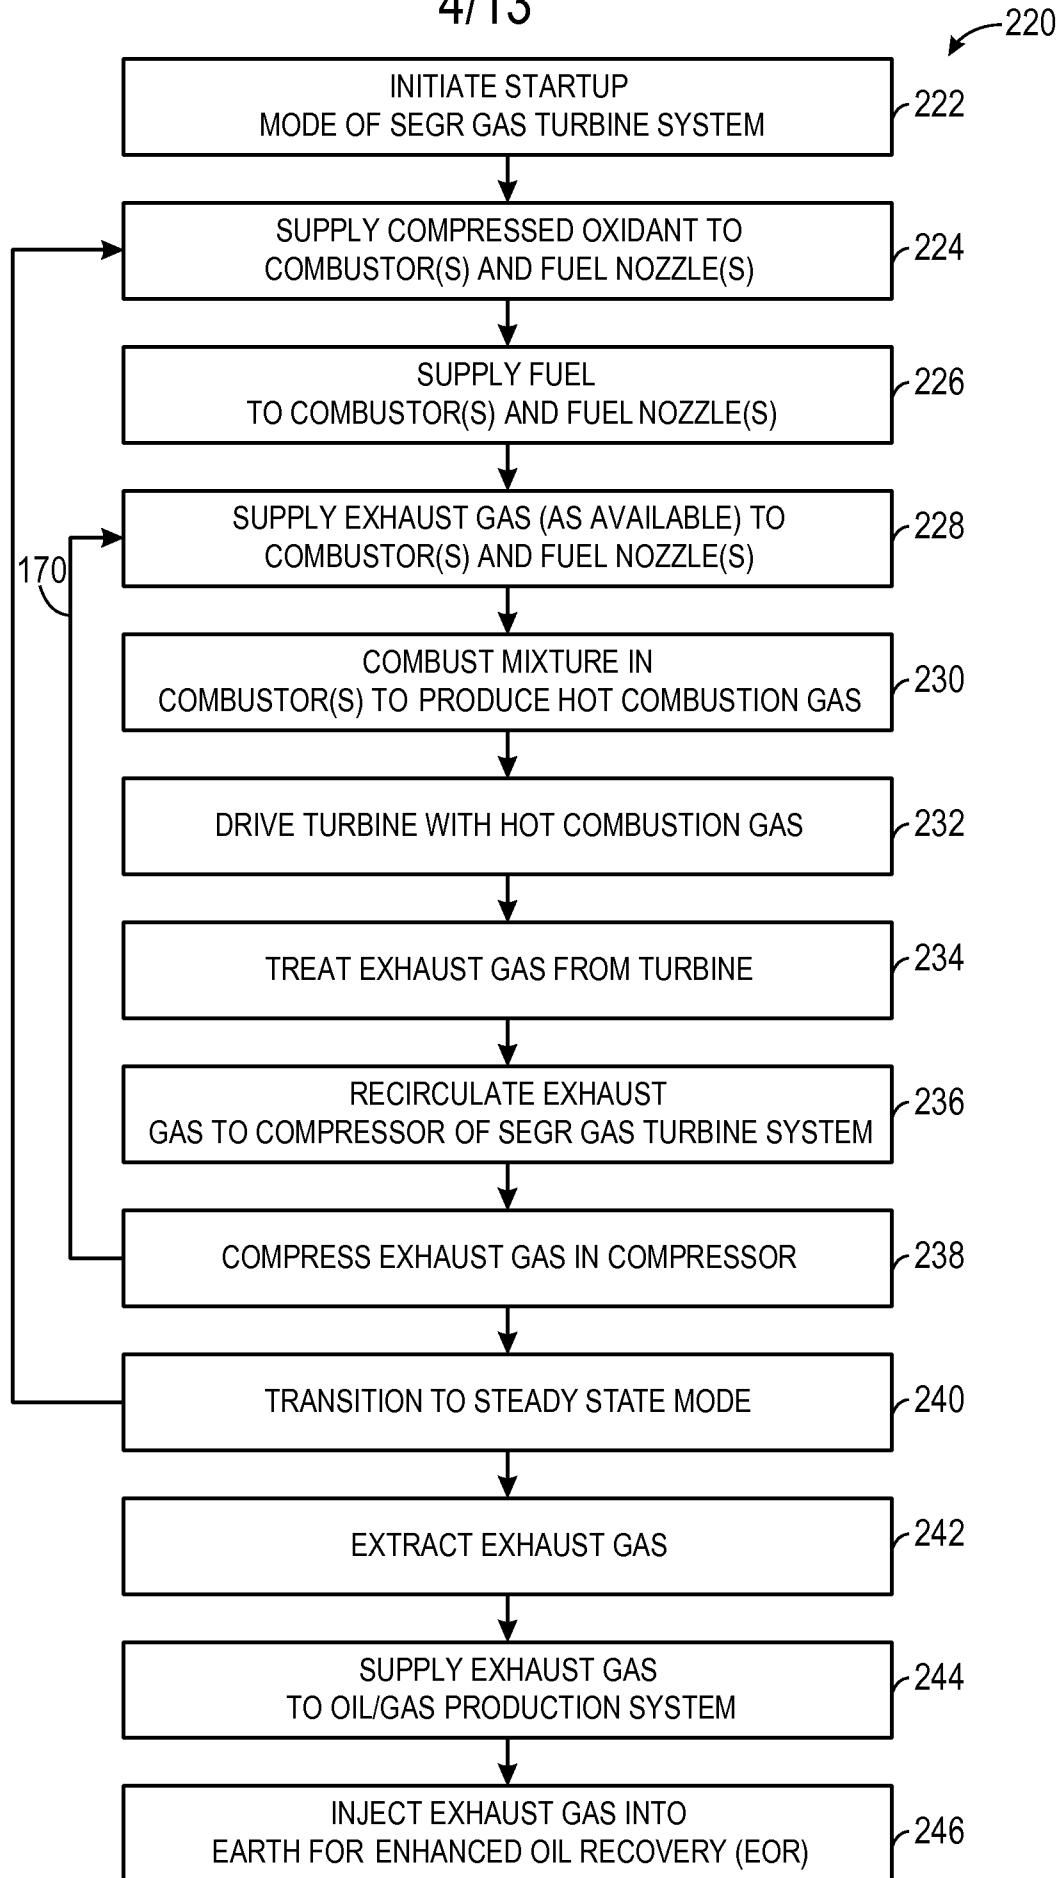


FIG. 4

5/13

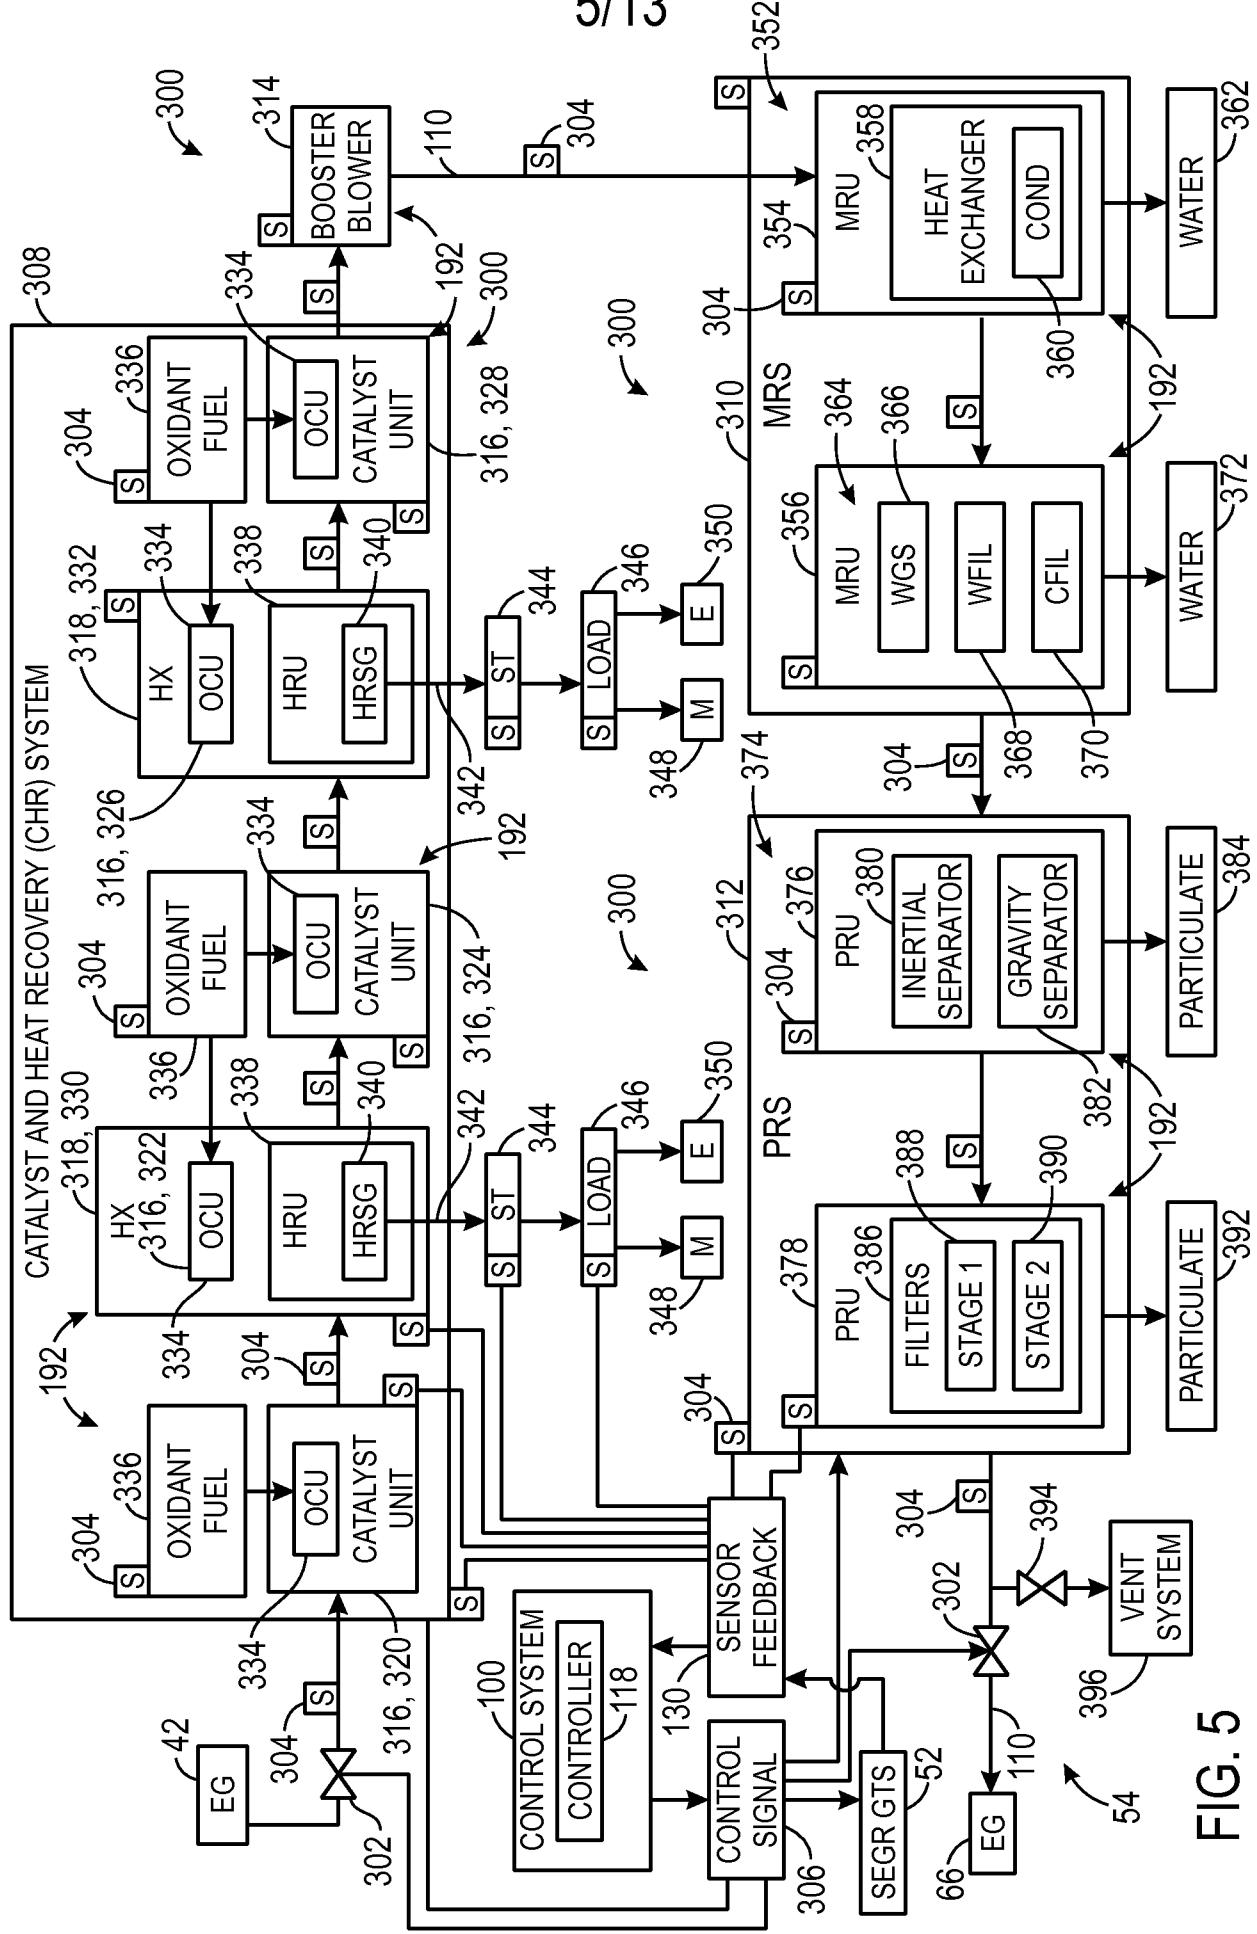


FIG. 5

6/13

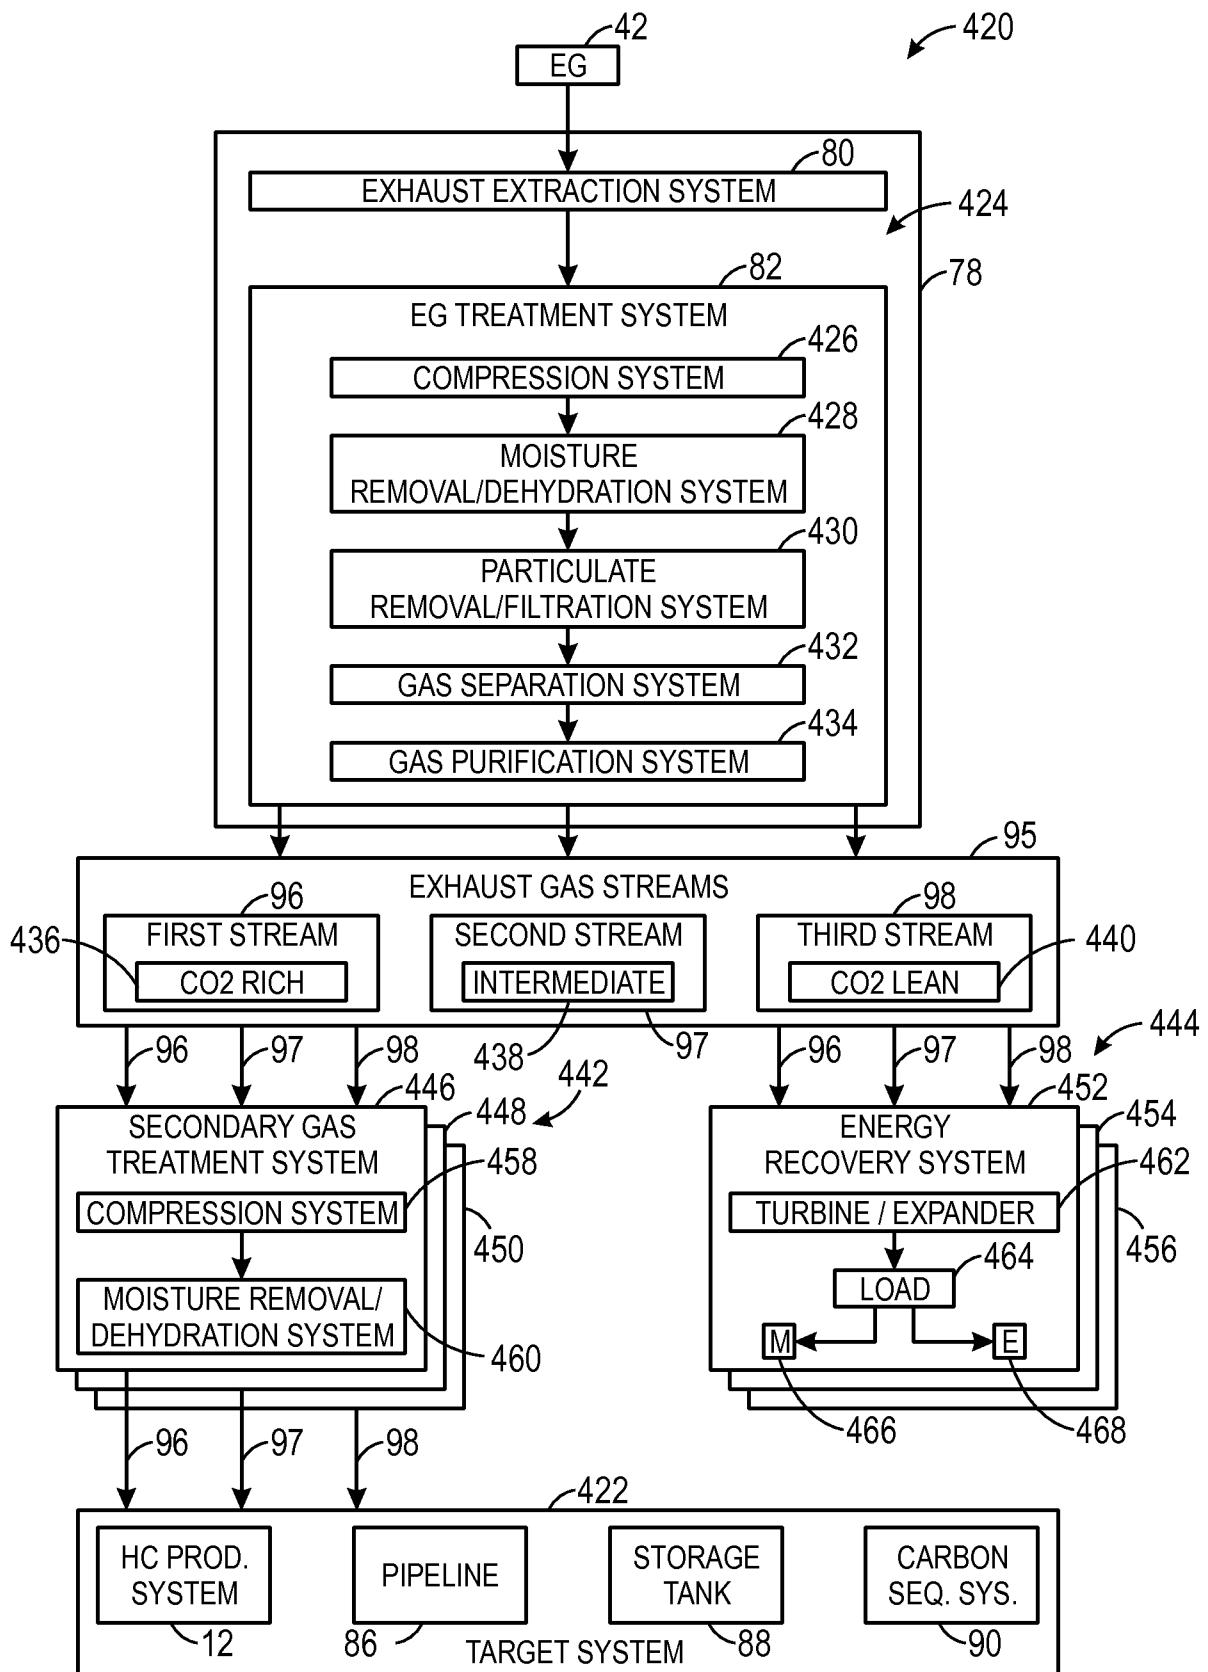


FIG. 6

7/13




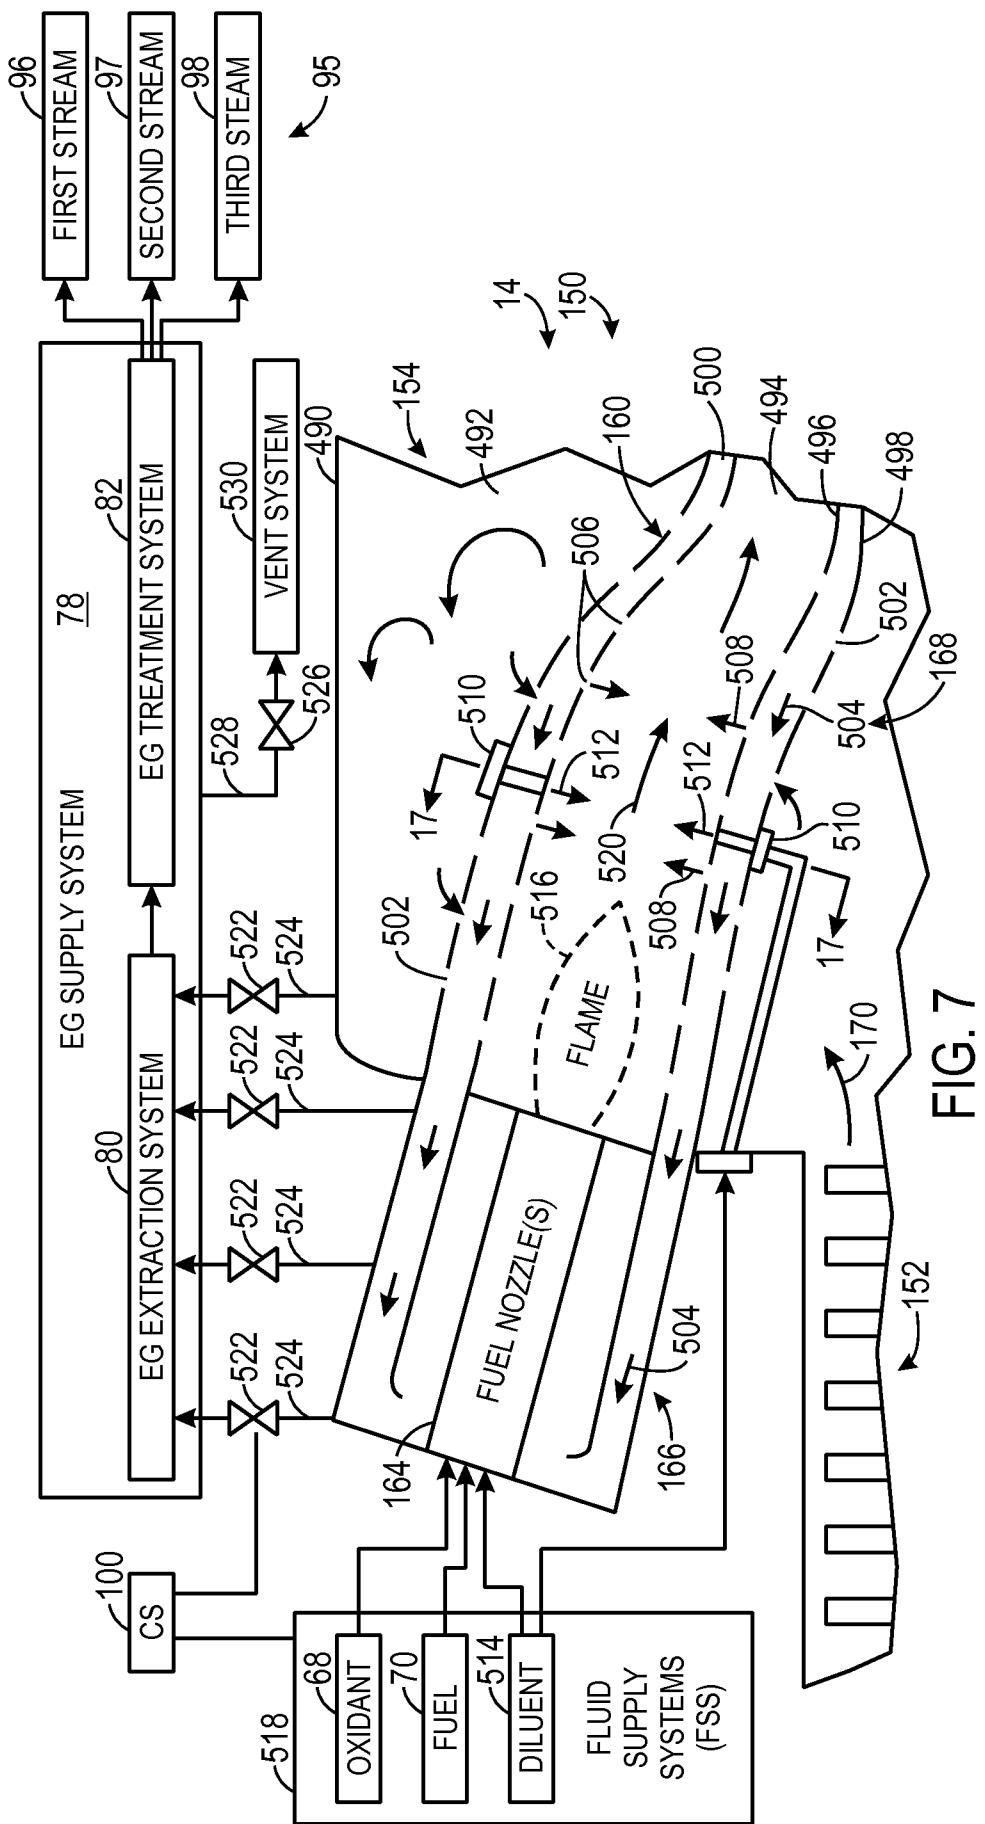


FIG. 7

8/13

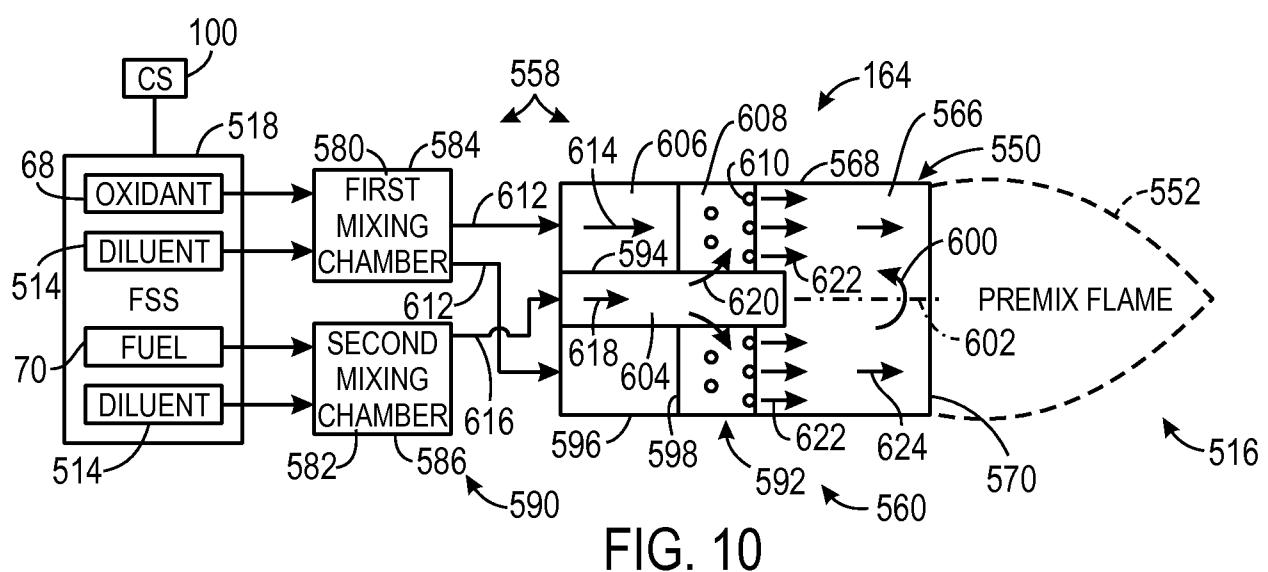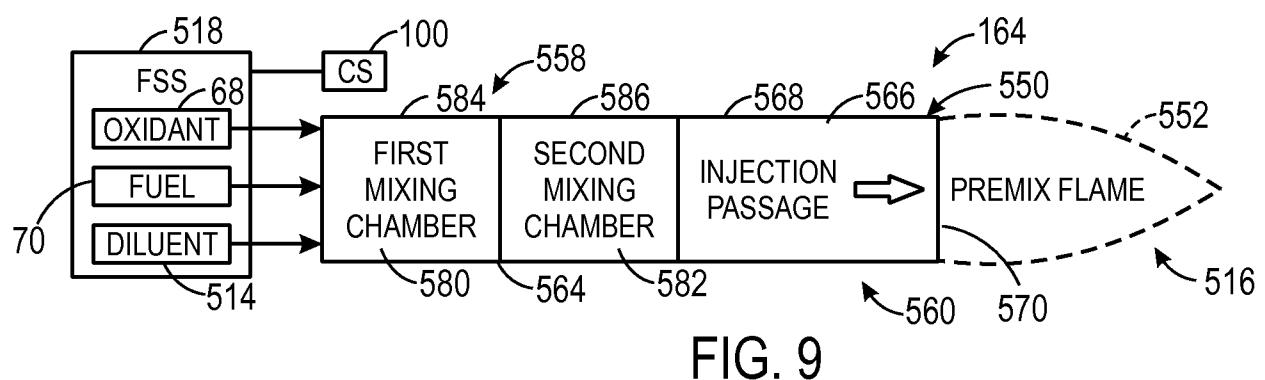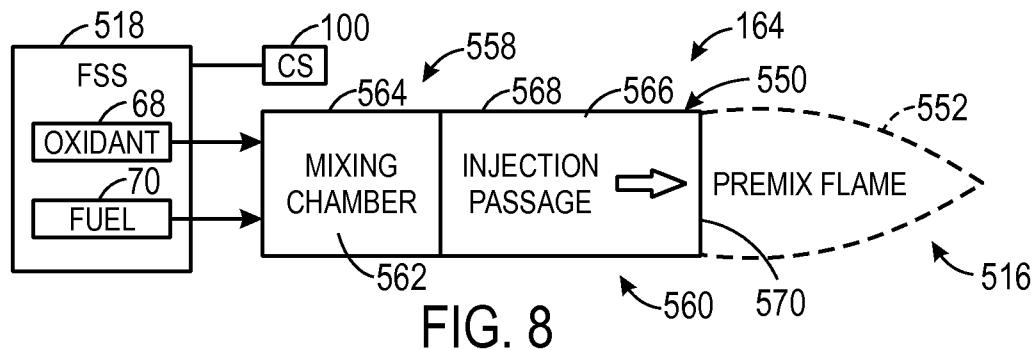

9/13

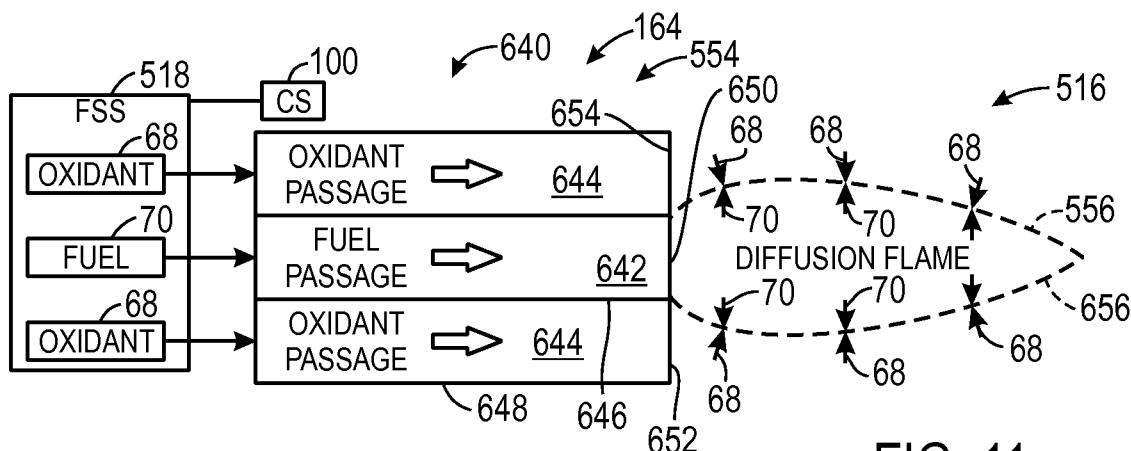


FIG. 11

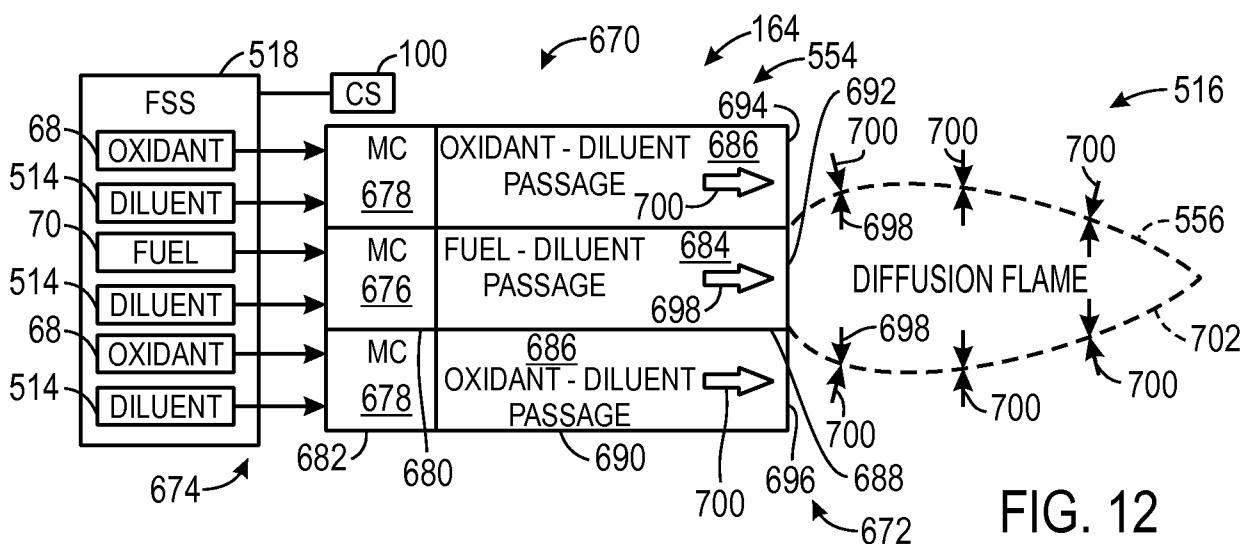


FIG. 12

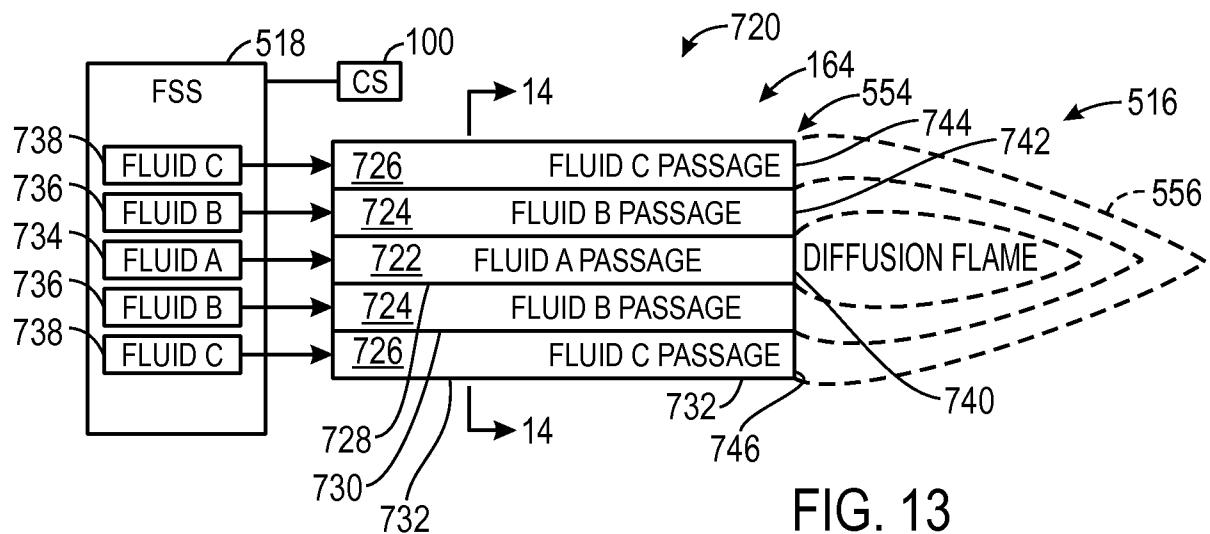


FIG. 13

10/13

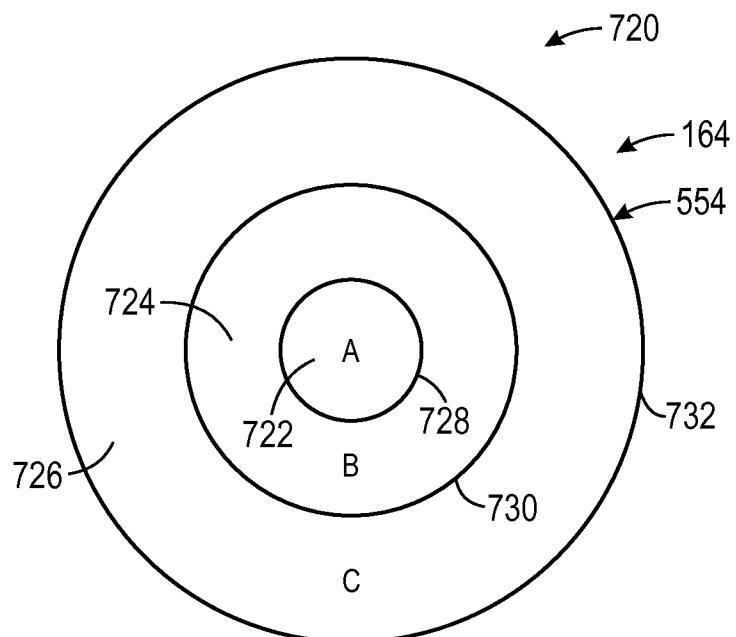


FIG. 14

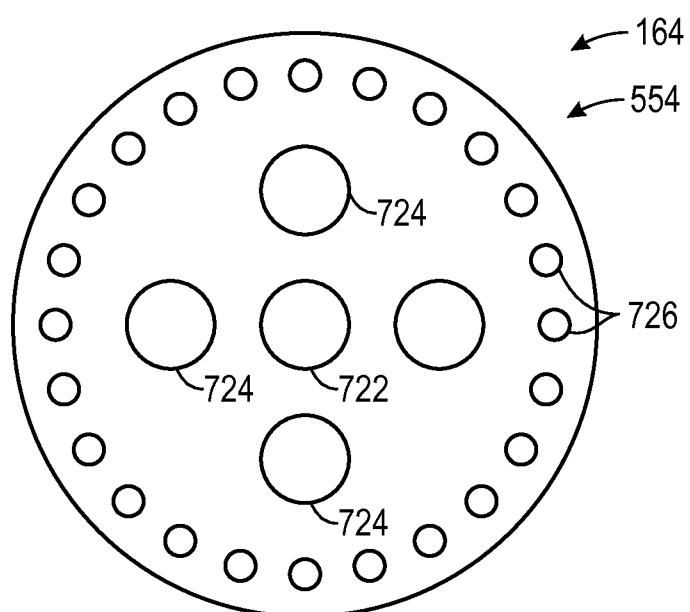


FIG. 15

11/13

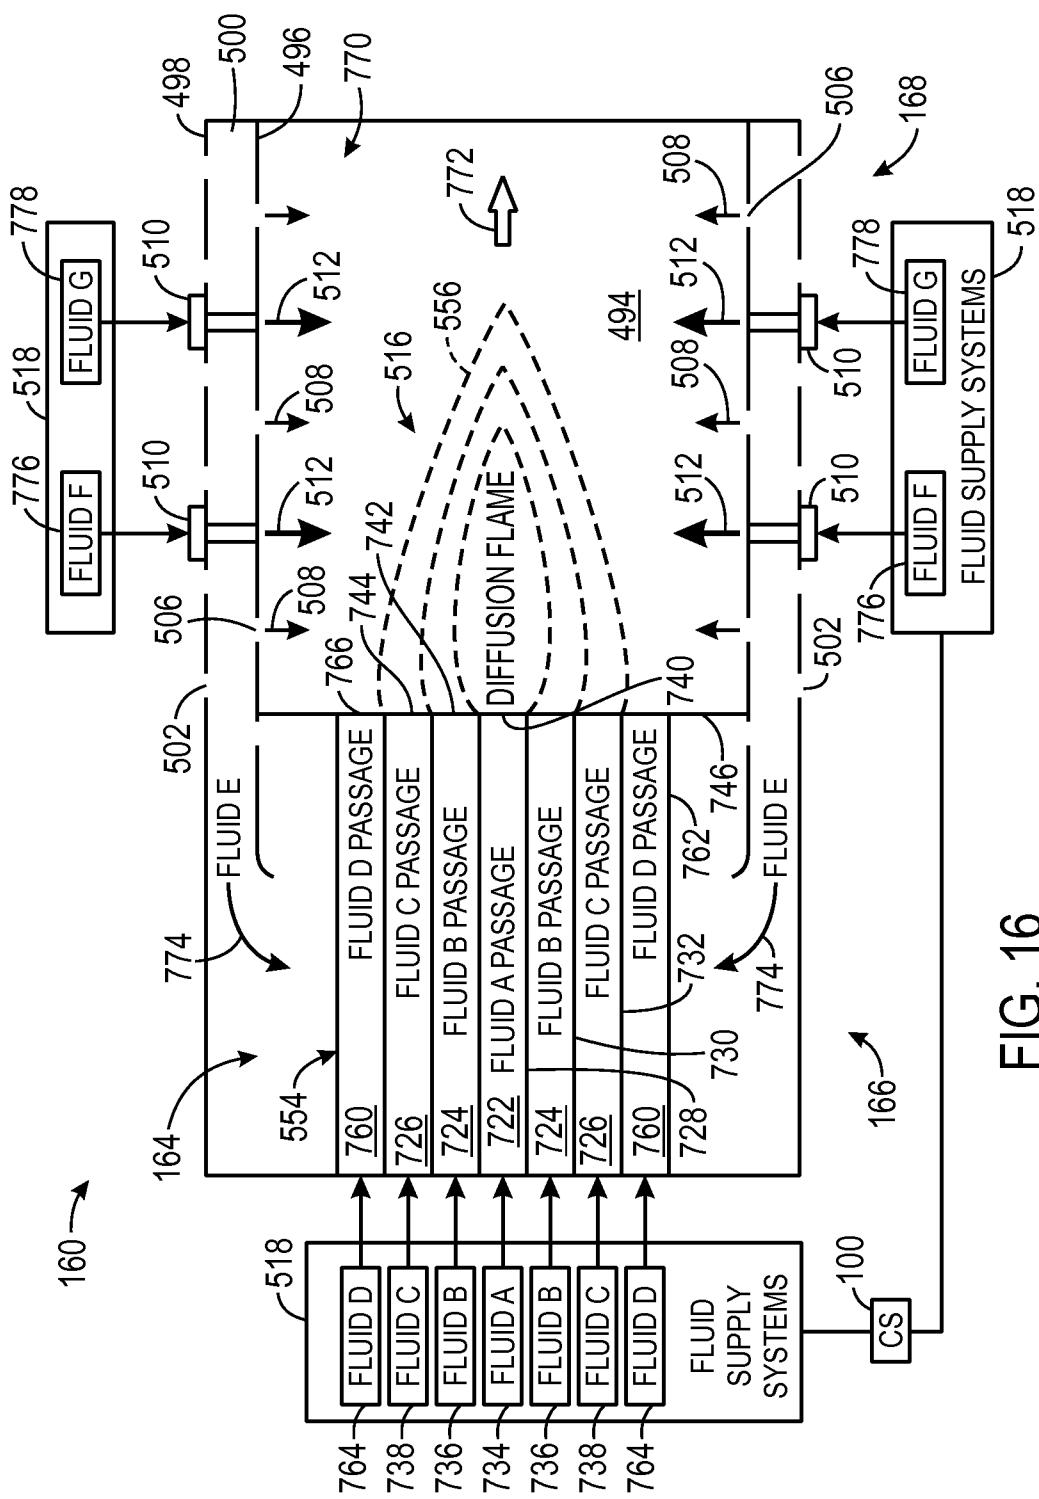


FIG. 16

12/13

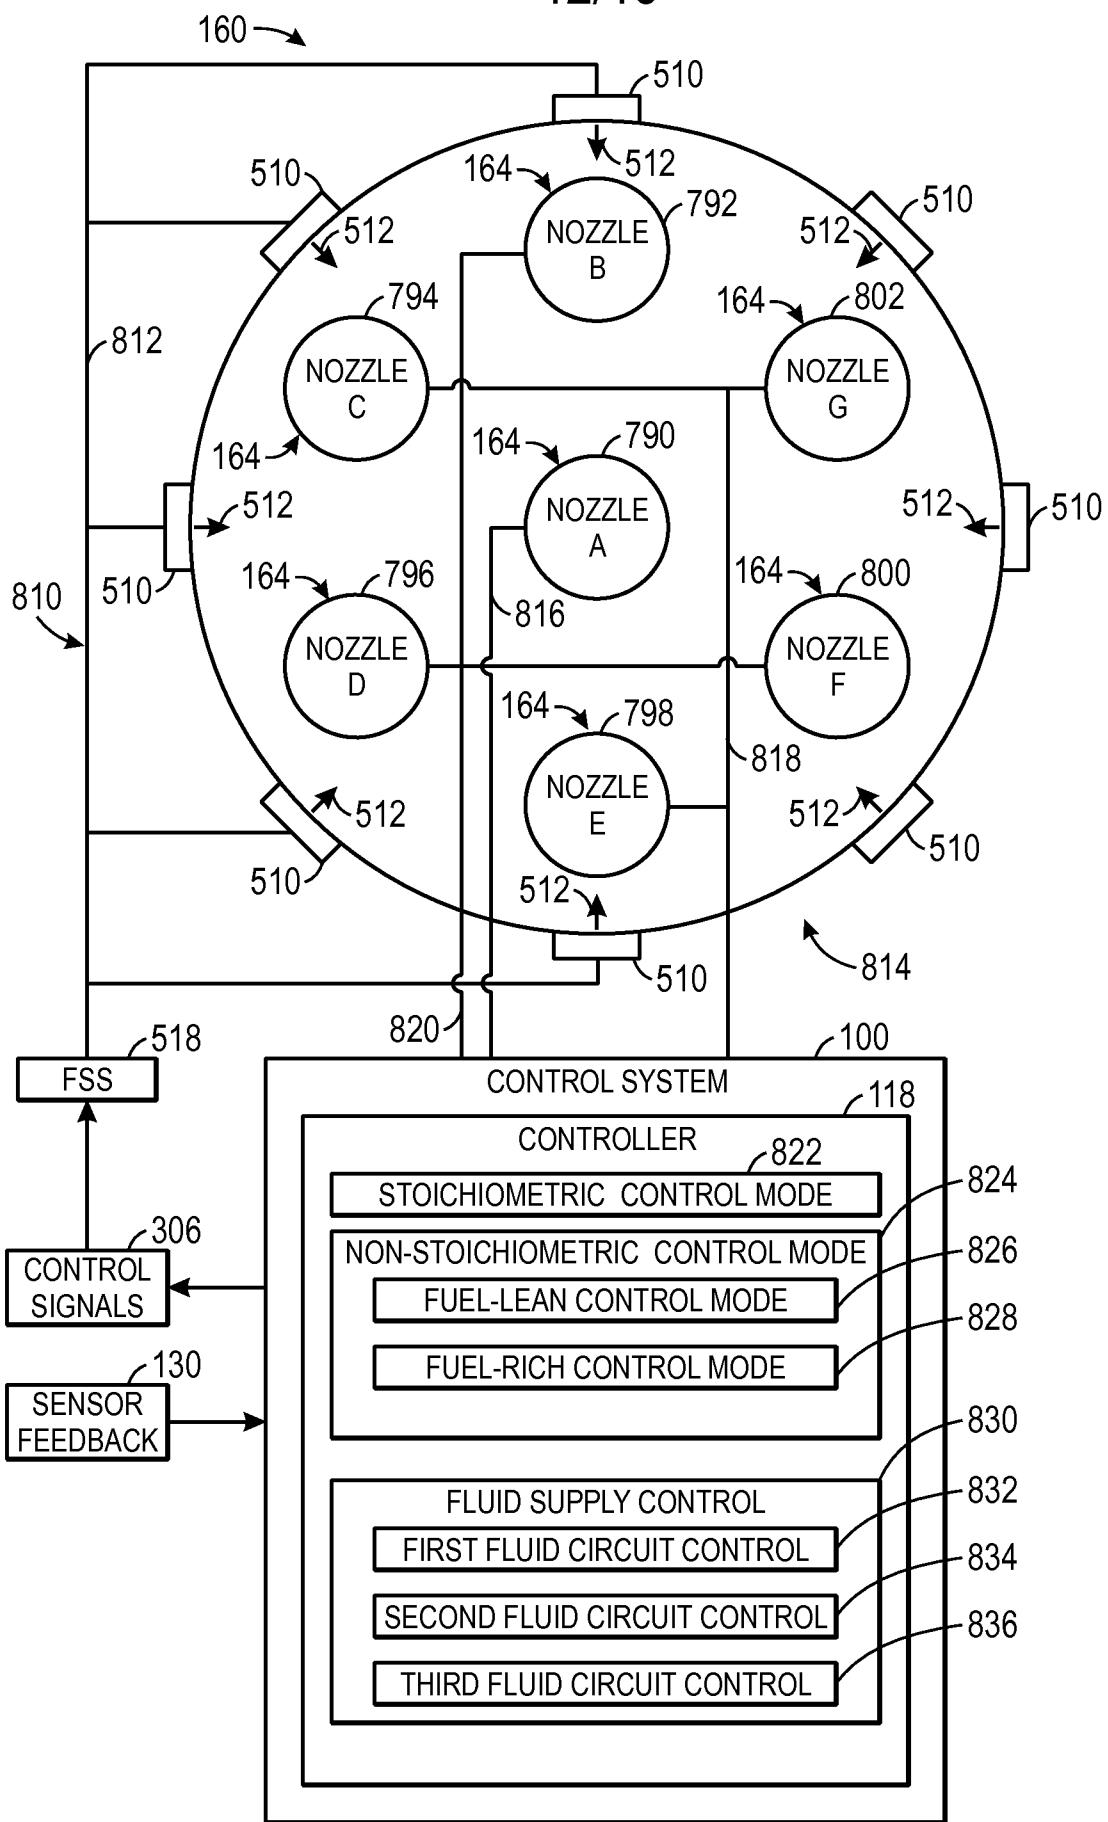


FIG. 17

13/13

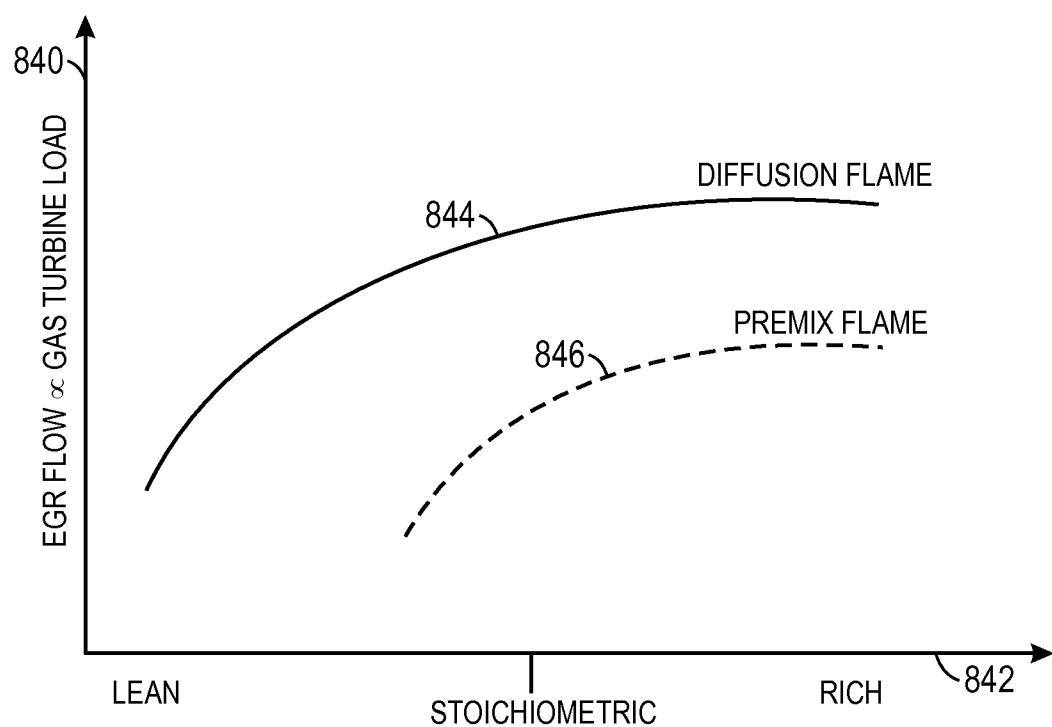


FIG. 18

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/068113

A. CLASSIFICATION OF SUBJECT MATTER
 INV. F02C1/06 F02C3/34 F02C6/18 F01K23/10
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F02C F01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 246 532 A1 (ALSTOM TECHNOLOGY LTD [CH]) 3 November 2010 (2010-11-03)	1-36, 57-60, 70-122, 143-146, 156-171
Y	paragraph [0014] figure 1 paragraph [0018] the whole document	37-56, 61-69, 123-142, 147-155
X	US 2010/115960 A1 (BRAUTSCH ANDREAS [CH] ET AL) 13 May 2010 (2010-05-13) figure 2 paragraph [0042] - paragraph [0043]	1,87
	----- ----- -/-	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 30 January 2014	Date of mailing of the international search report 15/04/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Burattini, Paolo

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/068113

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2005/124231 A2 (VAST POWER SYSTEMS INC [US]; CAMPBELL PAUL ANDRE [US]; HAGEN DAVID [US] 29 December 2005 (2005-12-29) figure 2 ----- EP 2 390 483 A2 (GEN ELECTRIC [US]) 30 November 2011 (2011-11-30) paragraph [0010] paragraph [0038] page 5 ----- US 2010/031661 A1 (VARATHARAJAN BALACHANDAR [US] ET AL) 11 February 2010 (2010-02-11) figure 5 paragraph [0005] - paragraph [0006] ----- US 2012/023957 A1 (DRAPER SAMUEL DAVID [US] ET AL) 2 February 2012 (2012-02-02) paragraph [0014] figure 1 ----- JP S62 108518 A (SUMITOMO ELECTRIC INDUSTRIES) 19 May 1987 (1987-05-19) abstract figure 1 -----	37-44, 123-130 45-56, 131-142 61-69, 147-155 1-171 61-64
A		
A		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/068113

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-171

Remark on Protest

The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-171

A system and related method of operation, the system comprising a turbine combustor with a diffusion fuel nozzle; a turbine; a compressor that compresses and routes an exhaust gas from the turbine to the combustor along an exhaust recirculation path; and a control system configured to control flow rates of oxidant and fuel in a stoichiometric and a non-stoichiometric control mode in order to transition between them.

2. claims: 172-232

A method of operating a combustor whereby streams of exhaust gases are recirculated at different ratios with respect to the injected stream either upstream of, at or downstream of the combustion zone, in order to modify the production on pollutants and the stability of the flame and concurrently operate different catalyst units.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2013/068113

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
EP 2246532	A1 03-11-2010	CA 2747643 A1 CN 102265005 A EP 2246532 A1 EP 2368023 A2 JP 2012514152 A US 2011314815 A1 US 2013118179 A1 WO 2010072729 A2			01-07-2010 30-11-2011 03-11-2010 28-09-2011 21-06-2012 29-12-2011 16-05-2013 01-07-2010
US 2010115960	A1 13-05-2010	EP 2158388 A1 JP 5366941 B2 JP 2010530490 A US 2010115960 A1 WO 2008155242 A1			03-03-2010 11-12-2013 09-09-2010 13-05-2010 24-12-2008
WO 2005124231	A2 29-12-2005	EP 1819964 A2 US 2006005542 A1 US 2010319594 A1 US 2013266902 A1 WO 2005124231 A2			22-08-2007 12-01-2006 23-12-2010 10-10-2013 29-12-2005
EP 2390483	A2 30-11-2011	CN 102330601 A EP 2390483 A2 JP 2011247266 A US 2011289930 A1			25-01-2012 30-11-2011 08-12-2011 01-12-2011
US 2010031661	A1 11-02-2010	CN 101644435 A DE 102009025934 A1 JP 2010048542 A US 2010031661 A1			10-02-2010 11-02-2010 04-03-2010 11-02-2010
US 2012023957	A1 02-02-2012	CN 102953820 A EP 2562390 A2 US 2012023957 A1			06-03-2013 27-02-2013 02-02-2012
JP S62108518	A 19-05-1987	NONE			