

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199895265 B2
(10) Patent No. 740178


(54) Title	Bill validator for bank note having conductive strip		
(51) ⁶ International Patent Classification(s)	G07D 007/00		
(21) Application No:	199895265	(22) Application Date:	1998 .10 .19
(87) WIPO No:	W099/21139		
(30) Priority Data			
(31) Number	(32) Date	(33) Country	
2218939	1997 .10 .22	CA	
09/102819	1998 .06 .23	US	
(43) Publication Date :	1999 .05 .10		
(43) Publication Journal Date :	1999 .07 .08		
(44) Accepted Journal Date :	2001 .11 .01		
(71) Applicant(s)	Cashcode Company Inc.		
(72) Inventor(s)	Vladymir Barchuk		
(74) Agent/Attorney	WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122		
(56) Related Art			
US 5394969			
DE 4339417			
DE 4429689			

OPI DATE 10/05/99 APPLN. ID 95265/98
AOJP DATE 08/07/99 PCT NUMBER PCT/CA98/00976



AU9895265

INTEL

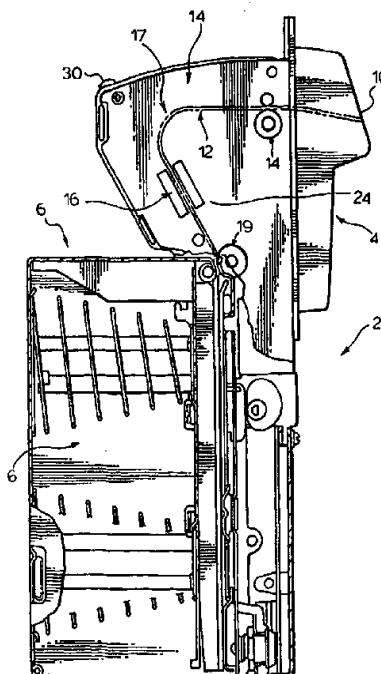(51) International Patent Classification ⁶ : G07D		A2	(11) International Publication Number: WO 99/21139 (43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/CA98/00976		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 October 1998 (19.10.98)			
(30) Priority Data: 2,218,939 22 October 1997 (22.10.97) CA 09/102,819 23 June 1998 (23.06.98) US			
(71) Applicant: CASHCODE COMPANY INC. [CA/CA]; Suite 2, 390 Edgely Boulevard, Concord, Ontario L4K 3Z6 (CA). 553 Basaltic Road 4W1		Published <i>Without international search report and to be republished upon receipt of that report.</i>	
(72) Inventor: BARCHUK, Vladymir, Apartment 11, Geroev Dnepra Street, Kiev (UA).			
(74) Agents: HALL, Warren, S. et al.; Suite 301, 133 Richmond Street West, Toronto, Ontario M5H 2L7 (CA).			
(54) Title: BILL VALIDATOR FOR BANK NOTE HAVING CONDUCTIVE STRIP			
(57) Abstract			
<p>A device for validating the authenticity of a document uses changes in capacitance due to the presence of an electrically conductive security thread extending across the document or the presence of a watermark. The device uses a drive arrangement for moving of a document such as a bank note, past a sensing arrangement which senses changes in capacitance due to movement of a security thread or watermark therapist. A frequency generator produces a high frequency time varying oscillator signal and provides this signal to an elongate oscillator electrode extending across the path of movement. A lead elongate measuring electrode is electrically conductive and positioned in front of the oscillator electrode and extends across said path and a trailing elongate measuring electrode is positioned behind the oscillator electrode and extends across the path. The signals from the measuring and the oscillator electrode are provided to a signal processing arrangement. The signal processing arrangement processes the signals relative to detect changes in amplitude and phase shift between the signals caused by a conductive security thread or the watermark passing by the electrodes. Chosen separation distances and using of two sensors placed on opposite sides of bank note reduces the signal intensity variations, caused by the wobbling of the bank note and changes in separation distance of the bank note from the sensor.</p>			
			

TITLE: BILL VALIDATOR FOR BANK NOTE HAVING CONDUCTIVE STRIP

5 FIELD OF THE INVENTION

The present application relates to sensors used in validating devices for detecting of electrically conductive security threads provided in currency and other documents.

10

BACKGROUND OF THE INVENTION

It is known to provide electrically conductive security threads in currency such as U.S. currency. These 15 security threads can be detected, using sensors which operate, based on changes in capacitance due to the presence of a security thread. The electrical conductivity of the security threads can be continuous or can be 20 segmented.

20

United States 5,419,424 discloses a device for sensing of the security threads in a document. This patent discloses a structure which has a host of sensors and uses 25 horizontal and vertically oriented electrodes in combination with a horizontally disposed feed electrode for distinguishing between security threads having discrete segments along the length thereof and a conductive line, such as a pencil line on a document.

30

As can be appreciated, sensing of security threads is used in combination with other sensing and evaluation techniques for collectively determining whether a particular document is authentic. Typically, the document is moved along a predetermined path and is moved 35 past fixed sensors. These sensors provide input which is evaluated to provide a prediction whether the document is authentic as the bill passes thereby. This evaluation and prediction occurs quickly as the consumer is typically

waiting for the results, i.e. credit towards a purchase, etc.

In sensing currency, it can be appreciated that

5 the condition of the currency can greatly vary from a relatively new crisp paper bill, to one which is quite worn and may have a series of creases or folds therein. The bill as it passes along the path, is normally controlled in a guide arrangement, however, there is some movement of the

10 currency within the guide from the guide centerline, and thus the bill can wobble within the guide. This wobble can dramatically effect a capacitance sensor, which is relatively sensitive to changes in the separation distance between the bill and the sensor. Most capacitance sensors

15 require the sensor to almost be in contact with the currency and this can cause the currency to jam in the validator. Thus with low separation spacing, the quality of the signal from the capacitance sensor improves, however there is a significant service and reliability problem,

20 caused by jamming of bills in the validator. Furthermore, the wobble of the paper currency, as it passes through the validator, can also rapidly change the separation distance and the signals from the capacitance sensor. The signal from the capacitance sensor is expected to increase and

25 decrease, however it is difficult to know whether these changes are caused by wobble or changing location of a security thread as it moves past a sensor.

In prior art devices there has been the tendency

30 to decrease the separation distance between the sensor and the bill to improve the strength of the signal but this has not proven entirely satisfactory.

The present invention overcomes a number of

35 these problems. It has also been found that changes in capacitance due to water marks can be recognized and used as part of the validating process.

Summary of the invention

According to the present invention there is provided a device of validating the authenticity of a document having an electrically conductive security thread extending across the document, said device including a drive arrangement for

5 moving the document in a length wise manner along a predetermined path of the device,

a generator producing a high frequency time varying oscillator signal,

an elongate oscillator electrode being electrically conductive and connected to said generator which applies said time varying oscillator signal

10 thereto, said elongate oscillator electrode being positioned to extend generally across said path,

a lead elongate measuring electrode being electrically conductive and positioned in front of said oscillator electrode and extending across said path,

a trailing elongate measuring electrode being electrically conductive and

15 positioned behind said oscillator electrode and extending across said path,

a signal processing arrangement connected to said measuring electrodes and receiving the outputs thereof and producing a measuring signal, said signal processing arrangement also receiving said time varying oscillator signal as a reference signal, said signal processing arrangement processing said measuring

20 signal relative to said reference to detect the variation of amplitude and changes in phase shift therebetween caused by a conductive security thread passing by said electrodes.

According to the present invention there is provided a device for validating the authenticity of a document having a electrically conductive security thread

25 extending across the document, said device including a drive arrangement for moving the document in a lengthwise manner along a predetermined path of the device,

a generator producing a high frequency time varying oscillator signal,

an elongate oscillator electrode being electrically conductive and

30 connected to said generator which applies said time varying oscillator signal



thereto, said elongate oscillator electrode being positioned to extend generally across said path,

a lead elongate measuring electrode being electrically conductive and positioned in front of said oscillator electrode and extending across said path,

5 a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path,

a reference ground electrode,

a signal processing arrangement connected to said measuring electrodes and receiving the outputs thereof and producing a measuring signal, said signal

10 processing arrangement also receiving said time varying oscillator signal as a reference signal, said signal processing arrangement processing said measuring signal relative to said reference signal to detect a phase shift therebetween caused by a conductive security thread passing by said electrodes, and wherein said processing arrangement includes a synchronous detector which compares a

15 differential signal derived from said measuring electrodes to said reference signal and detects said change in phase.

According to the present invention there is provided a device for validating the authenticity of a document having an electrically conductive security thread extending across the document, said device including,

20 a drive arrangement for moving the document in a lengthwise manner along a predetermined path of the device and a pair of security thread sensing arrangements located generally opposite to each other at a location above and below said predetermined path,

each said security thread sensing arrangement having a generator
25 producing a high frequency time varying oscillator signal, an elongate oscillator electrode being a lead elongate measuring electrode being a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path, a signal processing arrangement connected to said measuring electrodes and receiving the outputs
30 thereof and producing a measuring signal, said signal processing arrangement also receiving said time varying oscillator signal as a reference signal, said signal



processing arrangement processing said measuring signal relative to said reference signal to detect a phase shift there between caused by a conductive security thread passing by said electrodes,

5 said device further including a summing arrangement receiving the outputs of said measuring signal from each said processing arrangement, said summing arrangement producing a cumulative detection signal when a security thread passes between said pair of security thread sensing arrangements.

According to the present invention there is provided an arrangement for sensing electrical fields generated by a security thread in a document as said 10 thread moves by said arrangement, said arrangement including,

a generator producing a high frequency time varying oscillator signal,
an elongate oscillator electrode being electrically conductive and connected to said generator which applies said time varying oscillator signal thereto, said elongate oscillator electrode being positioned to extend generally 15 across a path of travel of said document,
a lead elongate measuring electrode being electrically conductive and positioned in front of said oscillator electrode and extending across said path,
a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path,
20 a reference electrode providing an electrical ground for fields generated within said elongate oscillator electrode, said lead elongate electrode and said trailing elongate electrode,
and an output signal from said arrangement,
wherein as said thread moves by said arrangement, said thread electrically 25 couples with each said electrode producing a characteristic, collective electric field pattern in said arrangement, signifying a detection of said security thread.

With the arrangement as described above, the security thread causes a first change in capacitance with the lead measuring electrode when the security thread is between the lead electrode and the oscillatory electrode. Further 30 movement of the document causes the security thread to then be located between the oscillatory electrode and the trailing elongate electrode. These



changes in capacitances cause the changes in amplitude and phase shift of the measuring signal with respect to the reference signal that can be easily detected. The arrangement with the lead electrode to one side of the oscillatory electrode and the trailing elongate measuring electrode to the opposite side of oscillatory 5 electrode permits to separate the signals caused by the security thread, from those caused by the changes in separation distance.

It has also been found with the present invention, that the positioning of the electrodes relative to the path can be quite large in the order of 1 to 1.2mm and the space between the lead electrode and the oscillatory electrode is also 10 approximately 1mm and the same separation distances found between the oscillatory electrode and the trailing electrode. However, this relatively large separation distance reduced the strength of measuring signals, it also significantly reduces the influence of wobbling of the bill as it passes along the pass on the measuring signals amplitude. This result is associated with nonlinear 15 dependence of measuring signal verses separation distance. The greater distance reduces the possibility of jamming the document relative to the prior practice of reducing or minimising the separation distance.

According to a preferred embodiment of the invention the signal generator produces an oscillatory signal having a frequency in the range of 50 to 150Mhz. 20 This frequency range is useful with respect to the larger separation distances and the separation distances between the electrodes.

In another preferred embodiment, two sensing arrangements are provided in opposed relation either side of the currency path. Different frequencies are used to reduce interference. With this arrangement, movement of the currency 25 off the center line increases the signal in one sensing arrangement and decreases the signal in the opposite sensing arrangement. The signals are processed and the evaluation is based on the signals from both sensing arrangements.

BRIEF DESCRIPTION OF THE DRAWINGS

30 Preferred embodiments of the invention are shown in the drawings, wherein:



Figure 1 is a partial sectional view of a currency validator;

Figure 2 is a partial top view showing the electrode sensing arrangement;

Figure 2a is a top view of a document containing a security thread;

Figure 3 shows the general signal processing arrangement;

5 Figure 4 shows an alternate embodiment of the invention;

Figure 5 shows a schematic equivalent of the electrode sensing arrangement;

Figure 6 shows a schematic equivalent of the electrode sensing arrangement when a bill containing a security thread is detected;

10 Figure 7 is a depiction of a U.S. \$50 bill having various security features;

Figure 8 is a representation of the capacitance readings of a U.S. \$50 bill of Figure 7; and

15 Figure 9 shows the signal response from a capacitance sensor through the center section of the U.S. \$50 bill.



DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The currency validator 2 has a processing section 4 which cooperates and guides validated documents into the security box 6. A processing section 4 has an 5 inlet 10 that allows the user to initially insert the document into the validator whereafter a drive arrangement 14 controls the movement of the document along the predetermined path indicated as 12. As the document moves 10 along this predetermined path, it is evaluated by sensors 16 and 24 to determine whether it is authentic. If it is determined to be authentic, it is then passed into the security box 16. If it is rejected, the drive arrangement 14 typically reverses and ejects the document through the inlet 10.

15

There are a number of different ways to evaluate the validity of a document and typically a validator such as the one shown as 2 uses a number of different sensing and evaluation techniques for determining whether a bill is 20 authentic. For example, this can include light emitting devices for determining reflected patterns, magnetic sensors and/or capacitance sensors.

The capacitance sensor of Figure 2 comprises an 25 oscillatory electrode 32 with a connecting portion 33. A lead measuring electrode 34 is positioned in front of the oscillatory electrode 32 relative to the direction of travel of the document through the validator. A trailing measure electrode 36 is provided to the opposite side of 30 the oscillatory electrode and both the lead and the trailing measure electrodes are spaced from the oscillatory electrode a similar distance indicated as 31. The arrangement also includes ground shielding electrodes 50 associated with the connecting portions 33, 35 and 37. 35 Arrow 9 shows the direction of travel of a document past the electrodes and it can be seen that each of the electrodes are placed across the width of the document and across the direction of travel indicated as 9. A document

7 is generally shown and is being fed to pass by the electrodes 32, 34 and 36. The document 7, as shown in Figure 2a has a security thread 21 extending across the width of the document. This security thread is 5 electrically conductive and can either be continuous or have discrete electrically conductive segments. The continuous security thread produces a stronger signal and will first be described.

10 As the security thread 21 passes by the lead electrode 34, it enters the gap between the lead electrode 34 and the oscillatory electrode 32. This effectively couples the two electrodes and produces a sudden increase in the intensity and change in phase shift of the signal 15 from the electrode 34. As the document continues to move along the predetermined path, the capacitance coupling of the lead electrode and the oscillatory electrode decreases. As the security thread 21 passes over the oscillatory electrode, it then starts coupling with the trailing 20 electrode 36.

Figure 3 shows an overview of the signal processing arrangement. The high frequency signal generator 38 feeds a signal to the oscillatory electrode 25 32. This high frequency signal is also provided to the synchronous detector 46. Thus, a reference signal 44 which is basically the high frequency signal being fed to the oscillatory electrode 32, is provided to the synchronous detector 46. The synchronous detector 46 receives the 30 signal 47 from the lead measuring electrode and signal 45 from the trailing electrode. The difference between these signals is determined and produces a further measuring signal 49. The synchronous detector 46 uses the measuring signal 49 and the reference signal 44 to form output 35 signal, depending on the changes in amplitude and phase of input signal with respect to the reference signal. In particular, polarities of synchronous detector output

signals indicative of the security thread passing by the lead and trailing electrodes are opposite.

The signal processing arrangement can also
5 successfully operate in the regime when only the phase shift is registered. This regime takes place when the amplitudes of high frequency signals each input of synchronous detector are large enough for its saturation. In our sensors it is achieved either by long electrodes
10 application or at high amplitudes of generator signals.

Returning to Figure 2, it can be seen that the three electrodes are parallel strips of conductors supported by dielectric film 51. The oscillatory electrode 15 is in the center of the sensor's active area. Measuring electrodes are parallel and symmetric about the oscillatory electrode and form equal capacitance therewith. The size of spaces between the oscillatory electrode and the measuring electrodes is chosen on the basis of
20 considerations as will be more fully described. The connecting portions of the measuring electrodes and the oscillatory electrode are extended to provide connection to corresponding terminals of the sensing unit. Between these connecting portions are the shielding conductors which are
25 connected to the ground terminal.

As shown in Figure 3, the output from the synchronous detector 46 is fed to an A/C amplifier 48. This allows for convenient processing of the signal and
30 allow it to be converted to a digital signal for assessment.

The electrodes are placed in the validator over the pathway and the document is pulled lengthwise through
35 the device. With this arrangement, the security thread is parallel to the longitudinal axis of the electrodes. When the document is pulled under the sensor, certain portions of the bank note pass beneath the sensor in sequential

order. As the dielectric character of the bank note paper and the dye used in the printing process are quite uniform, the signals phases and amplitudes from the measuring electrodes with respect to that on the oscillatory electrode remain generally the same. Furthermore, it can be appreciated even if there is some variation of the separation of the document from the sensor, it occurs to both of the measuring electrodes thus changes to separation essentially subtract out.

10

Figure 5 shows a schematic of the equivalent capacitance bridge circuit created by the arrangement of the electrodes 32, 34, 36 and 50 in the sensor. The bridge circuit 51 registers a change in capacitance and phase when a bank note security strip passes over it. The schematic represents a sensor energized by high frequency oscillator 38 provided on electrode 44 and having no bank note around the sensor. Output signals 47 and 45 are fed to the synchronous detector.

15

As shown in Figure 5, the bridge circuit 51 comprises a two sections: a first section associated with the leading electrode and a second with the trailing electrode. In the first section, capacitance 52 is created by the electric field between leading electrode 34 and oscillatory electrode 32. Capacitance 54 is formed by leading electrode 36, ground shielding electrode 50 and the input capacitance of synchronous detector 2. In the second section, capacitance 56 is formed by trailing electrode 36, ground shielding electrode 32 and input capacitance of synchronous detector 2. To the capacitances 53 and 54 are also coupled input ohmic resistances of synchronous detector 2; the values of these resistances are of the same order of magnitude as the impedances of the bridge capacitances at the operating frequency. Due to their presence, any change in bridge's arm capacitance leads to signal phase shift change on the corresponding input of

10 synchronous detector 2 with respect to the reference signal.

15 Figure 6 shows the capacitances present in bridge circuit 51 as security strip passes 21 by it, wherein capacitances are formed between the strip and each electrode, thereby increasing the total capacitance in the bridge circuit 51. These are noted as capacitances 60, 62, 64 and 66.

10

15 The size of capacitance 66 between security strip 21 and ground 50 depends on the type of security strip 21. A continuous strip of metal will create a relatively high capacitance value for capacitance 66; a series of discrete metallic sections in security strip 21 will create a small capacitance but one which can be distinguished from the signal where there is no security threat.

20 As the security strip passes between the leading electrode and the oscillatory electrode, the impedance of the associated with security strip capacitances in the first section of the bridge circuit greatly increase. Then, as the security strip passes between the trailing and 25 generator electrodes, the impedances of corresponding capacitances in the second section of bridge circuit greatly increase.

30 These changes in the impedances unbalance the bridge circuit, which in turn changes the phase and amplitude of high frequency signal fed to the input of synchronous detector. Especially, the signals associated with the strip pass near lead and trailing electrodes are out of phase with respect to each other.

35

Thus, as a result of passing of the security strip close to the sensor at the output of the synchronous detector 46, there is an increase in voltage first in one

polarity and then in the opposite polarity. This voltage, after being amplified with A/C amplifier 48 is sufficient enough for further processing of the signal. The use of the A/C amplifier makes it possible to reduce the 5 requirements for balancing of the bridge and synchronous detector 46 such that manual adjustments for balancing is not required. Basically there is enough tolerance in this system that even if the bridge is slightly unbalanced, the signal is still easy to detect. This simplifies the 10 circuitry and the cost thereof.

When the bank note passes along the pathway in the validator, the distance between the bank note and the sensor can vary. Such variations are due to the particular 15 bank note, i.e. it can be rippled or have bends and its position in the guide varies. This changing separation distance creates additional noise which can contribute to unbalancing the bridge at the moment of the bank notes passage and on the other hand produces changes in amplitude 20 of the signal formed by the conducted security strip. By increasing the spacing of the sensor from the center line of the predetermined path, the influence of the variations in the distance between the sensor and bank note on the signals amplitude is reduced. It is known that these 25 creases etc. cause wobbling as the bank note passes through the validator and this wobble is typically in the range of .2 to .3 mm. The sensor is preferably placed 3 to 5 times this wobble distance away from the center line and is preferably spaced approximately 1 to 1.2 mm away. With 30 this arrangement, wobble can be tolerated. To completely eliminate wobble, is not practical as it is likely to cause jamming.

It has been found that this arrangement also can 35 be used for electrically conductive security threads which are continuous or in discrete segments. Basically the changes in sensors output signals are opposite for continuous and discrete security threads due to capacitance

effect of the security thread with the case. In any event, this sensor detection works for both types of security threads and allows to recognize their type due to the variation of the output signal shape.

5

It can be appreciated that the invention may comprise the use of one or two sensors. In a one sensor embodiment described above, a single bridge circuit provides all the signals to the synchronous detector.

10

In a two sensor embodiment, two sensors are located in the validating device, such that they oppose each other and that the document to be validated passes between them. Figure 1 shows a validator with two sensors, 15 16 and 24. The two sensor arrangement allows for a cumulative capacitance signal to be generated as a security strip passes between the sensors. The two sensing arrangements are provided to opposite sides of the guide such that a change in position increases the signal in one 20 sensing arrangement and decreases the signal in the other sensing arrangement. Combining the signals contribute to reducing the effect of wobble.

Figure 4 shows a block diagram of the two sensor arrangement. Essentially, the two sensor arrangement has two functionally identical, but separate signal processing arrangements. Each signal processing arrangement operates as the arrangement described in Figure 3.

30

Figure 4 shows each sensor arrangement distinguished from each other with A and B suffix notations. As such, the two signal processing arrangements comprise synchronous detectors 46A and 46B, high frequency generators 38A and 38B, amplifiers 48A and 48B, electrode 35 signals 45A, 45B, 47A and 47B and reference signals 44A and 44B. Outputs from amplifiers 48A and 48B are fed to signal summing arrangement 49, which produces output signal 70, which can be converted to a digital signal for processing.

If bills wobble as they pass by a sensor, the distance of the bill from the sensor will vary. Two sensors allow the validation system to compensate for 5 wobble distance of a document from a single sensor. As a document passes between the two sensors, it will be closer to one of the sensors. As such, the cumulative output signal from the two sensors reduces variation in the signal caused by wobble. In order to minimize any cross-talk 10 between the signals of one sensor to another, high frequency generators 38A and 38B each generate frequencies that are different from each other and that are not harmonics of each other. The difference between generators must be out of bandwidths of the sensors AC amplifiers. 15 For example, the frequencies of the generators preferably have a 10% to 20% difference in the operating range 50-150MHz..

The U.S. \$50 banknote generally shown as 100 in 20 Figure 7, has a host of fixed security features which are imparted to the bill at the time of the manufacture thereof. A security thread 102 is imbedded in the paper of the document and can be sensed by a capacitance sensor. There are various printing features such as 106 which are 25 specifically designed making it difficult to reproduce this image. In addition to these features, the paper can also include a watermark 104. The watermark and the printing features are typically considered visual features of the document whereas the security thread 102 is something that 30 is sensed. The position of these various security features is set for each denomination of banknotes and thus, it is possible to scan a banknote, identify the particular denomination thereof, and check the scanned results with reference signal to determine whether the bill is 35 authentic.

With the capacitance sensor described in the earlier figures, it is possible to recognize certain of

these security features in the scan of the bill. For example, in the capacitance scan shown in Figure 8, the security thread 102 causes the response 112 which generally corresponds to the location of the security thread. In 5 addition, it can be seen how the watermark 104 which is a visual security feature, produces a change in capacitance which is detected by the capacitance sensor. The change in capacitance due to the watermark signal generally shown as 114.

10

Figure 9 shows a response taken through a center location of a bill and it can be seen how the security thread 102 produces the response 122 and it can also be seen how the watermark 104 has produced a response 124. It 15 has been found that the watermark 104 can be sensed using the capacitance sensor and can provide additional information used to provide a prediction whether the bill is authentic. It is believed the method of applying the watermark and the ink associated with the watermark 20 establishes a particular capacitance which can be sensed and recognized. This signal is generally consistent for a particular banknote denomination.

Although various preferred embodiments of the 25 present invention have been described herein in detail, it will be appreciated by those skilled in the art, that variations may be made thereto without departing from the spirit of the invention or the scope of the appended claims.

30

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A device of validating the authenticity of a document having an electrically conductive security thread extending across the document, said device including a drive arrangement for moving the document in a length wise manner along a predetermined path of the device,

 a generator producing a high frequency time varying oscillator signal,

 an elongate oscillator electrode being electrically conductive and connected to said generator which applies said time varying oscillator signal thereto, said elongate oscillator electrode being positioned to extend generally across said path,

 a lead elongate measuring electrode being electrically conductive and positioned in front of said oscillator electrode and extending across said path,

 a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path,

 a signal processing arrangement connected to said measuring electrodes and receiving the outputs thereof and producing a measuring signal, said signal processing arrangement also receiving said time varying oscillator signal as a reference signal, said signal processing arrangement processing said measuring signal relative to said reference to detect the variation of amplitude and changes in phase shift therebetween caused by a conductive security thread passing by said electrodes.

2. A device for validating the authenticity of a document as claimed in claim 1 wherein said elongate measuring electrodes are each spaced from said oscillator electrode approximately 1mm.

3. A device for validating the authenticity of a document as claimed in claim 1 or 2 wherein said electrodes on average are spaced approximately 1mm from a document as it moves past said electrodes.



4. A device for validating the authenticity of a document as claimed in claim 1, 2 or 3 wherein signal generator produces a oscillator signal having a frequency of in the range of 50 to 150 Mhz.
5. A device for validating the authenticity of a document as claimed in any one of claims 1 to 4 wherein said device is designed to validate United States paper currency.
6. A device of validating the authenticity of a document as claimed in any one of claims 1 to 5 wherein said processing arrangement includes a synchronous detector which compares a differential signal derived from said measuring electrodes to said reference signal and detects said change in phase.
7. A device for validating the authenticity of a document as claimed in claim 6 wherein said processing arrangement further includes and AC amplifier for amplifying an output signal of said synchronous detector.
8. A device for validating the authenticity of a document as claimed in any one of claims 1 to 7 including shielding electrodes associated with leads of each electrodes to reduce the unwanted contributions in the signals from the measuring electrodes or the oscillator electrode due to changes in capacitance detected by the leads.
9. A device for validating the authenticity of a document as claimed in any one of claims 1 to 8 wherein said path includes a document guide which maintains a document spaced from the electrodes at least .5mm.
10. A device for validating the authenticity of a document as claimed in claim 9 wherein said document guide accepts movement of said document to or away from said electrodes plus or minus about .3mm. from a centerline of said guide.



11. A device for validating the authenticity of a document having a electrically conductive security thread extending across the document, said device including a drive arrangement for moving the document in a lengthwise manner along a predetermined path of the device,

a generator producing a high frequency time varying oscillator signal,

an elongate oscillator electrode being electrically conductive and connected to said generator which applies said time varying oscillator signal thereto, said elongate oscillator electrode being positioned to extend generally across said path,

a lead elongate measuring electrode being electrically conductive and positioned in front of said oscillator electrode and extending across said path,

a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path,

a reference ground electrode,

a signal processing arrangement connected to said measuring electrodes and receiving the outputs thereof and producing a measuring signal, said signal processing arrangement also receiving said time varying oscillator signal as a reference signal, said signal processing arrangement processing said measuring signal relative to said reference signal to detect a phase shift therebetween caused by a conductive security thread passing by said electrodes, and wherein said processing arrangement includes a synchronous detector which compares a differential signal derived from said measuring electrodes to said reference signal and detects said change in phase.

12. A device for validating the authenticity of a document as claimed in claim 1 wherein said elongate measuring electrodes are each spaced from said oscillator electrode approximately 1mm.

13. A device for validating the authenticity of a document as claimed in claim 11 or 12, wherein said electrodes on average are spaced approximately 1mm from a document as it moves past said electrodes.



14. A device for validating the authenticity of document as claimed in claim 11, 12 or 13 wherein said generator produces an oscillator signal having a frequency of in the range of 50 to 150 MHz.
15. A device for validating the authenticity of a document as claimed in any one of claims 11 to 14 wherein said device is designed to validate United States paper currency.
16. A device for validating the authenticity of a document as claimed in any one of claims 11 to 15 wherein said processing arrangement further includes an AC amplifier for amplifying an output signal of said synchronous detector.
17. A device for validating the authenticity of a document as claimed in any one of claims 11 to 16 including shielding electrodes associated with lead of each electrode to reduce the unwanted contributions in the signals from the measuring electrodes or the oscillator electrode due to changes in capacitance detected by the leads.
18. A device for validating the authenticity of a document as claimed in any one of claims 11 to 17 wherein said path includes a document guide which maintains a document spaced from the electrodes at least 0.5 mm.
19. A device for validating the authenticity of a document as claimed in any one of claims 1 to 10 wherein said security thread sensing arrangement may detect either a continuous segment of a plurality of discrete segments in said electrically conductive security thread.



20. A device for validating the authenticity of a document having an electrically conductive security thread extending across the document, said device including,

 a drive arrangement for moving the document in a lengthwise manner along a predetermined path of the device and a pair of security thread sensing arrangements located generally opposite to each other at a location above and below said predetermined path,

 each said security thread sensing arrangement having a generator producing a high frequency time varying oscillator signal, an elongate oscillator electrode being a lead elongate measuring electrode being a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path, a signal processing arrangement connected to said measuring electrodes and receiving the outputs thereof and producing a measuring signal, said signal processing arrangement also receiving said time varying oscillator signal as a reference signal, said signal processing arrangement processing said measuring signal relative to said reference signal to detect a phase shift there between caused by a conductive security thread passing by said electrodes,

 said device further including a summing arrangement receiving the outputs of said measuring signal from each said processing arrangement, said summing arrangement producing a cumulative detection signal when a security thread passes between said pair of security thread sensing arrangements.

21. A device for validating the authenticity of a document as claimed in claim 20 wherein said electrodes on average are spaced approximately 1mm from a document as it moves past said electrodes.

22. A device for validating the authenticity of a document as claimed in claim 20 or 21 wherein each of said generator produces an oscillator signal having a frequency of the range of 50 to 150 MHz.



23. A device for validating the authenticity of a document as claimed in any one of claims 20 to 22 wherein said generators produce an oscillator signal differing approximately 10% to 20% from each other.

24. A device for validating the authenticity of a document as claimed in any one of claims 20 to 23 and wherein said device is designed to validate United States paper currency.

25. A device for validating the authenticity of a document as claimed in any one of claims 20 to 24 wherein said processing arrangement includes a synchronous detector which compares a differential signal derived from said measuring electrodes to said reference signal and detects said change in phase.

26. A device for validating the authenticity of a document as claimed in claim 25 wherein said processing arrangement further includes an AC amplifier for amplifying an output signal of said synchronous detector.

27. A device for validating the authenticity of a document as claimed in any one of claims 20 to 26 including shielding electrodes associated with lead of each electrode to reduce the unwanted contributions in the signals from the measuring electrodes or the oscillator electrode due to changes in capacitance detected by the leads.

28. An arrangement for sensing electrical fields generated by a security thread in a document as said thread moves by said arrangement, said arrangement including,

a generator producing a high frequency time varying oscillator signal,

an elongate oscillator electrode being electrically conductive and connected to said generator which applies said time varying oscillator signal thereto, said elongate oscillator electrode being positioned to extend generally across a path of travel of said document,



a lead elongate measuring electrode being electrically conductive and positioned in front of said oscillator electrode and extending across said path,

a trailing elongate measuring electrode being electrically conductive and positioned behind said oscillator electrode and extending across said path,

a reference electrode providing an electrical ground for fields generated within said elongate oscillator electrode, said lead elongate electrode and said trailing elongate electrode,

and an output signal from said arrangement,

wherein as said thread moves by said arrangement, said thread electrically couples with each said electrode producing a characteristic, collective electric field pattern in said arrangement, signifying a detection of said security thread.

29. The arrangement as claimed in claim 28,

wherein said lead elongate measuring electrode, said elongate oscillator electrode and said reference electrode are positioned relative to each other to produce a first half of a bridge circuit and,

wherein said trailing elongate measuring electrode, said elongate oscillator electrode and said reference electrode are positioned relative to each other to produce a second half of said bridge circuit.

30. An arrangement as claimed in claim 28 or 29 wherein said generator produces an oscillating signal by having a frequency in the range of 50 to 60 MHz.

31. An arrangement as claimed in claim 28, 29 or 30 wherein said electrodes on average are spaced approximately 1mm from said document as it moves past said electrode.

32. A device for validating the authenticity of a document as claimed in claims 1, 11 and 20 substantially as herein described with reference to any one of the accompanying drawings.



33. An arrangement as claimed in claim 28 substantially as herein described with reference to any one of the accompany drawings.

DATED this 4th day of September 2001

CASHCODE COMPANY INC.

WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA


RCS/AJL/MBL

16
2001
10/08/06



1/ 6

FIG.1.

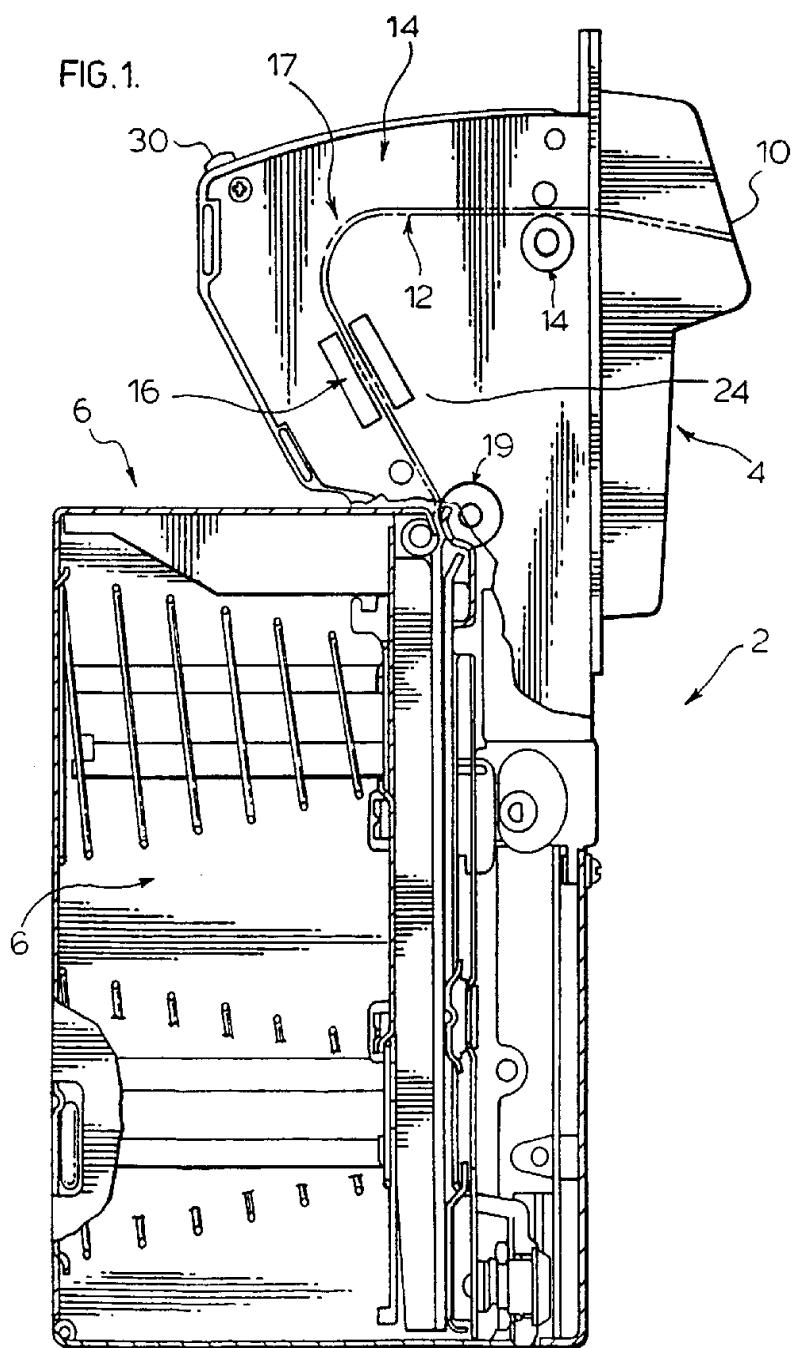

SUBSTITUTE SHEET (RULE 26)

2/ 6


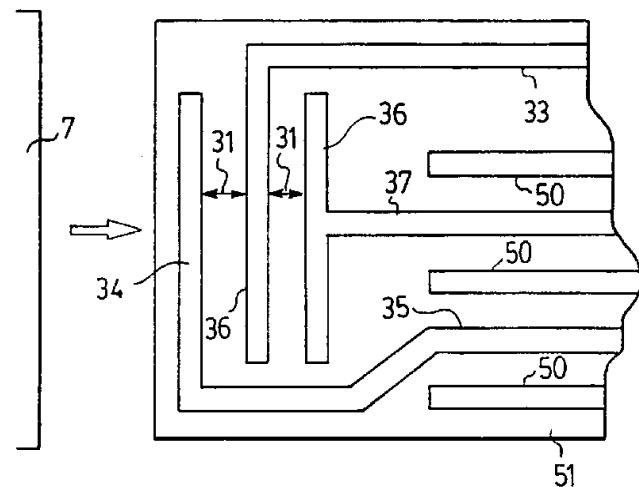


FIG. 2

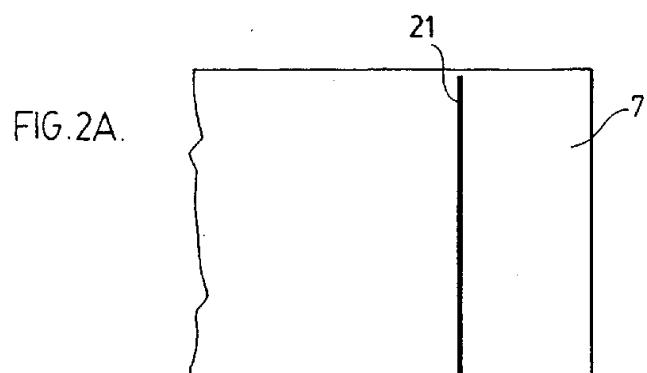

SUBSTITUTE SHEET (RULE 26)

FIG. 3. 3/6

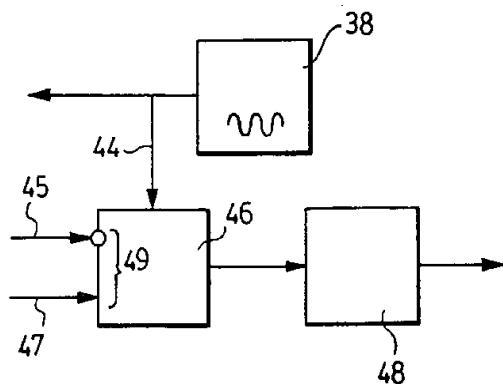
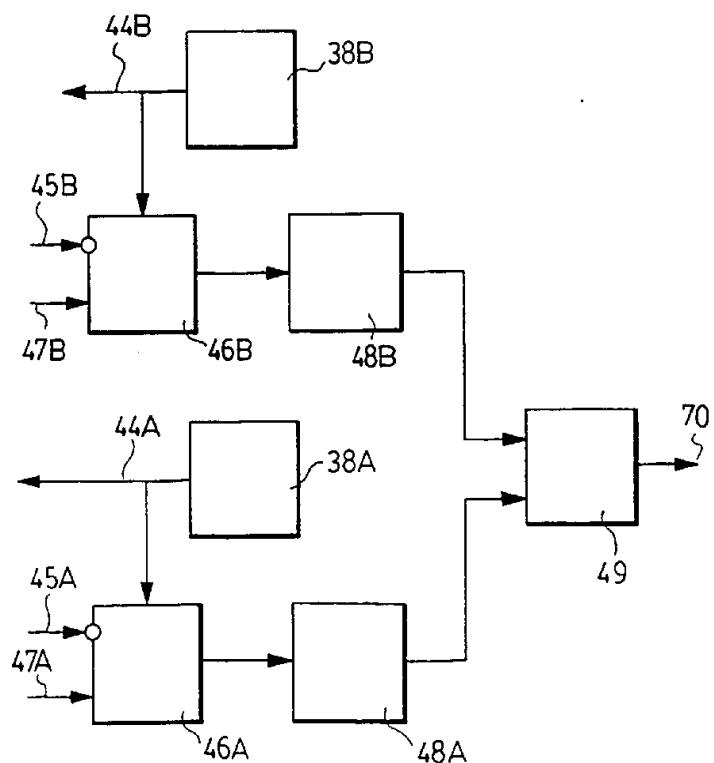


FIG. 4.



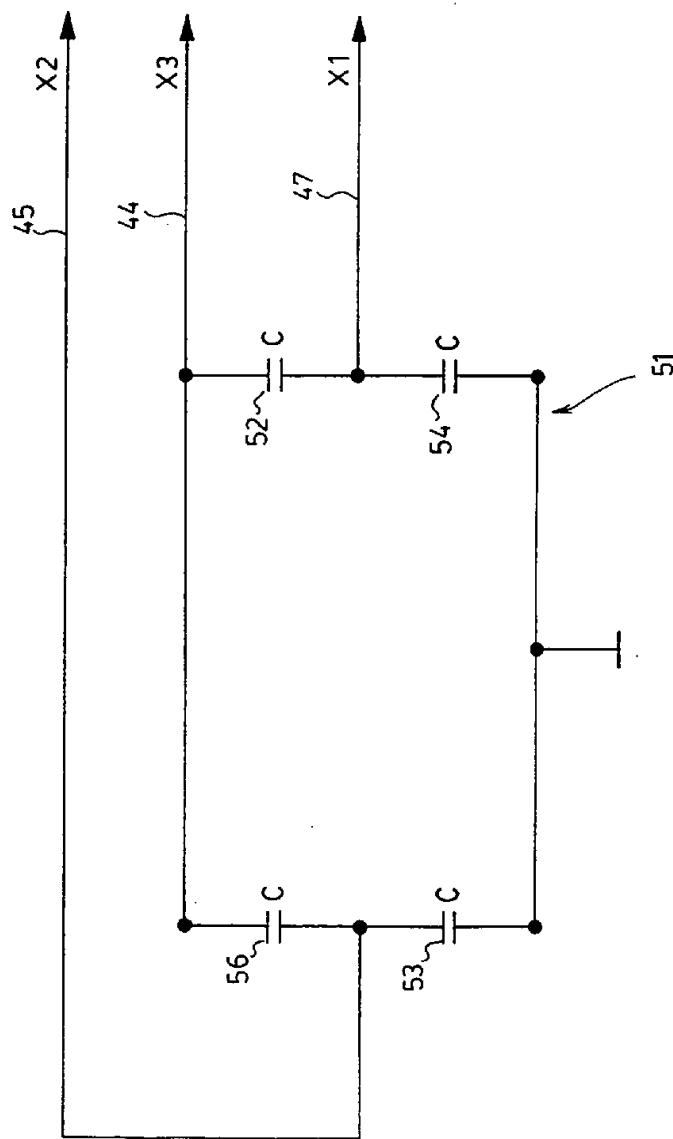


FIG. 5.

FIG. 6.

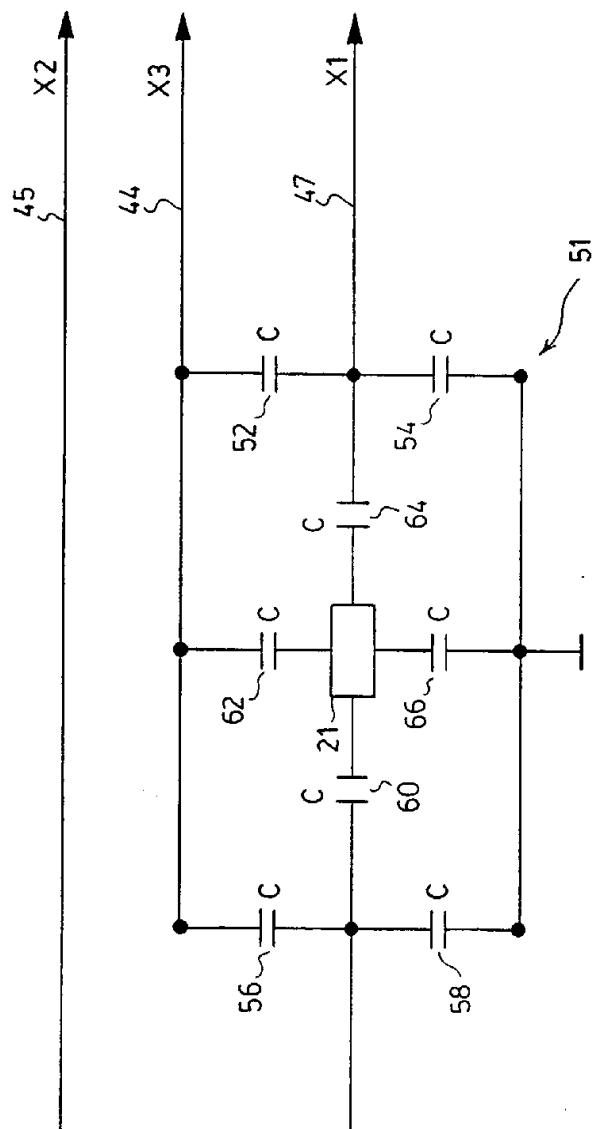


FIG.7.

6/6

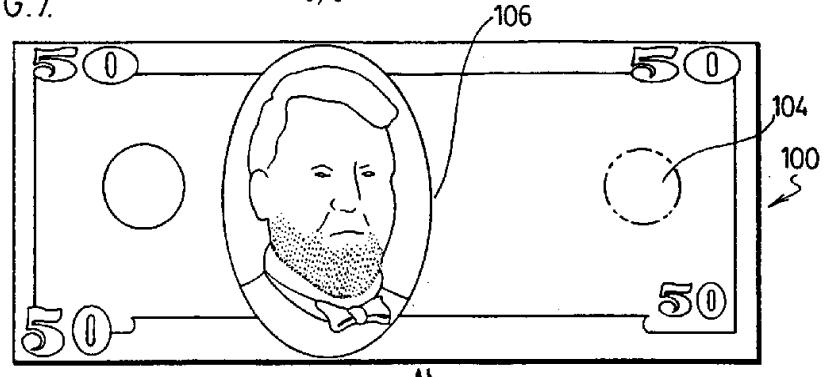


FIG.8.

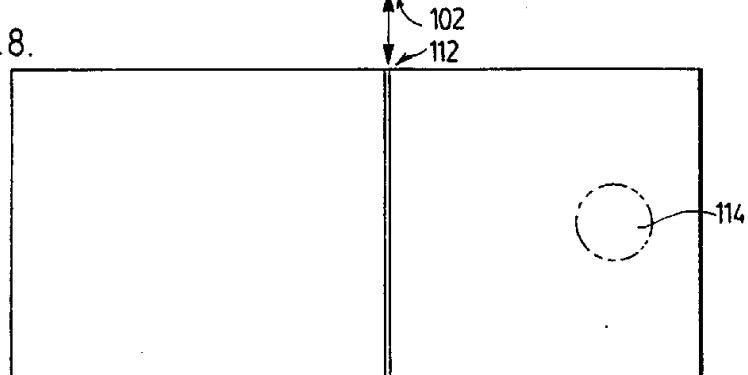


FIG.9.

