



(19) **United States**
(12) **Patent Application Publication**
Appelman

(10) **Pub. No.: US 2013/0073645 A1**
(43) **Pub. Date: Mar. 21, 2013**

(54) **PROVIDING SUPPLEMENTAL CONTACT INFORMATION CORRESPONDING TO A REFERENCED INDIVIDUAL**

Publication Classification

(75) Inventor: **Barry Appelman**, McLean, VA (US)

(51) **Int. Cl.**
G06F 15/16 (2006.01)
(52) **U.S. Cl.**
USPC **709/206**

(73) Assignee: **FACEBOOK, INC.**, Menlo Park, CA (US)

(21) Appl. No.: **13/616,630**

(57) **ABSTRACT**

(22) Filed: **Sep. 14, 2012**


Related U.S. Application Data

Providing supplemental contact information for an individual referenced in an electronic message typically includes receiving an electronic message, examining the electronic message, detecting an identifier for a referenced individual contained in the electronic message, and making supplemental contact information for the referenced individual available to a recipient of the electronic message. The supplemental contact information may include information that is in addition to information contained in the electronic message. The supplemental contact information may include at least one of an e-mail address, a screen name, a telephone number, a facsimile number, and a mailing address, each of which is associated with the referenced individual.

(63) Continuation of application No. 13/149,368, filed on May 31, 2011, which is a continuation of application No. 10/146,814, filed on May 17, 2002, now Pat. No. 7,979,802, which is a continuation-in-part of application No. 09/843,788, filed on Apr. 30, 2001, now abandoned.

(60) Provisional application No. 60/229,311, filed on Sep. 1, 2000, provisional application No. 60/201,738, filed on May 4, 2000.

100

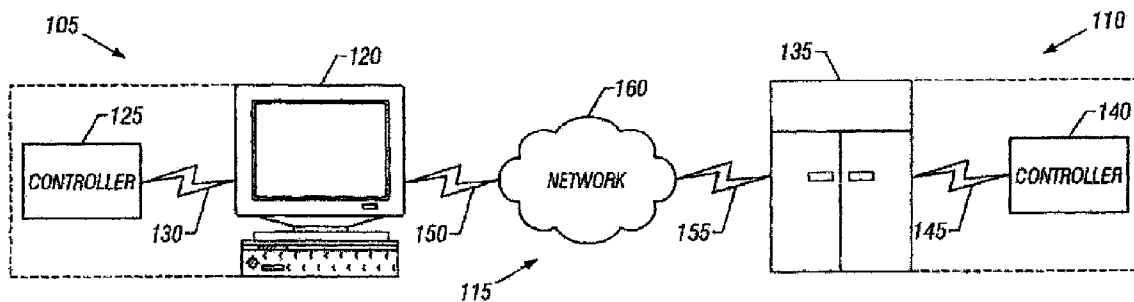

100

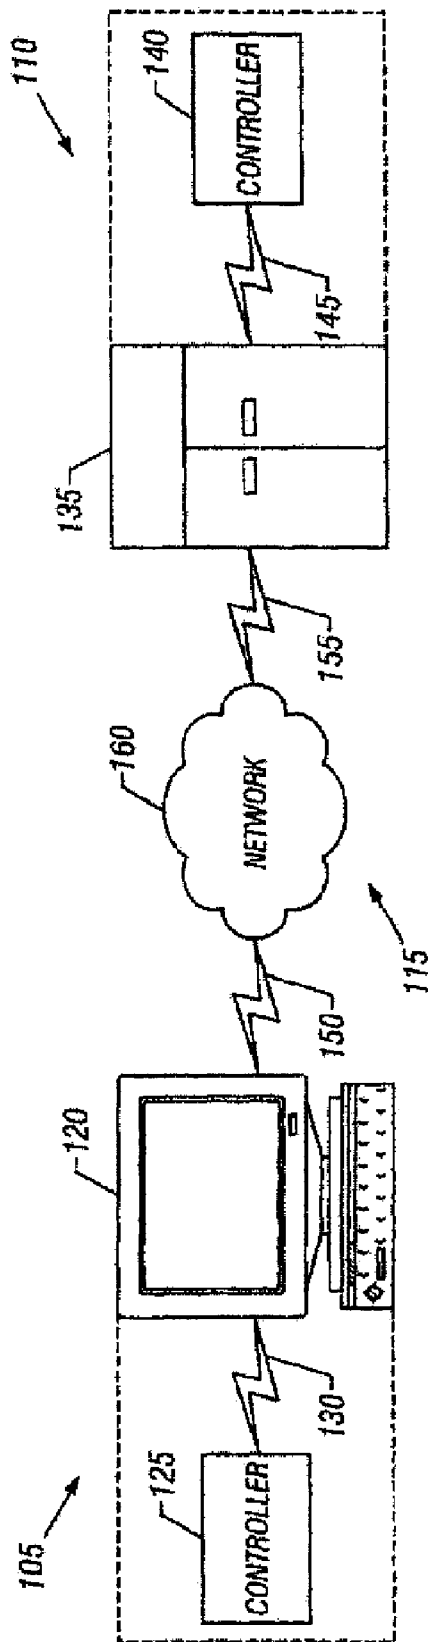


FIG. 1

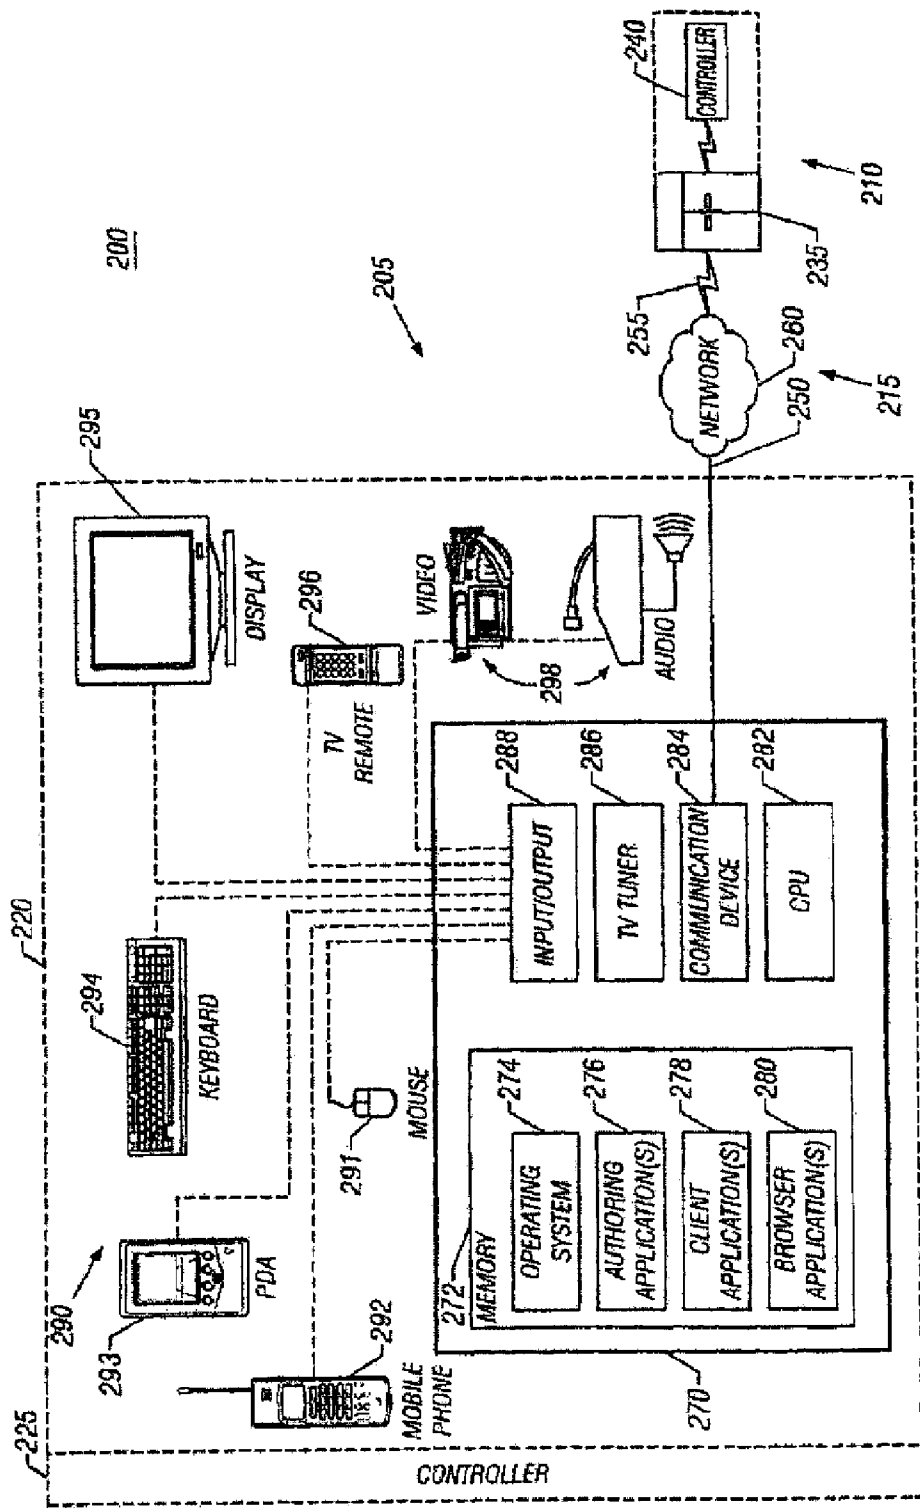


FIG. 2

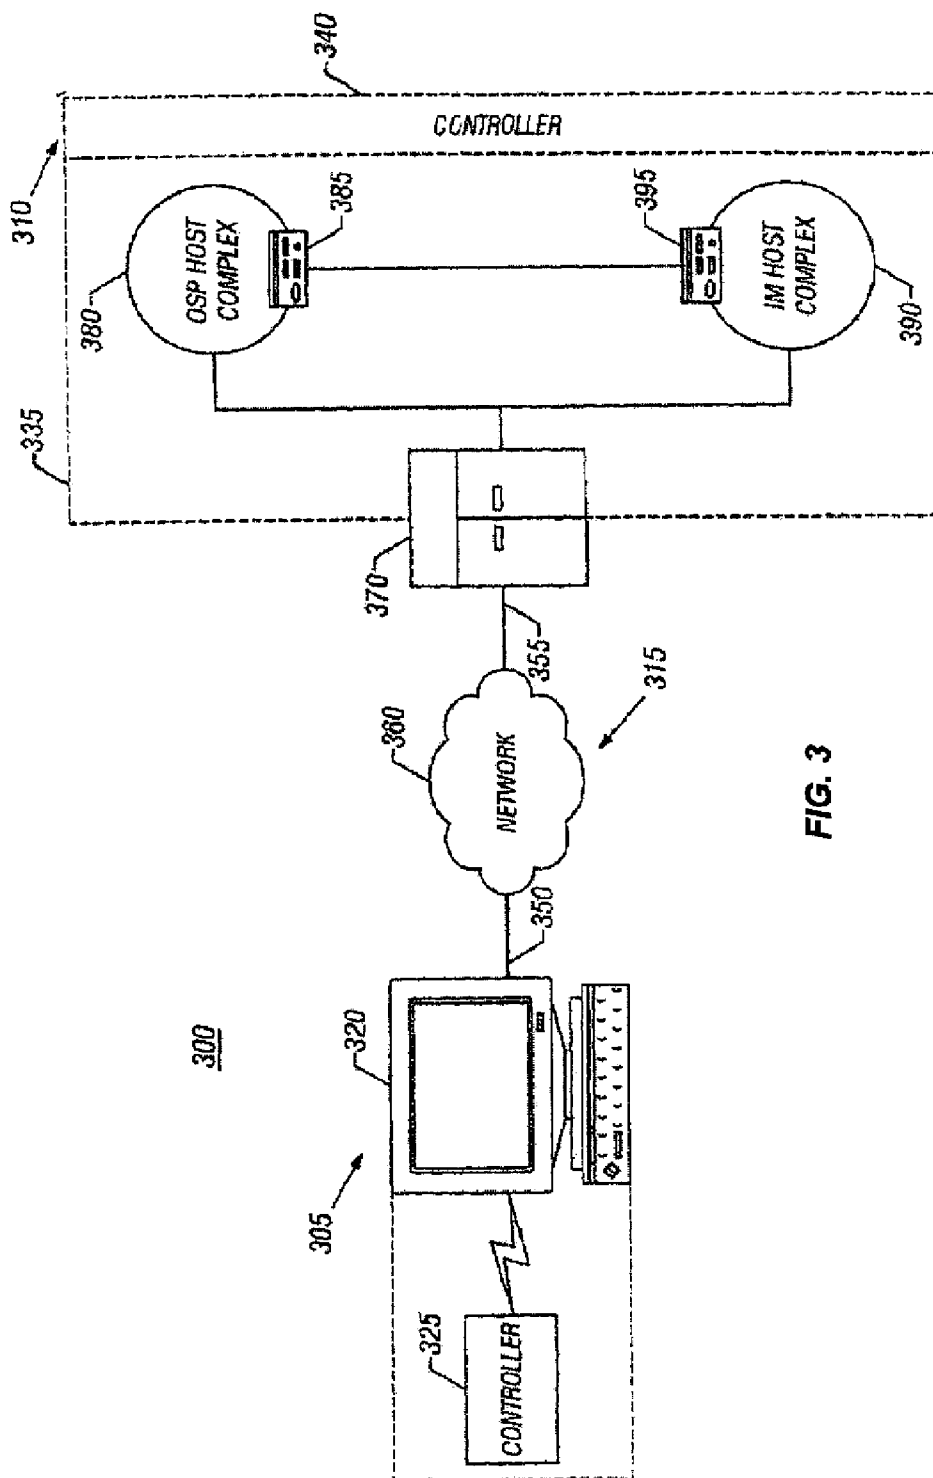


FIG. 3

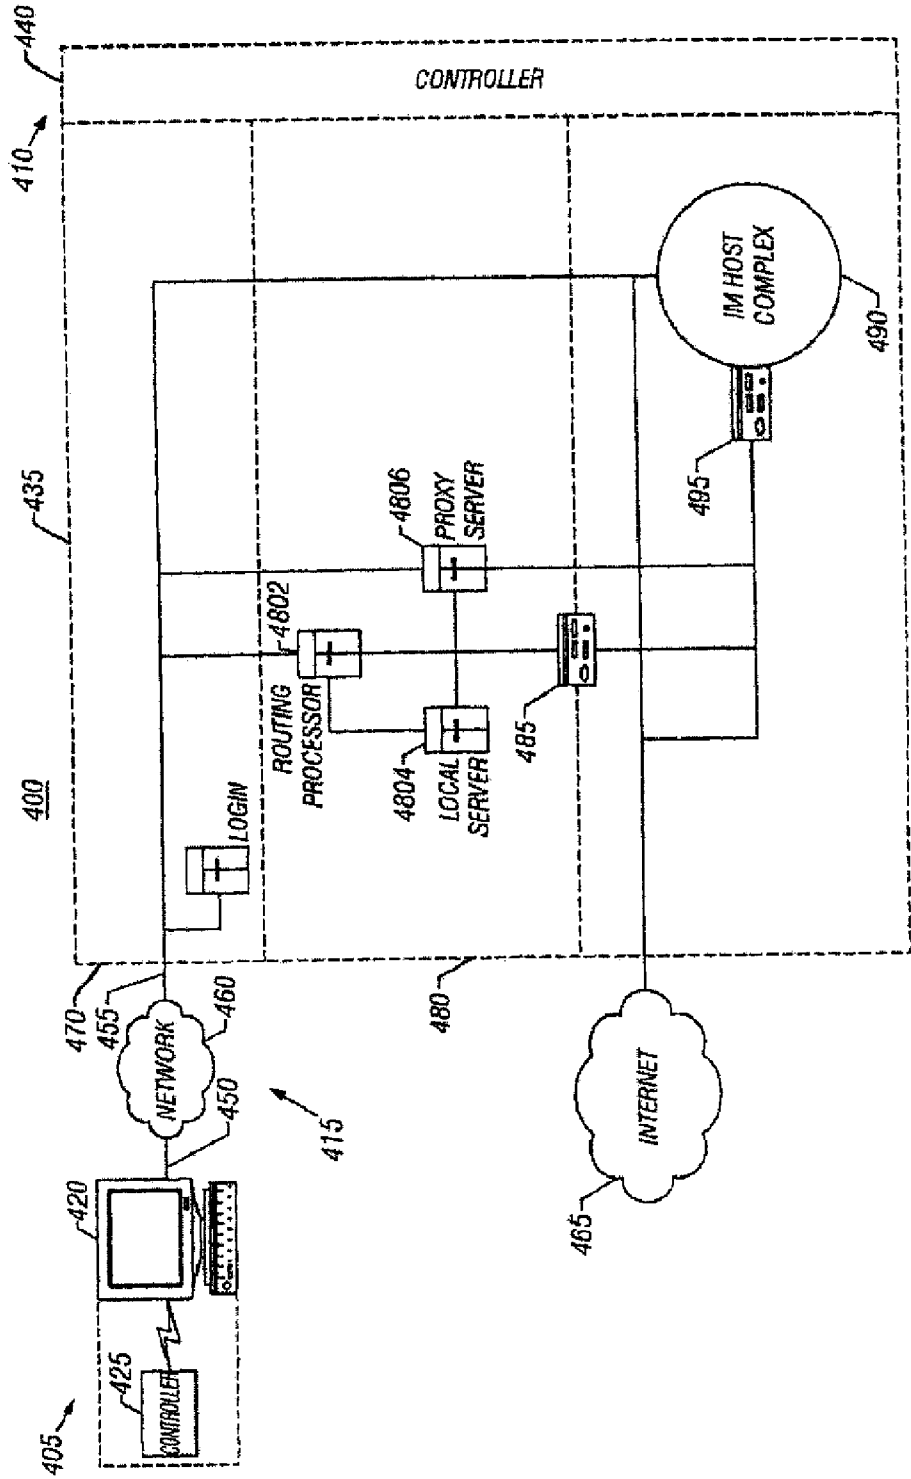


FIG. 4

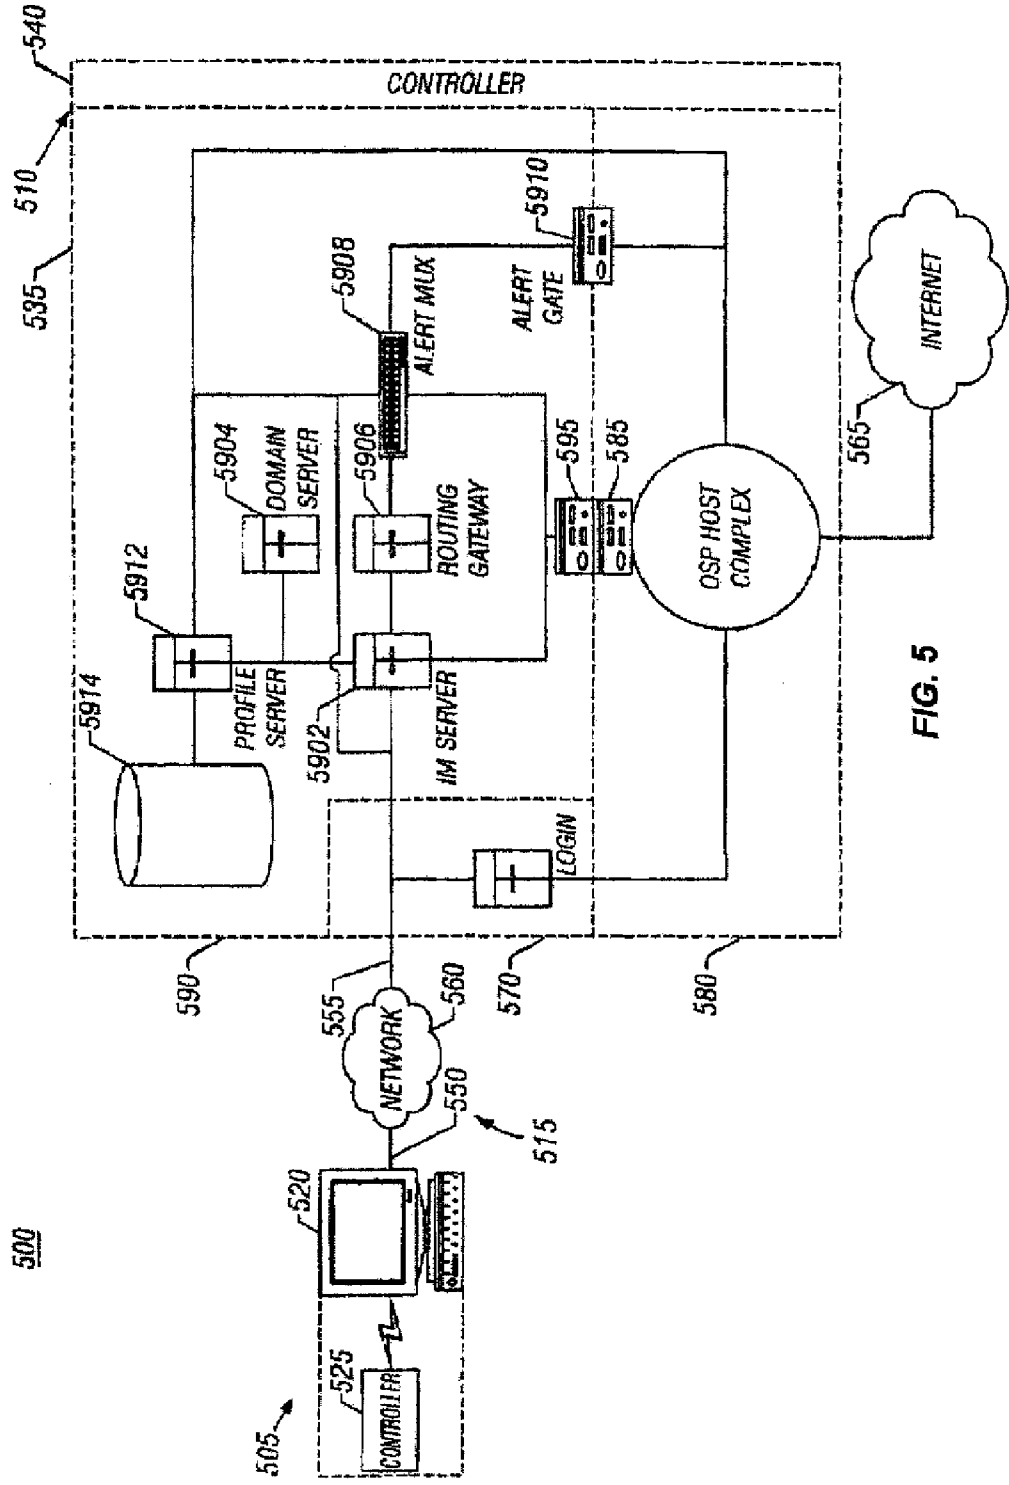


FIG. 5

600

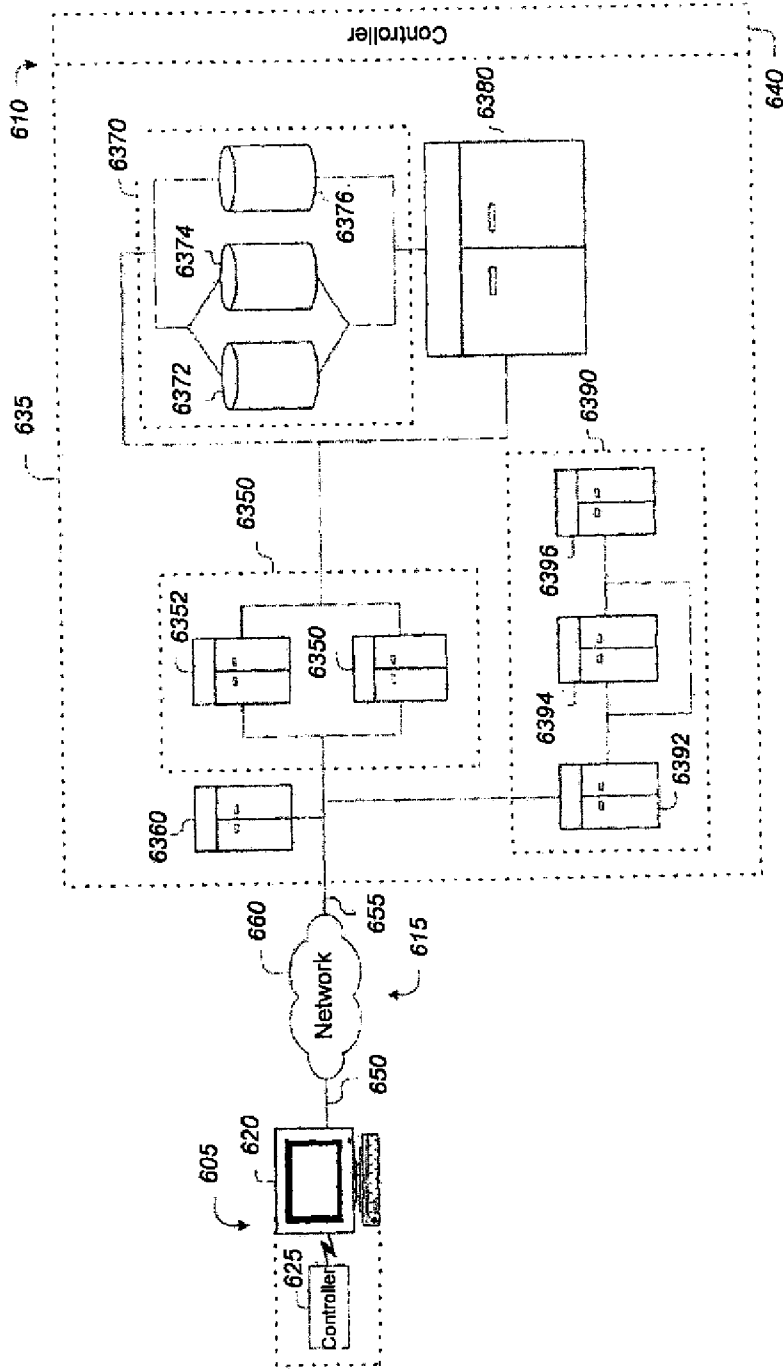


FIG. 6

700

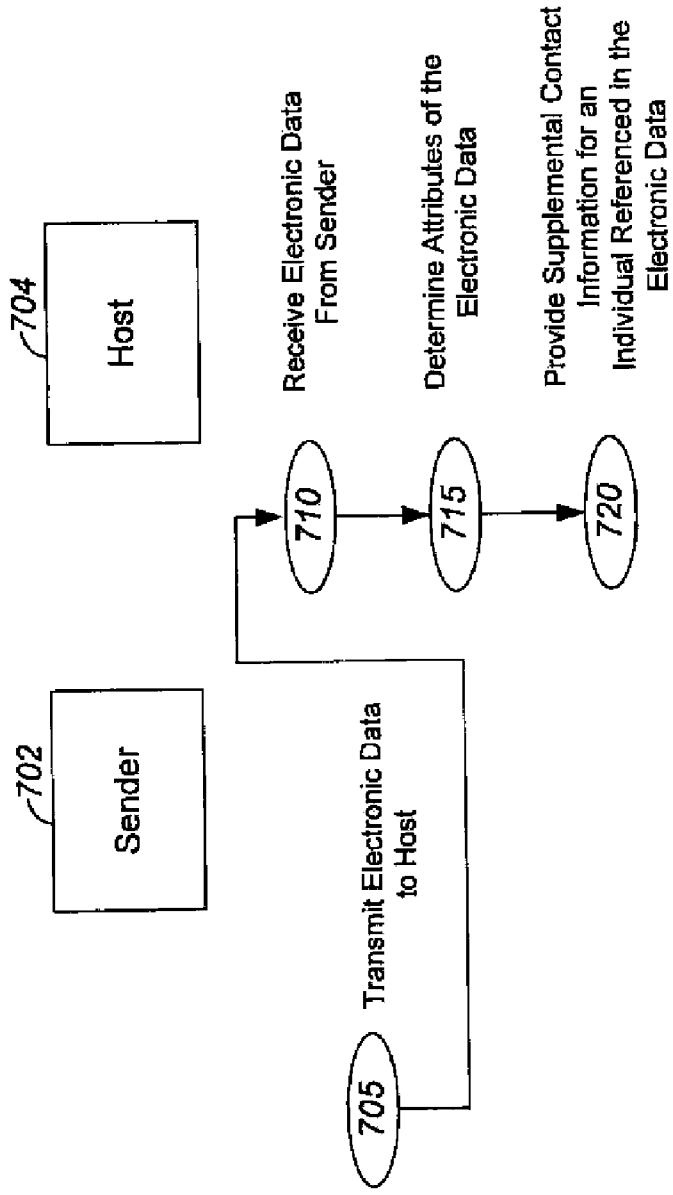


Fig. 7

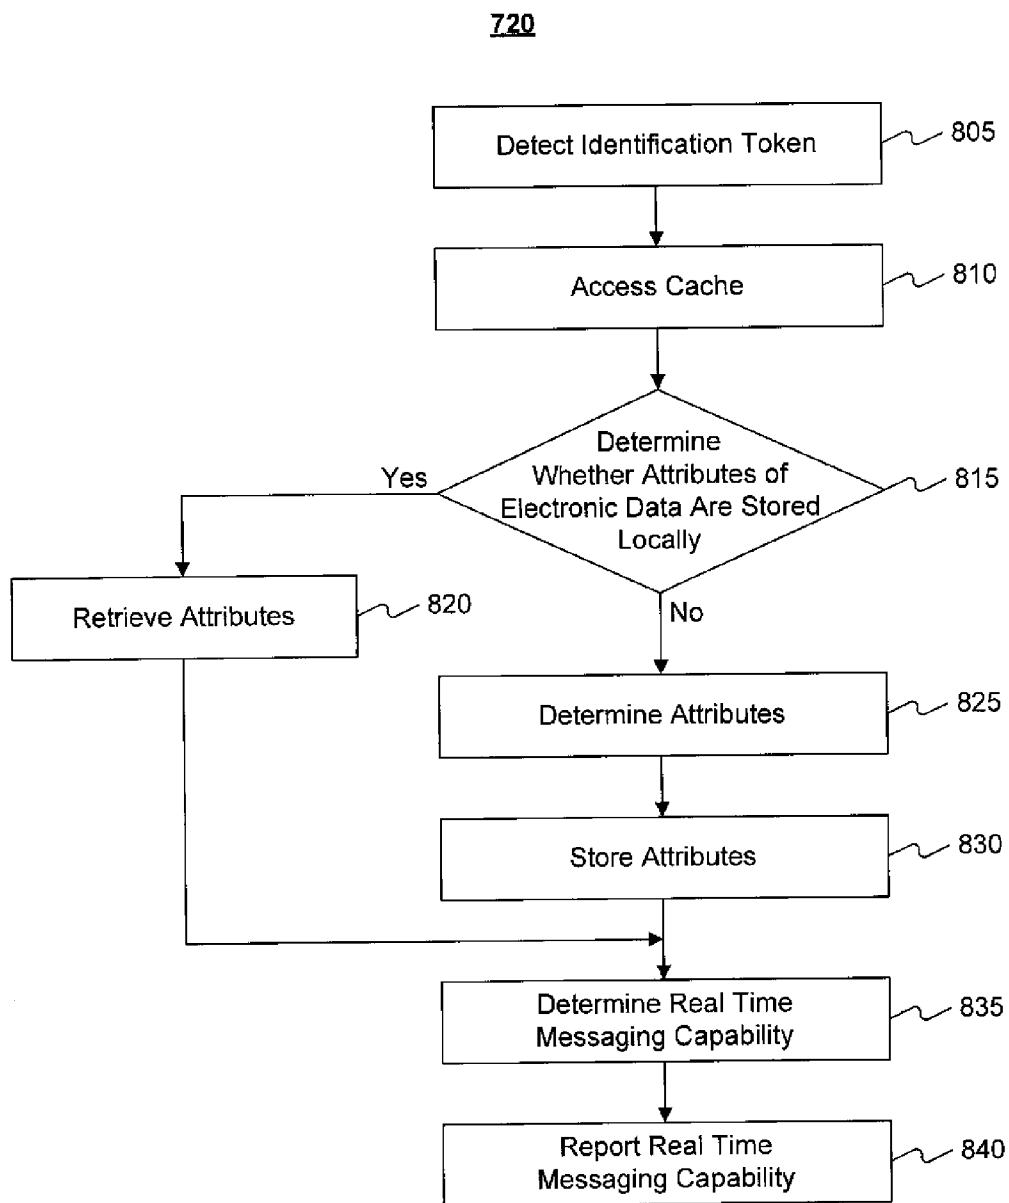


Fig. 8

900

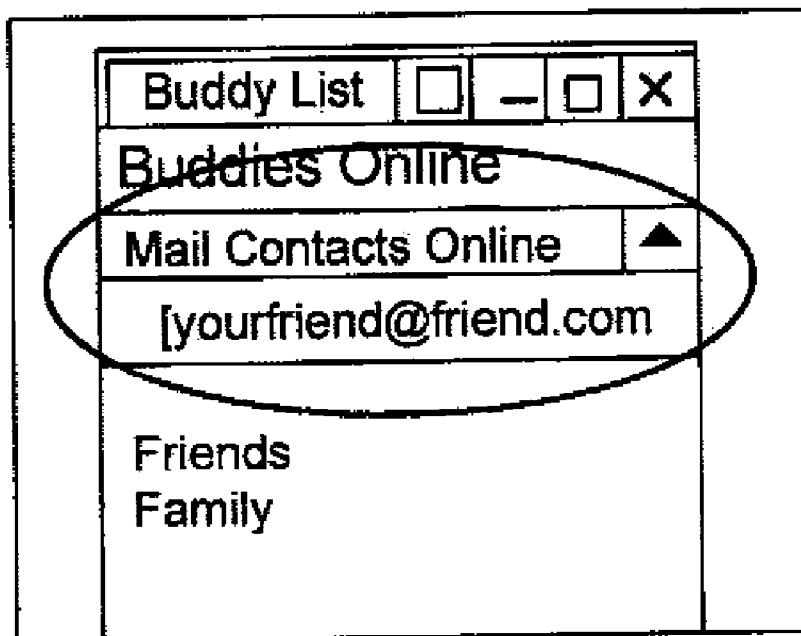


Fig. 9

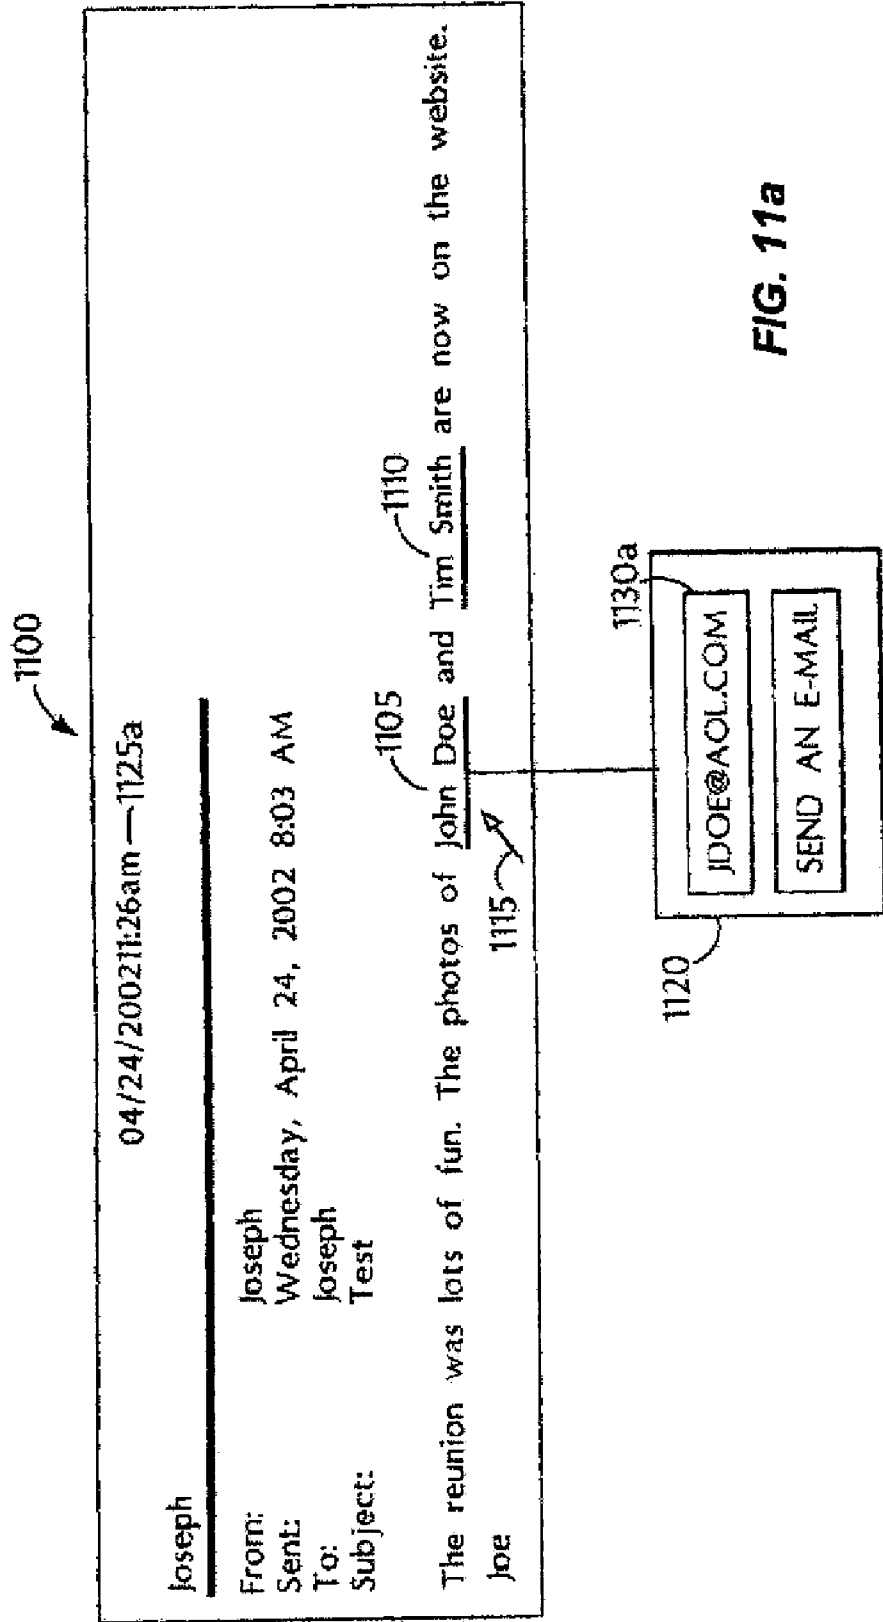


FIG. 11a

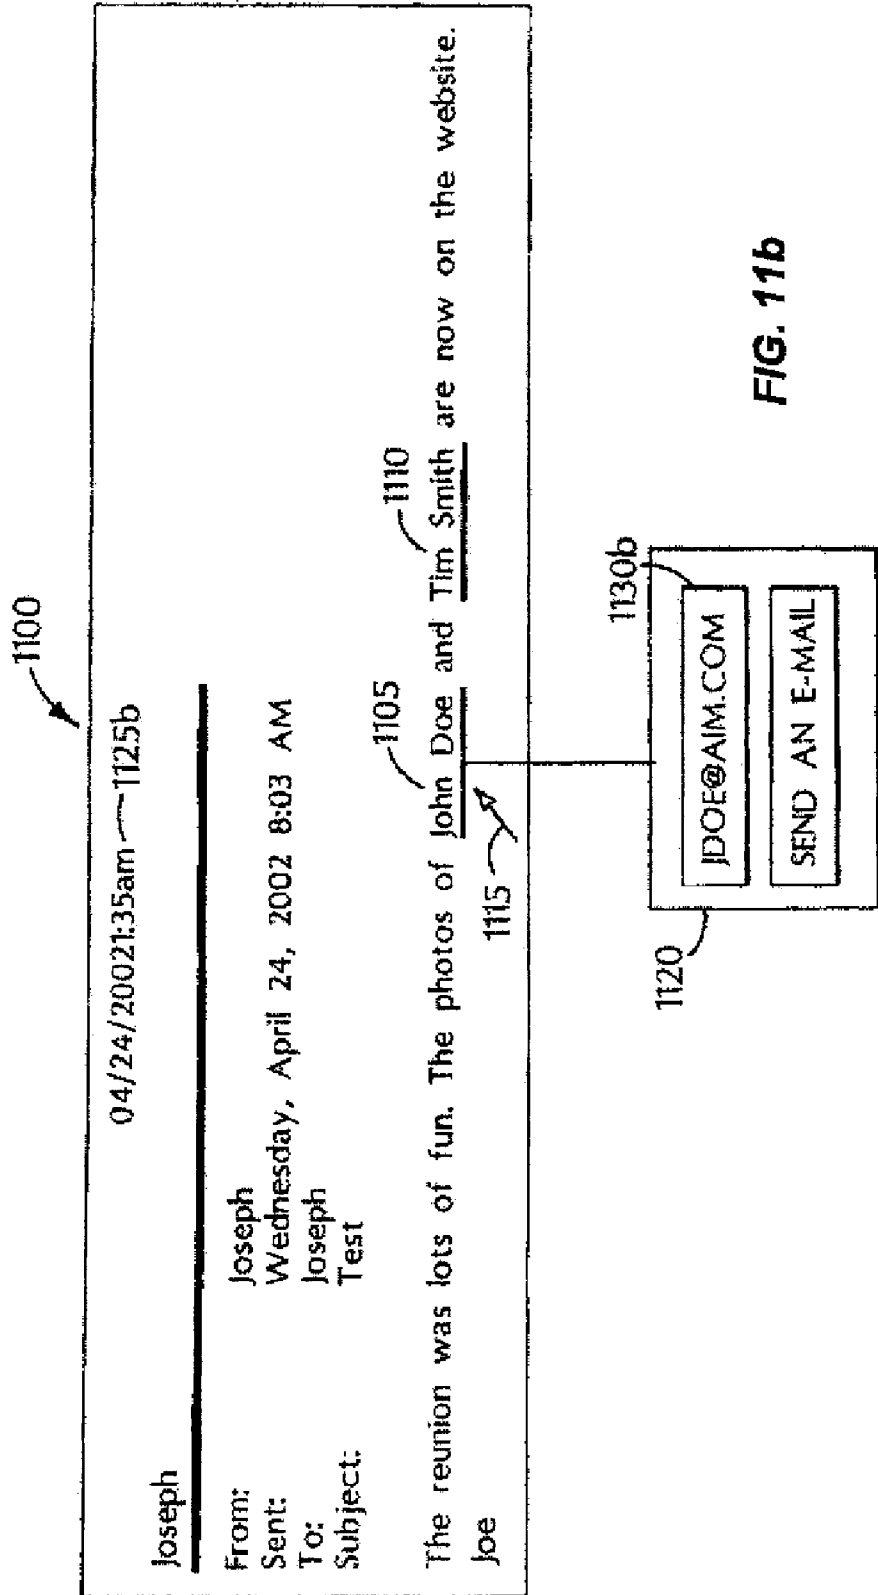


FIG. 11b

PROVIDING SUPPLEMENTAL CONTACT INFORMATION CORRESPONDING TO A REFERENCED INDIVIDUAL

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. application Ser. No. 13/149,368 filed on May 31, 2011, which is a continuation of U.S. application Ser. No. 10/146,814 filed on May 17, 2002 and issued as U.S. Pat. No. 7,979,802, which is a continuation in part of U.S. application Ser. No. 09/843,788 filed on Apr. 30, 2001 and now abandoned, which claims the benefit of U.S. Provisional Application Nos. 60/229,311 filed on Sep. 1, 2000; and 60/201,738 filed on May 4, 2000. Each of the aforementioned applications and patents are hereby incorporated by reference in their entirety.

TECHNICAL FIELD

[0002] The present invention relates generally to online communications systems and more particularly to an online communications system that automatically provides supplemental contact information corresponding to a referenced individual.

BACKGROUND

[0003] In the client-server network architecture of the Internet and/or the Web, electronic documents are stored in computer systems running server programs and are accessed by computer systems running client programs. For example, information on the Web is provided by Web servers and is accessible by a client program such as a Web browser (e.g., Netscape's Navigator, Microsoft's Internet Explorer, or Java's micro-browser).

[0004] Information on the Internet and/or Web may be represented by specially formatted text files (e.g., Web pages) written in Hypertext Markup Language ("HTML") or some other markup language, such as XML, HDML, and/or VRML. Each text file may be identified by a network address such as a Universal Resource Locator ("URL"). A typical Web page may include one or more hyperlinks referring to the network addresses of other Web pages. Hyperlinks may be displayed as underlined text or graphical images that, when clicked, send a request for the associated page. For example, when a hyperlink in a home page is selected, a request is sent out by the client to the address specified in the hyperlink, and the associated Web page is downloaded and displayed, by replacing the home page on the user's screen with the associated Web page.

[0005] Browsers and other client programs typically use a communications protocol such as Hypertext Transfer Protocol ("HTTP") to request pages from Web servers. HTTP is a request/response protocol. Through a connection established between a client and a server, the client sends a request to the server, and the server provides a response to the client.

[0006] An Internet service provider ("ISP") may be used to provide subscribers with access to the Internet and/or the World Wide Web ("Web"). In general, a subscriber relies on an ISP to provide computers that are connected to and therefore enable communication over the Internet and/or the Web. An ISP may offer services in addition to basic Internet access such as, for example, providing e-mail and instant messaging services that enable electronic communication, Web-hosting services that allow subscribers to publish homepages, news-

group services that allow subscribers to read and post to newsgroups, and image services that allow subscribers to view and order digital images of pictures from a developed film roll.

SUMMARY

[0007] In one general aspect, providing supplemental contact information for an individual referenced in an electronic message typically includes receiving an electronic message, examining the electronic message, detecting an identifier for a referenced individual contained in the electronic message, and making supplemental contact information for the referenced individual available to a recipient of the electronic message. The supplemental contact information may include information that is in addition to information contained in the electronic message.

[0008] Implementations may include one or more of the following features. For example, the supplemental contact information for the referenced individual may include an e-mail address, a screen name, a telephone number, a facsimile number, and/or a mailing address, each of which is associated with the referenced individual. The supplemental contact information for the referenced individual may include supplemental contact information that was communicated by the referenced individual to a host that maintains the supplemental contact information. The electronic message may include an e-mail message and/or an instant message.

[0009] A communication scheme may be configured between a sender of the electronic message and the individual referenced in the electronic message using the supplemental contact information. The referenced individual may include a sender of the electronic message, a recipient of the electronic message, and/or a name included in a body of the electronic message.

[0010] The preferences of the referenced individual may be checked such that the supplemental contact information for the referenced individual is made available according to the preferences of the referenced individual. Additionally or alternatively, the preferences of the recipient may be checked such that additional supplemental information is made available for the referenced individual according to the preferences of the recipient.

[0011] A personal address book may be updated with the supplemental contact information of the referenced individual. A global address book that includes the supplemental contact information for the referenced individual may be maintained. The global address book may be automatically updated when the referenced individual makes changes to the supplemental contact information.

[0012] A status of online presence for the referenced individual may be made available. A real time messaging capability of the referenced individual may be determined such that the real time messaging capability of the referenced individual may be made available.

[0013] An invitation may be sent to the referenced individual to subscribe to an instant messaging service. An invitation to subscribe to an instant messaging service may be sent to a referenced individual who is not an instant messaging service subscriber.

[0014] An e-mail address may be detected for the referenced individual and a domain may be snipped from the e-mail address such that a reverse-lookup may be performed to obtain an instant messaging screen name for the referenced

individual. An indicator associated with the referenced individual may be displayed to indicate available supplemental contact information.

[0015] The referenced individual may define the rights of recipients for viewing the supplemental contact information associated with the referenced individual. The referenced individual may define the rights of recipients for viewing the supplemental contact information to change temporally. The referenced individual may define the rights of recipients to enable only designated recipients to view the supplemental contact information associated with the referenced individual, only persons designated in a personal address book to view the supplemental contact information associated with the referenced individual, and/or only persons designated in a global address book to view the supplemental contact information associated with the referenced individual.

[0016] The supplemental contact information may include a screen name, which may be added to an instant messaging buddy list. Real time contact information for the referenced individual may be made available to the recipient of the electronic message.

[0017] In another general aspect, receiving supplemental contact information for an individual referenced in an electronic message typically includes receiving from a host an electronic message that includes an identifier for a referenced individual and receiving supplemental contact information for the referenced individual from the host. The supplemental contact information may be in addition to information contained in the electronic message.

[0018] Implementations may include one or more of the features described above.

[0019] These general and specific aspects may be implemented using a system, a method, or a computer program, or any combination of systems, methods, and computer programs.

[0020] Other features and advantages will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF THE DRAWINGS

[0021] FIG. 1 is a block diagram of a communications system.

[0022] FIGS. 2-6 are block diagrams of expansions of aspects of the block diagram of FIG. 1.

[0023] FIGS. 7 and 8 are flows charts of communications methods that may be implemented by the system of FIG. 1.

[0024] FIGS. 9-11 are illustrations of different graphical user interfaces that may be provided by the system of FIG. 1.

DETAILED DESCRIPTION

[0025] For illustrative purposes, FIGS. 1-5 show an example of a communications system for implementing techniques for transferring electronic data. For brevity, several elements in the figures described below are represented as monolithic entities. However, as would be understood by one skilled in the art, these elements each may include numerous interconnected computers and components designed to perform a set of specified operations and/or may be dedicated to a particular geographical region.

[0026] Referring to FIG. 1, a communications system 100 is capable of delivering and exchanging data between a client system 105 and a host system 110 through a communications link 115. The client system 105 typically includes one or more client devices 120 and/or client controllers 125, and the

host system 110 typically includes one or more host devices 135 and/or host controllers 140. For example, the client system 105 or the host system 110 may include one or more general-purpose computers (e.g., personal computers), one or more special-purpose computers (e.g., devices specifically programmed to communicate with each other and/or the client system 105 or the host system 110), or a combination of one or more general-purpose computers and one or more special-purpose computers. The client system 105 and the host system 110 may be arranged to operate within or in concert with one or more other systems, such as, for example, one or more LANs (“Local Area Networks”) and/or one or more WANs (“Wide Area Networks”).

[0027] The client device 120 (or the host device 135) is generally capable of executing instructions under the command of a client controller 125 (or a host controller 140). The client device 120 (or the host device 135) is connected to the client controller 125 (or the host controller 140) by a wired or wireless data pathway 130 or 145 capable of delivering data.

[0028] The client device 120, the client controller 125, the host device 135, and the host controller 140 each typically include one or more hardware components and/or software components. An example of a client device 120 or a host device 135 is a general-purpose computer (e.g., a personal computer) capable of responding to and executing instructions in a defined manner. Other examples include a special-purpose computer, a workstation, a server, a device, a component, other physical or virtual equipment or some combination thereof capable of responding to and executing instructions. The client device 120 and the host device 135 may include devices that are capable of peer-to-peer communications.

[0029] An example of client controller 125 or a host controller 140 is a software application loaded on the client device 120 or the host device 135 for commanding and directing communications enabled by the client device 120 or the host device 135. Other examples include a program, a piece of code, an instruction, a device, a computer, a computer system, or a combination thereof, for independently or collectively instructing the client device 120 or the host device 135 to interact and operate as described. The client controller 125 and the host controller 140 may be embodied permanently or temporarily in any type of machine, component, physical or virtual equipment, storage medium, or propagated signal capable of providing instructions to the client device 120 or the host device 135.

[0030] The communications link 115 typically includes a delivery network 160 making a direct or indirect communication between the client system 105 and the host system 110, irrespective of physical separation. Examples of a delivery network 160 include the Internet, the World Wide Web, WANs, LANs, analog or digital wired and wireless telephone networks (e.g. PSTN, ISDN, and xDSL), radio, television, cable, satellite, and/or any other delivery mechanism for carrying data. The communications link 115 may include communication pathways 150 and 155 that enable communications through the one or more delivery networks 160 described above. Each of the communication pathways 150 and 155 may include, for example, a wired, wireless, cable or satellite communication pathway.

[0031] FIG. 2 illustrates a communications system 200 including a client system 205 communicating with a host system 210 through a communications link 215. Client system 205 typically includes one or more client devices 220 and

one or more client controllers **225** for controlling the client devices **220**. Host system **210** typically includes one or more host devices **235** and one or more host controllers **240** for controlling the host devices **235**. The communications link **215** may include communication pathways **250** and **255** that enable communications through the one or more delivery networks **260**.

[0032] Examples of each element within the communications system of FIG. 2 are broadly described above with respect to FIG. 1. In particular, the host system **210** and the communications link **215** typically have attributes comparable to those described with respect to host system **110** and communications link **115** of FIG. 1. Likewise, the client system **205** of FIG. 2 typically has attributes comparable to and illustrates one possible implementation of the client system **105** of FIG. 1.

[0033] The client device **220** typically includes a general-purpose computer **270** having an internal or external storage **272** for storing data and programs such as an operating system **274** (e.g., DOS, Windows™, Windows 95™, Windows 98™, Windows 2000™, Windows Me™, Windows XP™, Windows NT™, OS/2, or Linux) and one or more application programs. Examples of application programs include authoring applications **276** (e.g., word processing programs, database programs, spreadsheet programs, or graphics programs) capable of generating documents or other electronic content; client applications **278** (e.g., AOL client, CompuServe client, AIM client, AOL TV client, or ISP client) capable of communicating with other computer users, accessing various computer resources, and viewing, creating, or otherwise manipulating electronic content; and browser applications **280** (e.g., Netscape's Navigator or Microsoft's Internet Explorer) capable of rendering standard Internet content.

[0034] The general-purpose computer **270** also includes a central processing unit **282** (CPU) for executing instructions in response to commands from the client controller **225**. In one implementation, the client controller **225** includes one or more of the application programs installed on the internal or external storage **272** of the general-purpose computer **270**. In another implementation, the client controller **225** includes application programs externally stored in and performed by one or more device(s) external to the general-purpose computer **270**.

[0035] The general-purpose computer typically will include a communication device **284** for sending and receiving data. One example of the communication device **284** is a modem. Other examples include a transceiver, a set-top box, a communication card, a satellite dish, an antenna, or another network adapter capable of transmitting and receiving data over the communications link **215** through a wired or wireless data pathway **250**. The general-purpose computer **270** also may include a TV ("television") tuner **286** for receiving television programming in the form of broadcast, satellite, and/or cable TV signals. As a result, the client device **220** can selectively and/or simultaneously display network content received by communications device **284** and television programming content received by the TV tuner **286**.

[0036] The general-purpose computer **270** typically will include an input/output interface **288** for wired or wireless connection to various peripheral devices **290**. Examples of peripheral devices **290** include, but are not limited to, a mouse **291**, a mobile phone **292**, a personal digital assistant **293** (PDA), a MP3 player (not shown), a keyboard **294**, a display monitor **295** with or without a touch screen input, a TV

remote control **296** for receiving information from and rendering information to subscribers, and an audiovisual input device **298**.

[0037] Although devices such as a mobile telephone **292**, a PDA **293**, a MP3 player (not shown), and a TV remote control **296** may be peripheral with respect to the general-purpose computer **270**, in another implementation, such devices may themselves include the functionality of the general-purpose computer **270** and operate as the client device **220**. For example, the mobile phone **292** or the PDA **293** may include computing and networking capabilities and function as a client device **220** by accessing the delivery network **260** and communicating with the host system **210**. Furthermore, the client system **205** may include one, some or all of the components and devices described above.

[0038] Referring to FIG. 3, a communications system **300** is capable of delivering and exchanging information between a client system **305** and a host system **310** through a communication link **315**. Client system **305** typically includes one or more client devices **320** and one or more client controllers **325** for controlling the client devices **320**. Host system **310** typically includes one or more host devices **335** and one or more host controllers **340** for controlling the host devices **335**. The communications link **315** may include communication pathways **350** and **355** that enable communications through the one or more delivery networks **360**.

[0039] Examples of each element within the communications system of FIG. 3 are broadly described above with respect to FIGS. 1 and 2. In particular, the client system **305** and the communications link **315** typically have attributes comparable to those described with respect to client systems **105** and **205** and communications links **115** and **215** of FIGS. 1 and 2. Likewise, the host system **310** of FIG. 3 may have attributes comparable to and illustrates one possible implementation of the host systems **110** and **210** shown in FIGS. 1 and 2.

[0040] The host system **310** includes a host device **335** and a host controller **340**. The host controller **340** is generally capable of transmitting instructions to any or all of the elements of the host device **335**. For example, in one implementation, the host controller **340** includes one or more software applications loaded on the host device **335**. In other implementations, as described above, the host controller **340** may include any of several other programs, machines, and devices operating independently or collectively to control the host device **335**.

[0041] The host device **335** includes a login server **370** for enabling access by subscribers and for routing communications between the client system **305** and other elements of the host device **335**. The host device **335** also includes various host complexes such as the depicted OSP ("Online Service Provider") host complex **380** and IM ("Instant Messaging") host complex **390**. To enable access to these host complexes by subscribers, the client system **305** includes communication software, for example, an OSP client application and an IM client application. The OSP and IM communication software applications are designed to facilitate the subscriber's interactions with the respective services and, in particular, may provide access to all the services available within the respective host complexes.

[0042] Typically, the OSP host complex **380** supports different services, such as e-mail, discussion groups, chat, news services, and Internet access. The OSP host complex **380** is generally designed with an architecture that enables the

machines within the OSP host complex 380 to communicate with each other and employs certain protocols (i.e., standards, formats, conventions, rules, and structures) to transfer data. The OSP host complex 380 ordinarily employs one or more OSP protocols and custom dialing engines to enable access by selected client applications. The OSP host complex 380 may define one or more specific protocols for each service based on a common, underlying proprietary protocol.

[0043] The IM host complex 390 is generally independent of the OSP host complex 380, and supports instant messaging services irrespective of a subscriber's network or Internet access. Thus, the IM host complex 390 allows subscribers to send and receive instant messages, whether or not they have access to any particular ISP. The IM host complex 390 may support associated services, such as administrative matters, advertising, directory services, chat, and interest groups related to the instant messaging. The IM host complex 390 has an architecture that enables all of the machines within the IM host complex to communicate with each other. To transfer data, the IM host complex 390 employs one or more standard or exclusive IM protocols.

[0044] The host device 335 may include one or more gateways that connect and therefore link complexes, such as the OSP host complex gateway 385 and the IM host complex gateway 395. The OSP host complex gateway 385 and the IM host complex gateway 395 may directly or indirectly link the OSP host complex 380 with the IM host complex 390 through a wired or wireless pathway. Ordinarily, when used to facilitate a link between complexes, the OSP host complex gateway 385 and the IM host complex gateway 395 are privy to information regarding the protocol type anticipated by a destination complex, which enables any necessary protocol conversion to be performed incident to the transfer of data from one complex to another. For instance, the OSP host complex 380 and IM host complex 390 generally use different protocols such that transferring data between the complexes requires protocol conversion by or at the request of the OSP host complex gateway 385 and/or the IM host complex gateway 395.

[0045] Referring to FIG. 4, a communications system 400 is capable of delivering and exchanging information between a client system 405 and a host system 410 through a communication link 415. Client system 405 typically includes one or more client devices 420 and one or more client controllers 425 for controlling the client devices 420. Host system 410 typically includes one or more host devices 435 and one or more host controllers 440 for controlling the host devices 435. The communications link 415 may include communication pathways 450 and 455 that enable communications through the one or more delivery networks 460. As shown, the client system 405 may access the Internet 465 through the host system 410.

[0046] Examples of each element within the communications system of FIG. 4 are broadly described above with respect to FIGS. 1-3. In particular, the client system 405 and the communications link 415 typically have attributes comparable to those described with respect to client systems 105, 205, and 305 and communications links 115, 215, and 315 of FIGS. 1-3. Likewise, the host system 410 of FIG. 4 may have attributes comparable to and illustrates one possible implementation of the host systems 110, 210, and 310 shown in FIGS. 1-3. FIG. 4 describes an aspect of the host system 410, focusing primarily on one particular implementation of OSP host complex 480.

[0047] The client system 405 includes a client device 420 and a client controller 425. The client controller 425 is generally capable of establishing a connection to the host system 410, including the OSP host complex 480, the IM host complex 490 and/or the Internet 465. In one implementation, the client controller 425 includes an OSP application for communicating with servers in the OSP host complex 480 using exclusive OSP protocols. The client controller 425 also may include applications, such as an IM client application, and/or an Internet browser application, for communicating with the IM host complex 490 and the Internet 465.

[0048] The host system 410 includes a host device 435 and a host controller 440. The host controller 440 is generally capable of transmitting instructions to any or all of the elements of the host device 435. For example, in one implementation, the host controller 440 includes one or more software applications loaded on one or more elements of the host device 435. In other implementations, as described above, the host controller 440 may include any of several other programs, machines, and devices operating independently or collectively to control the host device 435.

[0049] The host system 410 includes a login server 470 capable of enabling communications with and authorizing access by client systems 405 to various elements of the host system 410, including an OSP host complex 480 and an IM host complex 490. The login server 470 may implement one or more authorization procedures to enable simultaneous access to the OSP host complex 480 and the IM host complex 490. The OSP host complex 480 and the IM host complex 490 are connected through one or more OSP host complex gateways 485 and one or more IM host complex gateways 495. Each OSP host complex gateway 485 and IM host complex gateway 495 may perform any protocol conversions necessary to enable communications between the OSP host complex 480, the IM host complex 490, and the Internet 465.

[0050] The OSP host complex 480 supports a set of services from one or more servers located internal to and external from the OSP host complex 480. Servers external to the OSP host complex 480 generally may be viewed as existing on the Internet 465. Servers internal to the OSP complex 480 may be arranged in one or more configurations. For example, servers may be arranged in centralized or localized clusters in order to distribute servers and subscribers within the OSP host complex 480.

[0051] In one implementation of FIG. 4, the OSP host complex 480 includes a routing processor 4802. In general, the routing processor 4802 will examine an address field of a data request, use a mapping table to determine the appropriate destination for the data request, and direct the data request to the appropriate destination. In a packet-based implementation, the client system 405 may generate information requests, convert the requests into data packets, sequence the data packets, perform error checking and other packet-switching techniques, and transmit the data packets to the routing processor 4802. Upon receiving data packets from the client system 405, the routing processor 4802 may directly or indirectly route the data packets to a specified destination within or outside of the OSP host complex 480. For example, in the event that a data request from the client system 405 can be satisfied locally, the routing processor 4802 may direct the data request to a local server 4804. In the event that the data request cannot be satisfied locally, the routing processor 4802 may direct the data request externally to the Internet 465 or the IM host complex 490 through the gateway 485.

[0052] The OSP host complex 480 also includes a proxy server 4806 for directing data requests and/or otherwise facilitating communication between the client system 405 and the Internet 465. The proxy server 4806 may include an IP (“Internet Protocol”) tunnel for converting data from OSP protocol into standard Internet protocol and transmitting the data to the Internet 465. The IP tunnel also converts data received from the Internet 465 in the standard Internet protocol back into the OSP protocol and sends the converted data to the routing processor 4802 for delivery back to the client system 405.

[0053] The proxy server 4806 also may allow the client system 405 to use standard Internet protocols and formatting to access the OSP host complex 480 and the Internet 465. For example, the subscriber may use an OSP TV client application having an embedded browser application installed on the client system 405 to generate a request in standard Internet protocol, such as HTTP (“HyperText Transport Protocol”). In a packet-based implementation, data packets may be encapsulated inside a standard Internet tunneling protocol, such as, for example, UDP (“User Datagram Protocol”) and muted to the proxy server 4806. The proxy server 4806 may include an L2TP (“Layer Two Tunneling Protocol”) tunnel capable of establishing a point-to-point protocol (PPP) session with the client system 405.

[0054] The proxy server 4806 also may act as a buffer between the client system 405 and the Internet 465, and may implement content filtering and time saving techniques. For example, the proxy server 4806 can check parental controls settings of the client system 405 and request and transmit content from the Internet 465 according to the parental control settings. In addition, the proxy server 4806 may include one or more caches for storing frequently accessed information. If requested data is determined to be stored in the caches, the proxy server 4806 may send the information to the client system 405 from the caches and avoid the need to access the Internet 465.

[0055] Referring to FIG. 5, a communications system 500 is capable of delivering and exchanging information between a client system 505 and a host system 510 through a communication link 515. Client system 505 typically includes one or more client devices 520 and one or more client controllers 525 for controlling the client devices 520. Host system 510 typically includes one or more host devices 535 and one or more host controllers 540 for controlling the host devices 535. The communications link 515 may include communication pathways 550 and 555 that enable communications through the one or more delivery networks 560. As shown, the client system 505 may access the Internet 565 through the host system 510.

[0056] Examples of each element within the communications system of FIG. 5 are broadly described above with respect to FIGS. 1-4. In particular, the client system 505 and the communications link 515 typically have attributes comparable to those described with respect to client systems 105, 205, 305, and 405 and communications links 115, 215, 315, and 415 of FIGS. 1-4. Likewise, the host system 510 of FIG. 5 may have attributes comparable to and illustrates one possible implementation of the host systems 110, 210, 310, and 410 shown in FIGS. 1-4. FIG. 5 describes an aspect of the host system 510, focusing primarily on one particular implementation of IM host complex 590.

[0057] The client system 505 includes a client device 520 and a client controller 525. The client controller 525 is gen-

erally capable of establishing a connection to the host system 510, including the OSP host complex 580, the IM host complex 590 and/or the Internet 565. In one implementation, the client controller 525 includes an IM application for communicating with servers in the IM host complex 590 utilizing exclusive IM protocols. The client controller 525 also may include applications, such as an OSP client application, and/or an Internet browser application for communicating with the OSP host complex 580 and the Internet 565, respectively.

[0058] The host system 510 includes a host device 535 and a host controller 540. The host controller 540 is generally capable of transmitting instructions to any or all of the elements of the host device 535. For example, in one implementation, the host controller 540 includes one or more software applications loaded on one or more elements of the host device 535. However, in other implementations, as described above, the host controller 540 may include any of several other programs, machines, and devices operating independently or collectively to control the host device 535.

[0059] The host system 510 includes a login server 570 capable of enabling communications with and authorizing access by client systems 505 to various elements of the host system 510, including an OSP host complex 580 and an IM host complex 590. The login server 570 may implement one or more authorization procedures to enable simultaneous access to the OSP host complex 580 and the IM host complex 590. The OSP host complex 580 and the IM host complex 590 are connected through one or more OSP host complex gateways 585 and one or more IM host complex gateways 595. Each OSP host complex gateway 585 and IM host complex gateway 595 may perform any protocol conversions necessary to enable communication between the OSP host complex 580, the IM host complex 590, and the Internet 565.

[0060] To access the IM host complex 590 to begin an instant messaging session, the client system 505 establishes a connection to the login server 570. The login server 570 typically determines whether the particular subscriber is authorized to access the IM host complex 590 by verifying a subscriber identification and password. If the subscriber is authorized to access the IM host complex 590, the login server 570 employs a hashing technique on the subscriber’s screen name to identify a particular IM server 5902 for use during the subscriber’s session. The login server 570 provides the client system 505 with the IP address of the particular IM server 5902, gives the client system 505 an encrypted key (i.e., a cookie), and breaks the connection. The client system 505 then uses the IP address to establish a connection to the particular IM server 5902 through the communications link 515, and obtains access to that IM server 5902 using the encrypted key. Typically, the client system 505 will be equipped with a Winsock API (“Application Programming Interface”) that enables the client system 505 to establish an open TCP connection to the IM server 5902.

[0061] Once a connection to the IM server 5902 has been established, the client system 505 may directly or indirectly transmit data to and access content from the IM server 5902 and one or more associated domain servers 5904. The IM server 5902 supports the fundamental instant messaging services and the domain servers 5904 may support associated services, such as, for example, administrative matters, directory services, chat and interest groups. In general, the purpose of the domain servers 5904 is to lighten the load placed on the IM server 5902 by assuming responsibility for some of the services within the IM host complex 590. By accessing the

IM server **5902** and/or the domain server **5904**, a subscriber can use the IM client application to view whether particular subscribers (“buddies”) are online, exchange instant messages with particular subscribers, participate in group chat rooms, trade files such as pictures, invitations or documents, find other subscribers with similar interests, get customized news and stock quotes, and search the World Wide Web.

[0062] In the implementation of FIG. 5, the IM server **5902** is directly or indirectly connected to a routing gateway **5906**. The routing gateway **5906** facilitates the connection between the IM server **5902** and one or more alert multiplexors **5908**, for example, by serving as a link minimization tool or hub to connect several IM servers **5902** to several alert multiplexors **5908**. In general, an alert multiplexor **5908** maintains a record of alerts and subscribers registered to receive the alerts.

[0063] Once the client system **505** is connected to the alert multiplexor **5908**, a subscriber can register for and/or receive one or more types of alerts. The connection pathway between the client system **505** and the alert multiplexor **5908** is determined by employing another hashing technique at the IM server **5902** to identify the particular alert multiplexor **5908** to be used for the subscriber’s session. Once the particular multiplexor **5908** has been identified, the IM server **5902** provides the client system **505** with the IP address of the particular alert multiplexor **5908** and gives the client system **505** an encrypted key (i.e., a cookie). The client system **505** then uses the IP address to connect to the particular alert multiplexor **5908** through the communication link **515** and obtains access to the alert multiplexor **5908** using the encrypted key.

[0064] The alert multiplexor **5908** is connected to an alert gate **5910** that, like the IM host complex gateway **595**, is capable of performing the necessary protocol conversions to form a bridge to the OSP host complex **580**. The alert gate **5910** is the interface between the IM host complex **590** and the physical servers, such as servers in the OSP host complex **580**, where state changes are occurring. In general, the information regarding state changes will be gathered and used by the IM host complex **590**. However, the alert multiplexor **5908** also may communicate with the OSP host complex **580** through the IM host complex gateway **595**, for example, to provide the servers and subscribers of the OSP host complex **580** with certain information gathered from the alert gate **5910**.

[0065] The alert gate **5910** can detect an alert feed corresponding to a particular type of alert. The alert gate **5910** may include a piece of code (alert receive code) capable of interacting with another piece of code (alert broadcast code) on the physical server where a state change occurs. In general, the alert receive code installed on the alert gate **5910** instructs the alert broadcast code installed on the physical server to send an alert feed to the alert gate **5910** upon the occurrence of a particular state change. Upon detecting an alert feed, the alert gate **5910** contacts the alert multiplexor **5908**, which in turn, informs the client system **505** of the detected alert feed.

[0066] In the implementation of FIG. 5, the IM host complex **590** also includes a subscriber profile server **5912** connected to a database **5914** for storing large amounts of subscriber profile data. The subscriber profile server **5912** may be used to enter, retrieve, edit, manipulate, or otherwise process subscriber profile data. In one implementation, a subscriber’s profile data includes, for example, the subscriber’s buddy list, alert preferences, designated stocks, identified interests, and geographic location. The subscriber may enter, edit and/or

delete profile data using an installed IM client application on the client system **505** to interact with the subscriber profile server **5912**.

[0067] Because the subscriber’s data is stored in the IM host complex **590**, the subscriber does not have to reenter or update such information in the event that the subscriber accesses the IM host complex **590** using a new or a different client system **505**. Accordingly, when a subscriber accesses the IM host complex **590**, the IM server **5902** can instruct the subscriber profile server **5912** to retrieve the subscriber’s profile data from the database **5914** and to provide, for example, the subscriber’s buddy list to the IM server **5902** and the subscriber’s alert preferences to the alert multiplexor **5908**. The subscriber profile server **5912** also may communicate with other servers in the OSP host complex **580** to share subscriber profile data with other services. Alternatively, user profile data may be saved locally on the client device **505**.

[0068] Referring to FIG. 6, a communications system **600** is capable of delivering and exchanging information between a client system **605** and a host system **610** through a communication link **615**. Client system **605** typically includes one or more client devices **620** and one or more client controllers **625** for controlling the client devices **620**. Host system **610** typically includes one or more host devices **635** and one or more host controllers **640** for controlling the host devices **635**. The communication link **615** may include communication pathways **650** and **655** that enable communications through the one or more delivery networks **660**. The network **660** may be any known or described delivery network including, but not limited to, a telephone network and/or the Internet.

[0069] Examples of each element within the communication system of FIG. 6 are broadly described above with respect to FIGS. 1-5. In particular, the client system **605** and the communications link **615** typically have attributes comparable to those described with respect to client systems **105**, **205**, **305**, **405**, and **505** and communications links **115**, **215**, **315**, **415**, and **515** of FIGS. 1-5. Likewise, the host system **610** of FIG. 6 may have attributes comparable to and illustrates one possible implementation of the host systems **110**, **210**, **310**, **410**, and **510** shown in FIGS. 1-5, respectively. However, FIG. 6 describes an aspect of the host system **610**, focusing primarily on one particular implementation of the host device **635**.

[0070] The client system **605** includes a client device **620** and a client controller **625**. The client controller **625** is generally capable of establishing a connection to the host system **610** through the delivery network **615**. In one implementation, the client controller **625** includes one or more applications, such as an IM application, an OSP application, and/or an Internet browser application.

[0071] The host system **610** includes a host device **635** and a host controller **640**. The host controller **640** is generally capable of transmitting instructions to any or all of the elements of the host device **635**. For example, in one implementation, the host controller **640** includes one or more software applications loaded on one or more elements of the host device **635**. However, in other implementations, as described above, the host controller **640** may include any of several other programs, machines, and devices operating independently or collectively to control the host device **635**. The host device **635** includes a mail gateway **6350** having a send mail server **6352** and a read mail server **6354**. The send mail server **6352** is configured to perform functions relating to transmit-

ting electronic data. The read mail server **6354** is configured to perform functions relating to receiving and accessing electronic data. The mail gateway **6350** is in communication with one or more processing servers **6360**.

[0072] The mail gateway **6350** also is in communication with the storage area **6370** and a tandem database **6380**. The storage area **6370** includes electronic content databases **6372**, **6374** and attachment database **6376**. The tandem database **6380** includes a system of folders that store electronic data for subscribers of the host system **610**.

[0073] The host device **635** also includes an identification ("ID") host complex **6390**. The ID host complex **6390** includes a configuration server **6392** in communication with the client system **605**, the read mail server **6352**, a look-up server **6394**, and an IM server **6396**. The IM server **6396** typically has attributes comparable to some or all elements of IM host complexes **390**, **490**, **590**, and **690**. In general, the IM server **6396** is capable of supporting instant messaging services including the identification of whether a particular individual is available for IM messaging, the look-up server **6394** is capable of finding subscriber account information (e.g., screen name) from a given e-mail address, and the configuration server **6392** is capable of configuring communication schemes between the intended recipient of an e-mail message and the sender and/or other recipients of the e-mail message. The configuration server **6392** may include an electronic data store (e.g., a cache) that may be used, for example, to cache attributes of electronic data communicated using the host **610**. The cache of attributes of electronic data may be associated with a previously encountered message (e.g., a cache entry may indicate that a message stored in the cache with ID=514 references individuals x, y, z) to avoid the need to analyze the message each time it is encountered.

[0074] Referring to FIGS. **7** and **8**, a sender **702** and a host **704** interact according to a procedure **700** to transmit electronic data. The procedure **700** may be implemented by any type of hardware, software, device, computer, computer system, equipment, component, program, application, code, storage medium, or propagated signal.

[0075] Examples of each element of FIGS. **7** and **8** are broadly described above with respect to FIGS. **1-6**. In particular, the sender **702** typically has attributes comparable to those described with respect to client devices **120**, **220**, **320**, **420**, **520**, and **620** and/or client controllers **125**, **225**, **325**, **425**, **525**, and **625**. The host **704** typically has attributes comparable to those described above with respect to host devices **135**, **235**, **335**, **435**, **535**, and **635** and/or host controllers **140**, **240**, **340**, **440**, **540**, and **640**. The sender **702** and/or the host **704** may be directly or indirectly interconnected through a known or described delivery network.

[0076] Initially, the sender **702** transmits electronic data to the host **704** (step **705**). In one implementation, the sender **702** is a client system **605** associated with an end user of the communication system **600**. In another implementation, the sender **702** aids the client system **605** in transmitting electronic data through a communications link **615** to the host system **610**. In yet another implementation, the sender **702** is a processing server **6360** within the host system **610**. For example, the processing server **6360** may be a web mail server arranged to store and forward electronic data transmitted between end users of the communication system **600**.

[0077] The host **704** receives the electronic data from the sender **702** (step **710**). In one implementation, the host **704** includes a mail gateway such as mail gateway **6350** of FIG. **6**.

In this implementation, the mail gateway **6350** generally receives the electronic data from the client system **605** and/or the processing server **6360**. Typically, the mail gateway **6350** will receive electronic content from subscribers through a dial-up telephone network or DSL (digital subscriber line) and will receive electronic content from non-subscribers indirectly through the Internet. The mail gateway **6350** may perform protocol conversions if necessary to receive electronic content from non-subscribers.

[0078] After receiving the electronic data from the sender **702** (step **710**), the host **704** determines one or more attributes of the electronic data (step **715**). Attributes of the electronic data may include, but are not limited to, an identification token, the author of the electronic data, the recipient(s) of the electronic data, the subject of the electronic data, the date and time of the transmission, and/or whether the electronic data contains attachments or embedded images. The host **704** typically will store the contents and attributes of the electronic data. For example, in one implementation of the structure shown by FIG. **6**, contents of the electronic data are stored in the storage area **6370** and the attributes of the electronic data are cached locally in the configuration server **6392** and also stored in the tandem database **6380**. The body of the electronic data is stored in electronic content databases **6372**, **6374** and any attachments are stored in the attachment database **6376**. In this example, the body of the electronic data is stored twice to assure its availability. Due to the typically large sizes of attachments, however, such objects are only stored once to conserve memory space.

[0079] The tandem database **6380** includes a system of actual or virtual folders corresponding to the subscribers of the host system **610**. Each folder may have properties assigned by the subscriber including, for example, properties for filtering electronic content from certain sources. When electronic data are received, the folder stores the attributes of the electronic data including the location(s) of the electronic data content (i.e., body and attachments) in the storage area **6370**.

[0080] The host **704** then provides supplemental contact information for a referenced individual (step **720**). The supplemental contact information for the referenced individual may be provided to the sender of the electronic data, the recipients of the electronic data, and other individuals referenced in the electronic data. In one implementation, the host **704** uses the supplemental contact information to configure a communication scheme between the recipient and the referenced individual.

[0081] In one implementation, the supplemental contact information may include real time contact information. Real time contact information includes information that reflects the current availability of the user to communicate through one or more communication schemes. For example, the real time contact information may include a referenced individual's current online status to communicate using instant messaging or a referenced individual's current availability to communicate using phone communications.

[0082] Additionally or alternatively, real time contact information may include information that reflects contact information provided by the referenced individual for display to others seeking their availability when viewing electronic messages that identify the individual.

[0083] FIG. **8** illustrates one implementation of a process **720** for providing supplemental contact information for a referenced individual. Initially, the configuration server **6392**

detects a token or other information capable of identifying incoming electronic data (e.g., an e-mail message or an instant message) (step 805). The identification token may be intercepted by the configuration server 6392 and/or presented to the configuration server 6392 by the client system 605, the processing server 6360, and/or the read mail server 6354 (communication path not shown by FIG. 6). Referencing the token, the configuration server 6392 accesses a cache (step 810) and determines whether attributes of the electronic data are stored locally (step 815). Such attributes may include, but are not limited to, a listing of referenced individuals associated with the electronic data. The listing of referenced individuals may include the sender and all recipients associated with the electronic data identified from addressing information. The listing of referenced individuals also may include names detected in the body of an electronic communication. For example, the listing of referenced individuals associated with an e-mail message may include the sender of the e-mail message, all recipients of the e-mail message, and any names of individuals detected in the body of the e-mail message.

[0084] If attributes of the electronic data are stored locally, the configuration server 6392 retrieves the attributes from the local cache (step 820). If, on the other hand, attributes of the electronic data are not stored locally, the configuration server 6392 determines the attributes of the electronic data (step 825) and then supplements the local cache with those attributes (step 830). The configuration server 6392 may determine the attributes of the electronic data itself and/or may access another server to determine the attributes. In one implementation, the configuration server 6392 accesses the read mail server 6354. The read mail server 6354 then determines attributes of the electronic data. Determining attributes of the electronic data may include detecting referenced individuals associated with the electronic data by examining addressing information and the content of the electronic data. The read mail server 6354 then presents the attributes to the configuration server 6392. The configuration server 6392 receives the listing from the read mail server 6354 and stores the listing in the local cache.

[0085] The configuration server 6392 sends the listing of referenced individuals to the look-up server 6394, which can be used to determine the real time messaging capability of each referenced individual (step 835). In one implementation, the look-up server 6394 determines whether supplemental contact information is associated with any or all referenced individuals. The supplemental contact information may include e-mail addresses, IM screen names, telephone numbers, and/or mailing addresses associated with the referenced individual. However, the referenced individuals may or may not be subscribers of the communication system 600. For instance, in one implementation, the listing includes e-mail addresses of subscribers and non-subscribers. Thus, to facilitate a determination of real time messaging capabilities, the configuration server 6392 may strip the domain (e.g., @aol.com) from the e-mail address of a subscriber with a recognized domain to obtain the subscriber's screen name and facilitate a reverse look-up process. In another implementation, the listing includes names detected in the content of an electronic message (e.g., an e-mail message or an instant message) or e-mail addresses otherwise recognizable to the configuration server 6392.

[0086] In general, the supplemental contact information will be provided by the referenced individuals themselves and will be maintained by the host system 610. For example, a

subscriber may provide contact information when establishing an account with the host system 610. A subscriber also may provide contact information transparently by connecting to host system 610 and allowing the host system 610 to monitor the subscriber's online presence. In one implementation, the host system 610 maintains a global electronic address book containing supplemental contact information associated with subscribers. Each subscriber may control what type of contact information is provided and to whom such contact information is made available. In addition, each subscriber may place conditions on when certain contact information is made available. For instance, a subscriber may make certain contact information available only at specified times.

[0087] In one example, a subscriber may make supplemental contact information available only to family members. In this example, the subscriber may have minimal privacy concerns and therefore may allow family members access to supplemental contact information including home and work e-mail addresses, IM screen names, telephone numbers, facsimile numbers, and mailing addresses. In addition, the subscriber may provide contact information for a person to contact in emergency cases when the subscriber is unavailable.

[0088] In another example, the subscriber may make supplemental contact information available to fellow employees during working hours. In this example, the subscriber may allow fellow employees access to supplemental contact information including a work e-mail address, IM screen name, telephone number, facsimile number, and mailing address. In addition, the subscriber may provide contact information for an assistant or supervisor that people should contact in urgent cases when the subscriber is unavailable. In another example for a working environment, the supplemental contact information may include an office layout (i.e., a map) so that a remote manager may be able to reach an unresponsive employee by sending a message to an employee located in close proximity to the unresponsive employee.

[0089] In yet another example, the subscriber may set preferences to enable the supplemental contact information to be provided to designated persons. For example, the subscriber may designate which group or groups of persons may receive the supplemental contact information, such as, senders of electronic messages, other recipient of electronic messages, and/or other individuals referenced. The subscriber may designate specific individuals to receive the supplemental contact information. Additionally and/or alternatively, the subscriber may designate specific individuals who should be blocked from receiving the supplemental contact information.

[0090] A subscriber may set preferences that control the presentation of supplemental contact information by the host system 610. For example, the subscriber may allow the host system 610 to examine some or all of the content of electronic messages sent to or by the subscriber. In one implementation, the host system 610 may examine the content of an electronic message (e.g., an e-mail message or an instant message) authored by the subscriber or delivered to the subscriber, detect names of referenced individuals included in the electronic message, and provide supplemental contact information for each referenced individual, if available.

[0091] In addition, the host system 610 may update a personal address book associated with the subscriber. For example, the host system 610 may ask the subscriber if a referenced individual should be included in a subscriber's

personal address book and/or may ask the subscriber if an existing entry for a referenced individual in the subscriber's personal address book should be updated with the supplemental contact information. Upon receiving an affirmative response from the subscriber, the host system 610 may populate and/or update the subscriber's personal address book. The subscriber's personal address book may be maintained on the host system 610 and/or on the subscriber's client system 605.

[0092] In some cases, a subscriber may allow the host system 610 to facilitate the acquisition of supplemental contact information. Typically, a subscriber will set preferences that control the amount of intervention by the host system 610. In one implementation, a subscriber may allow the host system 610 to automatically update a global electronic address book containing supplemental contact information associated with the subscriber. That is, the host system 610 may be permitted to automatically update a subscriber's contact information in the global electronic address book as new contact information for the subscriber becomes available. For example, contact information may be automatically added or updated whenever a subscriber creates and/or changes an e-mail address, screen name, telephone number, facsimile number, and/or mailing address. As such, the most current contact information associated with the subscriber may be made available to other subscribers.

[0093] In one implementation, the configuration server 6392 interacts with the IM server 6396 to make known whether referenced individuals are available for instant messaging communication, and to enable such communications. For example, the configuration server 6392 may request the IM server 6396 to identify the IM state (e.g., online, offline, away, busy, not a member) of each referenced individual. As described above, the IM server 6396 may be a network of interconnected servers capable of determining the status or online presence of subscribers. The online presence of the referenced individual can be detected, for example, from a persistent connection to an IM server and/or the activity of a specific control port.

[0094] In response to the request, the IM server 6396 identifies the IM state of the referenced individual to the configuration server 6392. In one implementation, the IM state is given by whether the referenced individual is online, offline, or does not have instant messaging capability. The configuration server 6392 may instruct the IM server 6396 to send an invitation to referenced individuals without instant messaging capability. The invitation may invite the referenced individual to subscribe to the IM host complex 6390 and/or the host system 610. For referenced individuals having instant messaging capability, the IM server 6396 reports whether each referenced individual is online or offline.

[0095] Once the look-up server 6394 has determined the supplemental contact information for the referenced individuals, the look-up server 6394 reports the real time messaging capabilities of each referenced individual to the configuration server 6392 (step 840). In one implementation, the look-up server 6394 identifies the capability of each referenced individual to communicate by e-mail, instant messaging, telephone, facsimile, and regular mail, for example, by using icons near references to the individual's name/reference within the electronic content, or by changing the font of the individual's name/reference. The look-up server 6394 also may provide supplemental contact information (e.g., screen name, e-mail address, telephone number, facsimile

number, mailing address) to the configuration server 6392. Based on the reported capabilities of the referenced individuals, the configuration server 6392 facilitates real time communication with each referenced individual.

[0096] In one implementation, when the look-up server 6394 reports the real time messaging capabilities of each referenced individual to the configuration server 6392, the configuration server 6392 may present a particular instant messaging user interface ("UI"). For example, the configuration server 6392 may cause a user's existing buddy list window to be updated with the screen names of referenced individuals capable of participating in an IM session. Additionally or alternatively, a new buddy list window may be created and updated with referenced individuals capable of participating in an IM session. In the example of FIG. 9, the UI 900 includes a buddy list window. The screen names of referenced individuals who are able to receive instant messages will appear in the buddy list window in a new group called Mail Contacts. A user may send an instant message to a person in the Mail Contacts list by clicking that person's screen name. Thus, when an individual referenced in electronic content (e.g., in an e-mail) is determined to have IM capabilities, a buddy list window may be presented with a screen name of the referenced individual.

[0097] FIG. 10 illustrates another example of how the IM state of each of the sender and the recipients may be represented. An icon may indicate that the referenced individual has IM capability. The icon may be presented upon opening an e-mail message, for example, in response to one or more redirection commands associated with the IM state of the referenced individual. The redirection command may include a URL for navigating a browser to a particular URL associated with a graphical user interface and/or icon corresponding to one of the IM states. By clicking on the IM icon, a subscriber may launch an instant message.

[0098] Where an icon does not appear next to a referenced individual, the referenced individual does not presently have IM capability, and selection of the subscriber reference (e.g., screen name) may elicit a list of other contact information. Thus, even if a referenced individual does not have IM capability, a subscriber still may be able to communicate with the referenced individual through an alternate communication scheme. For example, the configuration server 6392 may receive an e-mail address for a referenced individual with e-mail capability. In one implementation, the configuration server 6392 displays an e-mail address of a referenced individual. By clicking the e-mail address, the subscriber may launch an e-mail message to the referenced individual, or the user may be presented with other forms of contact information such as the telephone number of the individual.

[0099] It should be noted that the e-mail address is displayed according to the supplemental contact information. As such, the displayed e-mail address is not necessarily the e-mail address included in the originally-transmitted message. For example, if a referenced individual has indicated a preferred e-mail address, the preferred e-mail address will displace another e-mail address. To illustrate with reference to FIG. 10, assume that a referenced individual (Sally Smith) has indicated that a work e-mail address (sallysmith@straitsight.com) is to be provided as supplemental contact information during working hours and that a home e-mail address (sallysmith@aol.com) is to be provided as supplemental contact information during all other times. Even if a sender (Chris Barker) sends the e-mail message

using the home e-mail address (sallysmith@aol.com), the work e-mail address (sallysmith@straitsight.com) may be displayed when the e-mail message is opened during working hours.

[0100] FIGS. 11a and 11b illustrate another example of how the supplemental contact information for referenced individuals may be presented. For example, in FIG. 11a, e-mail 1100 includes two referenced individuals in the body of the e-mail 1100 (i.e., John Doe 1105 and Tim Smith 1110). As the cursor 1115 is moved over the referenced individuals 1105 and 1110, a window (e.g., a pop-up window) may be displayed for each referenced individual listing the individual's supplemental contact information. For instance, as cursor 1115 is moved over John Doe 1105, pop-up window 1120 displays John Doe's supplemental contact information.

[0101] The supplemental contact information displayed in the pop-up window 1120 may depend on the date and/or time at which the e-mail is being viewed. In this case, the date-time stamp 1125a on e-mail 1100 indicates that the e-mail 1100 is being viewed on "Apr. 24, 2002 11:26 AM" 1125a. Based on the date and the time 1125a that the e-mail 1100 is being viewed, the supplemental contact information for John Doe indicates that the address "JDOE@AOL.COM" 1130a should be used to reach John Doe by e-mail.

[0102] In FIG. 11b, when the same e-mail 1100 is viewed at a different time 1125b, the pop-up window 1120 displays different supplemental contact information for John Doe 1105. In this case, based on the date and time 1125b that the e-mail 1100 is being viewed, the supplemental contact information for John Doe indicates that the address "JDOE@AIM.COM" 1130b should be used to reach John Doe by e-mail.

[0103] As is true with respect to other drawings, the contact information may be provided for individuals referenced in the header (e.g., To, From, cc) or body of the message, and may be formed of complete or partial names or aliases, or by complete or partial reference to other contact information that is recognizable and that may be associated with the individual. Furthermore, the pop-up window of FIGS. 11a and 11b, while shown as being positioned so as to avoid overlap of the current message, may be positioned over, under, or away from the viewable area of the message that references the individual.

[0104] In one exemplary implementation, an individual referenced in an electronic message may make other supplemental information available to recipients of the electronic message based on the preferences of the recipient. A host system may facilitate this exchange of supplemental information by maintaining this other supplemental information for the referenced individual and by enabling recipients to designate the

other supplemental information they desire to receive about referenced individuals. For example, the host may maintain other supplemental information provided by the referenced individual, such as, for example, a type of PDA used, date of birth, clothes sizes, favorites (e.g., type of food or restaurant), and other types of other supplemental information. A recipient, who also may subscribe to the host system, may designate what other supplemental information the recipient desires to receive about referenced individuals, if that information is made available by a referenced individual. For example, in addition to supplemental contact information, a recipient also may want to receive information about a referenced individual's favorite restaurant. As long as that information is made available by a referenced individual, then the recipient may receive that information.

[0105] While the general aspects described above relate to instant messaging and e-mail, other types of supplemental contact information such as telephone numbers, facsimile numbers, and mailing addresses for the referenced individual may be displayed. In some implementations, all available supplemental contact information for a referenced individual is displayed. For example, a pull-down menu listing all supplemental contact information for a referenced individual may be presented by clicking text or an icon associated with the referenced individual. In such cases, a subscriber may choose the manner in which to contact the referenced individual. In other implementations, only the most efficient or reliable ways of contacting the referenced individual are displayed. For example, limited contact information such as a primary e-mail address, screen name, and telephone number may be displayed even if other contact information is available.

[0106] Other implementations are within the scope of the following claims.

1. A method for providing supplemental contact information corresponding to an individual referenced in an electronic message, the method comprising:

- receiving an electronic message;
- examining the electronic message;
- detecting an identifier for a referenced individual contained in the electronic message; and
- making supplemental contact information for the referenced individual available to a recipient of the electronic message, wherein the supplemental contact information is in addition to information contained in the electronic message.

2-111. (canceled)

* * * * *