(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number: 0 418 515 B1

(12) EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: 21.09.94 (51) Int. Cl.5: B41J 13/26

(21) Application number: 90114396.6

(22) Date of filing: 26.07.90

(54) Automatic sheet feed active alignment system.

(30) Priority: 21.09.89 US 410395

(43) Date of publication of application:
27.03.91 Bulletin 91/13

(45) Publication of the grant of the patent:
21.09.94 Bulletin 94/38

(84) Designated Contracting States:
DE FR GB IT

(56) References cited:
EP-A- 0 189 798
EP-A- 0 228 789
US-A- 3 967 715

IBM TECHNICAL DISCLOSURE BULLETIN, vol. 27, no. 1A, June 1984, pages 216, 217, New York, US; R.E. HUNT: "Paper-aligning Apparatus"

(73) Proprietor: Hewlett-Packard Company
Mail Stop 20 B-O,
3000 Hanover Street
Palo Alto, California 94304 (US)

(72) Inventor: Underwood, John A.
1352 Timber Glen
Escondido, CA 92027 (US)
Inventor: Ebersole, Anthony W.
13222 Standish Drive
Poway, CA 92064 (US)
Inventor: Medin, Todd R.
2875 Geise Ct.
Escondido, CA 92027 (US)

(74) Representative: Liesegang, Roland, Dr.-Ing. et al
FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38
D-80801 München (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 418 515 B1

Description

BACKGROUND OF THE INVENTION

The invention relates to an active sheet alignment system for feeding and aligning a sheet relative to a print mechanism, as well as to a method for actively aligning the leading edge of picked sheets with a printer mechanism, so that the skew of the sheet relative to the printer mechanism is significantly reduced.

Various active alignment systems have been employed in printer devices to align paper sheets relative to the printer mechanism. One type relies on gravity to achieve alignment. The disadvantage of such a system is that the orientation of the paper tray is necessarily constrained to particular orientations. Another system employs separate motors for the sheet pick up and paper advance mechanisms. The use of separate motors leads to additional cost and complexity.

Some sheet alignment systems use a clutch between the main paper advance mechanism and its motor, which could have a significant adverse effect on swath advance accuracy.

In IBM Technical Disclosure Bulletin, Vol. 27, No. 1A, June 1984, pp. 216, 217, R.E. Hunt: "Paper-Aligning Apparatus" an apparatus for aligning sheets during entry to a counterrotating platen is described. The counterrotation of the main advance platen continually rejects a sheet which is delivered from a tray holding a stack of sheets by means of a sheet pick roller. When the pick roller continues to drive the sheet, the sheet buckles against main advance platen. The sheet is then released from the sheet pick roller and due to the buckle the leading edge of the sheet is aligned to the main advance platen. The platen is then rotated clockwise and the sheet is advanced between the platen and its backup roller for feeding past a printing point.

It is an object of the present invention to provide a simple and effective active sheet alignment system and a method for actively aligning the leading edge of picked sheets for feeding the sheets to a printer mechanism, which does not rely on gravity and does not affect the orientation of the paper tray.

An further object is to provide an active alignment system and method for feeding sheets for a printer mechanism which requires only one motor drive and yet does not require a clutch between the main paper advance mechanism and its motor.

These objects are solved by an active sheet alignment system according to claim 1 and by a method for actively aligning the leading edge of picked sheets according to claim 11, respectively;

SUMMARY OF THE INVENTION

An active sheet feed alignment system for feeding and aligning a sheet relative to a print mechanism is described. The system comprises a sheet pickup roller mounted for rotational movement and for contacting the outside sheet in a sheet tray. A main sheet advance roller is disposed in a sheet feed path between the tray and the print mechanism. A pinch roller is disposed adjacent the main roller so that a nip is defined between the main roller and the pinch roller, the sheet being received into the nip as it is advanced by the sheet pickup roller.

The system further comprises a motor drive system for selectively driving the main roller in either the clockwise or counter-clockwise direction, the motor being further coupled to the sheet pickup roller through a non-reversing clutch so that the sheet pickup and main rollers are driven in a predetermined one of the clockwise or counter-clockwise directions to feed sheets from the tray toward the printer mechanism, and when the main drive roller is driven in the opposite direction, the pickup roller is not driven.

A motor drive controller actuates the motor drive system to feed sheets seriatum to the printer mechanism in aligned positions. The controller comprises means for driving the pickup and main rollers in the predetermined direction so that the leading edge of the sheet is fed past the nip between the main and pinch rollers. The controller further comprises means for reversing the motor to drive the main roller in the reverse direction while the pickup roller is not driven and remains stationary, thereby forming a buckle in the sheet which tends to align the sheet leading edge with the nip. Means are provided for changing the motor drive direction to advance the sheet to the print position.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features and advantages of the present invention will become more apparent from the following detailed description of an exemplary embodiment thereof, as illustrated in the accompanying drawings, in which:

FIGS. 1-3 are simplified schematic diagrams illustrating the operation of the invention in the alignment of a sheet.

FIG. 4 is a simplified schematic diagram of a preferred embodiment of the invention.

FIG. 5 is a partially broken-away plan view illustrating the main drive roller, the pick-up roller and the clutch coupling the main roller drive to the pick-up roller.

FIGS. 6 and 7 are cross-sectional views of the pick-up roller clutch in the respective disen-

gaged and engaged positions.

FIG. 8 is a simplified flow diagram illustrative of the operation of the sheet feed alignment system in accordance with the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Overview of the Invention

The operation of a sheet feed alignment system in accordance with the invention is disclosed in the simplified schematic diagrams of FIGS. 1-3. The system 50 is employed to sequentially feed sheet stock of a print media such as paper from a supply tray 40 to a print position. The elements of the system 50 include a D-shaped roller 55, a main sheet advance roller 60, a pinch roller 65, and a platform surface 70 for directing the sheets from the tray 40 into the nip between the pinch roller 65 and the main sheet advance roller 60. The main sheet advance roller and the sheet pick roller are arranged so that the distance between the respective rollers is less than the length of the sheet.

A single motor (not shown in FIGS. 1-3) is used to drive the sheet advance roller 60 and the sheet pick D roller 55. A non-reversing clutch (not shown in FIGS. 1-3) is used to couple the main drive to the D roller 55 so that the clutch will transmit motion in the forward direction (counter-clockwise) only; it slips when the motor reverses.

The alignment sequence commences when a sheet is picked by the rubber D roller 55. The D roller 55 pushes the sheet 75 into the nip between the main sheet advance roller and the pinch roller 65, until the entire leading edge of the sheet 75 has passed the nip (FIG. 1). At this point the D roller is still in contact with the sheet 75. Then the motor is reversed. The D roller 55 does not move because the clutch will not transmit reverse motion. The advance roller 60 and pinch roller 65 push the leading edge of the sheet 75 back into the nip, while the D roller prevents the rear of the sheet 75 from moving. Thus, a buckle 80 is created between the nip and the D roller 55 (FIGS. 2-3). This buckle tends to align the leading edge of the sheet 75 against the nip. Then the sheet 75 is advanced to the print position for the printing operation.

The Preferred Embodiment

FIG. 4 shows a preferred embodiment of a sheet feed active alignment system 100 embodying the invention. The system comprises a pair of separated D-shaped sheet pickoff rollers 105, preferably having a sheet contacting surface coated with rubber or similar material having a high coefficient of friction. The rollers 105 are mounted for rotation about an axis 107 on a common shaft 160, and are driven by a main clutch drive gear 110, also mounted for rotation about axis 107.

The main sheet advance roller 115 also has a circumferential surface coated with a material such as rubber, and is mounted for rotation on shaft 117. The main advance roller 115 is elongated with its sheet contacting surface area having a length preferably equal to or greater than the width dimension of the sheets. A drive roller gear 120 is secured to the drive roller 115 and is mounted for rotation on shaft 117. The drive gear 115 is further meshed with the motor pinion gear 125 of drive motor 130.

The system 100 further comprises an idler gear 135 mounted for rotation on shaft 140, and situated so that it meshes with the drive roller gear 120 and the main clutch drive gear 110.

The motor 130 is preferably a stepper motor controlled by a system controller 210. Thus, the motor 130 drives the drive roller 115 in a counter-clockwise, sheet advancing direction to advance the sheet from the tray 95. Driven by the idler gear 135, the D rollers 105 are driven in the counter-clockwise, sheet advancing direction as well, picking the sheet from the tray 95. Reversing the direction of the motor 130 causes the main roller 115 to rotate in the clockwise direction, but the drive force is not imparted to the D rollers 105 as a result of the clutch action, described more fully below.

The system further comprises an optical sensor 145 and a paper sensor lever 150 pivoting on pivot point 147. The lever 150 trips the optical sensor 145 when the leading edge of the sheet deflects the lever 150, providing a signal to the controller 140 used in control of the system.

FIG. 5 illustrates in a broken-away plan view elements of the sheet feed alignment system of FIG. 4. The main sheet advance roller 115 is mounted on shaft 117. The D roller 105 is mounted on shaft 160. The drive gear 120 meshes with idler gear 135, which in turn meshes with the main clutch drive gear 110.

The D roller non-reversing clutch comprises the main drive half 170 and the main driven half 180, each mounted on shaft 160 and biased apart by the clutch release spring 175. The main driven half 180 is coupled to the spring clutch driven half 190 of the spring clutch by a square helical clutch spring 185, and by snaps 191 comprising the spring clutch driven half 190. The spring clutch driven half member 190 is keyed to the shaft 160, i.e, when the half member 190 rotates, the shaft 160 also rotates. The clutch drive half 170 and the main clutch drive gear 110 are free to rotate on shaft 160.

The clutch engagement lever 195 pivots on pivot axis 200. The pen carriage is mounted for

sliding movement in the conventional manner on a pair of slider rods (not shown) directly above the main drive roller. The pen carriage carries the pen or print head and is driven along the slider rods to print a line or swath of data. The printing mechanism prints a swath or line of data along a printing axis or direction, which is substantially parallel to the axis on which the main sheet advance roller 115 rotates. The print media is advanced by the main drive roller to position the media to print the next line or swath. Other types of print and media advancement techniques may alternatively be employed with this invention. The pen carriage 195 is moved to an extreme left marginal position prior to the commencement of the printing of a sheet, thereby engaging the respective facing gear teeth of the clutch drive half 170 and the clutch driven half 180. In the engaged position, the D roller will be driven in one rotational direction; the clutch will not transmit drive force in the other direction.

FIGS. 6 and 7 illustrates in schematic cross-sectional view the non-reversing clutch in both the engaged and non-engaged positions. The clutch comprises a sideplate 111, main drive gear 110, bushing 165 and the main clutch drive half 170.

The main clutch driven half 180 is connected to the spring clutch driven half 190 by snaps 191, holding these elements together in the axial direction, but allowing them to rotate relative to one another.

The clutch spring 185 is a square wire helical spring which is fitted over respective hubs 180A and 190A comprising the main clutch driven half 180 and the spring clutch driven half 190, with some frictional interference. When the main clutch driven half 180 rotates in one direction, friction between the spring 185 and the hubs 180A and 190A causes the spring to tighten on the hubs. This locks the hubs 180A and 190A together so they turn together.

When the main clutch driven half 180 rotates in the other direction, the spring 185 loosens (unwinds) on the hubs 180A and 190A so that they do not lock and the main clutch driven half 180 and the spring clutch driven half 190 can rotate relative to one another.

The non-reversing clutch operates in the following manner. The main clutch drive gear 110 is continuously in mesh with the gear train, so that the clutch drive half 170 moves when the motor 130 moves. The drive half 170 with gear 110 rotates freely about bushing 165. Shaft 160 rotates freely within bushing 165, which is fixedly mounted in sideplate 111.

When the clutch is in the non-engaged position (FIG. 6), the clutch drive half 170 and the clutch driven half 180 are not engaged, and therefore no drive force in either direction can be imparted to the D rollers. Thus, while a sheet is being printed, advancement of the sheet by rotation of the main drive roller 115 does not result in any movement of the D roller. While a sheet is being printed, the D roller is preferably in the position shown in FIG. 4, with the roller flat side adjacent and parallel to the tray 95 so that the surface of roller 105 is not in engagement with the sheet, and does not impede its movement while being driven forward during the print operation.

When a sheet is to be fed, the pen carriage 220 pushes on the lever 195 to engage the clutch (FIG. 7). The stepper motor 130 turns in the forward direction. The lever 195 pushes elements 180, 185 and 190 so that the facing gear teeth of element 180 meshes with the corresponding facing gear teeth of the main clutch drive half 170. The pickoff shaft 160 turns, because motion is in the forward direction and the hubs 180A and 190A elements 180 and 190 are locked together by clutch spring 185.

The stepper motor 130 reverses for the active alignment sequence. The pickoff shaft 160 no longer moves, because element 190 slips relative to element 180. The stepper motor 130 moves forward again. The pickoff shaft 160 turns again and is released by the pen carriage 220. Element 190 continues to turn as a result of a detent drive, the turning D roller has made one full rotation, ending so that the D roller periphery is not in engagement with the sheet in the tray and the roller 105 flat side is substantially parallel with the paper tray. The detent drive (not shown) includes a dog protruding from the side of the spring clutch driven half 190 facing the lever 195. A housing plate (not shown) extends between the element 190 and lever 195, with the tip of the lever 195 extending through a hole formed in the housing. The dog formed on the side of element 190 normally is received in another hole formed in the housing. When the clutch is engaged by the lever 195, the element 190 is pushed away from the housing, freeing the dog and engaging gear elements 180 and 170. Element 190 rotates, moving the dog away from the corresponding opening in the housing plate. When the lever 195 releases, the dog bears on the housing plate, keeping the gear elements 180 and 170 in engagement and the element 190 and D roller rotating when the motor is turning in the forward direction, until the dog rotates to and drops into its corresponding opening formed in the housing plate. At this point, the gear elements 180 and 170 are released from engagement, and the D roller is correctly positioned with its flat side facing the sheet in the paper tray.

In a preferred embodiment, the clutch drive half 170, gear 110 and spring clutch driven half 190 are fabricated from a polyphenylene oxide material.

The clutch driven half 180 is fabricated from a polycarbonate material. The hubs 180A and 190A have a nominal outer diameter dimension of 10.55 mm. The clutch spring comprises a stainless steel spring with left hand wind. The spring wire has a rectangular cross-section (0.635 by 0.38 mm) with a nominal 10.25 mm diameter.

The flow diagram of FIG. 8 illustrates the sequence of steps taken to feed the sheet to the print position, including the active alignment of the sheet leading edge. At step 250, the pen carriage is moved to engage the pickoff clutch lever 195. The stepper motor 130 is then driven forward until the leading edge of the sheet is sensed by sensor 145, or until the motor has stepped through some predetermined number of steps, e.g., 3000 steps. If the motor has stepped through this number of steps (step 256) then a sheet feed error is declared and the system waits for service (step 258).

Once the leading edge of the sheet is sensed at step 254, then the motor 130 is advanced a predetermined number of steps (e.g., 350) so that the edge is advanced past the nip between the drive and pinch rollers 115 and 132 by a known distance. The motor 130 is then reversed by a similar number of steps, the pickoff shaft 160 not rotating during this motor reversal, in order to create the buckle in the sheet (step 262). The motor is then advanced a predetermined number of steps to bring the sheet to the print position (step 264).

There are three main advantages of this invention over previous active alignment systems (1) it does not rely on gravity and therefore does not affect the orientation of the paper tray, (2) it does not require separate motors for the sheet pick and paper advance mechanisms, and (3) it does not require a clutch between the main paper advance mechanism and its motor which could have a significant adverse effect on swath advance accuracy.

It is understood that the above-described embodiment is merely illustrative of the possible specific embodiments which may represent principles of the present invention. Other arrangements may readily be devised in accordance with these principles by those skilled in the art without departing from the scope of the appended claims.

Claims

1. An active sheet alignment system for feeding and aligning a sheet relative to a print mechanism in a printer system having a sheet tray (40;95) for storing a stack of print media sheets (75), and a sheet feed path extending between the sheet tray (40,95) and the print mechanism, wherein
   a sheet pick roller (55,105) is mounted for axially rotational movement and for contacting a sheet (75) in the tray;
   a main sheet advance roller (60,115) disposed in a sheet feed path between the tray (40) and the print mechanism and arranged so that the distance between the sheet pick roller (55,105) and the main sheet advance roller (60,115) is less than the length of the sheet:
   at least one pinch roller (65,132) disposed adjacent said main roller (60,115), said main and pinch rollers being disposed to engagingly receive a sheet in the nip therebetween;
   drive means (130) for selectively driving said main roller (60,115) in a sheet advancing or in a sheet retracting direction;
   coupling means (170-195) for coupling said sheet pick roller (55,105) to said drive means (130) so that said sheet pick roller and said main roller (60,115) are driven in the sheet advancing direction to feed a sheet (75) from said tray (40,95) toward said printer mechanism, and when the main roller (60,115) is driven in the sheet retracting direction, the sheet pick roller (55,105) is not driven and remains stationary;
   and
   control means (210) for controlling said drive means (130) to feed sheets (75) to the print mechanism with the sheet leading edge in an aligned position, wherein
   said control means (210) are adapted to drive said sheet pick and main drive rollers in the sheet advancing direction so that the leading edge of the sheet is fed past the nip of the main and pinch rollers;
   means for reversing the drive means (130) are provided to drive the main roller (60,115) in the sheet retracting direction while the sheet pick roller (55,105) is stationary and does not move, thereby forming a buckle (80) in the sheet (75) which tends to align the sheet leading edge with the nip; and
   means for changing the drive direction of said drive means (130) are provided to advance the sheet to the print position.

2. The system of claim 1, **characterized** in that said coupling means (170-195) comprises a non-reversing clutch (170,180,190), comprising means for selectively transmitting only drive forces tending to rotate said sheet pick roller (105) in said sheet advancing direction.

3. The system of claim 2, **characterized** in that said clutch (170,180,190) is operable in an engaged configuration to selectively transmit said drive forces tending to rotate said sheet pick roller (105) in the sheet advancing direction, and in a nonengaged configuration

wherein said clutch does not transmit drive forces to said sheet pick roller in either direction.

4. The system of claim 2 or 3, **characterized** by engaging means (195) for placing said clutch in the engaged position for feeding and aligning a sheet (75).

5. The system of claim 4, **characterized** in that said engaging means comprises a clutch engagement lever (195) selectively actuated by said print mechanism to place the clutch (170,180,190) in the engaged configuration.

6. The system of claim 5, **characterized** in that said print mechanism is positioned to an extreme marginal position to actuate said clutch engagement lever (195).

7. The system of one of claims 2 to 6, **characterized** in that said sheet pick roller (105) is mounted on a first shaft (160) for rotational movement, and said clutch comprises a spring clutch driven half member (190) having a first hub (190A) fixedly secured on said first shaft (160), a spring clutch drive half member (170) mounted on said first shaft (160) and having a second hub rotatable with respect to said first shaft, and a helical spring (185) having a first end disposed over said first hub (190A) and a second end disposed over said second hub (180A) with some frictional interference, whereby when said drive half member (170) is rotated in a first direction, said spring (185) tightens on said respective hubs to cause said driven half member (190) to be rotated, and when said drive half member rotates in the opposite direction, said spring loosens on said hubs so that no rotational force is imparted to said driven half member.

8. The system of one of the preceding claims, **characterized** in that said sheet pick roller (105) is a D-shaped roller having a flat side.

9. The system of one of the preceding claims, **characterized** in that said sheet advance roller (115) comprises an elongated roller arranged to rotate on an axis which is substantially parallel to the direction of printing by the printer mechanism.

10. The system of one of the preceding claims, **characterized** in that the drive means is a reversible motor (130).

11. A method for actively aligning the leading edge of picked sheets with a printer mechanism, in which a sheet tray (95) for holding a plurality of print media sheets (75), a sheet pick roller (55,105) for picking sheets from the tray, a main sheet advance roller (60,115) and an idler roller are disposed adjacent the main sheet advance roller, with the nip between the main and idler roller (65,132) being disposed less than the length of a sheet from the sheet pick roller, comprising the steps of:
rotating the sheet pick roller (55,105) and main advance roller (60,115) in an advancing direction so as to pick a sheet (75) from the sheet tray (40,95) and advance it through the sheet feed path until the leading edge has been advanced past the nip between the main advance roller (60,115) and the idler roller (65,132);
reversing the main drive roller (60,115) to rotate in the sheet retracting direction with the sheet pick roller (55,105) stationary to withdraw the leading edge of the sheet (75) while the trailing portion of the sheet is held fixed by the stationary pick roller, thereby forming a buckle (80) in the sheet which tends to align the sheet leading edge with the nip; and rotating the main roller (60,115) and the sheet pick roller (55,105) in the advancing direction to advance the sheet (75) to the print position.

12. The method of claim 11, wherein said sheet pick roller comprises a generally D-shaped roller having a flat side normally disposed substantially parallel to the sheets held in the tray, and wherein said steps of rotating the sheet pick roller in the advancing direction results in the sheet pick roller being rotated through substantially one complete revolution.

Patentansprüche

1. Aktives Blattausrichtesystem zum Speisen und Ausrichten eines Blattes relativ zu einem Druckmechanismus in einem Drucksystem mit einem Blattablett (40; 95) zum Speichern eines Stapels von Druckmediumblättern (75) und einer Blattspeisebahn, die sich zwischen dem Blattablett (40, 95) und dem Druckmechanismus erstreckt, wobei
eine Blattmitnahmerolle (55, 105) zur axialen Drehbewegung und zum Kontaktieren eines Blattes (75) auf dem Tablett angeordnet ist;
eine Hauptvorschubrolle (60, 115) in der Blattspeisebahn zwischen dem Tablett (40) und dem Druckmechanismus so angeordnet ist, daß der Abstand zwischen der Blattmitnahmerolle (55, 105) und der Blattvorschubrolle (60,

115) kleiner als die Länge des Blattes ist;
mindestens eine Klemmrolle (65, 132) benachbart der Hauptvorschubrolle (60, 115) vorgesehen ist, wobei diese und die Klemmrolle so angeordnet sind, daß sie ein Blatt in dem zwischen ihnen gebildeten Klemmspalt aufnehmen und einziehen;
Antriebsmittel (130) zum wahlweisen Antreiben der Hauptrolle (60, 115) in Blattvorschubrichtung oder in Blattrückzugsrichtung vorgesehen sind;
Kupplungsmittel (170 - 195) zum Kuppeln der Blattmitnahmerolle (55, 105) mit den Antriebsmitteln (130) so angeordnet sind, daß die Blattmitnahmerolle und die Hauptvorschubrolle (60, 115) in Blattvorschubrichtung zum Zuführen eines Blattes (75) vom Tablett (40, 95) zum Druckmechanismus angetrieben werden und bei Antrieb der Hauptrolle (60, 115) in Blattrückzugsrichtung die Blattmitnahmerolle (55, 105) nicht angetrieben wird, sondern in Ruhe bleibt; und
Steuermittel (210) die Antriebsmittel (130) so steuern, daß Blätter (75) zum Druckmechanismus mit der auflaufenden Blattkante in ausgerichteter Postition gefördert werden, wobei

- die Steuermittel (210) die Blattmitnahmerolle und die Hauptvorschubrolle in Blattvorschubrichtung so steuert, daß die auflaufende Blattkante durch den Klemmspalt zwischen Hauptrolle und Klemmrolle transportiert wird;
- Mittel zum Reversieren der Antriebsvorrichtung (130) vorgesehen sind, um die Hauptvorschubrolle (60, 115) in der Blattrückzugsrichtung anzutreiben, während die Blattmitnahmerolle (55, 105) in Ruhe bleibt, wodurch eine Auswölbung (80) im Blatt (75) gebildet wird, welche dazu tendiert, die auflaufende Blattkante auf den Klemmspalt auszurichten; und
- Mittel zum Ändern der Antriebsrichtung der Antriebsmittel (130) vorgesehen sind, um das Blatt in die Druckposition zu befördern.

2. System nach Anspruch 1, **dadurch gekennzeichnet,** daß die Kupplungsmittel (170 - 195) eine einsinnige Kupplung (170, 180, 190) mit Mitteln zum wahlweisen Übertragen von Antriebskräften zum Drehen der Blattmitnahmerolle (105) nur in der Blattvorschubrichtung umfaßt.

3. System nach Anspruch 2, **dadurch gekennzeichnet,** daß die Kupplung (170, 180, 190) in Einrückstellung betätigbar ist, um wahlweise die Antriebskräfte zum Drehen der Blattmitnahmerolle (105) in Blattvorschubrichtung zu übertragen, und in ausgerückte Stellung, bei welcher die Kupplung keine Antriebskräfte auf die Blattmitnahmerolle in irgendeiner Richtung überträgt.

4. System nach Anspruch 2 oder 3, **gekennzeichnet durch** Betätigungsmittel (195) zum Bringen der Kupplung in die Einrückstellung, um ein Blatt (75) zu speisen und auszurichten.

5. System nach Anspruch 4, **dadurch gekennzeichnet,** daß die Betätigungsmittel einen Kupplungseinrückhebel (195) aufweisen, der wahlweise mittels des Druckmechanismus betätigbar ist, um die Kupplung (170, 180, 190) in Einrückstellung zu bringen.

6. System nach Anspruch 5, **dadurch gekennzeichnet,** daß der Druckmechanismus in eine äußerste Randposition zum Betätigen des Kupplungs-Einrückhebels (195) positioniert ist.

7. System nach einem der Ansprüche 2 bis 6, **dadurch gekennzeichnet,** daß die Blattmitnahmerolle (105) auf einer ersten Welle (160) drehbar angebracht ist und daß die Kupplung eine federbeaufschlagte Kupplungshälfte (190) mit einer ersten Nabe (190 A) aufweist, die fest auf der ersten Welle (160) sitzt, eine federbelastete Kupplungshälfte (170), die auf der ersten Welle (160) sitzt und eine zweite, bezüglich der ersten Welle drehbare Nabe aufweist, sowie eine Schraubenfeder (185), deren erstes Ende die erste Nabe (190 A) übergreift und deren zweites Ende die zweite Nabe (180 A) mit Reibung umgreift, wobei bei Drehung der ersten Kupplungshälfte (170) in eine erste Richtung die Feder (185) auf den entsprechenden Naben sich festzieht, um die getriebene Kupplungshälfte (190) in Drehung zu versetzen, während bei einer Drehung der antriebsseitigen Kupplungshälfte in entgegengesetzer Richtung die Feder sich auf den Naben lockert, so daß keine Umfangskraft auf die angetriebene Kupplungshälfte übertragen wird.

8. System nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet,** daß die Blattmitnahmerolle (105) eine D-förmige Rolle mit einer ebenen Seite ist.

9. System nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet,** daß die Blattmitnahmerolle (115) eine langgestreckte Rolle umfaßt, die um eine Achse drehen kann, welche im wesentlichen parallel zur Druckrichtung mittels des Druckmechanismus ist.

10. System nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet,** daß die Antriebsvorrichtung ein reversierbarer Motor (130) ist.

11. Verfahren zum aktiven Ausrichten der auflaufenden Kante von mit einem Druckermechanismus aufgenommenen Blättern, bei dem ein Blattablett (95) zum Halten mehrerer Druckmedium-Blätter (75), eine Blattmitnahmerolle (55, 105) zum Aufnehmen von Blättern von dem Tablett, eine Hauptvorschubrolle (60, 115) und eine leerlaufende Mitlaufrolle benachbart der Hauptvorschubrolle angeordnet sind, wobei der Klemmspalt zwischen der Hauptvorschubrolle und der Mitlaufrolle (65, 132) kleiner als die Länge eines von der Blattmitnahmerolle aufgenommenen Blattes ist, umfassend die Schritte:
Drehen der Blattmitnahmerolle (55, 105) sowie der Hauptvorschubrolle (60, 115) in Vorschubrichtung, um ein Blatt (75) von dem Blattablett (40, 95) aufzunehmen und dieses entlang der Blattspeisebahn vorzuschieben, bis die auflaufende Kante an dem Klemmspalt zwischen der Hauptvorschubrolle (60, 115) und der Mitlaufrolle (65, 132) vorgeschoben ist;
Reversieren der Hauptantriebsrolle (60,115) zu deren Drehen in die Blattrückzugsrichtung, wobei die Blattmitnahmerolle (55, 105) in Ruhe bleibt, um das auflaufende Ende des Blattes (75) zurückzuziehen, während das ablaufende Ende des Blattes durch die stationäre Blattmitnahmerolle fixiert gehalten wird, um eine Auswölbung (80) des Blattes zu formen, was die auflaufende Blattkante auf den Spalt ausrichtet; und
Drehen der Hauptvorschubrolle (60, 115) und der Blattmitnahmerolle (55, 105) in Vorschubrichtung zum Vorschieben des Blattes (75) in die Druckposition.

12. Verfahren nach Anspruch 11, bei dem die Blattmitnahmerolle eine im wesentlichen D-förmige Rolle mit einer ebenen Seite, die normalerweise im wesentlichen parallel zu den auf dem Tablett gehaltenen Blättern liegt, und bei dem der Schritt des Drehens der Blattmitnahmerolle in Vorschubrichtung eine im wesentlichen vollständige Umdrehung der Blattmitnahmerolle ergibt.

Revendications

1. Système d'alignement actif de feuille pour approvisionner et aligner une feuille relativement à un mécanisme d'impression dans un système d'imprimante ayant un plateau de feuille (40, 95) pour stocker une pile de feuilles de support d'impression (75), et un chemin d'approvisionnement de feuille s'étendant entre le plateau de feuille (40, 95) et le mécanisme d'impression, dans lequel sont inclus

un rouleau d'extraction de feuille (55, 105) monté en rotation autour d'un axe et afin d'être en contact avec une feuille (75) dans le plateau;

un rouleau principal d'avance de feuille (60, 115) disposé dans un chemin d'approvisionnement de feuille entre le plateau (40) et le mécanisme d'impression et qui est prévu de façon à ce que la distance entre le rouleau d'extraction de feuille (55, 105) et le rouleau principal d'avance de feuille (60, 115) soit inférieure à la longueur de la feuille;

au moins un rouleau de pincement (65, 132) disposé de façon adjacente audit rouleau principal (60, 115), lesdits rouleaux principal et de pincement étant disposés pour recevoir en engagement un feuille dans la ligne de contact entre eux;

des moyens d'entraînement (130) pour entraîner de façon sélective ledit rouleau principal (60, 115) dans un sens d'avance de feuille ou dans un sens de retrait de feuille;

des moyens de couplage (170 à 195) pour coupler ledit rouleau d'extraction de feuille (55, 105) auxdits moyens d'entraînement (130) de telle façon que ledit rouleau d'extraction de feuille et ledit rouleau principal (60, 115) soient entraînés dans le sens d'avance de feuille afin d'approvisionner une feuille (75) dudit plateau (40,95) vers ledit mécanisme d'imprimante, et que lorsque le rouleau principal (60,115) est entraîné dans le sens de retrait de feuille, le rouleau d'extraction de feuille (55, 105) ne soit pas entraîné et reste stationnaire; et

des moyens de commande (210) pour commander lesdits moyens d'entraînement (130) afin d'approvisionner des feuilles (75) vers le mécanisme d'impression avec la bord avant de la feuille dans une position alignée, dans lesquels

lesdits moyens de commande (210) sont adaptés pour entraîner lesdits rouleaux d'extraction de feuille et d'entraînement principal dans le sens d'avance de feuille de telle façon que le bord avant de la feuille est avancé jusqu'au-delà de la ligne de contact des rouleaux principal et de pincement;

des moyens pour inverser les moyens d'entraînement (130) sont fournis afin d'entraîner le rouleau principal (60, 115) dans le sens de retrait de feuille tandis que le rouleau d'extraction de feuille (55, 105) est stationnaire et ne se déplace pas, grâce à quoi il est formé dans la feuille (75) une boucle (80) qui tend à

aligner le bord avant de la feuille avec la ligne de contact; et

des moyens pour modifier la sens d'entraînement desdits moyens d'entraînement (130) sont fournis afin de faire avancer la feuille jusqu'à la position d'impression.

2. Système selon la revendication 1, caractérisé en ce que lesdits moyens de couplage (170 à 195) comprennent un embrayage non-inverseur (170, 180, 190), comprenant des moyens pour transmettre de façon sélective uniquement des forces d'entraînement tendant à faire tourner ledit rouleau d'extraction de feuille (105) dans ledit sens d'avance de feuille.

3. Système selon la revendication 2, caractérisé en ce que ledit embrayage (170, 180, 190) est actionnable dans une configuration engagée afin de transmettre de façon sélective lesdites forces d'entraînement tendant à faire tourner ledit rouleau d'extraction de feuille (105) dans le sens d'avance de feuille, et dans une configuration désengagée dans laquelle ledit l'embrayage ne transmet aucune force d'entraînement audit rouleau d'extraction de feuille dans l'un ou l'autre sens.

4. Système selon la revendication 2 ou 3, caractérisé par des moyens d'engagement (195) pour placer ledit embrayage dans ladite position engagée, afin d'approvisionner et d'aligner une feuille (75).

5. Système selon la revendication 4, caractérisé en ce que lesdits moyens d'engagement comprennent un levier d'engagement d'embrayage (195) actionné de façon sélective par ledit mécanisme d'impression afin de placer l'embrayage (170, 180, 190) dans la configuration engagée.

6. Système selon la revendication 5, caractérisé en ce que ledit mécanisme d'impression est positionné à une position marginale extrême afin d'actionner ledit levier d'engagement d'embrayage (195).

7. Système selon l'une quelconque des revendications 2 à 6, caractérisé en ce que ledit rouleau d'extraction de feuille (105) est monté en rotation sur un premier arbre (160) et ledit embrayage comprend un demi-élément entraîné d'embrayage à ressort (190) ayant un premier moyeu (190A) assemblé de manière fixe audit premier arbre (160), un demi-élément d'entraînement d'embrayage à ressort (170) monté sur ledit premier arbre (160) et ayant un second moyeu qui peut tourner par rapport audit premier arbre, et un ressort hélicoïdal (185) ayant une première extrémité disposée sur ledit premier moyeu (190A) et une seconde extrémité disposée sur ledit second moyeu (180A) avec une certaine interférence de friction, de sorte que lorsque ledit demi-élément d'entraînement (170) est actionné en rotation dans un premier sens, ledit ressort (185) serre lesdits moyeux respectifs afin d'amener ledit demi-élément entraîné (190) à tourner, et lorsque ledit demi-élément d'entraînement tourne dans le sens opposé, ledit ressort relâche lesdits moyeux si bien qu'aucune force rotation n'est communiquée audit demi-élément entraîné.

8. Système selon l'une quelconque des revendications précédentes, caractérisé en ce que ledit rouleau d'extraction de feuille (105) est un rouleau en forme de D ayant un côté plat.

9. Système selon l'une quelconque des revendications précédentes, caractérisé en ce que le rouleau d'avance de feuille (115) comprend un rouleau allongé qui est disposé afin de tourner autour d'un axe qui est sensiblement parallèle à la direction de l'impression effectuée par le mécanisme d'imprimante.

10. Système selon l'une quelconque des revendications précédentes, caractérisé en ce que les moyens d'entraînement consistent en un moteur réversible (130).

11. Procédé pour aligner activement avec un mécanisme d'imprimante le bord avant de feuilles extraites, dans lequel un plateau de feuille (95) pour contenir une pluralité de feuilles de support d'impression (75), un rouleau d'extraction de feuille (55, 105) pour extraire des feuilles du plateau, un rouleau principal d'avance de feuille (60, 115) et un rouleau intermédiaire sont disposés de façon adjacente au rouleau principal d'avance de feuille, la ligne de contact entre les rouleaux principal et intermédiaire (65, 132) étant disposée à une distance inférieure à la longueur d'une feuille provenant du rouleau d'extraction de feuille, comprenant les étapes consistant à:

faire tourner le rouleau d'extraction de feuille (55, 105) et le rouleau principal d'avance (60, 115) dans un sens d'avance de façon à extraire une feuille (75) du plateau de feuille (40, 95) et à la faire avancer à travers le chemin d'approvisionnement de feuille jusqu'à ce que le bord avant soit avancé au-delà de la ligne de contact entre le rouleau principal

d'avance (60, 115) et le rouleau intermédiaire (65, 132);

inverser la rotation du rouleau principal d'entraînement (60, 115) afin de le faire tourner dans le sens de retrait de feuille, le rouleau d'extraction de feuille (55, 105) étant stationnaire afin de retirer le bord avant de la feuille (75) tandis que la partie arrière de la feuille est maintenue fixe par le rouleau d'extraction stationnaire, grâce à quoi il est formé dans la feuille une boucle (80) qui tend à aligner le bord avant de la feuille avec la ligne de contact; et

faire tourner le rouleau principal (60, 115) et le rouleau d'extraction de feuille (55, 105) dans le sens d'avance afin de faire avancer la feuille (75) jusqu'à la position d'impression.

12. Procédé selon la revendication 11, dans lequel ledit rouleau d'extraction de feuille comprend un rouleau globalement en forme de D ayant un côté plat qui est normalement disposé sensiblement en parallèle avec les feuilles contenues dans le plateau, et dans lequel lesdites étapes consistant à faire tourner le rouleau d'extraction de feuille dans le sens d'avance ont pour effet d'entraîner en rotation le rouleau d'extraction de feuille sur sensiblement un tour complet.

FIG. 1

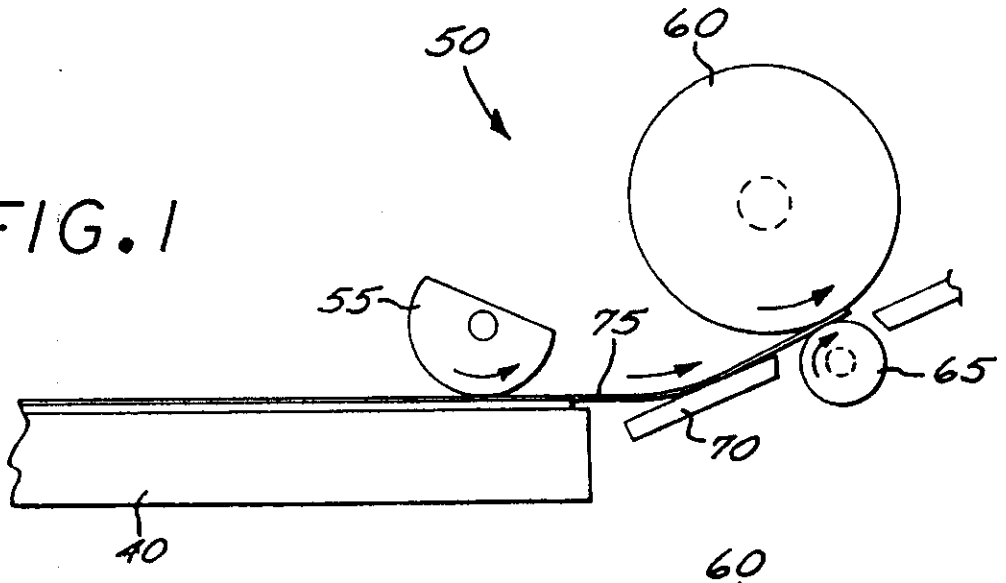


FIG. 2

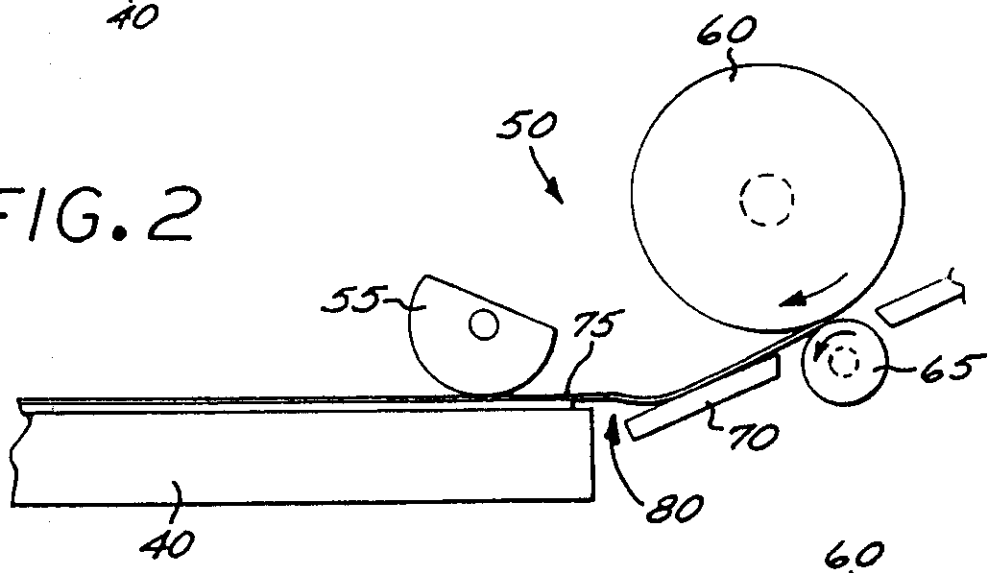


FIG. 3

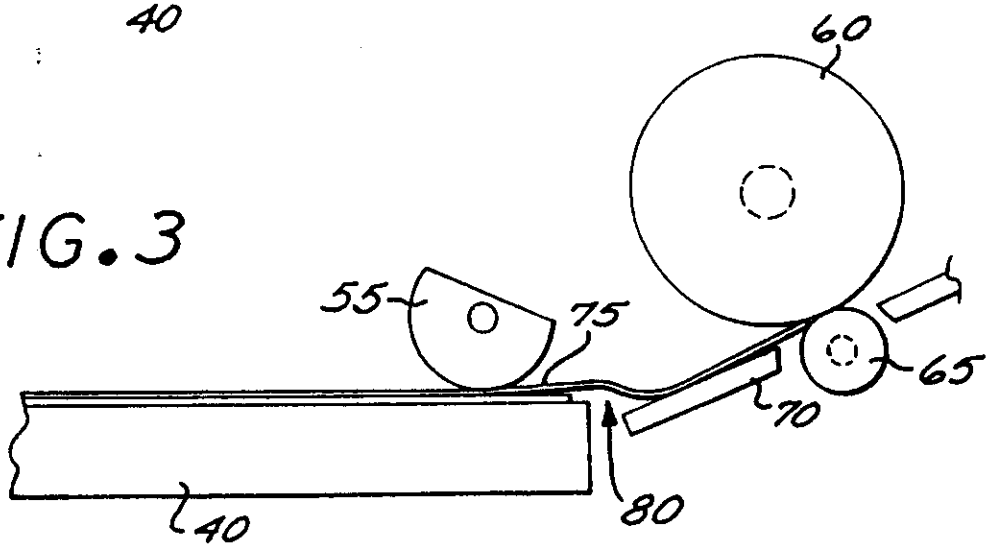


FIG. 4

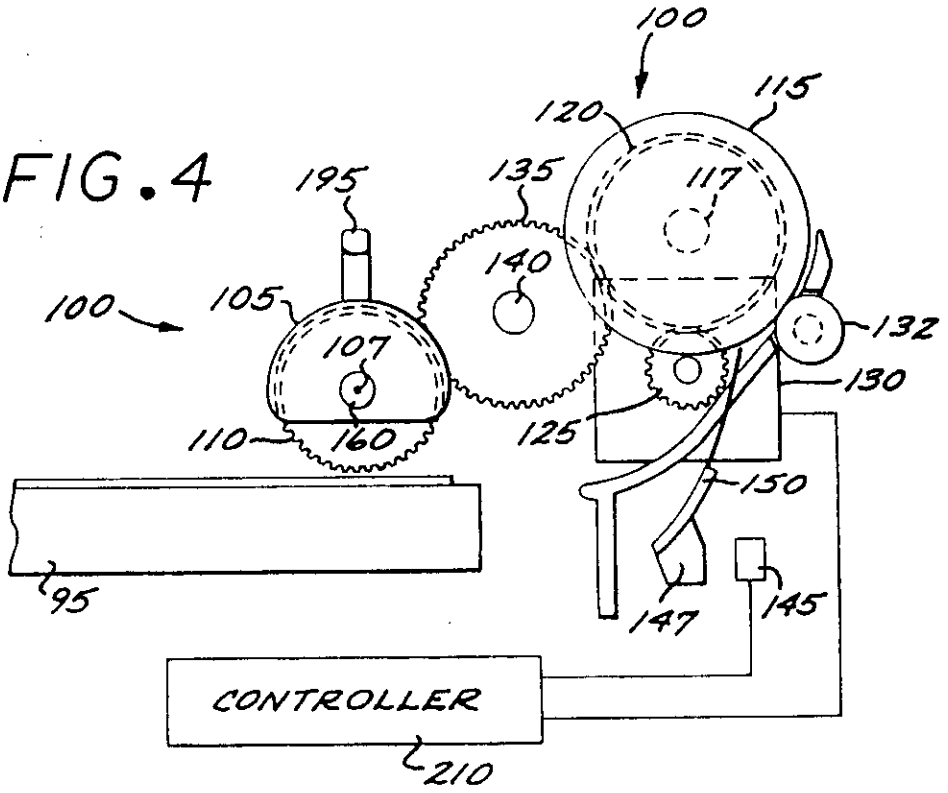

100
115
120
117
195
135
140
100
105
107
132
130
110
160
125
150
95
147
145
CONTROLLER
210

FIG. 5

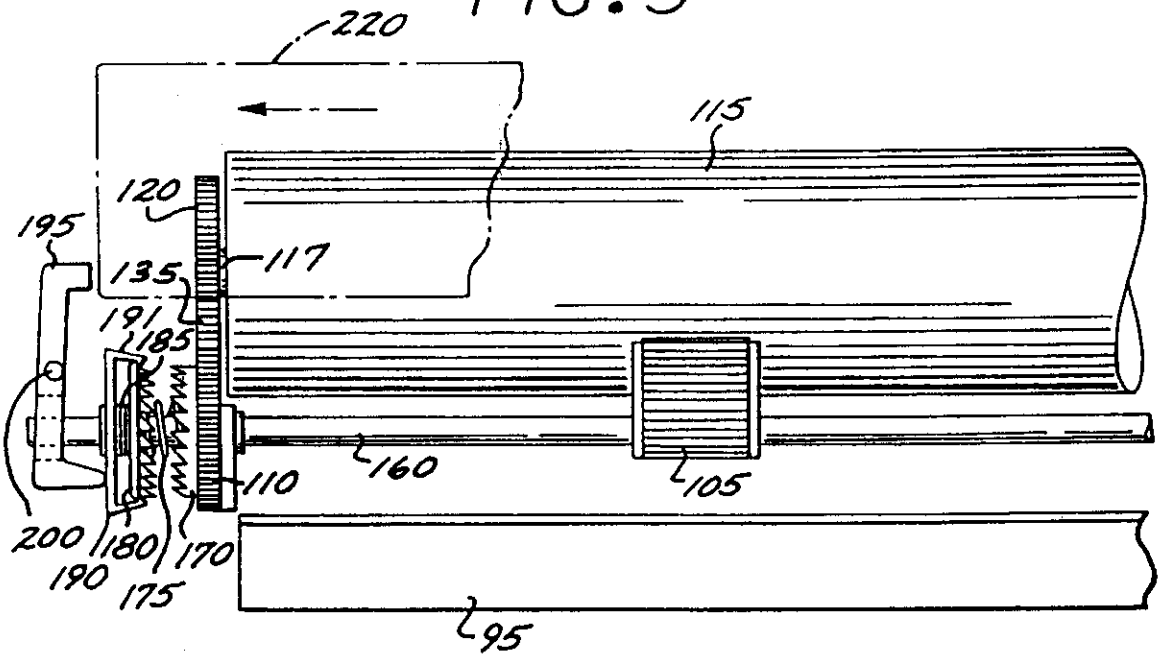

220
115
120
195
117
135
191
185
160
105
110
200
180
170
190
175
95

FIG.6

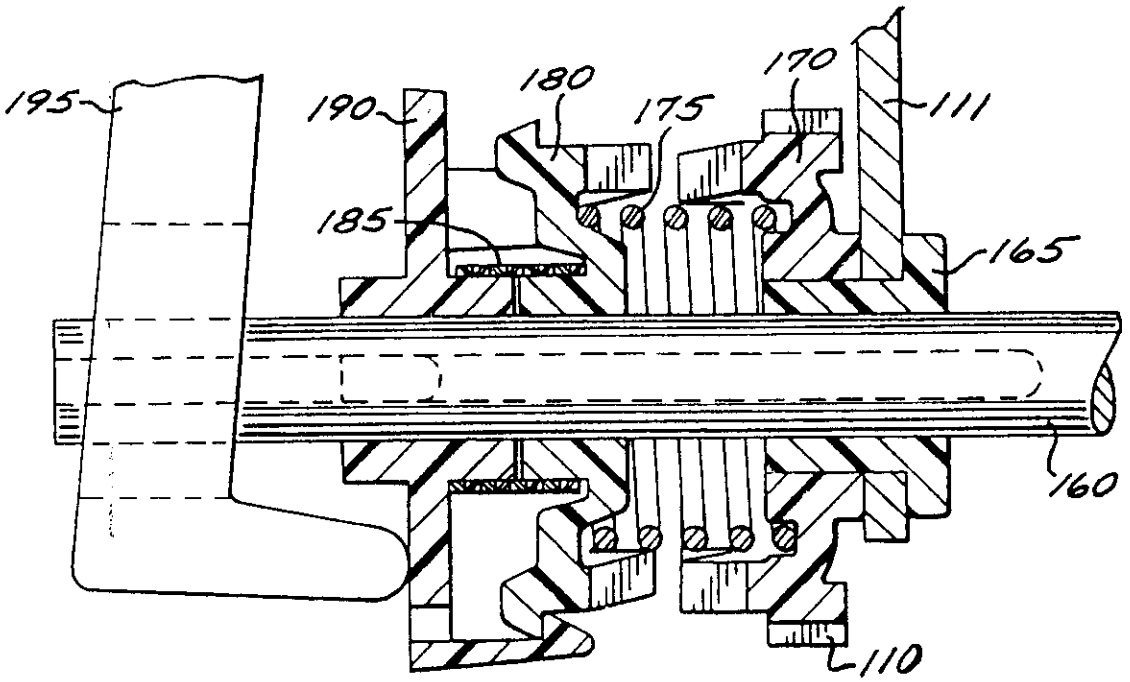
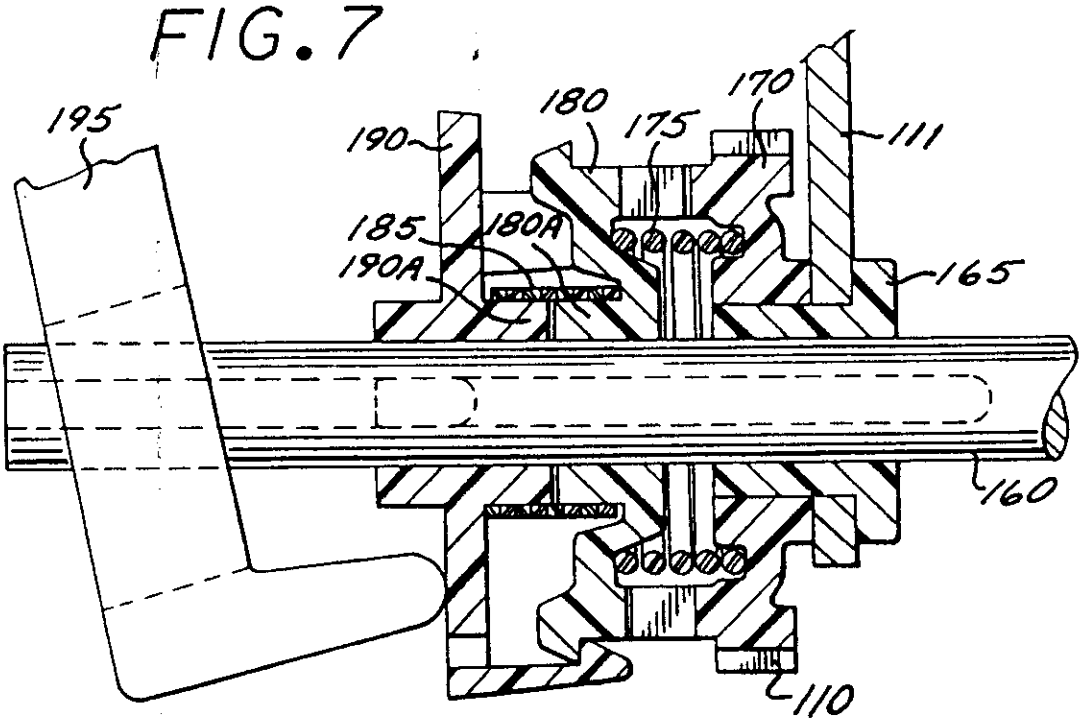

195
190
180
175
170
111
185
165
160
110

FIG.7


195
190
180
175
170
111
185
180A
190A
165
160
110

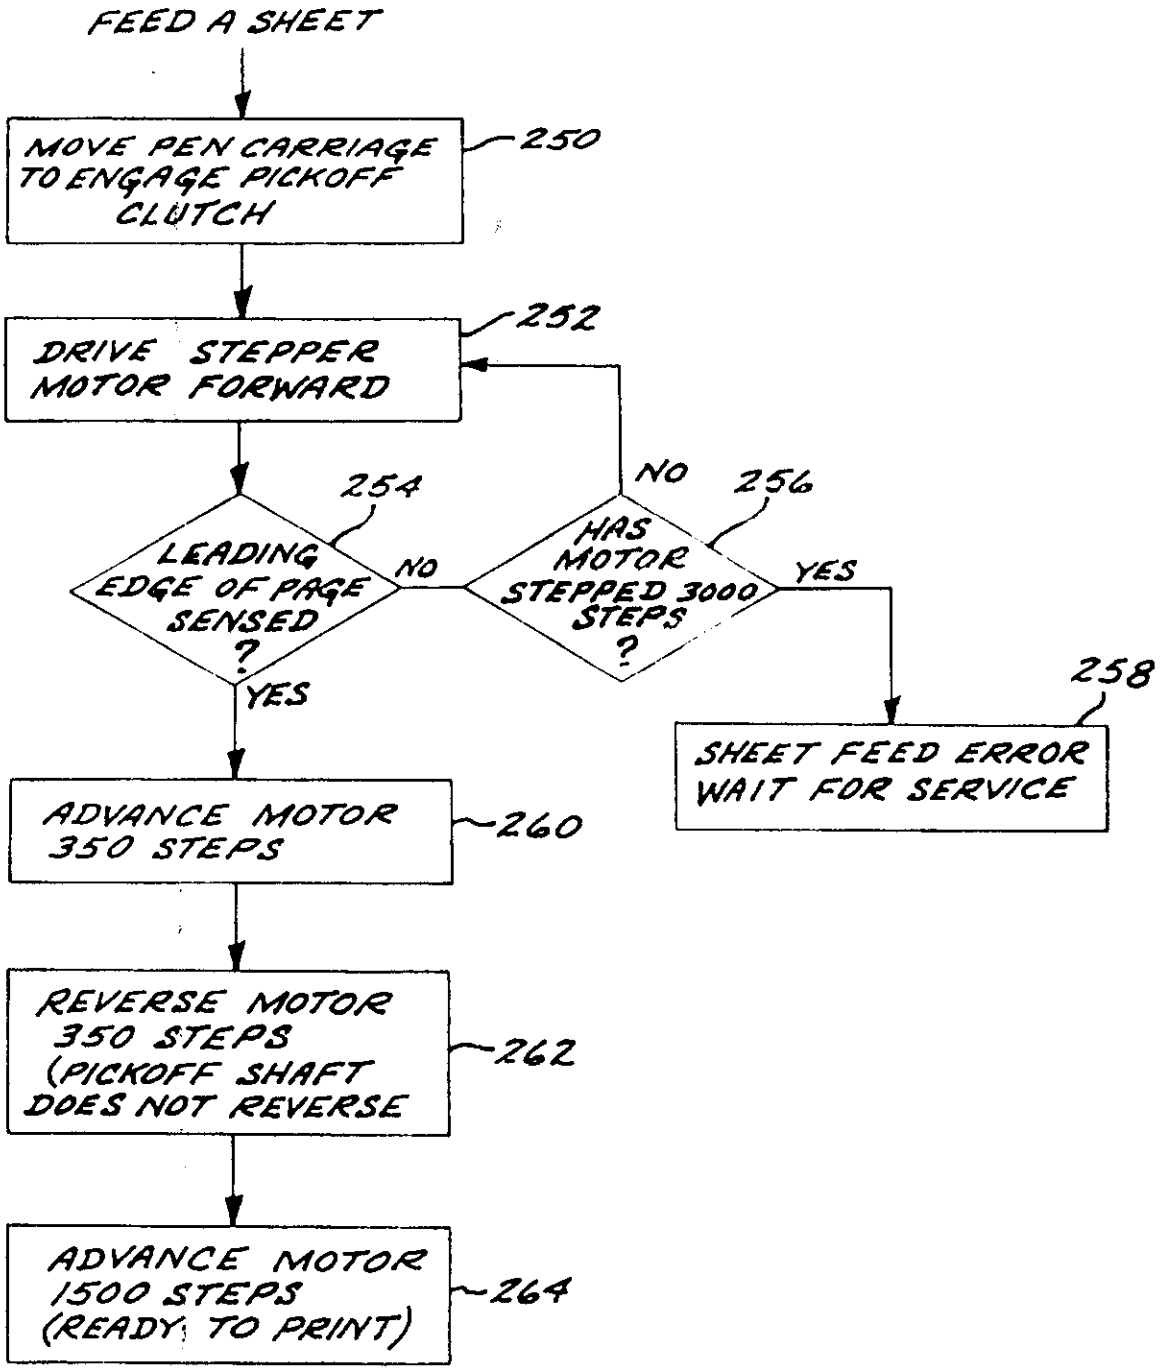

FEED A SHEET
MOVE PEN CARRIAGE TO ENGAGE PICKOFF CLUTCH
250
DRIVE STEPPER MOTOR FORWARD
252
254
LEADING EDGE OF PAGE SENSED ?
NO
YES
256
HAS MOTOR STEPPED 3000 STEPS ?
NO
YES
258
SHEET FEED ERROR WAIT FOR SERVICE
ADVANCE MOTOR 350 STEPS
260
REVERSE MOTOR 350 STEPS (PICKOFF SHAFT DOES NOT REVERSE
262
ADVANCE MOTOR 1500 STEPS (READY TO PRINT)
264

FIG. 8

REGISTER ENTRY FOR EP0418515

European Application No EP90114396.6 filing date 26.07.1990

Priority claimed:
21.09.1989 in United States of America - doc: 410395

Designated States DE FR GB IT

Title AUTOMATIC SHEET FEED ACTIVE ALIGNMENT SYSTEM.

Applicant/Proprietor
HEWLETT-PACKARD COMPANY, Mail Stop 20 B-O, 3000 Hanover Street, Palo Alto, California 94304, United States of America [ADP No. 50014570001]

Inventors
JOHN A. UNDERWOOD, 1352 Timber Glen, Escondido, CA 92027, United States of America [ADP No. 58391715001]

ANTHONY W. EBERSOLE, 13222 Standish Drive, Poway, CA 92064, United States of America [ADP No. 58391723001]

TODD R. MEDIN, 2875 Geise Ct., Escondido, CA 92027, United States of America [ADP No. 58391731001]

Classified to
B41J

Address for Service
HEWLETT PACKARD LIMITED, Building 2, Filton Road, Stoke Gifford, BRISTOL, BS12 6QZ, United Kingdom [ADP No. 00001933005]

EPO Representative
DR. ROLAND LIESEGANG, FORRESTER & BOEHMERT Widenmayerstrasse 4, W-8000 München 22, Federal Republic of Germany [ADP No. 50647569001]

Publication No EP0418515 dated 27.03.1991
Publication in English

Examination requested 15.04.1991

Patent Granted with effect from 21.09.1994 (Section 25(1)) with title
AUTOMATIC SHEET FEED ACTIVE ALIGNMENT SYSTEM.

01.05.1992 Notification from EPO of change of EPO Representative details from
DR. ROLAND LIESEGANG, FORRESTER & BOEHMERT Widenmayerstrasse 4, W-8000 München 22, Federal Republic of Germany [ADP No. 50647569001]
to
DR.-ING. ROLAND LIESEGANG, FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38, W-8000 München 40, Federal Republic of Germany [ADP No. 50272772001]
Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

16.08.1994 HEWLETT PACKARD LIMITED, Building 2, Filton Road, Stoke Gifford, BRISTOL, BS12 6QZ, United Kingdom [ADP No. 00001933005]
registered as address for service
Entry Type 8.11 Staff ID. KE1 Auth ID. AO

19.08.1994 Notification from EPO of change of EPO Representative details from
DR.-ING. ROLAND LIESEGANG, FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38, W-8000 München 40, Federal Republic of
Germany [ADP No. 50272772001]
to
DR.-ING. ROLAND LIESEGANG, FORRESTER & BOEHMERT
Franz-Joseph-Strasse 38, D-80801 München, Federal Republic of
Germany [ADP No. 50272772001]
Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

**** END OF REGISTER ENTRY ****

RENEWAL DETAILS

PUBLICATION NUMBER EP0418515

PROPRIETOR(S)

Hewlett-Packard Company, Mail Stop 20 B-O, 3000 Hanover Street, Palo Alto, California 94304, United States of America

DATE FILED 26.07.1990

DATE GRANTED 21.09.1994

DATE NEXT RENEWAL DUE 26.07.1995

DATE NOT IN FORCE

DATE OF LAST RENEWAL

YEAR OF LAST RENEWAL 00

STATUS PATENT IN FORCE