



US005813946A

United States Patent [19]

[11] Patent Number: **5,813,946**

Lin et al.

[45] Date of Patent: **Sep. 29, 1998**

[54] **INFLATABLE JUMPING TOY AND METHOD**

[75] Inventors: **Hua Hsiang Lin**, Kowloon; **Yaw-Yuan Hsu**; **Yu-Fu Hsiao**, both of Fuzhou, all of Hong Kong; **Richard A. Saputo**, Long Beach, Calif.

[73] Assignee: **Intex Recreation Corp.**, Long Beach, Calif.

[21] Appl. No.: **674,620**

[22] Filed: **Jul. 3, 1996**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 45,210, Oct. 12, 1995, abandoned.

[51] Int. Cl.⁶ **A63B 5/11**

[52] U.S. Cl. **482/27; 482/77; 47/135**

[58] Field of Search 482/77, 27, 135; 472/126; 446/220, 221; 5/449, 455, 99.1, 98.1; 52/2.11, 2.22; 441/40, 41

[56] References Cited

U.S. PATENT DOCUMENTS


| | | | | |
|-----------|---------|-------------------|-------|---------|
| 1,738,411 | 12/1929 | Welch | | 482/132 |
| 4,815,153 | 3/1989 | Bleser et al. | | 5/98 R |
| 4,817,935 | 4/1989 | Varga | | 472/126 |
| 4,935,970 | 6/1990 | Aristone | | 472/126 |
| 5,575,738 | 11/1996 | Millington et al. | | 482/27 |



Primary Examiner—Jerome Donnelly
Attorney, Agent, or Firm—Lewis, D'Amato, Brisbois & Bisgaard

[57] ABSTRACT

An inflatable jumping toy typically employed in a play area by children performing jumping exercises is disclosed. The inflatable jumping toy comprises a construction incorporating a large torodial-shaped tube utilized as a base element and a vertical retainer wall mounted upon the top of the torodial-shaped tube. The retainer wall functions to absorb the lateral impact of a child against the jumping toy and to prevent a child from falling out of or being accidentally ejected from the jumping toy. A multi-layer bouncing mattress which is surrounded by and in communication with the torodial-shaped tube serves as a cushioned floor to absorb the vertical impact of the children during the jumping exercises. In a preferred embodiment, the multi-layer bouncing mattress includes an upper floor layer having an I-beam construction for providing maximum impact absorption of the vertical forces associated with jumping. Beneath the upper I-beam layer is a lower floor layer comprising a single X-beam spiral construction which enjoys strong welded seals about one continuous spiral air chamber which promotes the passage of inflation air therethrough. As an alternative, a parallel X-beam constructed layer can be used as the lower floor layer. Either lower floor layer provides a robust, wear-resistant surface for indoor or outdoor use.

19 Claims, 12 Drawing Sheets

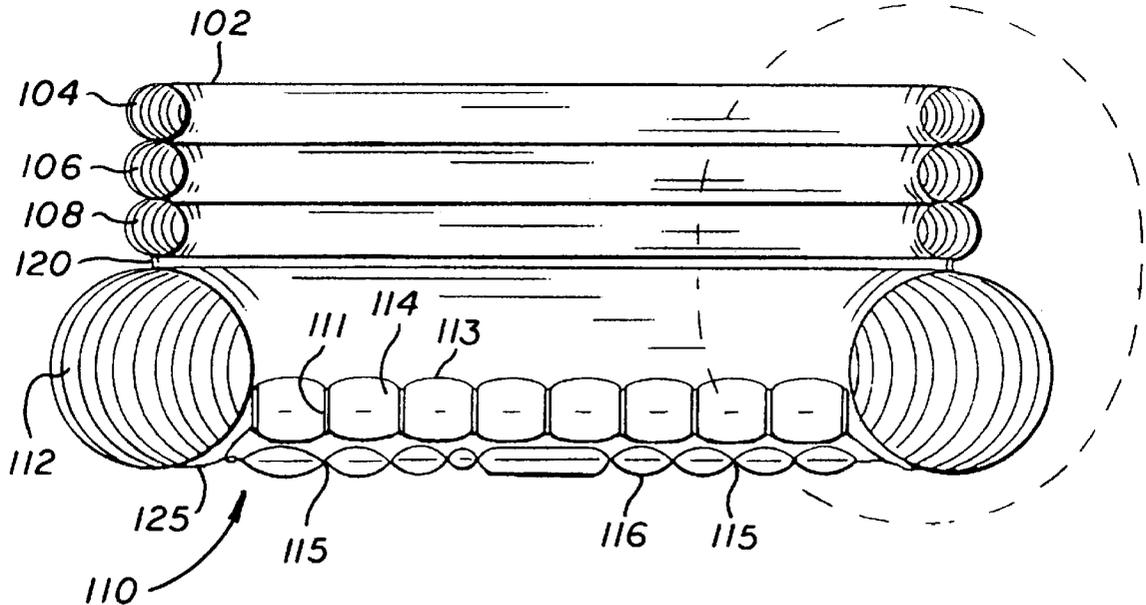

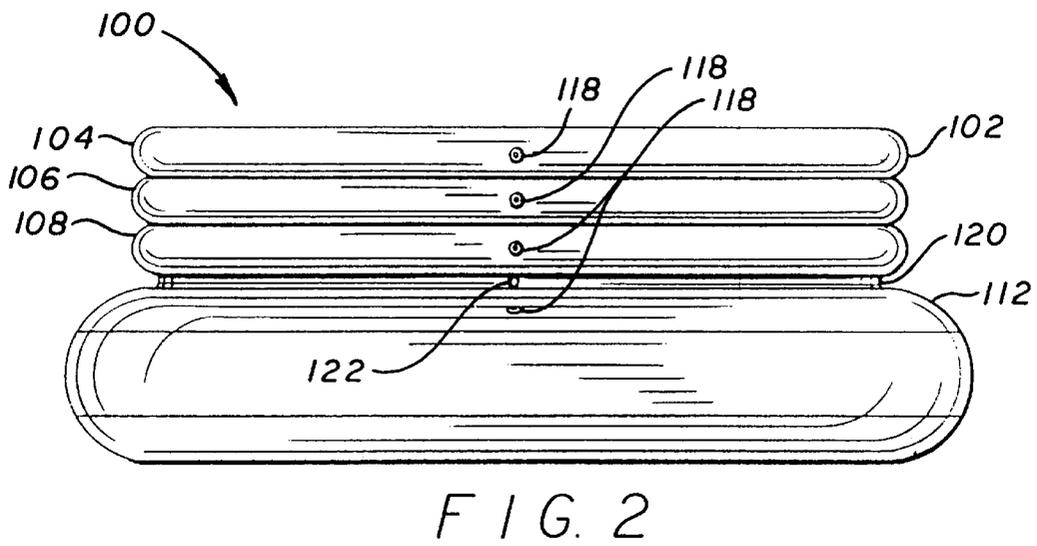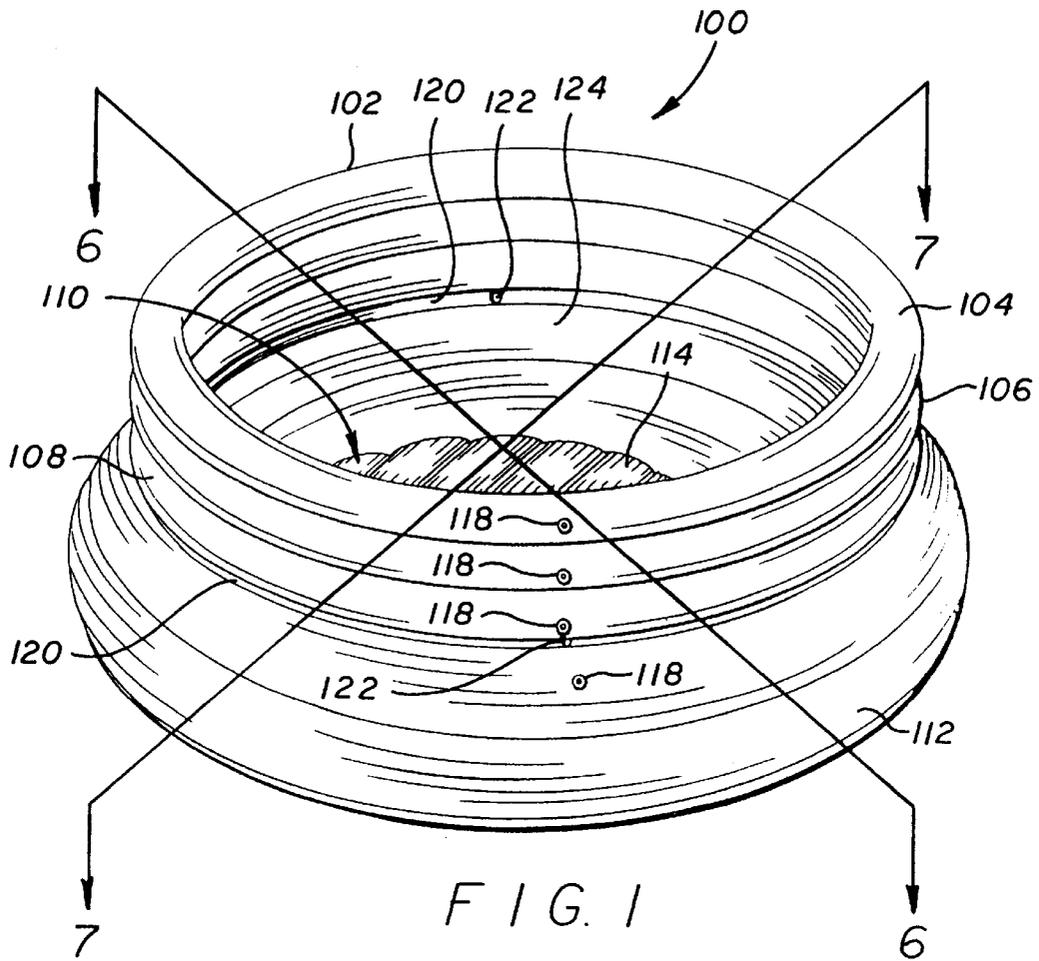

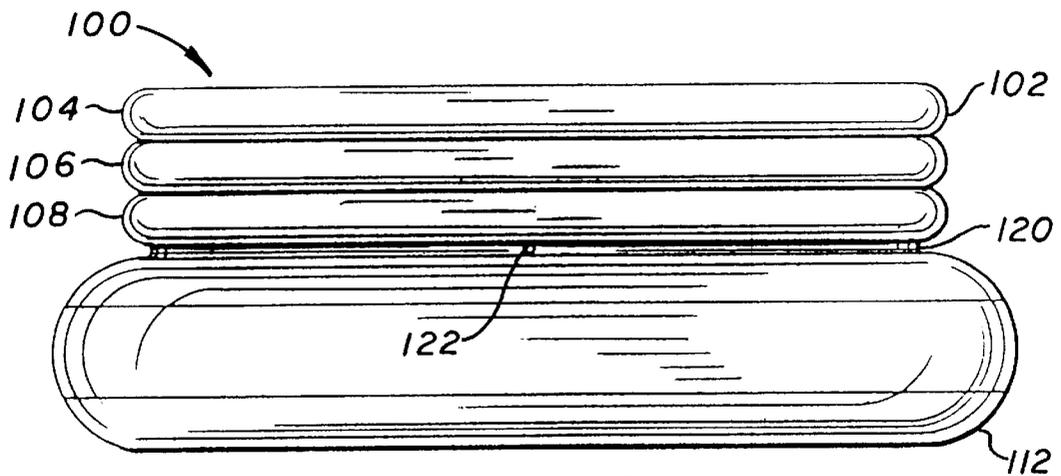


FIG. 3

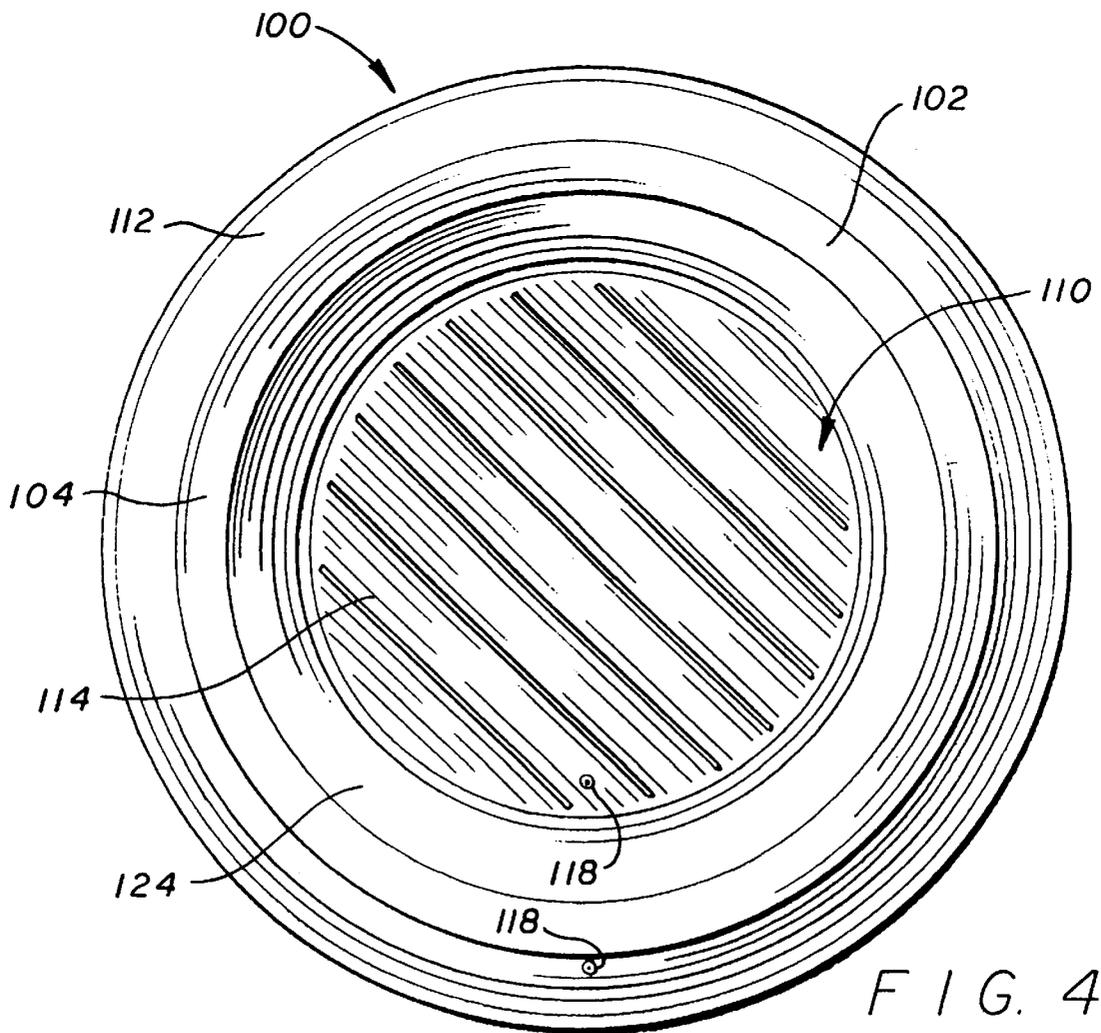


FIG. 4

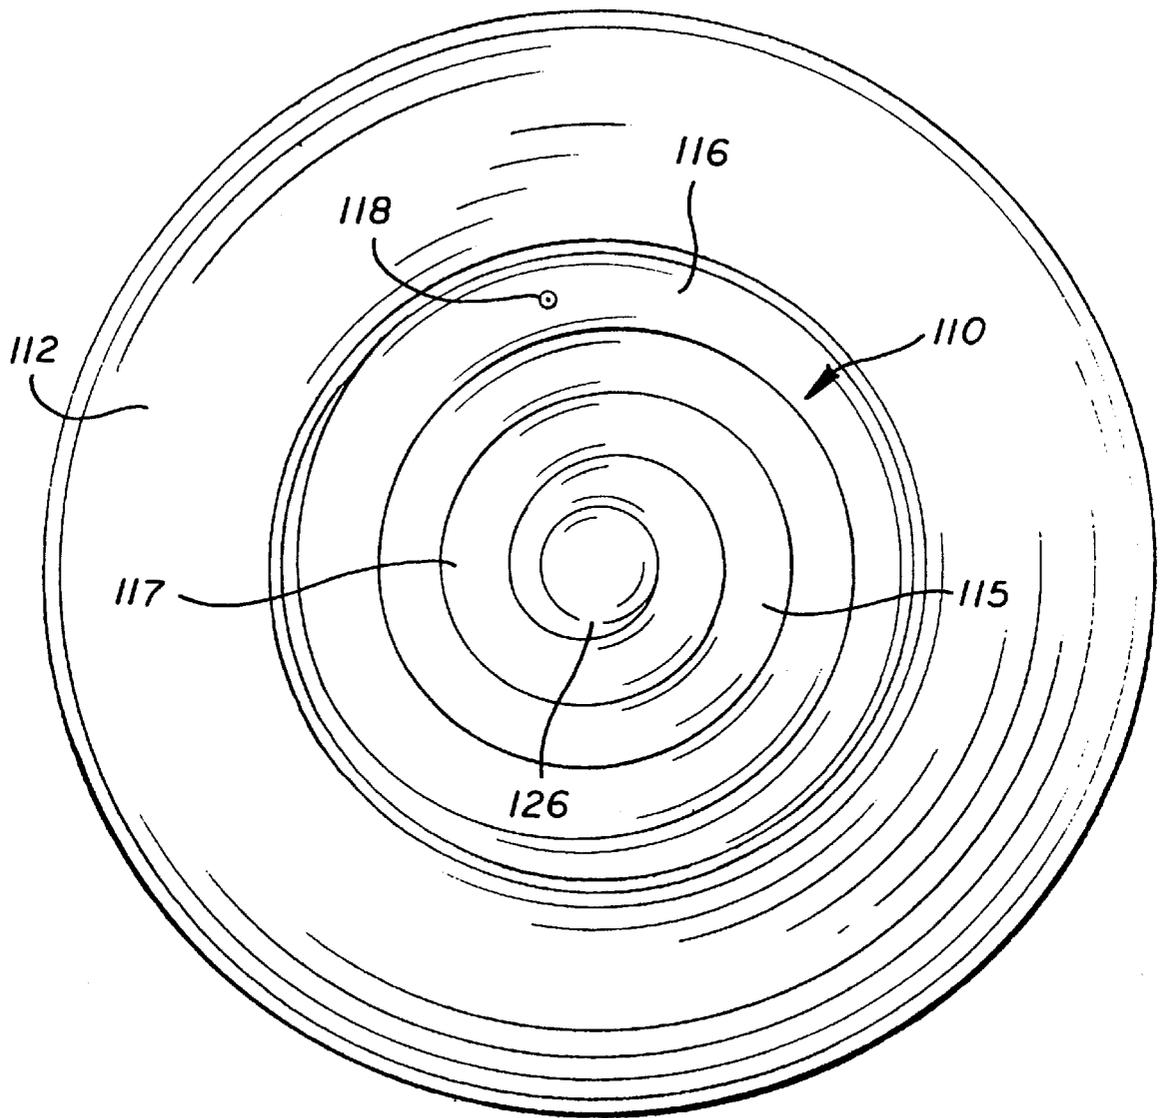


FIG. 5

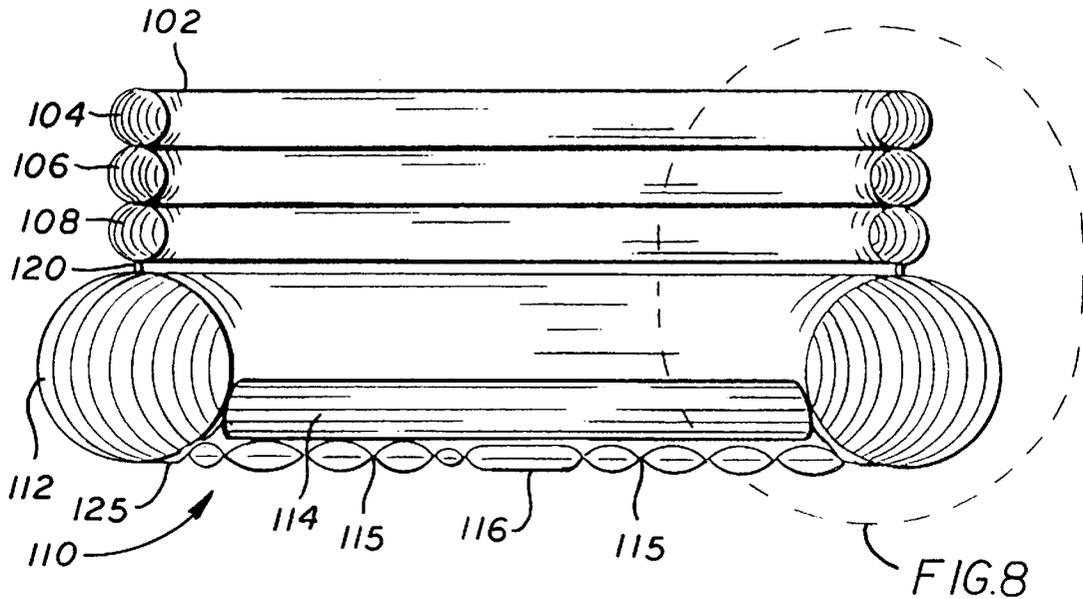


FIG. 6

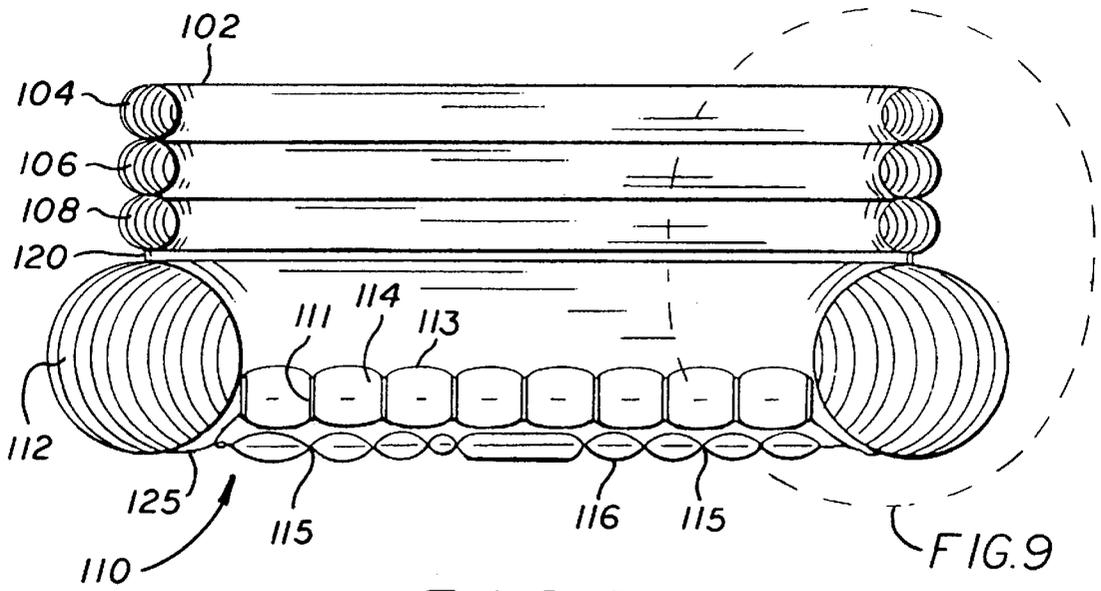
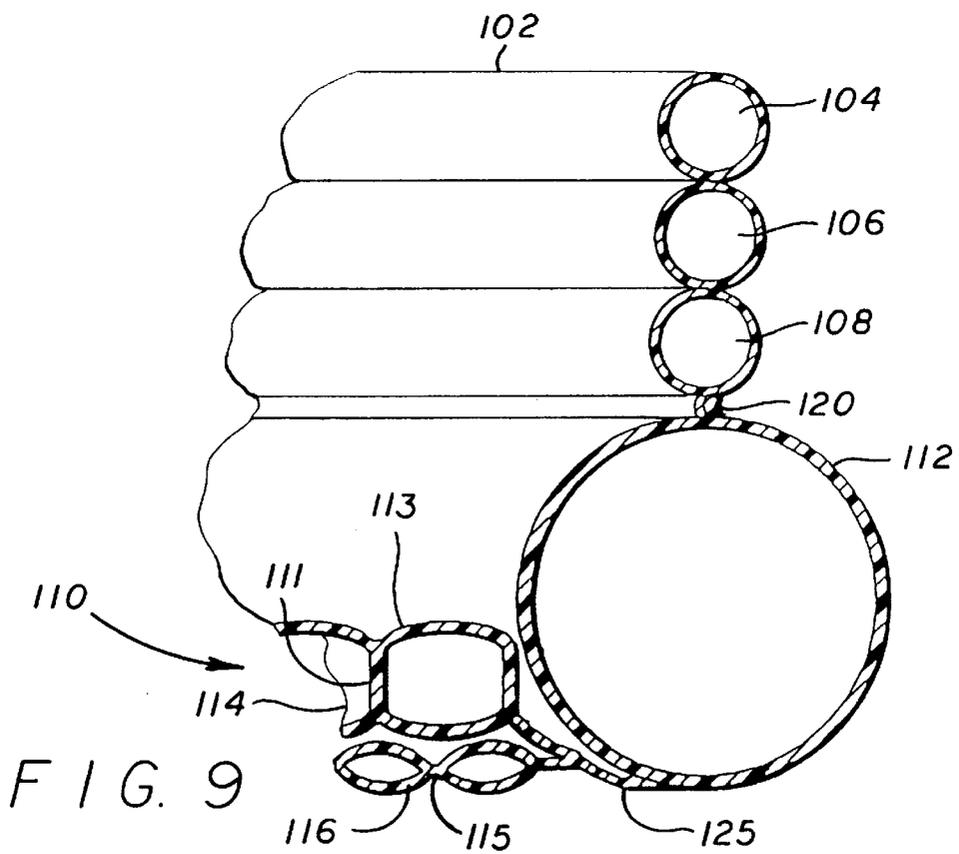
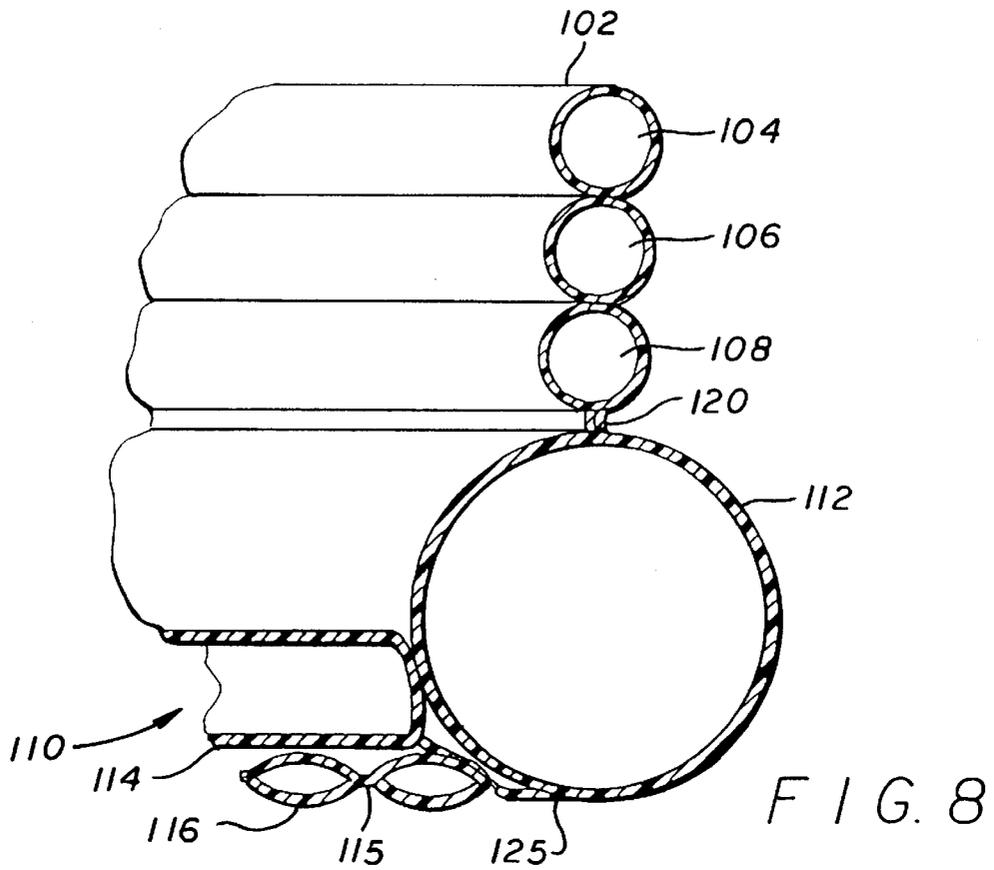


FIG. 7



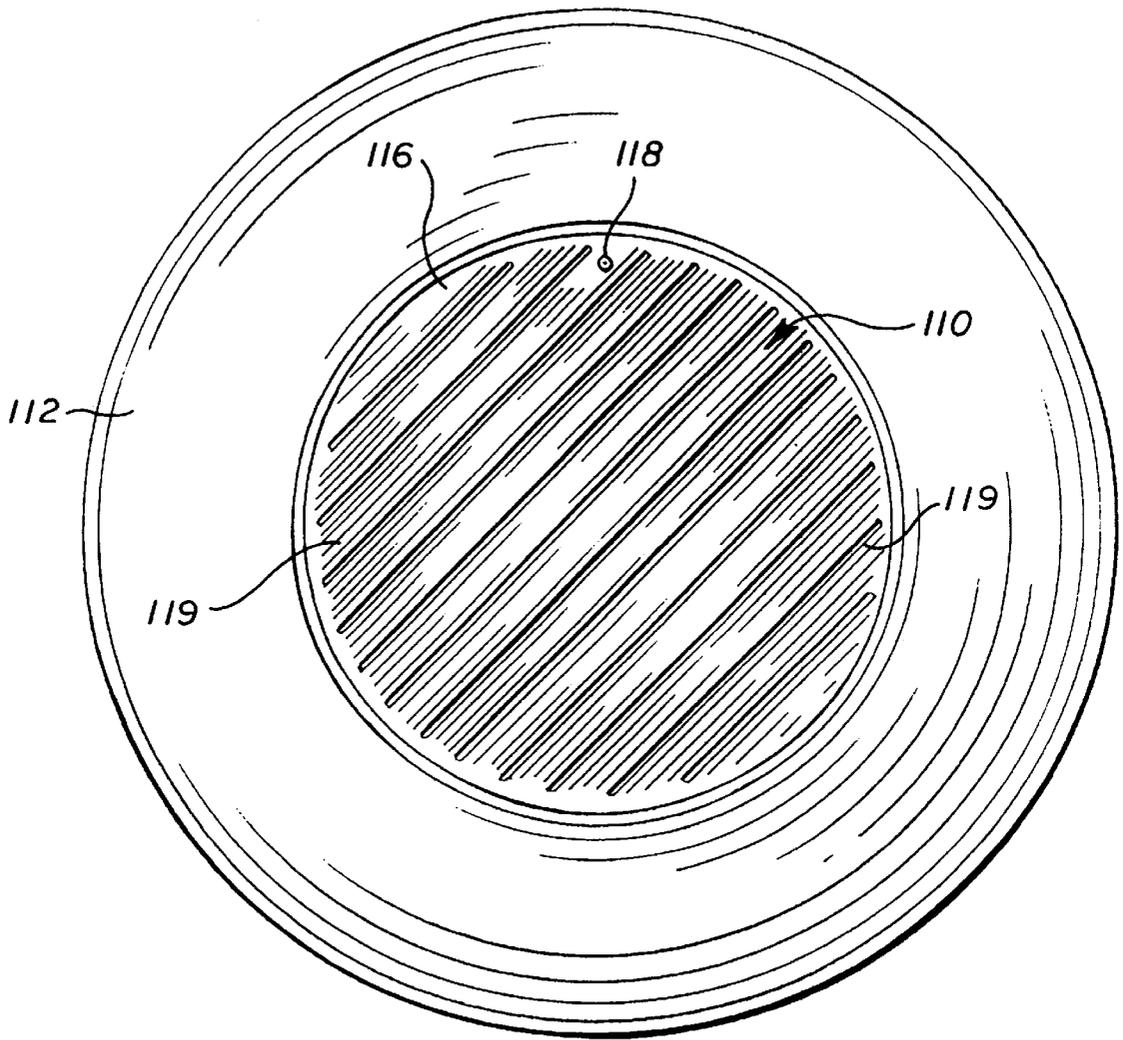


FIG. 10

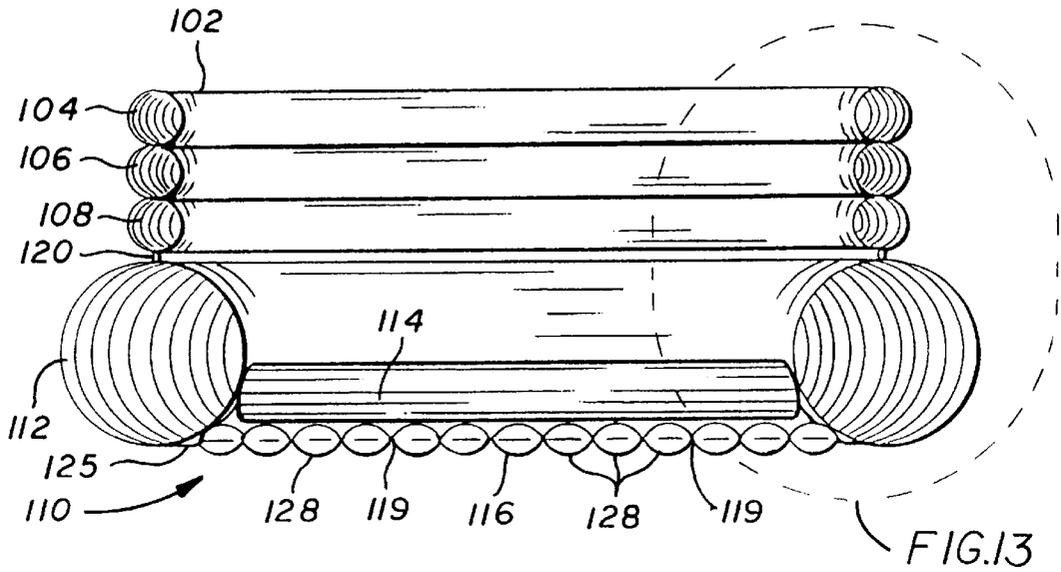


FIG. 11

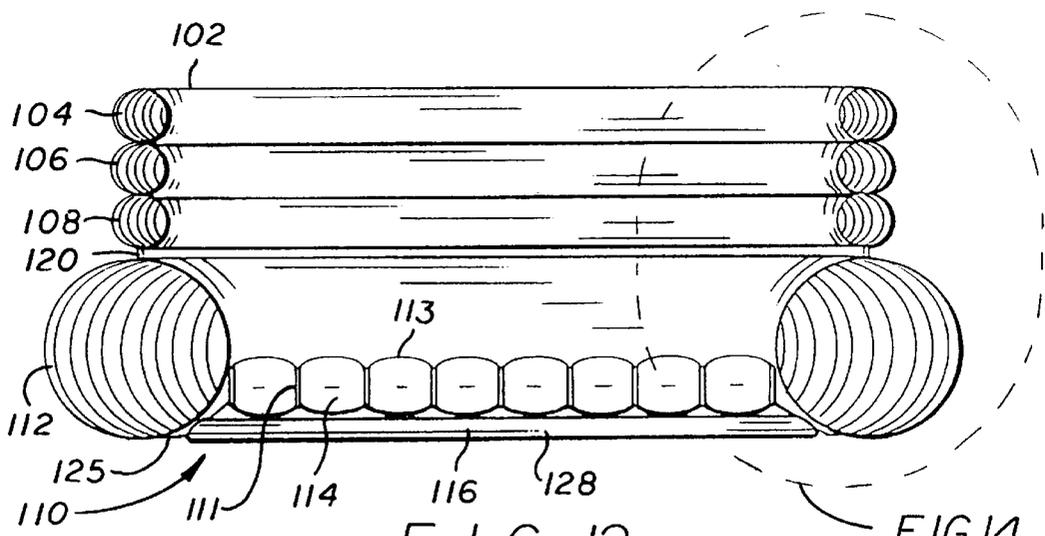
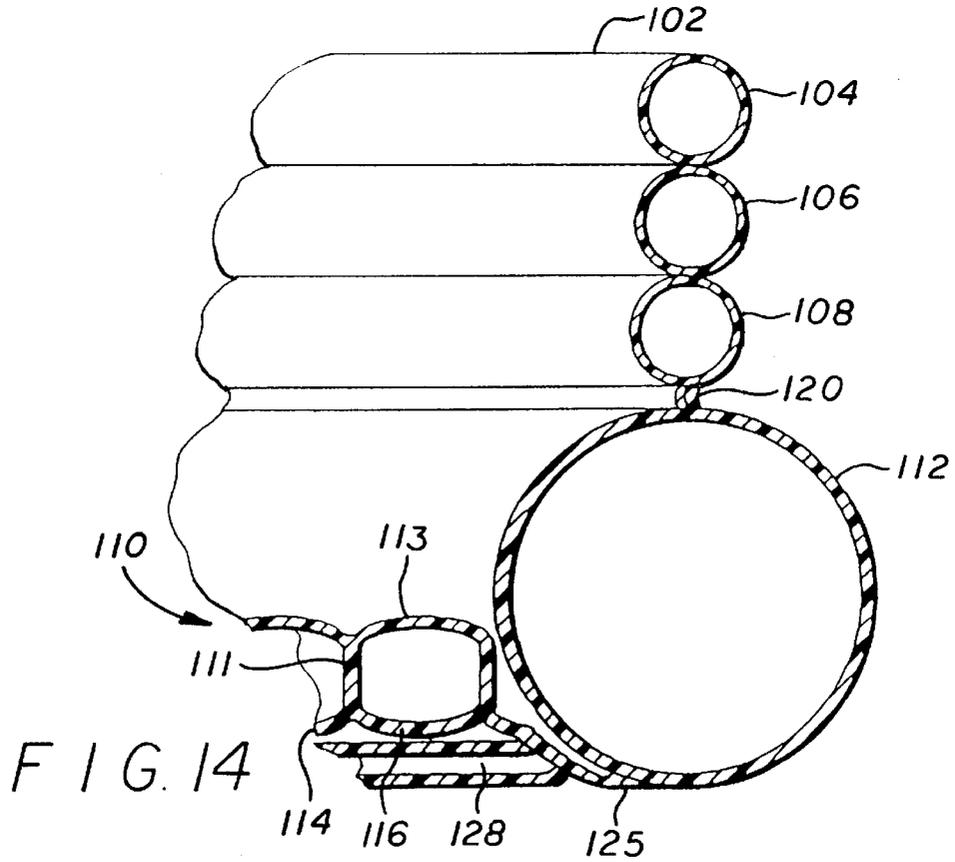
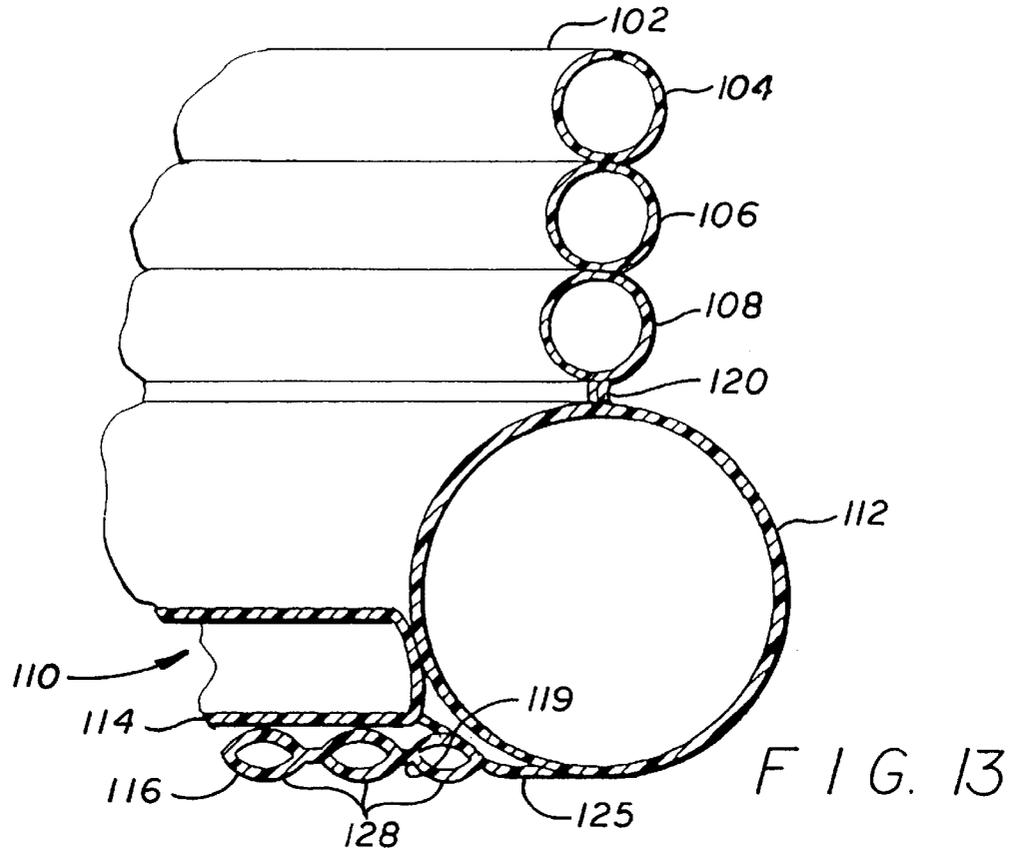


FIG. 12



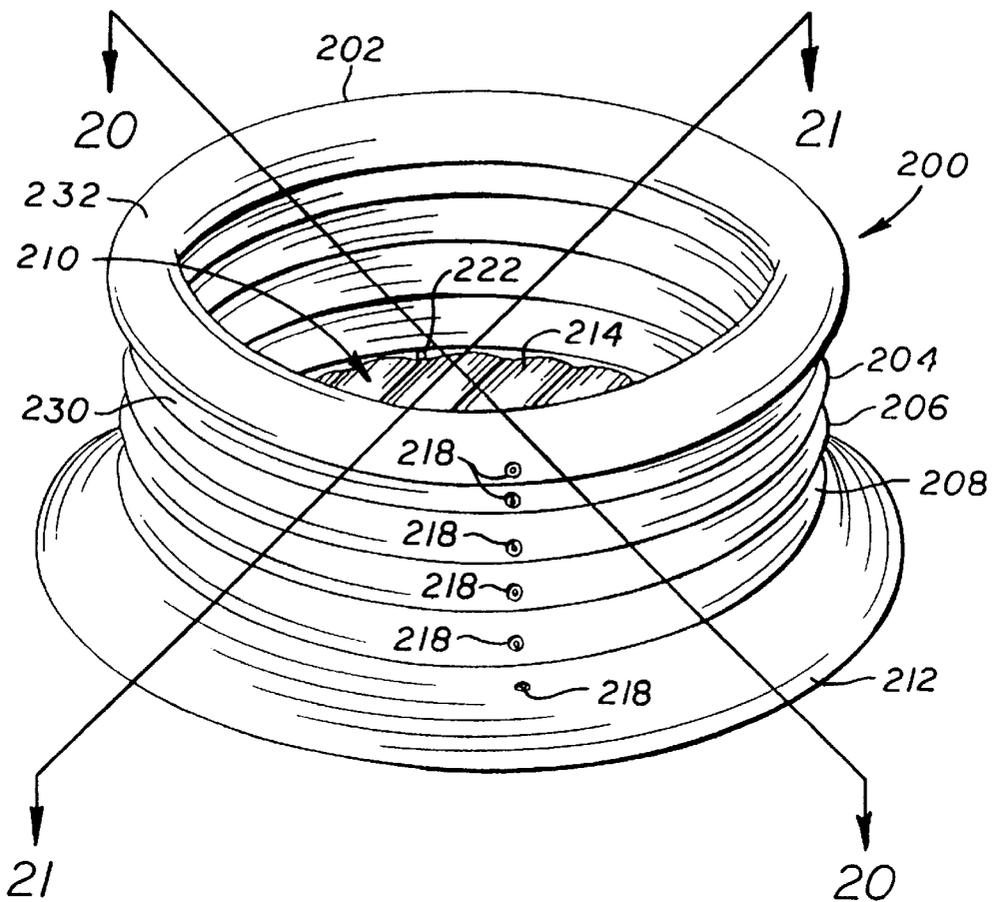


FIG. 15

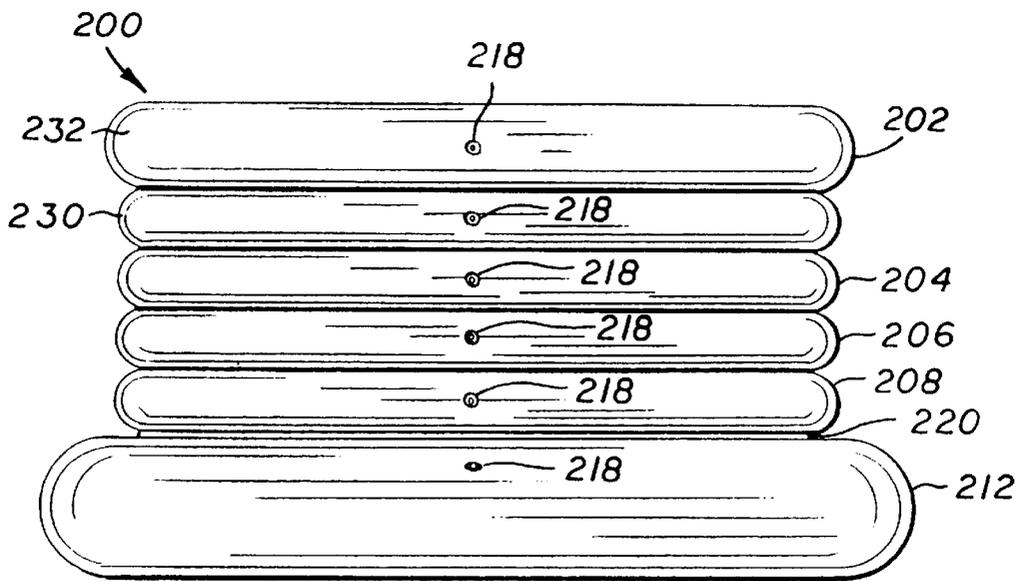


FIG. 16

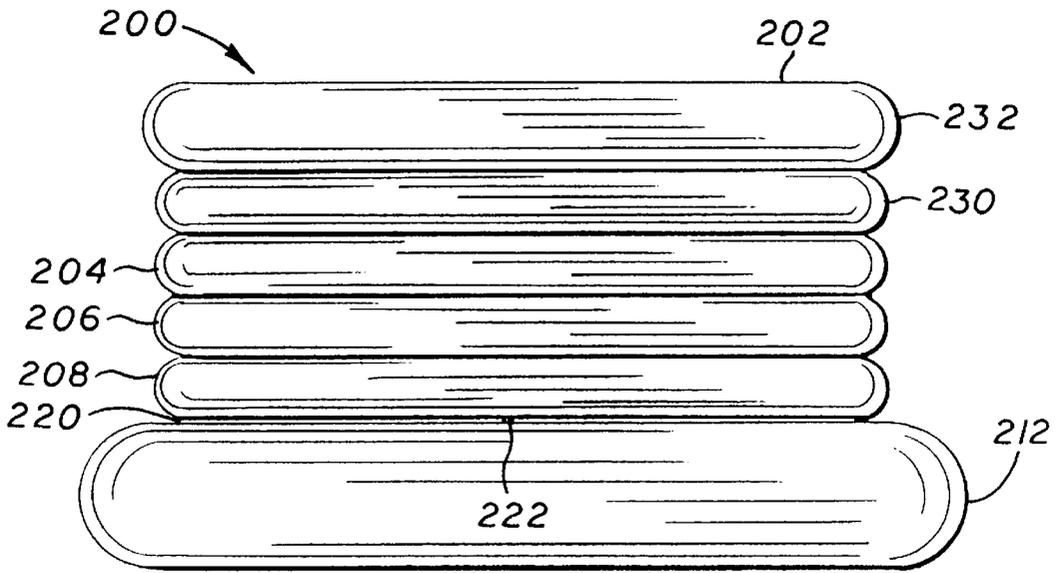


FIG. 17

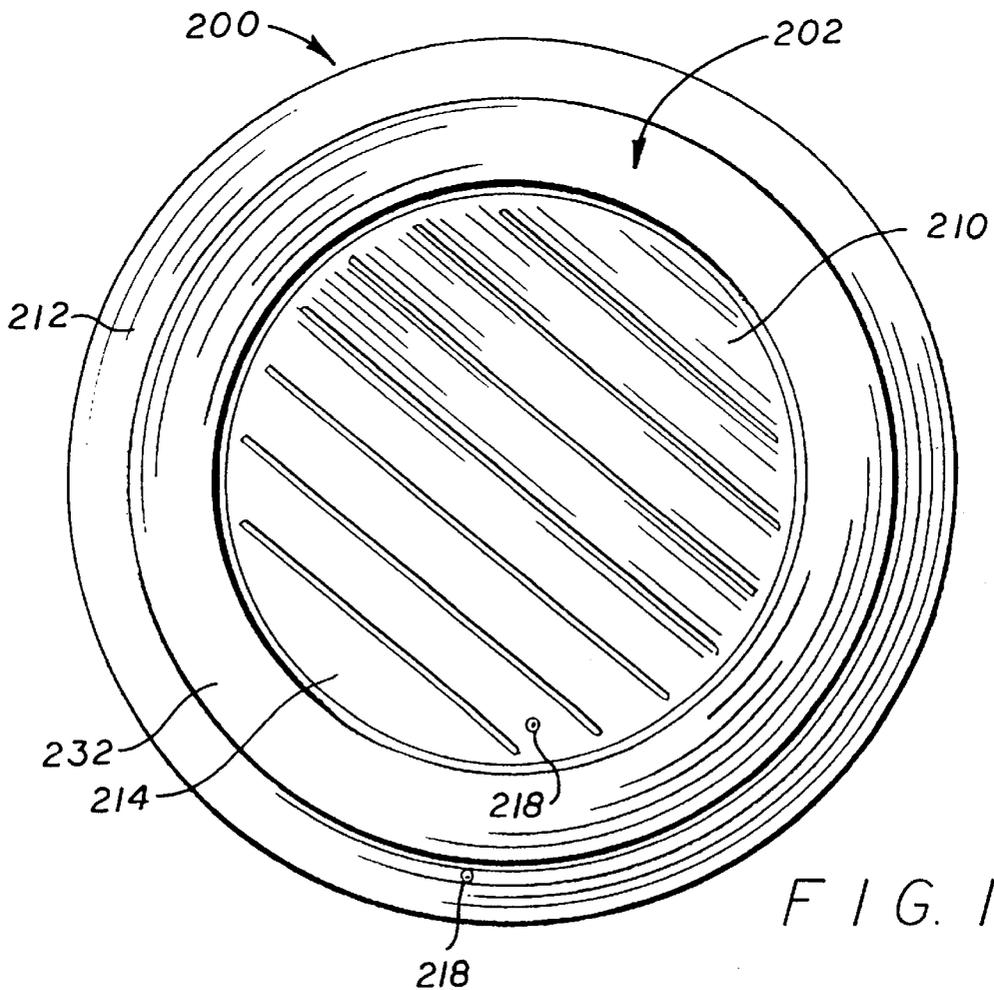


FIG. 18

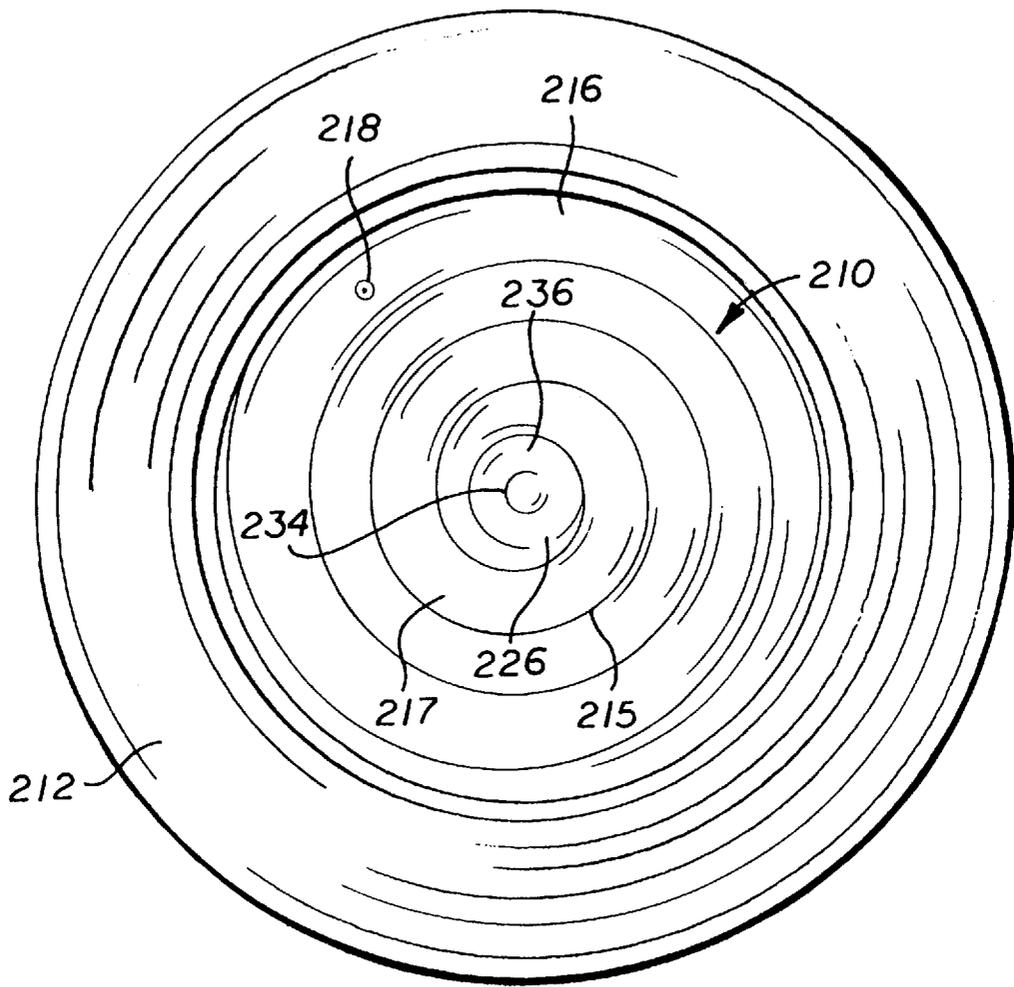


FIG. 19

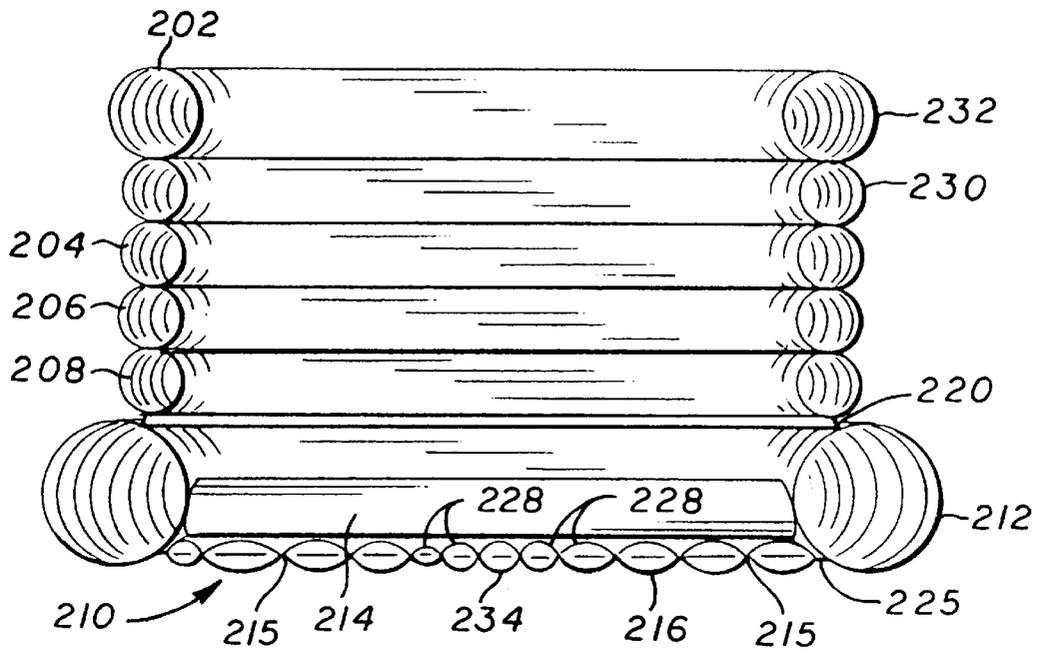


FIG. 20

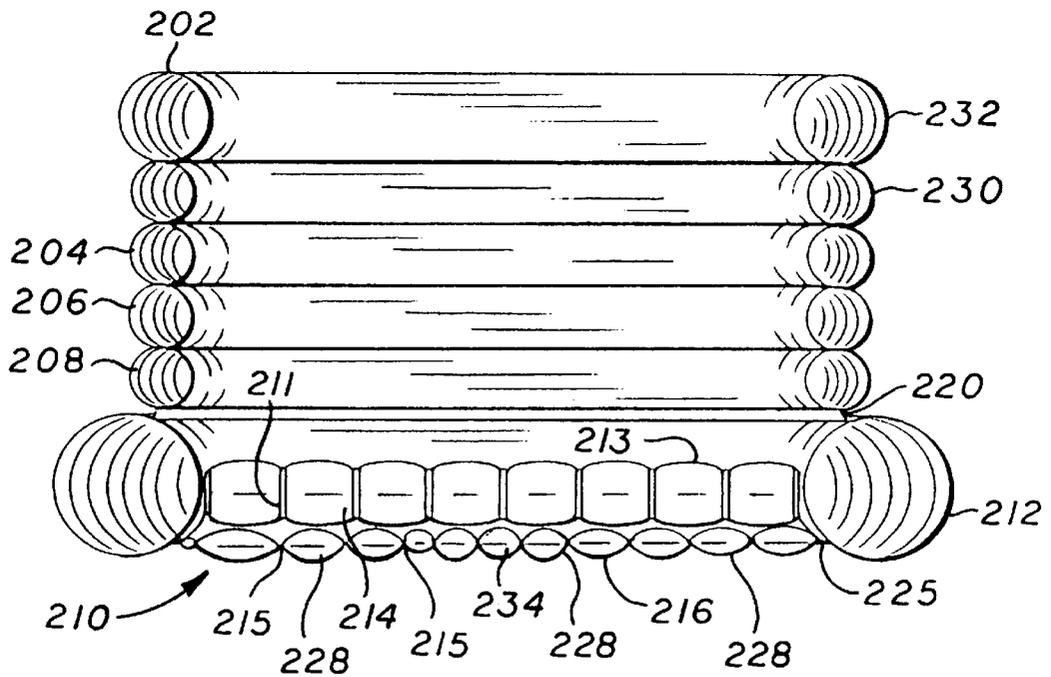


FIG. 21

INFLATABLE JUMPING TOY AND METHOD

This application is a continuation-in-part of the patent application Ser. No. 29/045,210 filed on Oct. 12, 1995, now abandoned and entitled Inflation Jumping Toy Design.

BACKGROUND OF THE INVENTION**1. Field of the Invention:**

The present invention generally relates to inflatable toys, and more particularly relates to an inflatable jumping toy having a vertical retainer wall mounted upon a torodial base tube which incorporates a multi-layer bouncing mattress utilized to support the weight of children during jumping exercises on the bouncing mattress.

2. Description of the Related Art:

Inflatable toys and devices, which are popular with small children, are available in the marketplace. Many of these inflatable toys are designed for use in water including wading and swimming pools for small children.

In the absence of water, wading and swimming pools and many other inflatable water toys cease to be a danger but no longer serve the function that they were designed for. Inflatable toys not intended to be utilized with water would eliminate most hazards to small children associated with wading and swimming pools. However, wading and swimming pool type toys usually attract the attention of small children.

Another type of inflatable toy which attracts the attention of small children comprises a surface for children to play and bounce on. Typically, the bouncing or play surface of the inflatable toy is the top layer of an inflatable balloon or mattress which is somewhat convex because of the pressure of the inflation medium. Thus, the bouncing or play surface is only semi-level and thus presents a challenge to walk across and presents a potential danger.

An inflatable toy as described in the preceding paragraph is utilized in a manner similar to a trampoline. One example of such an inflatable toy includes a large heavy duty inflatable balloon or mattress equipped with a compressor which cycles periodically to maintain the pressure within the inflatable mattress. The inflatable toy often includes a cover housing formed of mesh which is employed to prevent small children from falling off of a bouncing surface on the top of the inflatable mattress. Unfortunately, this type of inflatable toy is extremely large and impractical for regular use by small children in or around the home.

Pool shaped inflatable toys not intended to be used with water have also been known in the past. A representative inflatable toy is comprised of vinyl and includes a circular jumping surface surrounded by a retaining wall. Both the jumping surface and retaining wall are inflated with air. The jumping surface supports the weight of a child and the retaining wall inflates to approximately 16" from the jumping surface.

Unfortunately, if the pool shaped inflatable toys of the prior art are not properly inflated, they can become unstable and cause a child to fall or bounce out and be injured. This occurs particularly when the jumping surface is over-inflated. Thus, proper inflation of the pool shaped inflatable toys of the past is critical. Furthermore, the pool shaped inflatable toys should always be positioned for use upon an impact absorbing surface such as sand or mulch if used outdoors or on a padded surface if used indoors. Use of the pool shaped inflatable toys of the prior art should never occur on hard surfaces since injuries can occur. Further, prior art inflatable toys also have been known to be unstable during use.

Thus, there is a need in the art for an inflatable jumping toy which is comprised of durable material such as vinyl and includes a vertical retainer wall mounted upon a wide torodial base tube, a seating shelf and a bouncing mattress comprised of an upper impact-absorbing section and a separate bottom section which exhibits strong seals, each of which are charged with air.

SUMMARY OF THE INVENTION

Briefly, and in general terms, the present invention provides a new and improved inflatable jumping toy and method therefore embodying a novel apparatus having a multi-layer bouncing mattress surrounded by a torodial base tube and a vertical retainer wall for protecting children against injury while using the inflatable toy for jumping exercises.

The present invention is generally directed to an inflatable jumping toy and method therefore and is typically employed in a play area by children performing jumping exercises. The inflatable jumping toy comprises a construction incorporating a large torodial-shaped tube utilized as a base element and a vertical retainer wall mounted upon the top of the torodial-shaped tube. The retainer wall functions to absorb the lateral impact of a child against the jumping toy and to prevent a child from falling out of or being accidentally ejected from the jumping toy. A multi-layer bouncing mattress which is surrounded by and in communication with the torodial-shaped tube serves as a cushioned floor to absorb the vertical impact of the children during the jumping exercises and affords greater stability.

In a preferred embodiment, the inflatable jumping toy exhibits durable vinyl construction and includes six separate air chambers each having double air valves. The torodial base tube is designed to have a wide dimension to provide vertical and lateral stability to the jumping toy. The torodial base tube is physically attached to the vertical retainer wall by a connection web having drains holes formed therein to prevent water accumulation within the jumping toy. The retainer wall is comprised of three separate tubular air chambers stacked one upon the other to provide extra protection.

In the preferred embodiment, the multi-layer bouncing mattress of the inflatable jumping toy serves as a cushioned floor to absorb vertical impact during jumping exercises. This is accomplished by providing an upper floor layer having I-beam construction for providing maximum impact absorption of the vertical forces associated with jumping. Beneath the upper I-beam layer is a lower floor layer comprising a single X-beam spiral construction. The single X-beam spiral construction enjoys strong seal protection since the spiral construction has one long air chamber which promotes the passage of inflation air therethrough thus providing absorption of energy which might break the seals.

As an alternative, the lower single X-beam spiral layer can be replaced with a parallel X-beam constructed layer which is mounted beneath the upper I-beam constructed layer. Under these conditions, the feature of providing maximum impact absorption of the vertical forces associated with jumping is retained. However, use of either of the single X-beam spiral constructed layer or the parallel X-beam constructed layer results in a robust, wear-resistant lower floor layer for either indoor or outdoor use.

These and other objects and advantages of the present invention will become apparent from the following more detailed description, taken in conjunction with the accompanying drawings which illustrate the invention, by way of example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front top perspective view of a preferred embodiment of the inflatable jumping toy of the present invention showing a vertical retainer wall comprised of stacked rings mounted upon a torodial base tube.

FIG. 2 is a front elevational view of the inflatable jumping toy of FIG. 1 showing an air valve mounted in each of the stacked rings of the retainer wall and in the torodial base tube.

FIG. 3 is a rear elevational view of the inflatable jumping toy of FIG. 1 showing a drain hole formed in a connection web positioned between the retainer wall and the torodial base tube.

FIG. 4 is a top planar view of the inflatable jumping toy of FIG. 1 showing the retainer wall mounted over the torodial base tube and a circular seating shelf extending inward from the retainer wall to the outer perimeter of the upper layer of a bouncing mattress positioned within the torodial base tube.

FIG. 5 is a bottom planar view of the inflatable jumping toy of FIG. 1 showing the bottom surface of the torodial base tube and the single X-beam spiral shaped lower layer of the bouncing mattress positioned within the torodial base tube.

FIG. 6 is a cross-sectional view of the inflatable jumping toy taken along the line 6—6 of FIG. 1 showing the stacked rings of the retainer wall, the torodial base tube and the single X-beam spiral shaped lower layer of the bouncing mattress.

FIG. 7 is a cross-sectional view of the inflatable jumping toy taken along the line 7—7 of FIG. 1 showing the stacked rings of the retainer wall, the torodial base tube, and the I-beam shaped upper layer and single X-beam spiral shaped lower layer of the bouncing mattress.

FIG. 8 is an enlarged detail drawing of the retainer wall, torodial base tube and the upper and lower layers of the bouncing mattress shown in FIG. 6.

FIG. 9 is an enlarged detail drawing of the retainer wall, torodial base tube and the upper and lower layers of the bouncing mattress shown in FIG. 7.

FIG. 10 is a bottom planar view of the inflatable jumping toy of FIG. 1 showing the bottom surface of the torodial base tube and an alternative parallel X-beam lower layer of the bouncing mattress positioned within the torodial base tube.

FIG. 11 is a cross-sectional view of the inflatable jumping toy taken along the line 6—6 of FIG. 1 showing the stacked rings of the retainer wall, the torodial base tube and the parallel X-beam lower layer of the bouncing mattress.

FIG. 12 is a cross-sectional view of the inflatable jumping toy taken along the line 7—7 of FIG. 1 showing the stacked rings of the retainer wall, the torodial base tube, and the I-beam shaped upper layer of the bouncing mattress.

FIG. 13 is an enlarged detail drawing of the retainer wall, torodial base tube and the upper and lower layers of the bouncing mattress shown in FIG. 11.

FIG. 14 is an enlarged detail drawing of the retainer wall, torodial base tube and the upper and lower layers of the bouncing mattress shown in FIG. 12.

FIG. 15 is a front top perspective view of an alternative embodiment of the inflatable jumping toy of the present invention showing a vertical retainer wall comprised of stacked rings mounted upon a torodial base tube.

FIG. 16 is a front elevational view of the inflatable jumping toy of FIG. 15 showing an air valve mounted in each of the stacked rings of the retainer wall and in the torodial base tube.

FIG. 17 is a rear elevational view of the inflatable jumping toy of FIG. 15 showing a drain hole formed in a connection web positioned between the retainer wall and the torodial base tube.

FIG. 18 is a top planar view of the inflatable jumping toy of FIG. 15 showing the retainer wall mounted over the torodial base tube and the upper layer of a bouncing mattress positioned within the torodial base tube.

FIG. 19 is a bottom planar view of the inflatable jumping toy of FIG. 15 showing the bottom surface of the torodial base tube and the single X-beam spiral shaped lower layer of the bouncing mattress positioned within the torodial base tube.

FIG. 20 is a cross-sectional view of the inflatable jumping toy taken along the line 20—20 of FIG. 15 showing the stacked rings of the retainer wall, the torodial base tube and the single X-beam spiral shaped lower layer of the bouncing mattress.

FIG. 21 is a cross-sectional view of the inflatable jumping toy taken along the line 21—21 of FIG. 15 showing the stacked rings of the retainer wall, the torodial base tube, and the I-beam shaped upper layer and single X-beam spiral shaped lower layer of the bouncing mattress.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, and particularly to FIG. 1, there is shown a front top perspective view of an inflatable jumping toy **100**. The jumping toy **100** is typically employed in an indoor and/or outdoor play area for use by children. The jumping toy **100** is used in a manner similar to that of a trampoline in that it is employed for jumping exercises.

In a preferred embodiment, the jumping toy **100** is comprised of durable high molecular weight vinyl construction and includes a vertical retainer wall **102** comprised of a plurality of stacked rings including a top ring **104**, a middle ring **106** and a bottom ring **108**. The stacked rings **104**, **106** and **108** are tubular in shape and are mounted one directly above the other. However, it is understood that the shape of the stacked rings **104**, **106** and **108** is not limited to tubular. Further, the stacked rings **104**, **106** and **108** are sealed together as best shown in FIGS. 6–9 and also in FIGS. 2–3 in a manner known in the art. A suitable method of sealing is dielectric radio frequency (RF) sealing using a die and platen combination (not shown). The cross-sectional views of FIGS. 8 and 9 clearly indicate the sealed nature of the three stacked rings **104**, **106** and **108**.

Children use the jumping toy **100** to perform jumping exercises. To this end, a child enters the jumping toy **100** by scaling the retainer wall **102**. Once inside the jumping toy **100**, the jumping exercises can be executed upon a bouncing mattress **110** clearly shown in FIGS. 1, 4 and 6–9. The function of the retainer wall **102** is two fold. Initially, the retainer wall **102** serves as a safety cushion during jumping exercises to protect the child during accidental collisions with the vertical retainer wall **102**. More importantly, the retainer wall **102** is designed to prevent a child from falling out of or being accidentally ejected from the jumping toy.

Six separate air chambers are built into the preferred embodiment of the inflatable jumping toy **100** of the present invention. Three of the six air chambers are provided by the three stacked tubular rings of the vertical retainer wall **102**, e.g., the top ring **104**, the middle ring **106** and the bottom ring **108**. Thus, the retainer wall **102** is comprised of three stacked tubular rings which form three separate air chambers. The remaining three air chambers are provided by a

torodial base tube **112** shown in FIGS. 1–9, an upper layer **114** of the bouncing mattress **110** shown in FIGS. 4 and 6–9 and a lower layer **116** of the bouncing mattress **110** shown in FIGS. 5 and 6–9. Further, each air chamber is fitted with a Double-Value **118** to retain the air within the respective air chamber as is shown in FIGS. 1–2 and 4–5. It is noted that each of the six separate air chambers formed within the jumping toy **100** can be inflated with a common toy inflating pump.

The vertical retainer wall **102** is mounted upon the torodial base tube **112** as best shown in FIGS. 6–9 and also in FIGS. 2–3. The physical connection between the retainer wall **102** and the torodial base tube **112** is accomplished by utilizing a connection web **120** comprised of durable vinyl construction.

The connection web **120** is clearly shown in FIGS. 8 and 9 as connecting the bottom stacked ring **108** to the top surface of the torodial base tube **112**. This attachment by connection web **120** can be accomplished in any suitable manner such as by RF sealing so that the vertical retainer wall **102** is rigidly connected to the torodial base tube **112**.

In order to prevent water accumulation within the volume bounded by the torodial base tube **112** and the upper layer **114** of the bouncing mattress **110**, drain holes **122** are formed along the retainer wall **102** such as, for example, within the connection web **120**. Drain holes **122** are shown formed within the connection web **120** in FIGS. 1–3 and are also necessary to prevent the jumping toy **100** from being utilized as a pool. It is to be understood that the number and location of drain holes is **122** can be changed.

The torodial base tube **112** is a large donut-shaped tubular structure fashioned from heavy duty vinyl construction. The function of the torodial base tube **112** is to serve as the base support structure to provide stability to the jumping toy **100**. The torodial base tube **112** of the preferred embodiment of the present invention inflates to 82" (e.g., to 6' 10" or 208 cm) to provide extra stability to the jumping toy **100**. As can be seen in FIGS. 6–9, the torodial base tube **112** is larger than the tubular stacked rings **104**, **106** and **108**. The torodial base tube **112** easily supports the stacked rings **104**, **106** and **108** and extends further outward and inward than the retainer wall **102** as is clearly illustrated in FIGS. 8 and 9.

The torodial base tube **112** is open in the center portion thereof which provides the situs of the bouncing mattress **110** and which serves as the floor of the jumping toy **100**. A seating shelf **124** extends from the torodial base tube **112** as shown in FIGS. 1 and 4. While standing on the bouncing mattress **110** within the periphery of the jumping top **100**, it can be seen that the seating shelf **124** extends into the volume encompassed by the torodial base tube **112**. The torodial base tube **112** can be manufactured to include the seating shelf **124** as a portion of the structure thereof. In the alternative, the seating shelf **124** can be manufactured as an extension of the torodial base tube **112**. In either case, the seating shelf **124** is charged with air pressure so that it can be utilized as a resting place for children using the jumping toy **100**. The seating shelf **124** is not shown in FIGS. 6–9 so that the relationship among the retainer wall **102**, the torodial base tube **112** and the bouncing mattress **110** can be illustrated.

The bouncing mattress **110** supports the weight of the children and is the medium that provides energy which assists in propelling the children upward during the jumping exercises. The bouncing mattress **110** comprises two sections or layers, e.g., the upper layer **114** which serves as a floor for the jumping toy **100** and upon which the children

stand and the lower layer **116** which is positioned immediately below the upper layer **114** and contacts the supporting surface (not shown) underneath the jumping toy **100**. In the preferred embodiment, the upper layer **114** of the bouncing mattress **110** comprises an I-beam construction as shown best in FIGS. 7 and 9 and 4. However, the lower layer **116** of the bouncing mattress **110** comprises a single X-beam spiral construction as shown best in FIGS. 6–9 and FIG. 5. Both the I-beam construction and the single X-beam spiral construction are known in the prior art for use in inflatable devices. Both the upper layer **114** and the lower layer **116** of the bouncing mattress **110** are bonded together and to the bottom of the torodial base tube **112** as by RF sealing at a connection point **125** as shown in FIGS. 6–9.

When forming the upper layer **114** of the bouncing mattress **110**, the I-beam construction shown in FIGS. 7 and 9 and in Fig. 4 is accomplished in the following manner. Two flat sheets (not shown separately) of an appropriate vinyl material such as, for example, 21 gauge polyvinylchloride, are positioned one on top of the other. A third vinyl member (not shown separately) is then fashioned in long strips of approximately 3" in height, 5" in width and 48" in length. The third vinyl member is then positioned in between and RF sealed to each of the two flat vinyl sheets in a press so that the resulting construction resembles an "I-beam" **111** as clearly shown in FIGS. 57 and 9. Several I-beams **111** formed in parallel create a plurality of parallel rectangular channels **113**. When the I-beam channels **113** also shown in FIGS. 7 and 9 are charged with air, the top and bottom of each channel **113** tends to round out. In the cross-sectional views provided, FIGS. 6 and 8 (taken along line 6–6 of FIG. 1) show a side view of the I-beam layer. However, FIGS. 7 and 9 (taken along line 7–7 of FIG. 1) show an end view of the I-beam channels **113**. The I-beam construction of the upper layer **114** is shown positioned within the open area of the torodial base tube **112** in FIG. 4.

The I-beam construction is employed for the upper layer **114** of the bouncing mattress **110** because it provides a level surface for children to jump upon, provides a thicker cushion to absorb the impact of the children striking the bouncing mattress **110**, and provides a better distribution of the weight of the children. The I-beam **111** provides a more robust construction because each of the channels **113** are open at the end (e.g., not sealed) and thus are tied together (see FIGS. 7 and 9). Thus, air can pass around the end of each channel **113**, e.g., from channel-to-channel, so that the air distribution (psi) can be more evenly spread across the channels **113** as a function of the weight load. When correct air pressure is observed in the upper layer **114** of the bouncing mattress **110**, weight applied on one side of the bouncing mattress **110** will cause some deflation on that side while charging the opposite side with more air.

When forming the lower layer **116** of the bouncing mattress **110**, the single X-beam spiral construction shown best in FIGS. 6 and 9 and in FIG. 5 is accomplished in the following manner. A special die-platen combination is formed in the shape of a spiral. Two flat sheets (not shown separately) of the 21 gauge polyvinylchloride are positioned one on top of the other. The die-platen combination is used to apply a spiral-shaped RF weld **115** to the two flat sheets to create the single X-beam spiral construction as is clearly shown in FIGS. 5–9. A gap **126** is located at the center of a continuous spiral of the single X-beam spiral **117** construction of the lower layer **114** shown in FIG. 5. The gap **126** serves to provide an opening to enable air to enter and thus inflate the center portion of the continuous spiral **117**. Because of the spiral construction, each of a plurality of

adjacent air pockets **128** of the sections of the continuous spiral **117** shown in the cross-sectional views of FIGS. **6** and **7** are not the same height or size. The single X-beam spiral construction of the lower layer **116** is shown positioned within the open area of the torodial base tube **112** in FIG. **5**.

The single X-beam spiral construction is employed for the lower layer **116** of the bouncing mattress **110** because of its strength. This construction is strong because the single spiral RF weld **115** is continuous and does not have multiple ends which are typically the weak point of the weld. Thus, the single X-beam spiral construction is ideal for the lower layer **116** of the bouncing mattress **110** to resist wear. Consequently, the single continuous spiral **117** supports more weight since the stress is spread more evenly over the continuous RF weld. Further, the spiral construction promotes the inherent movement of air through the continuous spiral **117** formed by the welds **115** of the die-platen combination.

During use of the inflatable jumping toy **100**, a child is positioned on the bouncing mattress **110** and within the periphery of the torodial base tube **112** and the retainer wall **102**. Upon execution of the jumping exercises, the child propels herself upward by applying a force from her legs downward against the bouncing mattress **110**. The child's body is then lifted into the air and gravity returned to the bouncing mattress **110**. Upon striking the bouncing mattress **110**, the upper layer **114** having the I-beam construction absorbs the impact of the child's weight and dissipates the downward force across the plurality of I-beam channels **113**. Those forces not entirely dissipated by the I-beam channels **113** are transferred to the lower layer **116**. The X-beam spiral construction of the lower layer **116** having the continuous spiral **117** ensures easy passage of the air therethrough for supporting the weight of the child. Further, the three tubular shaped rings **104**, **106** and **108** and the torodial base tube **112** are arranged to absorb the impact of a child colliding with the retainer wall **102**. Likewise, the retainer wall **102** is designed to prevent a child from either falling out of or accidentally being ejected from the jumping toy **100**. The seating shelf **124** can be used to rest once the child completes the jumping exercises.

The bouncing mattress **110** of the jumping toy **100** comprises the I-beam constructed upper layer **114** and the single X-beam spiral constructed lower layer **116**. As an alternative, the lower layer **116** can comprise a parallel cross-beam or X-beam construction as shown in FIGS. **10-14**. A bottom planar view of the jumping toy **100** showing the bottom surface of the torodial base tube **112** and the lower layer **116** of the bouncing mattress **110** is shown in FIG. **10**. In this view, the lower layer **116** comprises the alternative construction having a plurality of X-beam welds **119** shown best in FIGS. **10**, **11**, and **13** fashioned in a parallel configuration.

In the cross-beam or X-beam construction, two flat sheets (not shown separately) of the **21** gauge polyvinylchloride are positioned one on top of the other. Using an appropriate die-platen combination, the sheets are welded together to form the plurality of parallel X-beam welds **119**. When the resulting welded sheets are charged with air, the adjacent air pockets **128** have the appearance of a "X" and thus are referred to as a cross-beam or X-beam construction. This feature can clearly be seen in the cross-sectional view of FIG. **11** taken along the line **6-6** of FIG. **1**. FIG. **13** is an enlarged detail view of the right side of FIG. **11**. It can be seen in both FIGS. **11** and **13** that the interface between the plurality of adjacent air pockets **128** of the lower layer **116** forms a cross-beam or "X". The remainder of the construc-

tion shown in FIGS. **10-14** is the same as that shown in FIGS. **1-9** of the preferred embodiment of the jumping toy **100**.

An alternative embodiment of the inflatable jumping toy is now presented in FIGS. **15-21** and will be identified by the reference number **200**. Each element in the alternative embodiment of the jumping toy **200** which corresponds to a duplicate element of the preferred embodiment will be identified by the equivalent number of the **200** series.

The construction of the jumping toy **200** is very similar to that of the apparatus disclosed in the preferred embodiment. In particular, the jumping toy **200** includes a vertical retainer wall **202** having a plurality of tubular rings stacked vertically one upon the other as can be seen in FIGS. **15-17**. Additionally, the retainer wall **202** is affixed to a torodial base tube **212** by a connection web **220** as shown in FIGS. **16-17** and **20-21**. The connection web **220** includes a plurality of drain holes **222** as shown in FIG. **15** to prevent the jumping toy **200** from accumulating water. Further, mounted within the open center space of the torodial base tube **212** is a bouncing mattress **210** clearly shown in FIGS. **18-21**.

The overall size of the jumping toy **200** is somewhat smaller than that disclosed in the preferred embodiment since it is intended to be used by younger children. However, the retainer wall **202** includes a plurality of five tubular vertically-stacked rings to provide more protection against falling out of or being accidentally ejected from the jumping toy **200**. In addition to the three stacked rings **204**, **206** and **208** corresponding to those of the preferred embodiment, stacked rings **230** and **232** are also included. Stacked ring **232** is the top ring of the retainer wall **202** and is oversized in order to provide additional cushioning.

The torodial base tube **212** of the jumping toy **200** inflates to a diameter of **55"** (e.g., **4' 7"** or **140 cm**) to provide extra stability as is clearly shown in FIGS. **15-17**. The diameter of the torodial base tube **212** is greater than the diameter of the oversized stacked ring **232** which can be seen in FIGS. **15-21** and particularly in FIG. **18**. It is also noted that the jumping toy **200** does not include a seating shelf as does the preferred embodiment. The jumping toy **200** includes eight separate air chambers each with a corresponding double valve **218**. The separate air chambers are located as follows. Each of the five vertical-stacked rings **204**, **206**, **208**, **230** and **232** comprise a separate air chamber. Also, the torodial based tube **212** and the upper layer **214** and lower layer **216** of the bouncing mattress **210** each include a separate air chamber.

The bouncing mattress **210** of the jumping toy **200** comprises the identical construction as that disclosed in FIGS. **5-9** of the preferred embodiment previously discussed with one exception. The upper layer **214** is comprised of the I-beam construction which is configured and operates in a manner duplicate to that previously described and as disclosed in FIGS. **18** and **20-21**. The lower layer **216** of the bouncing mattress **210** is comprised of the single X-beam spiral construction previously described and as shown in FIGS. **19-21**. In addition to the elements recited in the description of the X-beam spiral constructed lower layer **116** shown in FIGS. **5-9** of the preferred embodiment, the lower layer **216** of the jumping toy **200** includes a center circular seal **234** having a gap **236** formed therein as shown in FIG. **19**. The gap **236** serves to enable air to enter and exhaust from the circular seal **234**. The remainder of the jumping toy **200** is constructed and operates in a manner duplicate to that described in the preferred embodiment of the jumping toy **100** of the present invention.

It is noted that each of the embodiments **100** and **200** of the inflatable jumping toy disclosed herein are constructed of durable vinyl. One such vinyl is S-80 resin which is a high molecular weight polyvinylchloride that is unaffected by oil, grease or the like. This vinyl is highly resistant to damage from abrasion, impact and sunlight and is designed to withstand higher air pressures for ensuring greater rigidity. The embodiments **100** and **200** of the jumping toy can be inflated with a regular toy inflation pump and can be deflated to approximately one cubic foot for convenient storage. The torodial base tube **112** employed in the present invention is used to ensure stability during use of the jumping toy **100**. Although not shown in the drawing Figs., the bottom surface of the torodial base tube **112** can include a traction element to improve the grip of the jumping toy **100** to the indoor or outdoor surface upon which the jumping toy **100** is placed.

It will be apparent from the foregoing that, while particular forms of the invention have been illustrated and described, various modifications can be made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by the appended claims. Accordingly,

What is claimed is:

1. An inflatable jumping toy comprising:
 - a torodial base tube for providing a base to a jumping toy;
 - retainer means vertically mounted on and connected to a top surface of said base tube for preventing accidental ejection from said jumping toy;
 - top bouncing means surrounded by and connected to a bottom surface of said base tube for providing impact absorption during use of said jumping toy; and
 - bottom bouncing means surrounded by and connected to said bottom surface of said base tube for providing wear resistance to said jumping toy, wherein said top bouncing means and said bottom bouncing means each being separate from said retainer means.
2. The inflatable jumping toy of claim **1** wherein said retainer means comprises a vertical retainer wall.
3. The inflatable jumping toy of claim **1** wherein said retainer means is comprised of a plurality of separate inflatable rings.
4. The inflatable jumping toy of claim **1** wherein said top bouncing means and said bottom bouncing means each comprise an air filled mattress layer.
5. The inflatable jumping toy of claim **1** wherein said top bouncing means comprises an I-beam construction.
6. The inflatable jumping toy of claim **1** wherein said bottom bouncing means comprises an X-beam spiral construction.
7. The inflatable jumping toy of claim **6** wherein said X-beam spiral construction comprises a single X-beam welded seal formed in a continuous spiral.
8. The inflatable jumping toy of claim **1** wherein said bottom bouncing means comprises a parallel X-beam construction.
9. The inflatable jumping toy of claim **1** wherein said retainer means, said torodial base tube and said top bouncing means and said bottom bouncing means each include a double air valve.
10. The inflatable jumping toy of claim **1** wherein said retainer means is attached to said torodial base tube by a connection web.

11. The inflatable jumping toy of claim **1** further including a plurality of drain holes for preventing the accumulation of water.

12. The inflatable jumping toy of claim **1** wherein the diameter of said torodial base tube is greater than the diameter of said retainer means for providing stability in said jumping toy.

13. The inflatable jumping toy of claim **1** further including a seating shelf extending inward from said torodial base tube for providing a seat within said jumping toy.

14. An inflatable jumping toy comprising:

- a torodial base tube for providing a base to a jumping toy;

- a vertical retainer wall mounted on and connected to a top surface of said base tube for preventing accidental ejection from said jumping toy;

- a top bouncing layer surrounded by and connected to a bottom surface of said base tube and comprising I-beam construction for providing cushioned impact absorption during use of said jumping toy; and

- a bottom bouncing layer surrounded by and connected to said bottom surface of said base tube and comprising single X-beam spiral construction for providing wear resistance to said jumping toy, wherein said top bouncing layer and said bottom bouncing layer each being separate from said vertical retainer wall.

15. The inflatable jumping toy of claim **14** wherein said retainer wall is comprised of a plurality of separate inflatable rings and where an uppermost positioned inflatable ring of said plurality of inflatable rings is the largest of said plurality of inflatable rings.

16. The inflatable jumping toy of claim **14** wherein said bottom bouncing layer includes a separate circular seal at the center of a single X-beam welded seal formed in a continuous spiral.

17. The inflatable jumping toy of claim **16** wherein said separate circular seal includes a gap to enable air to enter and escape from said separate circular seal.

18. An inflatable jumping toy comprising:

- a torodial base tube for providing a base to a jumping toy;

- a vertical retainer wall mounted on and connected to a top surface of said base tube for preventing accidental ejection from said jumping toy;

- a top bouncing layer surrounded by and connected to a bottom surface of said base tube and comprising I-beam construction for providing cushioned impact absorption during use of said jumping toy; and

- a bottom bouncing layer surrounded by and connected to said bottom surface of said base tube and comprising parallel X-beam construction for providing wear resistance to said jumping toy, wherein said top bouncing layer and said bottom bouncing layer each being separate from said vertical retainer wall.

19. The inflatable jumping toy of claim **1** wherein said top bouncing means and said bottom bouncing means are connected together and to said bottom surface of said base tube at a connection point by heating sealing.