OPIC
Office de la propriété intellectuelle du Canada

CIPO
Canadian Intellectual Property Office

(12) (19) (CA) **Brevet-Patent**


(11) (21) (C) **2,196,541**
(86) 1995/07/25
(87) 1996/02/15
(45) 2000/09/12

(72) Gangemi, Donald, US
(73) BELOIT TECHNOLOGIES, INC., US

(51) Int.Cl.[6] B65H 75/24
(30) 1994/08/01 (08/283,974) US

(54) **MANDRIN POUR NOYAU**

(54) **CORE CHUCK**

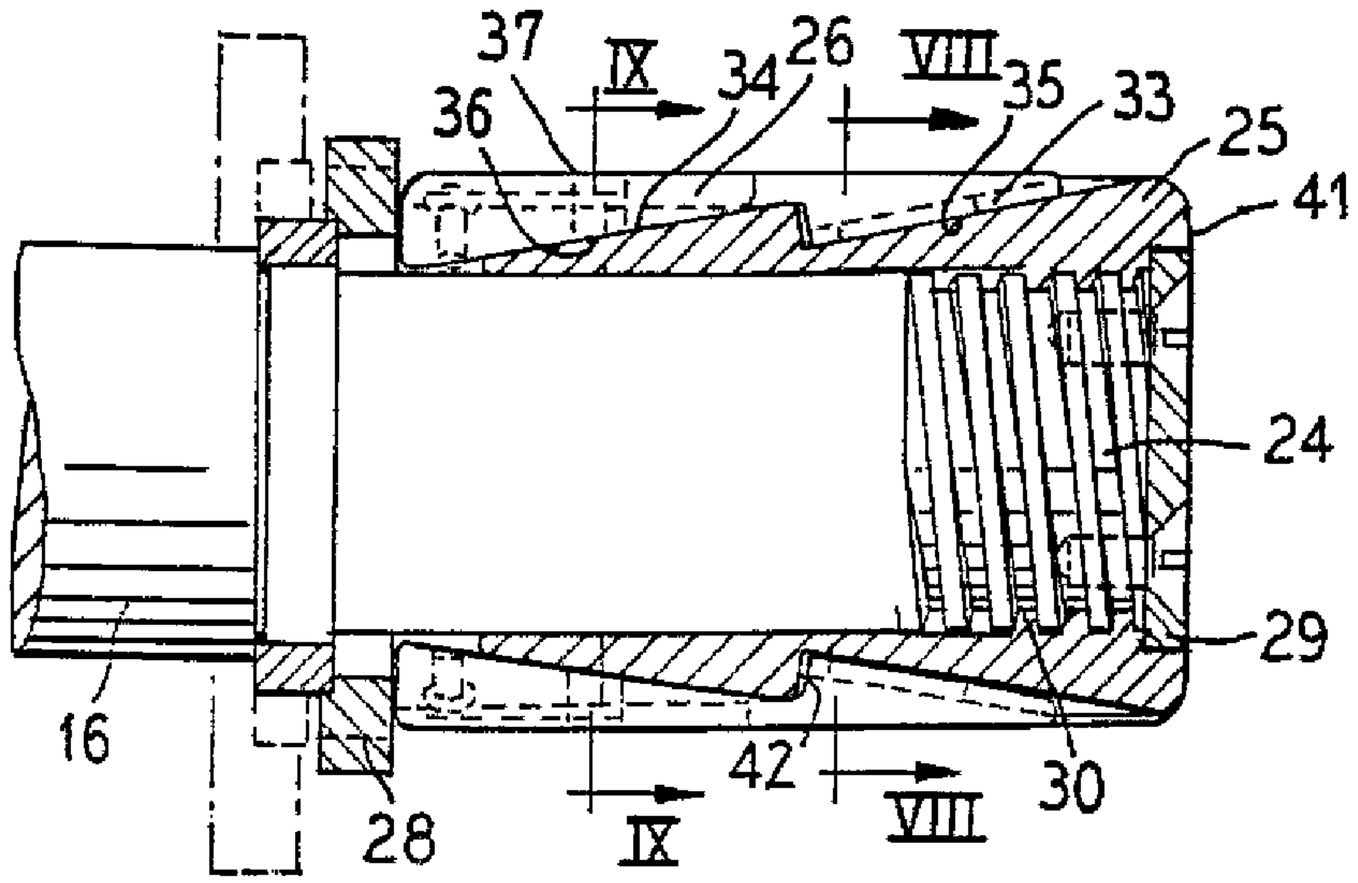

(57) Mandrin extensible, comprenant un axe fileté (16) associé à un dispositif d'entraînement servant à le faire tourner, des cales (41) supportées sur l'axe avec des pattes (26) de mandrin orientées vers l'extérieur pour venir en contact avec la surface interne d'un noyau, les cales comportant des surfaces (33, 34) de came inclinées et orientées vers l'extérieur s'appariant à des surfaces (35, 36) de came situées sur les pattes du mandrin pour écarter lesdites pattes lorsque les cales sont déplacées axialement par l'axe, les cales et les pattes du mandrin pouvant tourner librement avec l'axe jusqu'à ce qu'il soit bloqué par une roue annulaire (28) et une crémaillère d'arrêt de sorte que les cales et les pattes du mandrin soient bloqués dans leur rotation pour permettre à l'axe de tourner et de déplacer ainsi axialement les cales et les pattes du mandrin vers l'extérieur.

(57) An expandable mandrel including a threaded spindle (16) with drive means for rotating the spindle, wedge pieces (41) supported on the spindle with core chuck lugs (26) facing outwardly for engaging the inner surface of a core, the wedge pieces having outwardly facing inclined cam surfaces (33, 34), matching cam surfaces (35, 36) on the core chuck lugs to expand the core chuck lugs when the wedge pieces are moved relatively axially by the spindle, the wedge pieces and core chuck lugs being free to rotate with the spindle until locked by an annular gear (28) and a stopping rack so that the wedge pieces and core chuck lugs are held against rotation to allows the spindle to rotate relatively thereby moving the wedge pieces axially and the core chuck lugs outwardly.

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification [6] :
B65H 75/24

A1

(11) International Publication Number: **WO 96/04196**

(43) International Publication Date: 15 February 1996 (15.02.96)

(21) International Application Number: PCT/US95/09995

(22) International Filing Date: 25 July 1995 (25.07.95)

(30) Priority Data:
08/283,974 1 August 1994 (01.08.94) US

(71) Applicant: BELOIT TECHNOLOGIES, INC. [US/US]; Suite 3001, 3513 Concord Pike, Wilmington, DE 19803 (US).

(72) Inventor: GANGEMI, Donald; 34 Seekonk Crossroads, Great Barrington, MA 01230 (US).

(74) Agent: MATHEWS, Gerald, A.; One St. Lawrence Avenue, Beloit, WI 53511 (US).

(81) Designated States: BR, CA, DE, FI, GB, JP, KR, SE, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

2196541

(54) Title: CORE CHUCK

(57) Abstract

An expandable mandrel including a threaded spindle (16) with drive means for rotating the spindle, wedge pieces (41) supported on the spindle with core chuck lugs (26) facing outwardly for engaging the inner surface of a core, the wedge pieces having outwardly facing inclined cam surfaces (33, 34), matching cam surfaces (35, 36) on the core chuck lugs to expand the core chuck lugs when the wedge pieces are moved relatively axially by the spindle, the wedge pieces and core chuck lugs being free to rotate with the spindle until locked by an annular gear (28) and a stopping rack so that the wedge pieces and core chuck lugs are held against rotation to allows the spindle to rotate relatively thereby moving the wedge pieces axially and the core chuck lugs outwardly.

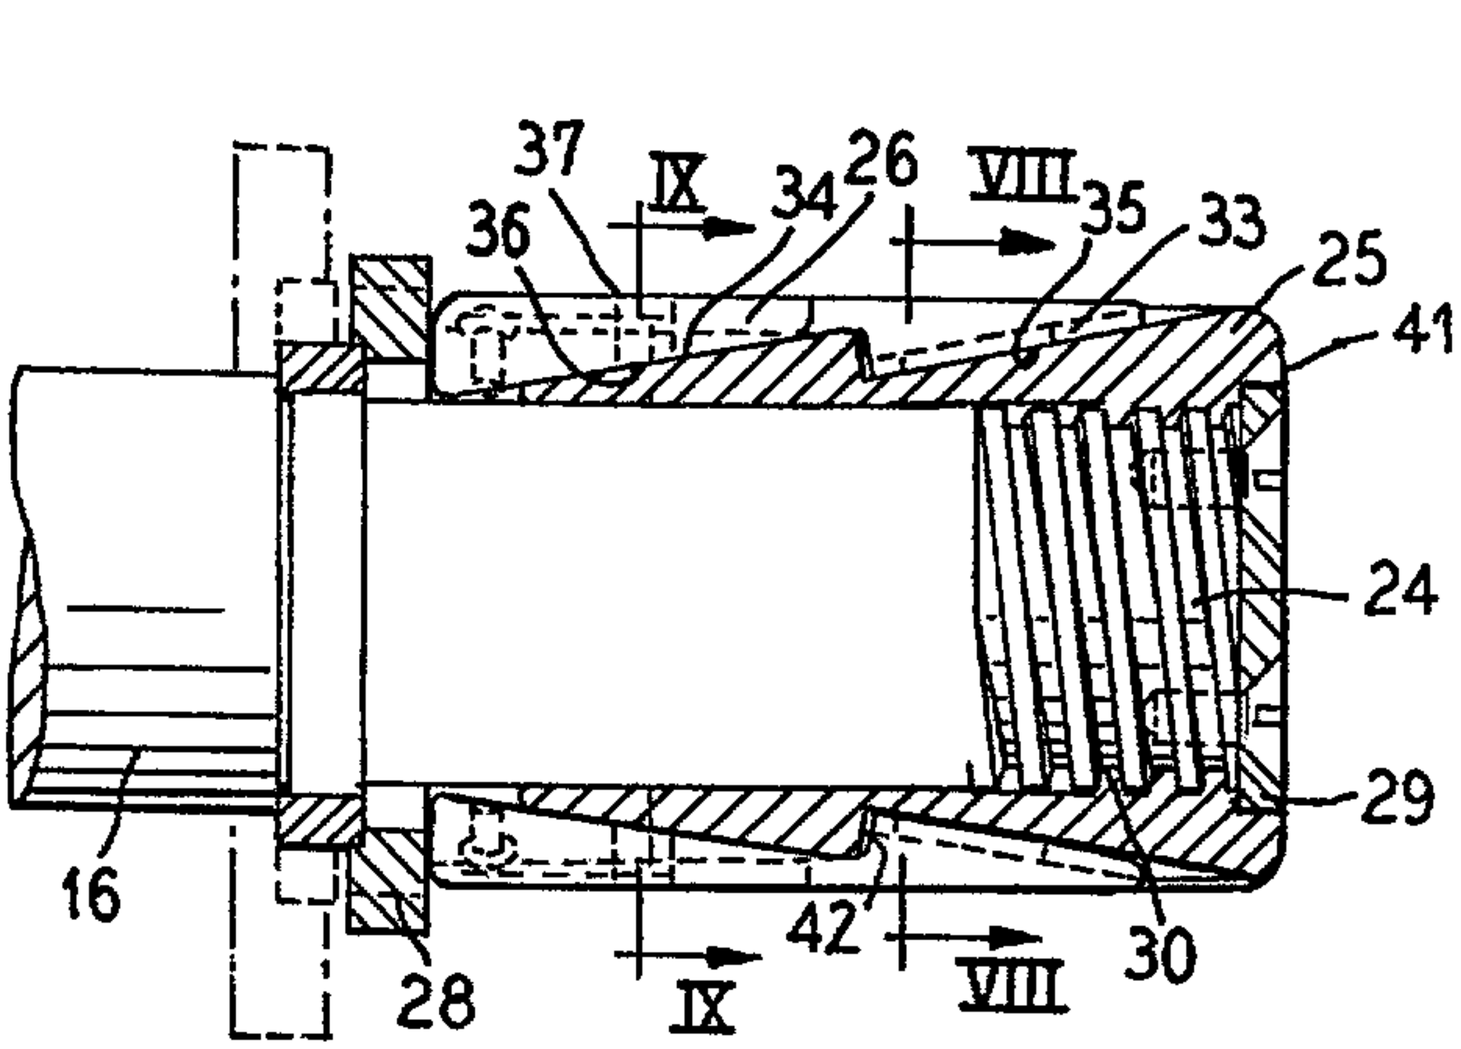

PATENT APPLICATION

SPECIFICATION

TITLE

CORE CHUCK

BACKGROUND OF THE INVENTION

The present invention relates to improvements in the field of paper handling machines, and, more particularly, to an improved supporting mandrel structure for firmly holding the ends of a hollow core on which a continuous web is to be wrapped.

In winding endless webs of material such as paper onto and off of a core, it is necessary that the core be mounted concentrically with its axis of rotation in order to prevent tearing and twisting of the web. It is also necessary to prevent longitudinal movement of the core with respect to the material being reeled to prevent tearing or twisting of the material and to assure that the material being wound onto the core will have its edges aligned. The cores which are used are normally fiberboard having a rupture strength so that while the ends must be firmly gripped, they must not be gripped in such a manner to rupture the material. Also, the engagement must be such that it is firm and reliable and the engagement must not
loosen during reeling operations. A further requirement is that the engagement between a supporting chuck arrangement and a core is that it can be completely and positively released.

Accordingly, it is an object of the invention to provide a core chuck apparatus which engage in the grips the inner surface of a core with a positive limit in engagement pressure to avoid damage to the core.

A further object of the invention is to provide a mechanical drive for a core chuck wherein a single drive is utilized for operatively engaging the core and the same drive is used for rotating the core after it has been gripped by the chuck.

A still further objection of the invention is to provide an improved core chuck apparatus which is of simplified construction and completely reliable providing advantages over structures heretofore available.

The prior art over which this invention is an improvement is shown in document U.S. -A-3,934,836. This document discloses an expandable mandrel for locking and supporting a tubular core, including a threaded spindle having a central axis, a drive means, a wedge member having a plurality of wedge pieces arranged circumferentially around the spindle, outer core chuck lugs have axially extending, radially outwardly facing, core-engaging surfaces extending parallel to the spindle axis, and have radially inwardly facing cam surfaces inclined axially complementary to the cam surfaces of the wedge pieces, and limit means limiting the axial travel of the wedge pieces. In this reference apparatus, there is no collar, and there are no wedge-shaped recesses in a collar for receiving a plurality of corresponding wedge-shaped lug elements. Further, this reference also has no cam surfaces in its mandrel shaft to actuate the core-engaging elements.

By contrast, in this invention, there is a collar having wedge-shaped recesses for receiving a plurality of lugs, but the collar never rotates to actuate the radial movement of the lugs, but only moves axially relative to the spindle.

FEATURES OF THE INVENTION

In accordance with the invention, a plurality of core chuck lugs are provided arranged circumferentially around a spindle with a rotation of the spindle expanding the lugs easily and rapidly but terminating the expansion at a positive location so that nothing is left to chance insofar as the drive is concerned to endanger damaging the core. Yet, the expansion is such that

AMENDED SHEET
IPEA/EP

the core is firmly gripped. This is accomplished by a plurality of wedge pieces driven axially by a spindle with the wedge pieces having inclined cam surfaces between them and the core chuck lugs. The spindle has positive stop limitations so that it can move the wedge pieces only so far. Also, a limitation is placed between the wedge pieces only so far. Also, a limitation is placed between the wedge pieces and core chuck lugs so that over radial expansion does not occur. A unique drive arrangement provides for the same drive to be utilized for the core griping apparatus and the drive used for rotating the core.

Other objects, advantages and features, as well as equivalent structures and methods which are intended to be covered herein, will become more apparent with the teaching of the principles of the invention in connection with the disclosure of the preferred embodiments thereof in the specification, claims and drawings, in which:

DESCRIPTION OF THE DRAWINGS

Figure 1 is a front elevational view of a winding stand for supporting a core constructed with the principles of the present invention;

Figure 2 is an enlarged vertical sectional view taken through the head of a winding stand;

Figure 3 is a fragmentary sectional view showing details of the core engaging mechanism;

Figure 4 is an end view of the core engaging mechanism of Figure 3;

Figure 5 is a vertical sectional view taken through the core engaging head;

Figure 6 is an end view of a holding gear;

Figure 7 is a perspective view of the core engaging mechanism with portions broken away;

Figure 8 is a sectional view taken substantially along line VIII-VIII of Figure 5;

Figure 9 is a sectional view taken substantially along line IX-IX of Figure 5; and

Figure 10 is a perspective view of one of the core chuck lugs for engaging the inner surface of the core.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

As illustrated in Figure 1, a rotatable core **10** is supported for winding a continual web into a roll **11** shown in phantom form in Figure 1. The core is supported by chucks **14** and **15** which are inserted into the ends of the core and have an expanding mechanism for pressure engaging the inner surface of the core **10** to support it. The core holding chucks are supported in end stands **12** and **13**.

The core chucks are driven in rotation with a unique drive arrangement which functions not only to expand the core chucks to engage the inner surfaces of the core but also to rotate the core in driven rotation. This drive mechanism drives a core spindle **16** and **17** at each end with the spindle having a driven gear **18** and **19** driven by mating beveled gears **20** and **21** connected to drive shafts **22** and **23** which extend vertically up through the stands **12** and **13**. Spindles **16,17** could be motor shafts.

Since each end of the apparatus supporting a core is identical, only one core chuck **14**, and spindle **16**, will be discussed with the understanding that the corresponding apparatus on the other end is the same in both structure and operation.

As illustrated in greater detail in Figures 5 and 7, the spindle shaft **16** is threaded with Acme-type threads at **24** at its outermost end to facilitate the transmission of axial force from the spindle through the expandable chuck mechanism to selectively engage and disengage the core as will be described in detail below. Spindle shaft **16** has a longitudinal axis **8**.

Positioned encircling the outer periphery of cylindrical spindle **16** is a concentric hollow cylindrical collar **41**, in the outer peripheral surface **47** of which are a plurality of wedge-shaped, axially extending recesses which are

generally designated with the numeral **25**. These wedge-shaped recesses have a pair of opposed, parallel side walls **31,31'** and a pair of longitudinally aligned bottom cam surfaces **33,34**. The first set of circumferentially disposed recesses **25** extend downwardly from the collar surface and axially inwardly from the outer, threaded end of spindle **16**. The second set of circumferentially disposed recesses **25'** begins axially inwardly, relative to the threaded outer end of the spindle, from near the ends of the corresponding first set of recesses **25**. A shoulder **42**, extending substantially radially relative to the outer surface of the collar, separates recesses **25,25'** which otherwise comprise a substantially continuous recess. The width of the wedge-shaped recesses **25,25'**, as defined by side walls **31,31'**, corresponds, with suitable tolerances, to the width of a corresponding plurality of lugs **26** which are slidably disposed within the recesses **25,25'**.

As shown in Figures 5, 7 and 10, each of the lugs **26** is shaped in the form of a pair of tandem, or end-aligned, wedges, which have a corresponding pair of cam surfaces **35,36** which are end-aligned and which are so constructed and arranged as to mate with corresponding cam surfaces **33,34**, in sliding engagement therewith, in each recess **25,25'** in the collar **41**. Each of the lugs thus comprise a pair of end-aligned wedges having an outer surface **37**, inner cam surfaces **35,36**, and side surfaces **39,39'**. The cam surfaces **35,36** are slanted relative to the outer surface **37**.

The inner, cylindrical surface of collar **41** is also formed to have Acme threads **30** to engage the threads **24** on the spindle. A disk-shaped head **29** is attached to the end of the spindle **16** by screws, as shown in Figure 5, and its outer periphery has a rim which engages a corresponding slot in the collar **41** to limit the axial outward movement of the collar relative to the outer, threaded end of spindle **16**.

(6/A)

In the view of Figure 3, the lugs **26** have moved axially to the right relative to the collar **41**, which causes these core chuck lugs to be forced radially outwardly to expand and engage the inner surface of the core **10** as their inner cam surfaces **35,36** slide over cam surfaces **33,34** on the collar **41**. The lugs do not move axially relative to the core. The collar does not rotate, but moves axially relative to the spindle in a direction away from the threaded end of the spindle, which direction is toward the end of the core, or to the left as shown in Figure 3.

In Figure 5, the lugs **26** have moved to the left relative to the collar, which permits the core chuck lugs to move radially inwardly and retract to a position where the core is released. As in all operation, such as described above in conjunction with Figure 3, the lugs do not move axially relative to the core. The collar does not rotate, but moves axially relative to the spindle. All of this operation shown in Figures 3 and 5 is accomplished by rotating the spindle to cause the collar **41** to move on the Acme threads to move the collar to the left in Figure 3, and to the right in Figure 5.

Axial Movement of the collar **41** having the lugs **26** thereon is achieved by rotation of the spindle **16** relative to the collar via Acme threads **24,30**. When the core chuck lugs are to be relaxed, rotation of the spindle moves the collar **41** axially outwardly toward the threaded end of the spindle until head **29** on the spindle seats against the collar **41** in the position shown in Figure 5.

To cause the core chuck lugs to move radially outwardly and engage the core, the spindle is rotated in the opposite direction so that the threads **24** on the spindle interengaging with the threads **30** on the collar **41** will move the collar to the left in Figure 3, or axially away from the threaded end of the spindle, and the cam surfaces **33,34** in the collar sliding axially along cam surfaces **35,36** on the lugs will cause the core chuck lugs to be forced radially

AMENDED SHEET
IPEA/EP

outwardly to engage the core with their outer surface **37**. This will only happen, however, if, as the spindle **16** is rotated, the collar **41** is held against rotation. If the collar 41 is allowed to rotate, the interaction between threads **24,30** will not move the collar because it will rotate with the spindle.

To lock the collar **41** to prevent its rotational movement so that the threads of the spindle move the collar co-axially with the longitudinal axis **8** of spindle **16**, a gear ring **28** is provided, Figure 7. This gear ring can be locked by a laterally (i.e. radially relative to the longitudinal axis **8** of spindle **16**) moving toothed rack **32** which moves between engaged and disengaged positions in the direction of double headed arrow 6. As the rack **32** moves to the left in Figure 7, it interengages with the teeth of the gear 28 to lock it. At that point, rotation of the spindle **16** in the appropriate direction will cause the collar **41** to be drive axially outwardly of the core **10**, which is to the left in Figure 3. This will cause the core chuck lugs **26** to climb in their individual grooves in the collar **41**, climbing on the cam surfaces **33** and **34** in the collar **41**.

When the core chuck is to be released, the collar is locked from rotating by the rack **32** engaging the gear **28**. The spindle rotates in a direction to move the collar **41** to the right as shown in Figure 3 which permits the lugs to slide relative to the collar and move radially inwardly until the head **29** limits the collar movement. At this same time, co-acting shoulders **42**, at the raised ends of the cam surfaces **34** on the collar **41**, and shoulders **46**, at the raised ends of the lug surfaces 35 also limit the axial and radial travel of the core chuck lugs.

When a core has been gripped by the core chuck lugs being moved outwardly, the gear **28** is released by moving the rack out of engagement with the gear, and at that point the entire assembly of the collar and lugs rotate with

AMENDED SHEET
IPEA/US

the spindle so that no further axial travel of the collar, and radial movement of the core chuck lugs is encountered.

The core chuck lugs are held in their recesses **25** in the collar assembly by tongues **40** and **43** which extend laterally from opposite sides **39,39'** of the lugs and into corresponding slots **50,53** in the collar **41**. The tongues on projections **40** and **43** are shown both in Figures 8 and 10.

Figure 9 illustrates additional retention mechanisms for the lugs. For this purpose, the lugs have recesses **38** in the side into which project retaining fingers **44**. These retaining fingers are held by suitable means such as a screw **45** in the collar **41**. This is shown in Figures 5, 7 and 9.

It is contemplated that in other constructions, separate wedge pieces may be employed held in place by suitable means to co-act with the chuck lugs.

With the double surfaces **33** and **34** in the collar acting on the corresponding cam surfaces **35,36** of the chuck lugs, the outer surfaces **37** of all the lugs will be kept parallel and will engage the cylindrical inner surface of the core for the entire length of each surface **37**. That is, the outer surfaces which are slightly crowned to conform to the inner surface of a core, will extend parallel to the axis **8** of the spindle **16** in both the expanded position of the core chuck lugs and in the release position.

In operation, the core chucks will start with the lugs recessed in the position shown in Figures 5 and 7. A core will then be located in position concentrically about each of the chucks **14** and **15** (i.e. the chucks will be inserted into either end of a core) and for this purpose, the stands **12** and **13** or their heads can be spread to put a core **10** in position. The operator then locks the gear **28** by moving the rack **32**, Figure 7, into interengagement therewith

and rotates the spindle in a first direction. This moves the collar **41** inwardly from the threaded end of spindle **16**, which is to the left in Figure 5 and to the right in Figure 7. This will cause the core chuck lugs **26** to be forced radially outwardly since their base abuts the inner surface of the gear **28** and they cannot shift axially as the cam surfaces **33,34** in the collar recesses co-act and slide over corresponding cam surfaces **35,36** on the lugs. The collar **41** can move only a limited distance thereby limiting the maximum radial outward expansion of the lugs **26** and the concomitant force they exert against the inner wall of the core. This limits the torque which can be applied. The gear **28** is then released by rack **32** and the spindle drives the core in rotation to proceed through the completion of the winding program. When the core is finished being wound, the control motors are reversed to reverse the direction of rotation of the spindle **16**, with the gear **28** locked by the rack **32**, and the chucks are unlocked from the cores by reverse movement of the lugs in the collar recesses. The stations are then separated to release the roll.

Generally speaking, torque must be applied to the spindle to expand the chuck, and counter-torque must be applied to collapse the chuck. In operation, collapse of the chuck is prevented by the fact that the frictional force between the cam surfaces on the collar and lugs exceeds the force which would cause these surfaces to slide relative to one another when the wound paper roll on the core supported by the chucks is braked. Inertia is controlled by controlling the braking procedure so as to not exceed the torque which will collapse the chuck.

With reference to Figure 7, other apparatus has been contemplated to selectively permit co-rotation of the spindle and collar, or rotation of the spindle relative to the collar, as desired. Such apparatus would take the place of the rack **32** operating in conjunction with the toothed gear ring **28**.

For example, a screw could be radially located in the peripheral edge of gear ring **28**. When the screw is advanced radially inwardly through the gear ring and into the spindle, the spindle and gear ring are locked together to maintain the chuck in an un-collapsed state. When the screw is withdrawn from engagement with the spindle, gear ring **28** can rotate relative to the spindle, and the lugs can be collapsed.

Another contemplated manner for selectively securing or releasing the gear from the spindle would be to have a pair of spring-biased shear pins mounted between gear ring **28** and spindle **16**. The pins could be positioned with their interface at the surface of the spindle so as to permit the gear to be unlocked relative to the spindle. When the pins are moved such that a pin extends between the spindle and gear ring, they would be locked together.

Both the screw and spring-biased shear pin arrangements are illustrated schematically in Figure 7 by double-headed arrow **48**.

Spindle **16** can be motor driven; it can be wrench actuated; it can be locked to gear ring **28** and engaged, or disengaged, by toothed rack **32**.

Thus, it will be seen that there has been provided an improved core chuck support and locking mechanism which meets the objectives and advantages above set forth and provides a simple yet very reliable arrangement which can be operated over a long period of time without necessitating attention or repair.

1. An expandable mandrel having a plurality of lugs for locking and supporting a tubular core, including a spindle having a threaded distal end and having a longitudinal axis, the spindle arranged to be inserted into a tubular core co-axially therewith to rotatably support the core, drive means operatively linked with the spindle for selectively rotating the spindle, locking means arranged relative to the spindle so as to selectively engage and rotatably lock the lugs to permit axial movement of the lugs relative to the spindle so that the spindle is selectively rotated relative to the lugs,

wherein

a collar is disposed about the periphery of the spindle, co-axially therewith, the collar having an outer surface and a longitudinal bore therethrough with one end of the bore containing internal threads for engaging threads on the spindle, thereby the collar can be moved axially and non-rotatably relative to the spindle by relative rotation between the spindle and the collar on the mating threads;

a plurality of wedge-shaped recesses formed in the outer surface of the collar, said recesses each having a cam surface extending from the outer surface inwardly longitudinally of the collar at an angle to the longitudinal axis to end at a shoulder extending between the cam surface and the outer surface;

each lug of the plurality of lugs is wedge-shaped, the number of lugs corresponding to the number of wedge-shaped recesses, the lugs being disposed in the recesses, each lug having an outer cam surface for engaging the tubular core, each lug also having an inner cam surface for engaging the corresponding cam surface of the wedge-shaped recess in which the lug is disposed, each lug

A

having a shoulder disposed at an angle with its cam surface for engaging a corresponding shoulder in the collar recess;

whereby rotation of the spindle relative to the collar causes the collar to move axially relative to the spindle about a longitudinal axis of the spindle to cause engagement between the locking means and the lugs to move the lugs on the cam surfaces of the wedge-shaped recesses to selectively move the outer cam surfaces of the lugs radially inwardly or radially outwardly to engage or disengage from the core according to the rotational direction of the spindle.

2. An expandable mandrel for locking and supporting a tubular core constructed in accordance with claim 1, wherein

the locking means comprises a gear, co-axially disposed about the collar, and a non-rotatable rack for selective translational movement toward and away from the gear for engaging the gear to lock the gear in place against rotational movement to prevent axial movement of the collar.

3. An expandable mandrel for locking and supporting a tubular core constructed in accordance with claim 1, wherein

the locking means includes a head mounted to the said distal end of the spindle for engaging the collar and limiting axial movement of the collar relative to the threaded end of the spindle.

4. An expandable mandrel for locking and supporting a tubular core constructed in accordance with claim 1, wherein

the collar includes slots in the recesses;

the said lugs include laterally extending tongues for extending into the slots to secure the lugs relative to the collar.

A

2196541

FIG. 1

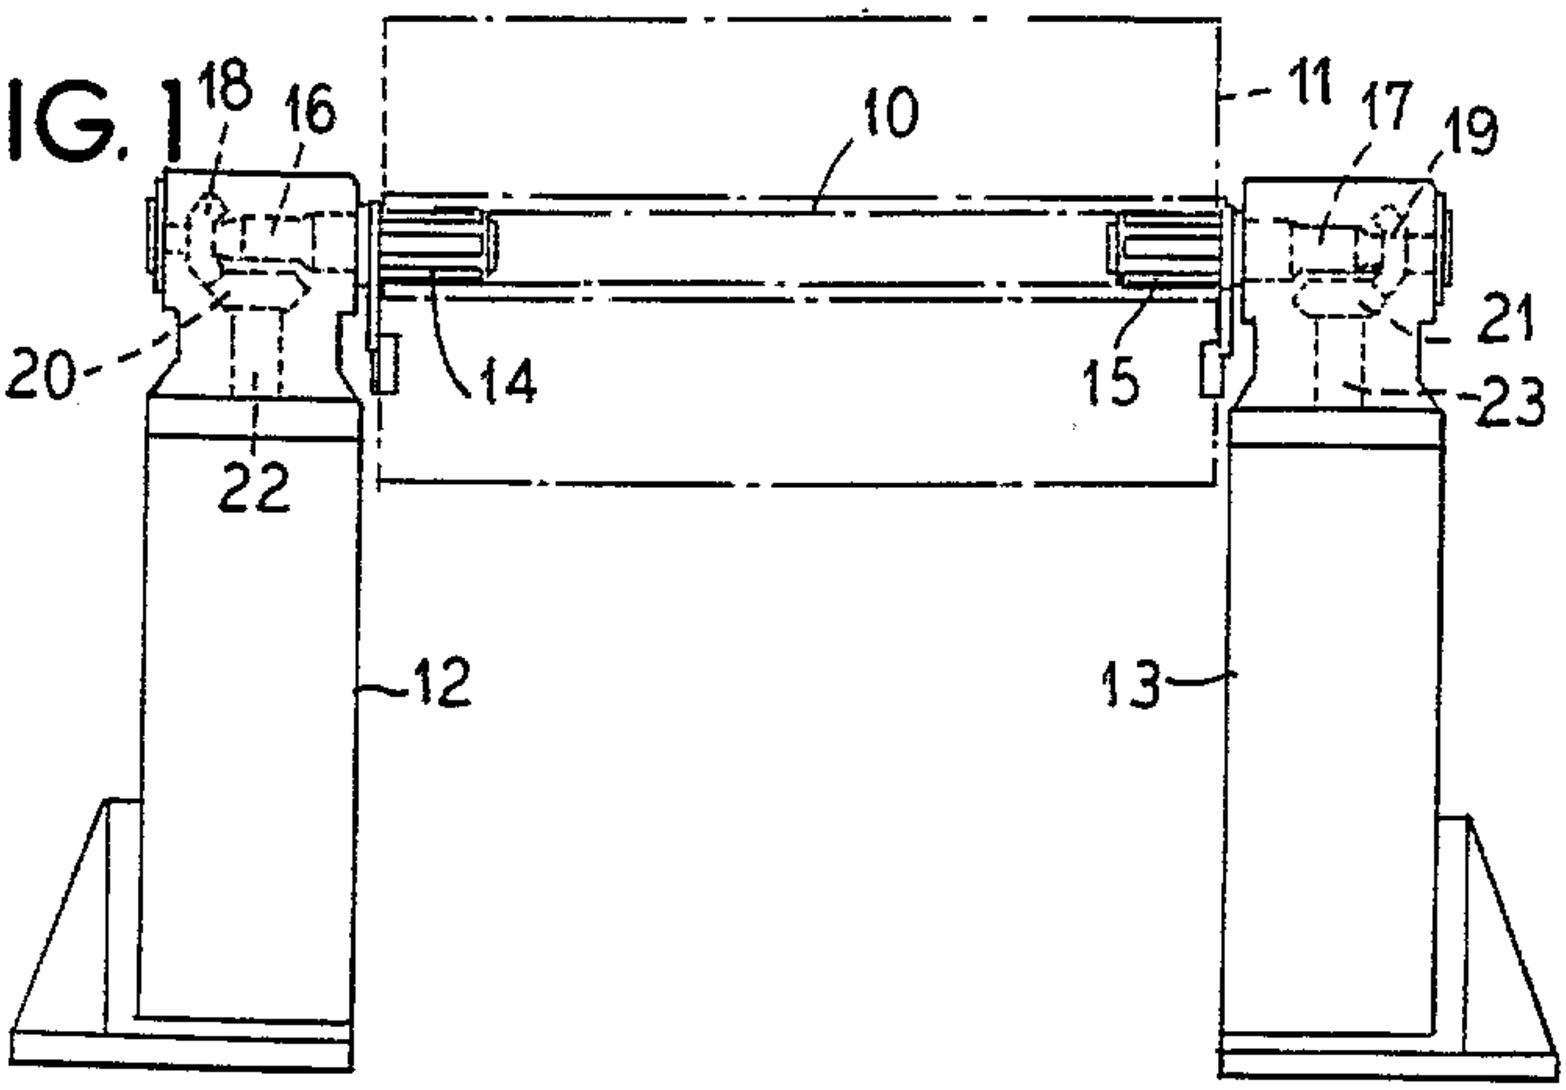


FIG. 2

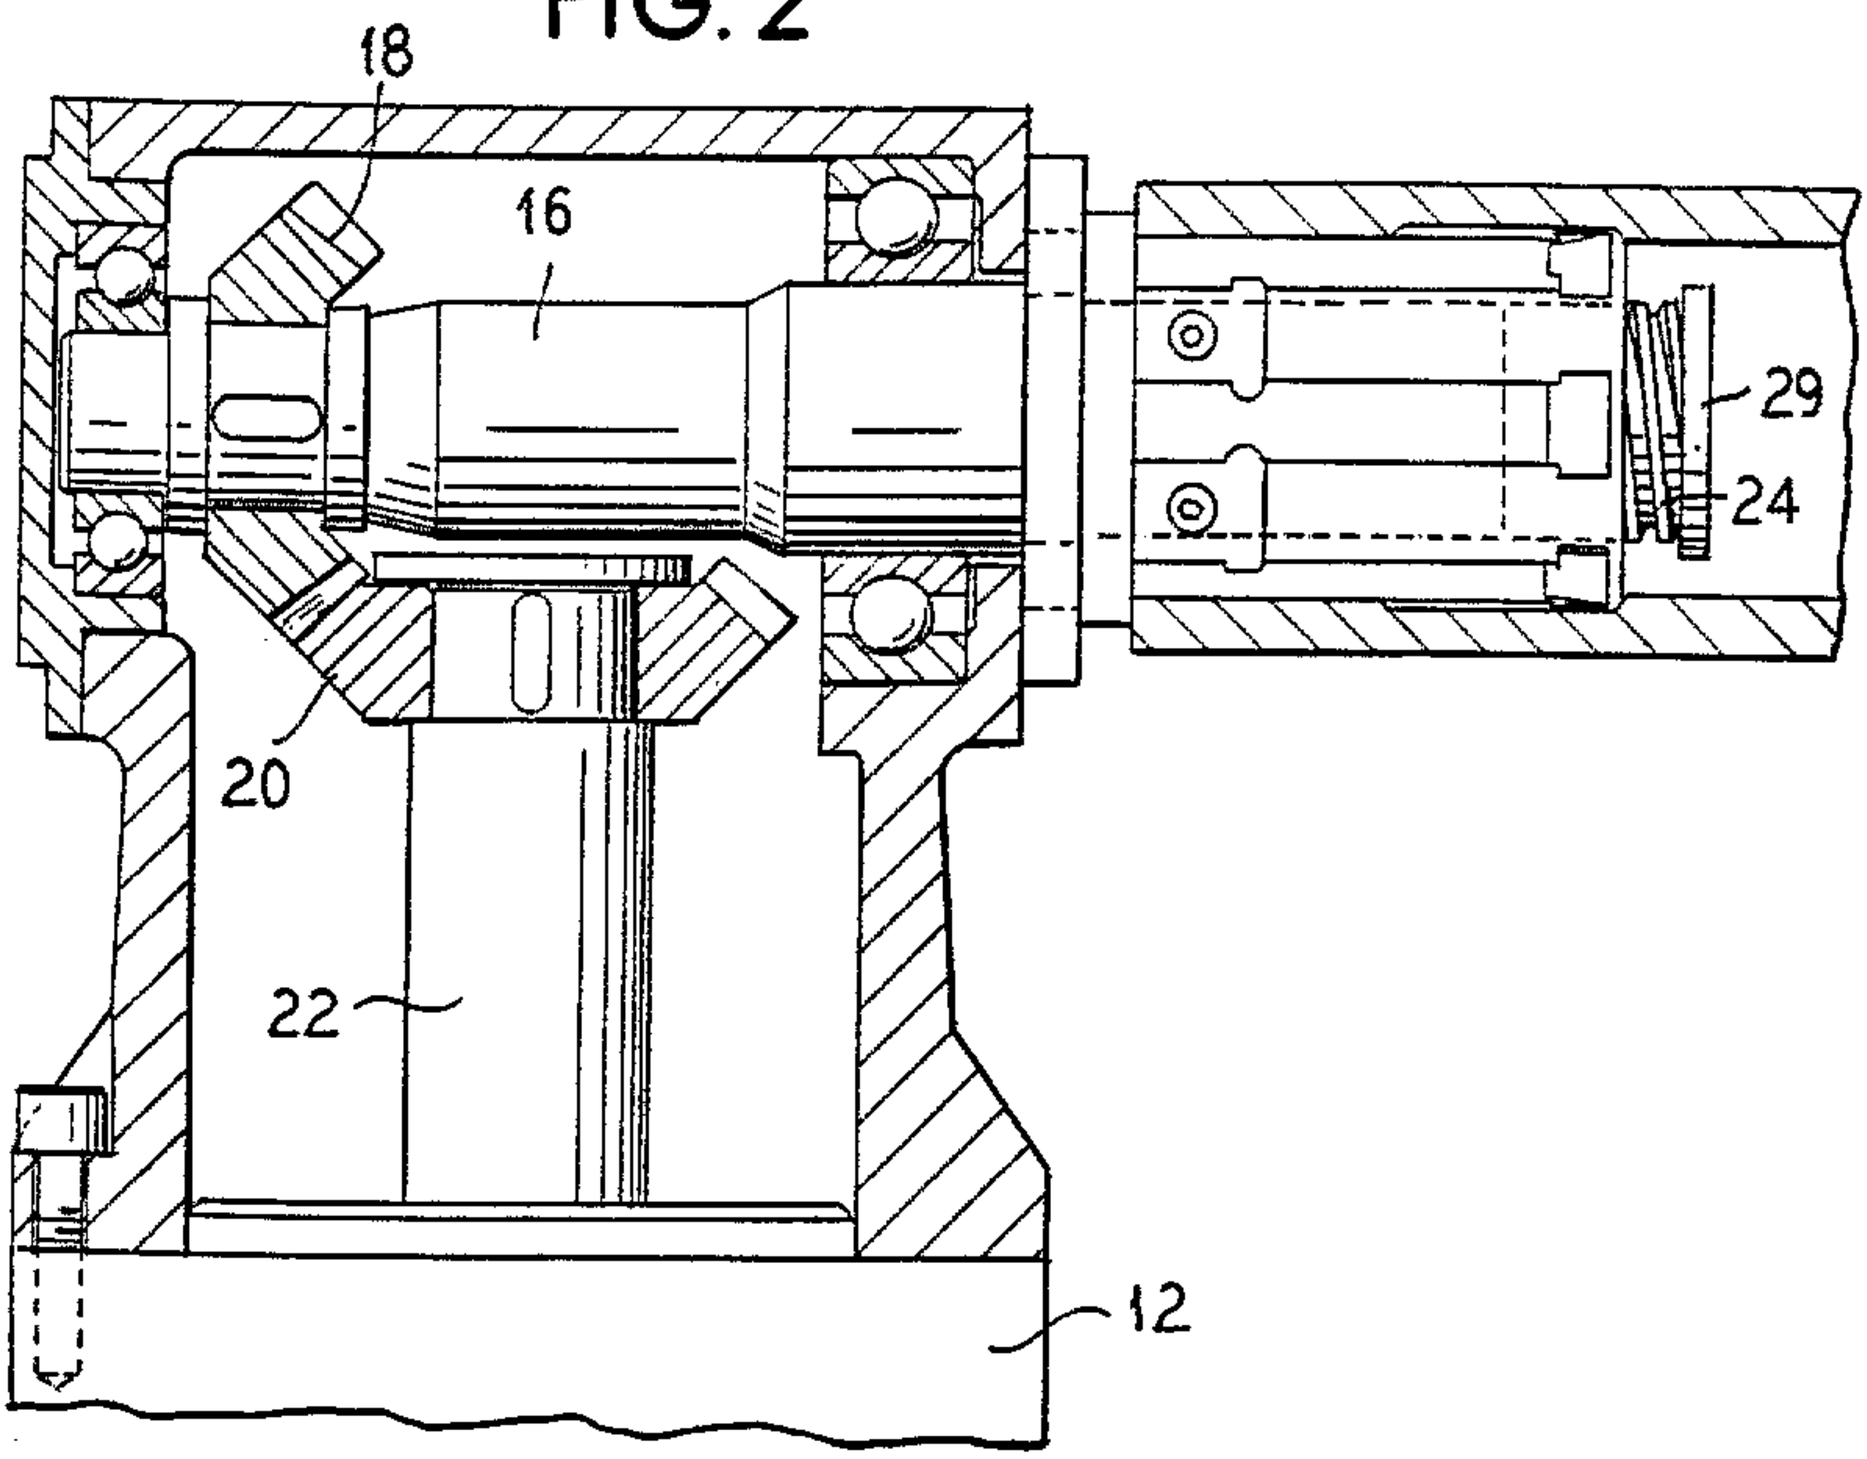


FIG. 4

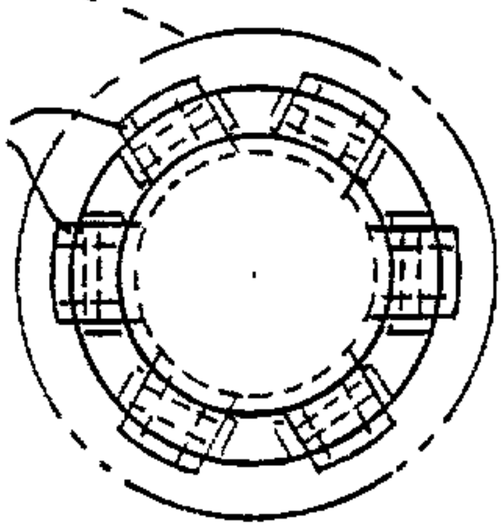


FIG. 3

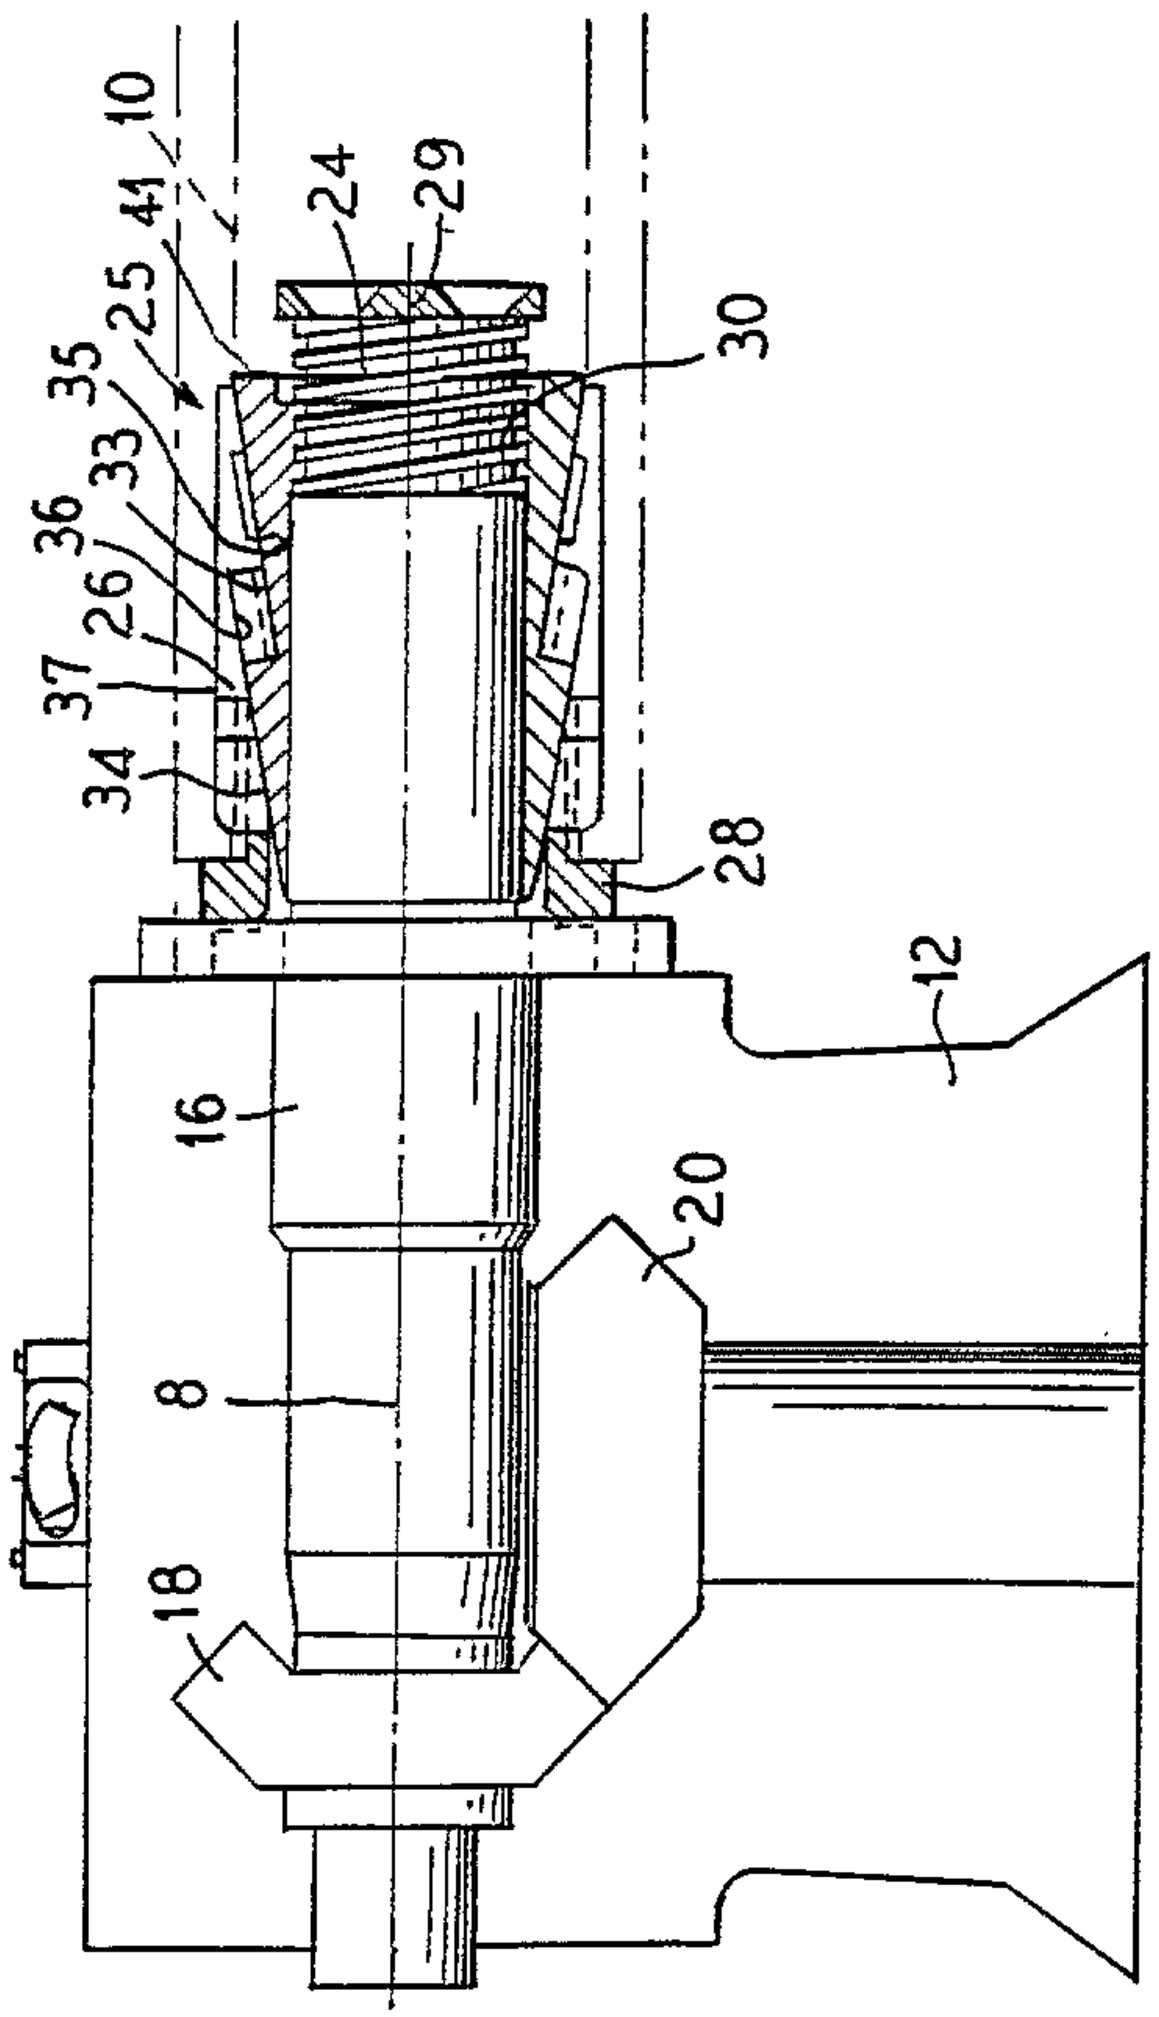


FIG. 5

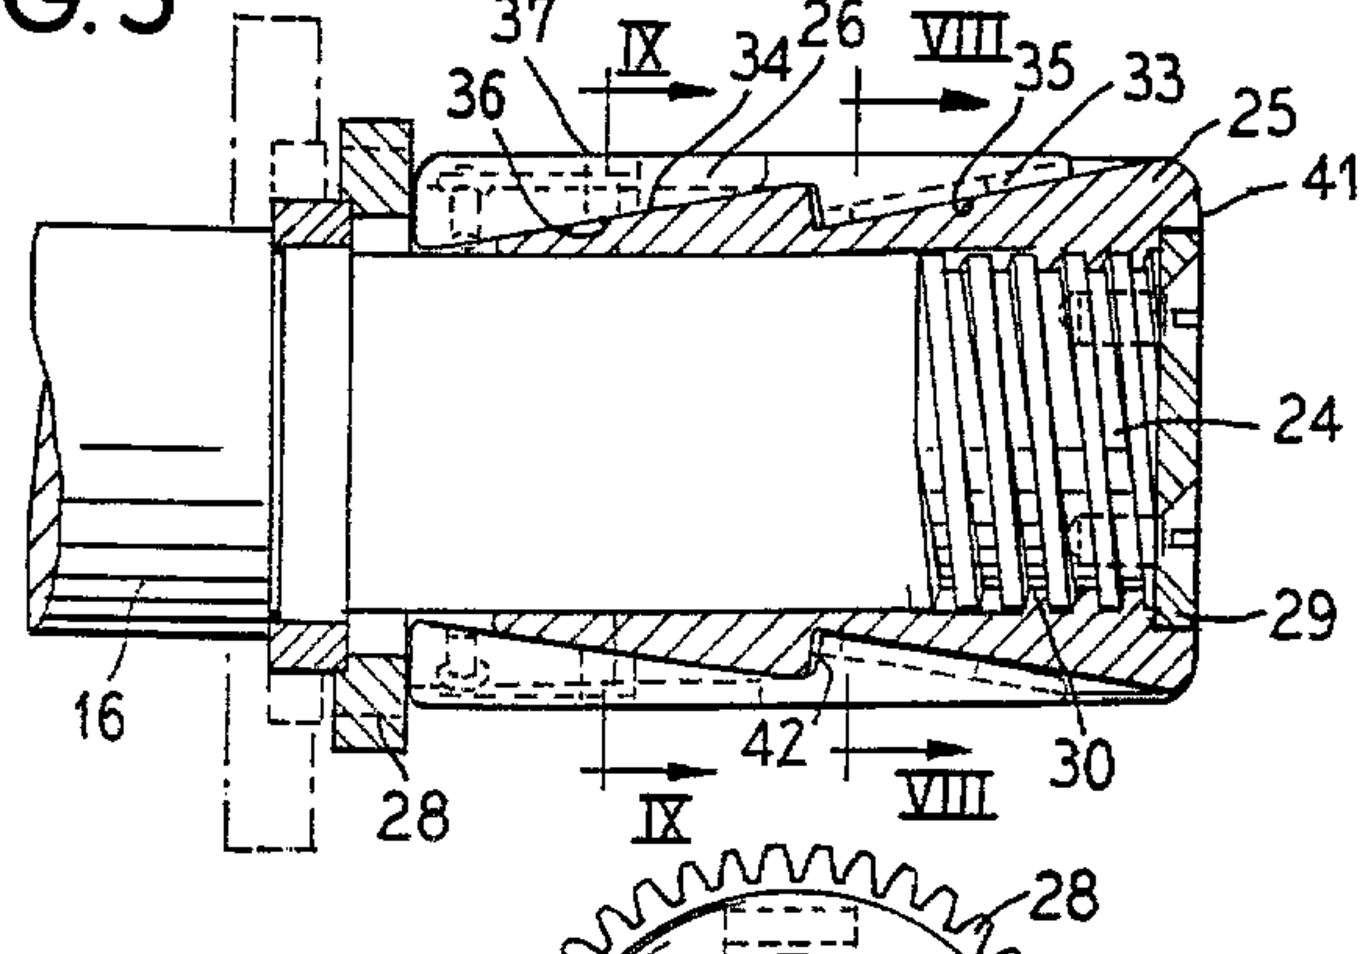


FIG. 6

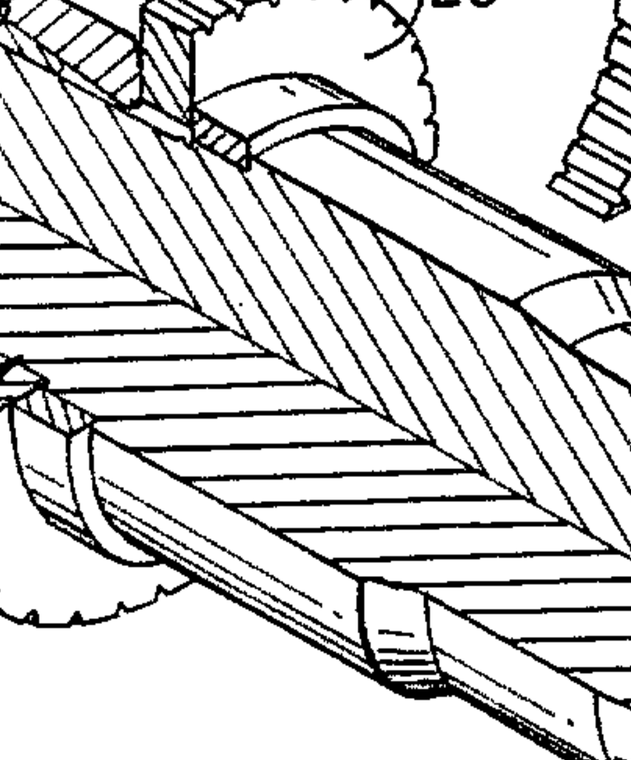


FIG. 7

FIG. 8

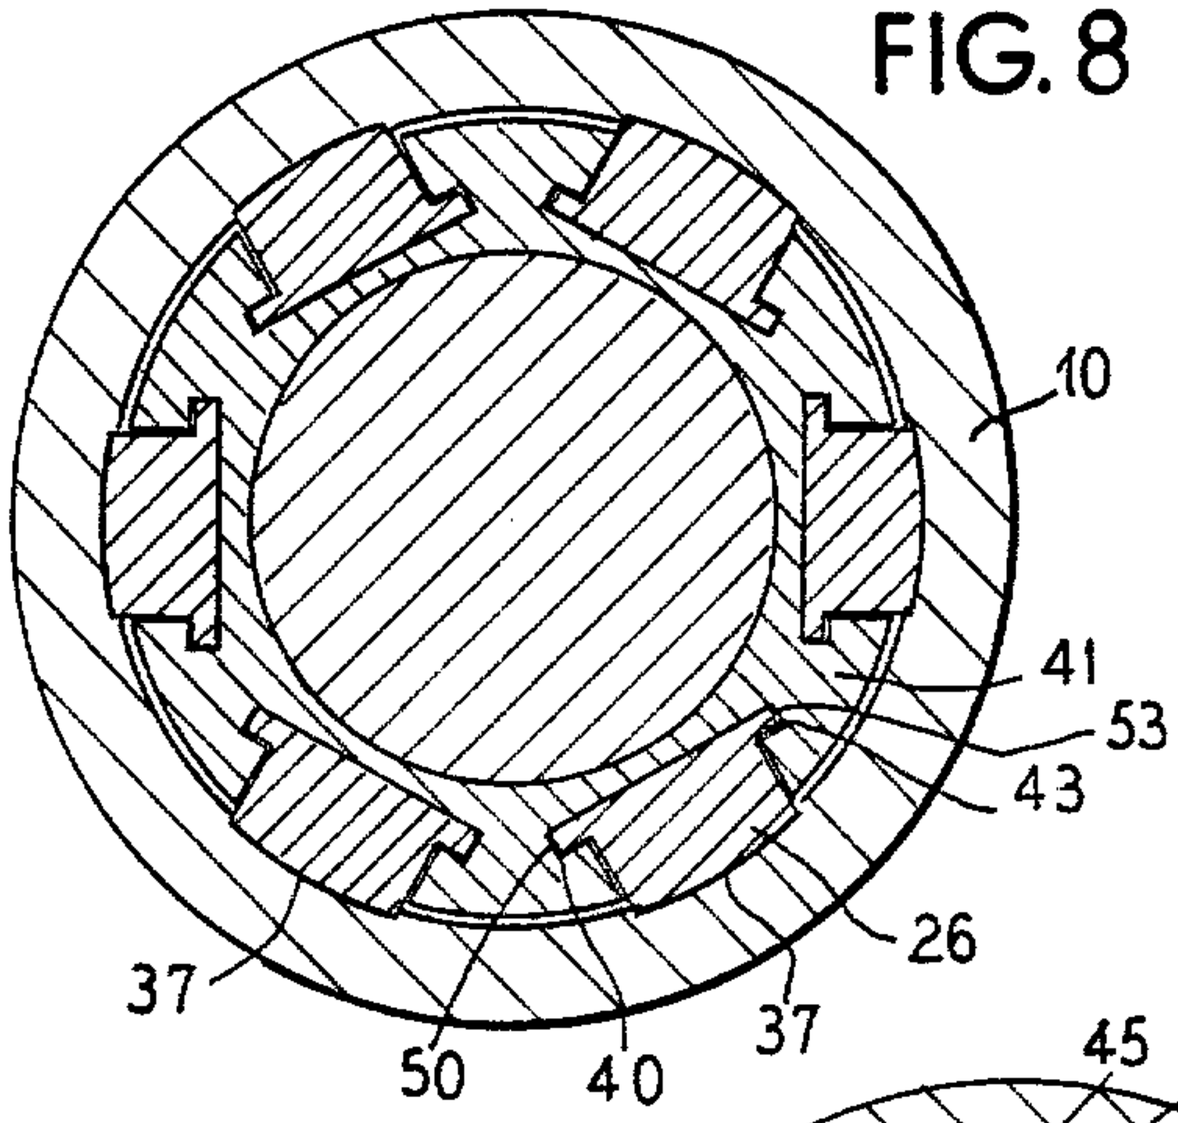


FIG. 9



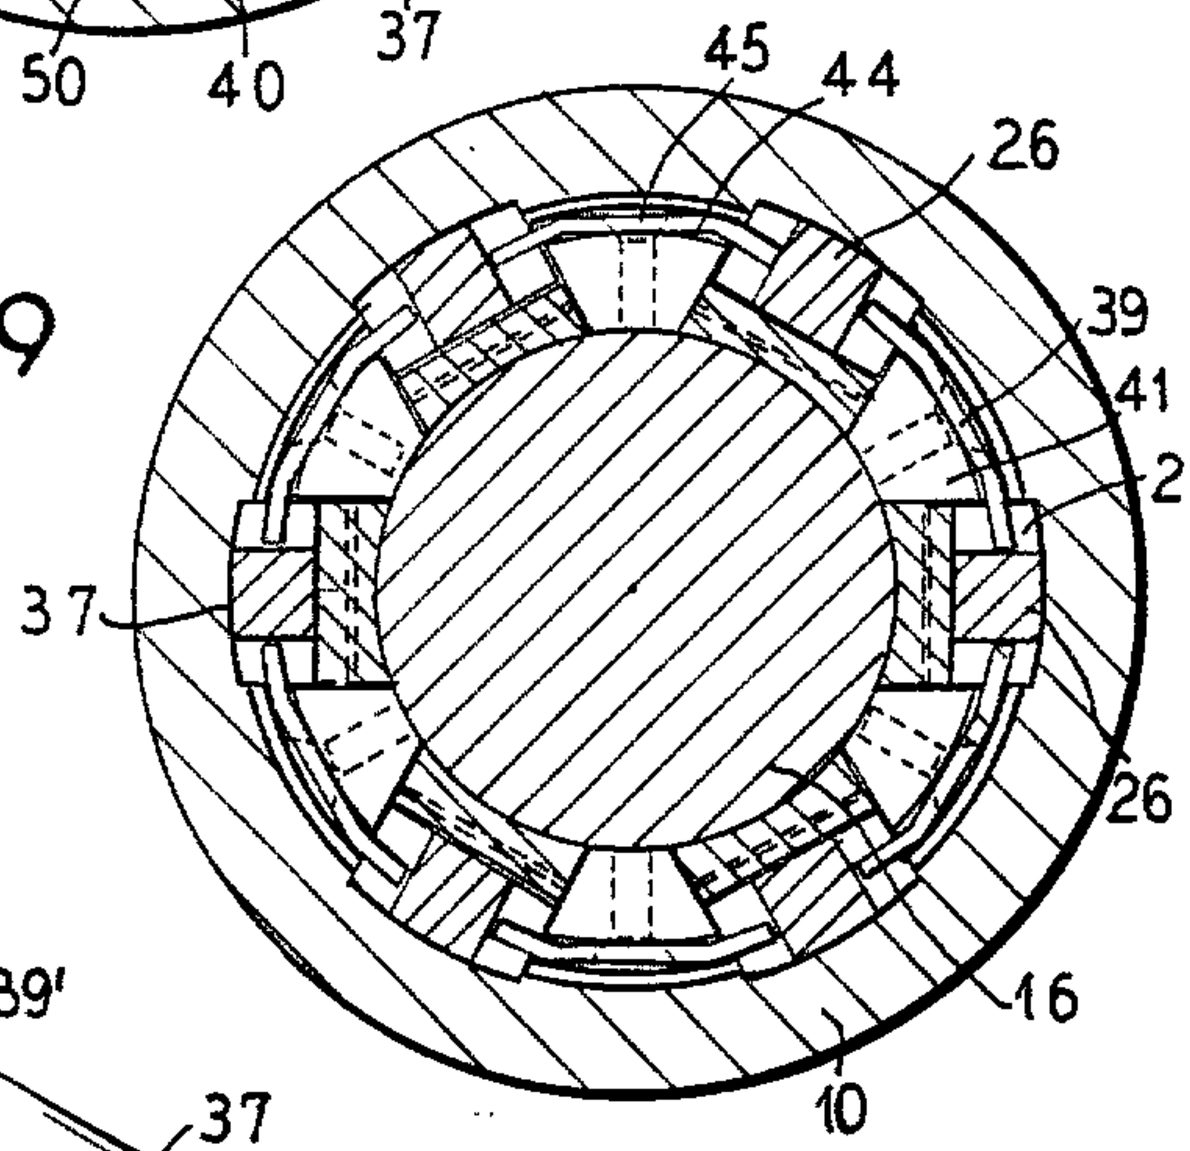


FIG. 10

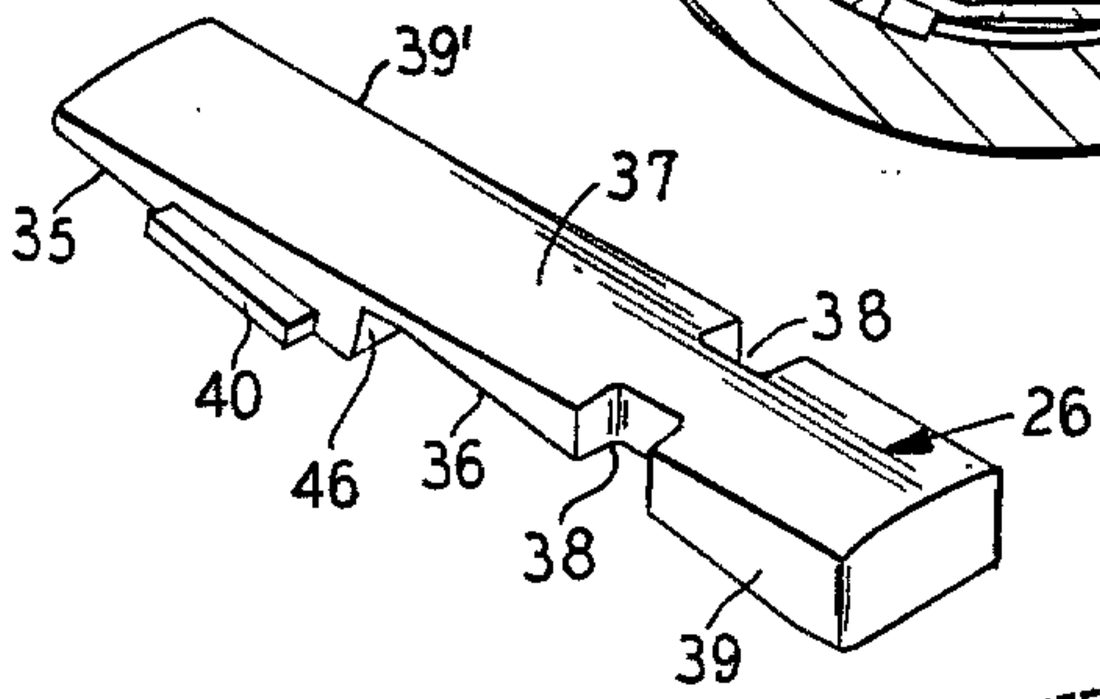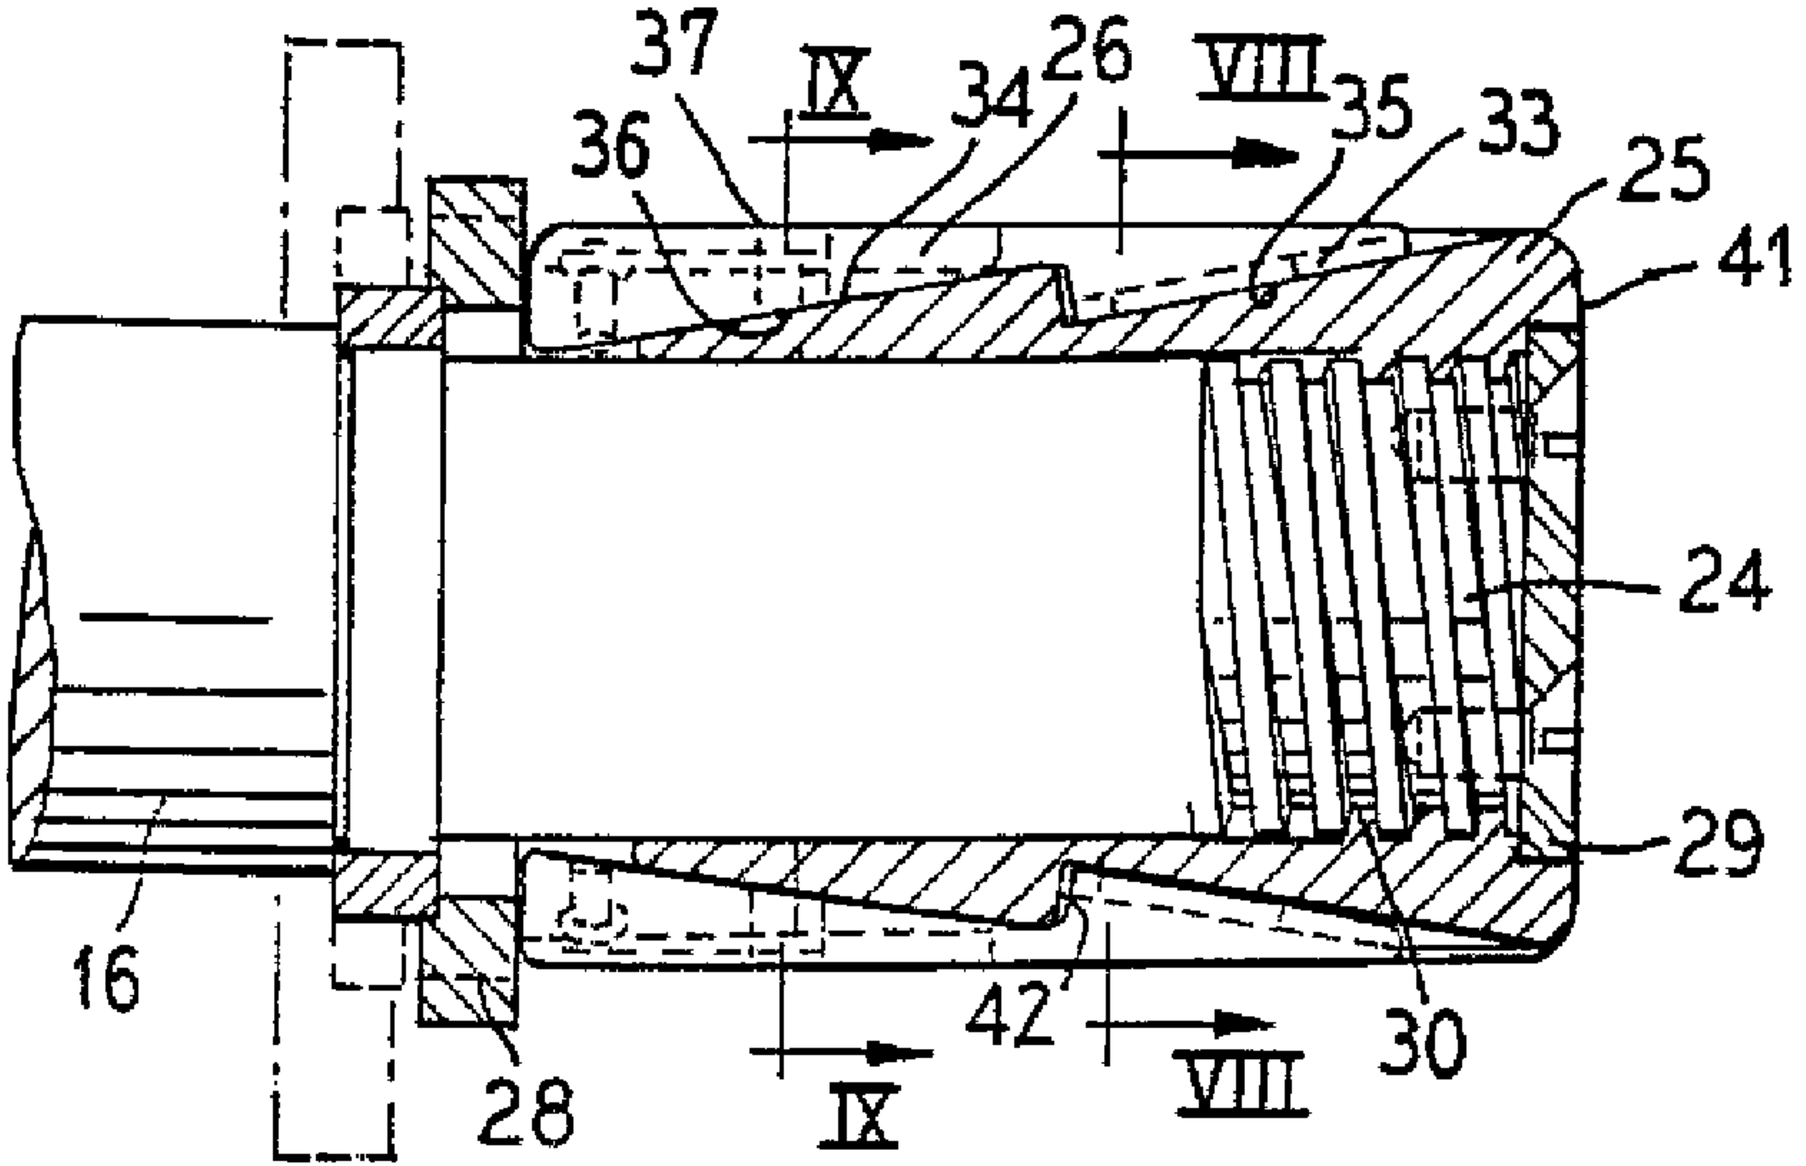


37
IX
34
26
VIII
35
33
25
36
41
24
29
16
28
42
30
IX
VIII