



US010678277B2

(12) **United States Patent**
Kline

(10) **Patent No.:** **US 10,678,277 B2**

(45) **Date of Patent:** **Jun. 9, 2020**

(54) **MIXING VALVE**

(56) **References Cited**

(71) Applicant: **Magarl, LLC**, Naples, FL (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **Kevin B. Kline**, Whitefish Bay, WI (US)

2,519,381 A 8/1950 Kreske
2,911,153 A 11/1959 Pelt
(Continued)

(73) Assignee: **Magarl, LLC**, Naples, FL (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

EP 0775954 5/1997
EP 1244948 2/2005
(Continued)

(21) Appl. No.: **16/280,533**

OTHER PUBLICATIONS

(22) Filed: **Feb. 20, 2019**

Symmons Industries product information for Symmons TempControl, 2 pgs, copyright 2011 Jan. 1, 2011.

(65) **Prior Publication Data**

US 2019/0384333 A1 Dec. 19, 2019

(Continued)

Primary Examiner — Marc E Norman

(74) *Attorney, Agent, or Firm* — John V. Daniluck;
Dentons Bingham Greenebaum LLP

Related U.S. Application Data

(60) Continuation of application No. 15/479,948, filed on Apr. 5, 2017, now Pat. No. 10,216,203, which is a (Continued)

(57) **ABSTRACT**


A mixing valve (10) includes a valve body (12) having a hot fluid inlet (14), a cold fluid inlet (16), a mixed fluid outlet (18), and a cavity (20) in the valve body (12) between the inlets (14, 16) and the outlet (18). Mixing valve (10) includes a liner (30, 130, 230, 430, 530, 630, 730, 830) positioned in valve body (12) and a valve member (40, 140, 240, 340, 440, 540, 640, 740, 840) movable therein between a first position restricting the flow of hot fluid and a second position. Liner (30, 130, 230, 430, 530, 630, 730, 830) includes a downstream valve seat (74, 174, 274, 474, 574, 674, 774) that, when engaged by valve member (40, 140, 240, 340, 440, 540, 640, 740, 840), restricts flow of hot fluid past valve member (40, 140, 240, 340, 440, 540, 640, 740, 840).

(51) **Int. Cl.**
G05D 23/13 (2006.01)
F16K 15/02 (2006.01)

(52) **U.S. Cl.**
CPC **G05D 23/134** (2013.01); **F16K 15/025** (2013.01); **Y10T 137/2514** (2015.04);
(Continued)

(58) **Field of Classification Search**
CPC G05D 23/13; G05D 23/134; Y10T 137/2514; Y10T 137/86815; Y10T 137/87652; F16K 15/025
See application file for complete search history.

4 Claims, 8 Drawing Sheets

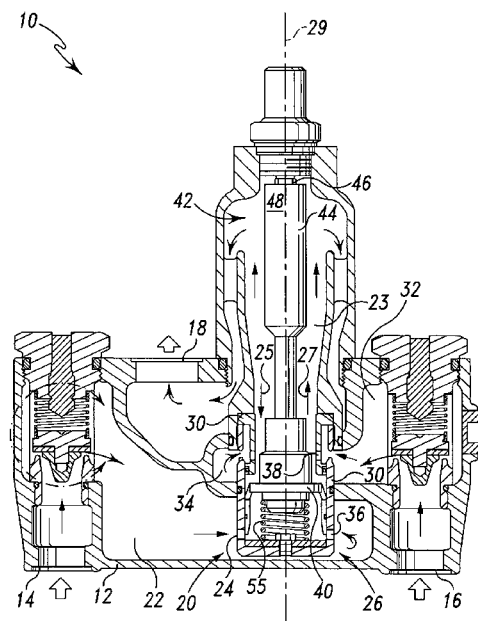

Related U.S. Application Data

- continuation of application No. 14/797,899, filed on Jul. 13, 2015, now Pat. No. 9,625,920, which is a continuation of application No. 14/040,115, filed on Sep. 27, 2013, now Pat. No. 9,081,392, which is a continuation of application No. 13/403,593, filed on Feb. 23, 2012, now Pat. No. 8,544,760, which is a continuation of application No. 12/762,942, filed on Apr. 19, 2010, now Pat. No. 8,123,140, which is a division of application No. 10/783,502, filed on Feb. 20, 2004, now Pat. No. 7,717,351, which is a continuation of application No. PCT/US02/27056, filed on Aug. 23, 2002.
- (60) Provisional application No. 60/314,803, filed on Aug. 24, 2001.
- (52) **U.S. CL.**
CPC *Y10T 137/86815* (2015.04); *Y10T 137/87652* (2015.04)

(56) References Cited

U.S. PATENT DOCUMENTS

3,001,717	A	9/1961	Kozel
3,124,304	A	3/1964	Stuhl
3,388,861	A	6/1968	Harding
3,685,728	A	8/1972	Chapou
3,827,016	A	7/1974	Knapp
3,929,283	A	12/1975	Delpla
3,938,741	A	2/1976	Allison
4,082,219	A	4/1978	Rogers, Jr. et al.
4,113,174	A	9/1978	Kagiyama et al.
4,299,354	A	11/1981	Ketley
4,509,677	A	4/1985	Bendall
4,607,788	A	8/1986	Bendall et al.
4,760,953	A	8/1988	Trubert
4,863,097	A	9/1989	Avelov
5,011,074	A	4/1991	Kline
5,033,671	A	7/1991	Shiba et al.
5,161,737	A	11/1992	Olmsted
5,174,496	A	12/1992	Bourgin
5,203,496	A	4/1993	Kline
5,323,960	A	6/1994	Kline
5,340,018	A	8/1994	MacDonald
5,341,987	A	8/1994	Ackroyd
5,356,074	A	10/1994	Limet et al.
5,379,936	A	1/1995	Kline
5,535,943	A	7/1996	Kahle et al.
5,647,531	A	7/1997	Kline et al.
5,806,761	A	9/1998	Enoki et al.
5,971,285	A	10/1999	Knapp
5,979,777	A	11/1999	Ems
5,988,514	A	11/1999	Huang
6,079,625	A	6/2000	Lubkuchner
6,085,984	A	7/2000	Chamot et al.
6,250,559	B1	6/2001	Knauss
6,257,493	B1	7/2001	Chamot et al.
6,279,831	B1	8/2001	Lorch
6,315,209	B1	11/2001	Tripp
6,315,210	B1	11/2001	Kline
6,328,219	B1	12/2001	Taylor et al.
6,405,932	B1	6/2002	Palmer
6,543,478	B2	4/2003	Kline
6,575,377	B1	6/2003	Graves
6,604,687	B2	8/2003	Goncze et al.
6,637,668	B2	10/2003	Eveleigh
6,726,110	B2	4/2004	Heinzelmann
6,820,816	B1	11/2004	Reid
6,851,440	B2	2/2005	Kline
6,880,575	B2	4/2005	Mountford et al.

6,926,205	B2	8/2005	Taylor et al.
6,929,188	B2	8/2005	Taylor et al.
6,994,266	B2	2/2006	Sadling
7,140,394	B2	11/2006	Eveleigh
7,163,157	B2	1/2007	Goncze et al.
7,191,954	B2	3/2007	Kline
7,240,850	B2	7/2007	Beck et al.
7,448,553	B2	11/2008	Schmitt
7,475,827	B2	1/2009	Schmitt
7,665,671	B2	2/2010	Cunningham et al.
7,673,808	B2	3/2010	Mace et al.
7,717,351	B2	5/2010	Kline
7,740,183	B2	6/2010	Knapp
7,744,007	B2	6/2010	Beagen et al.
7,770,807	B2	8/2010	Robinson et al.
7,850,088	B2	12/2010	Wei et al.
7,874,498	B2	1/2011	Kempf
7,913,926	B2	3/2011	Goncze
10,216,203	B2 *	2/2019	Kline F16K 15/025
2004/0084541	A1	5/2004	Eveleigh
2006/0090798	A1	5/2006	Beagen et al.
2007/0246549	A1	10/2007	Kline
2009/0314844	A1	12/2009	Mace
2010/0123014	A1	5/2010	Beagen
2010/0147963	A1	6/2010	Goncze
2010/0219255	A1	9/2010	Sansum et al.

FOREIGN PATENT DOCUMENTS

GB	2460878	12/2009
WO	9732147	9/1997
WO	2004068252	8/2004
WO	2010028790	3/2010

OTHER PUBLICATIONS

Symmons Industries Installation, Operation, and Service Instruction for Symmons TepControl, 4 pgs, copyright 2011 Jan. 2, 2011.

PCT/US02/27056, International Search Report dated Dec. 10, 2002, 4 pgs, dated Dec. 10, 2002.

PCT/US02/27056, International Preliminary Examination Report dated Sep. 27, 2004, 4 pgs, dated Sep. 27, 2004.

Examiner Norman, U.S. Appl. No. 10/783,502, NF OA mailed Mar. 23, 2009, 7 pages dated Mar. 23, 2009.

Applicant Response, U.S. Appl. No. 10/783,502, filed Oct. 22, 2009, 21 pages dated Oct. 22, 2009.

Examiner Norman, U.S. Appl. No. 10/783,502, Notice of Allowance dated Jan. 11, 2010, dated Jan. 11, 2010.

Examiner Norman, U.S. Appl. No. 12/762,942, Notice of Allowance dated Oct. 25, 2011, 6 pages dated Oct. 25, 2011.

Examiner Norman, U.S. Appl. No. 13/403,593, NF OA dated Nov. 29, 2012, 6 pages dated Nov. 29, 2012.

Applicant Response, U.S. Appl. No. 13/403,593, filed Apr. 29, 2013 and May 6, 2013, 23 pages dated May 6, 2013.

Examiner Norman, U.S. Appl. No. 13/403,593, Notice of Allowance dated Jun. 11, 2013, 7 pages dated Jun. 11, 2013.

Examiner Norman, U.S. Appl. No. 14/797,899, NF OA, 6 pages May 3, 2016.

Applicant Response, U.S. Appl. No. 14/797,899, 13 pages dated Nov. 3, 2016.

Examiner Norman, U.S. Appl. No. 14/797,899, Notice of Allowance, 7 pages dated Dec. 13, 2016.

Examiner Norman, U.S. Appl. No. 14/040,115, Office Action dated Oct. 31, 2014.

Applicant Response, U.S. Appl. No. 14/040,115 dated Jan. 29, 2015.

Examiner Norman, U.S. Appl. No. 14/040,115, Notice of Allowance dated Mar. 11, 2015.

Examiner Norman, U.S. Appl. No. 15/479,948, NOA mailed Oct. 16, 2018.

* cited by examiner

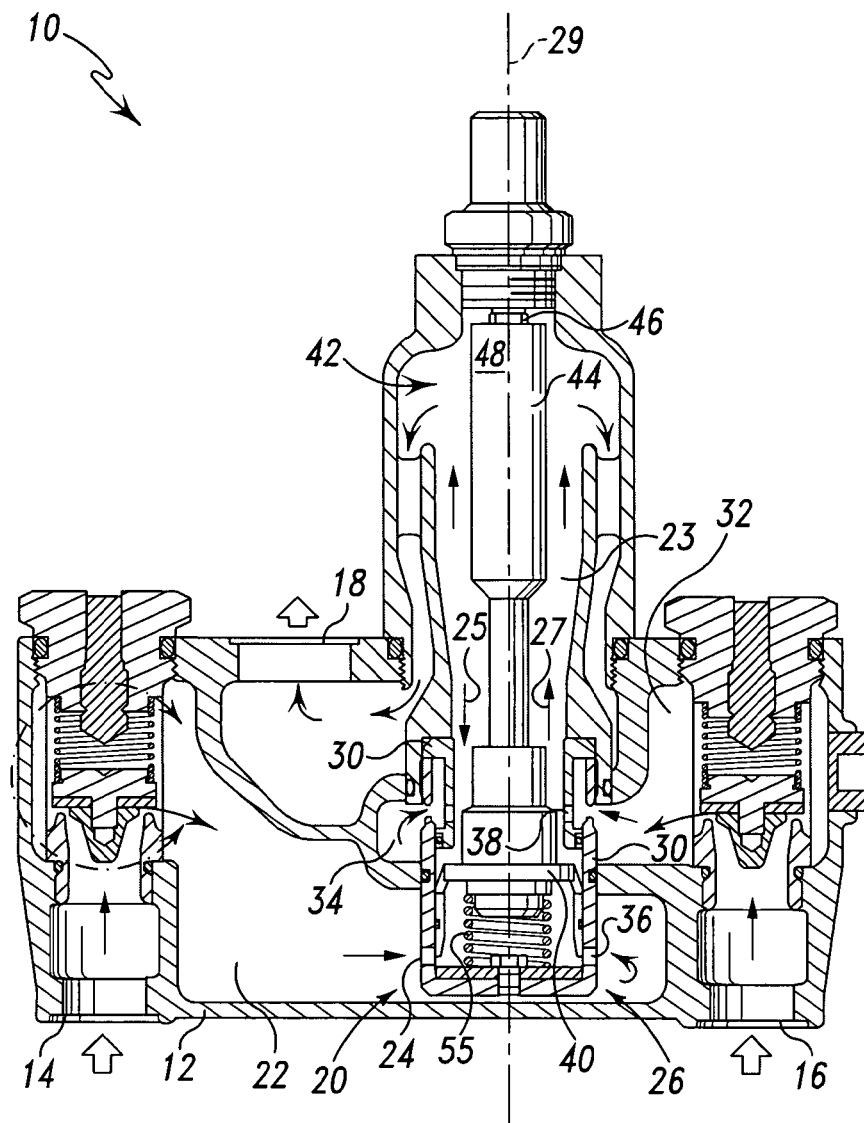


Fig. 1

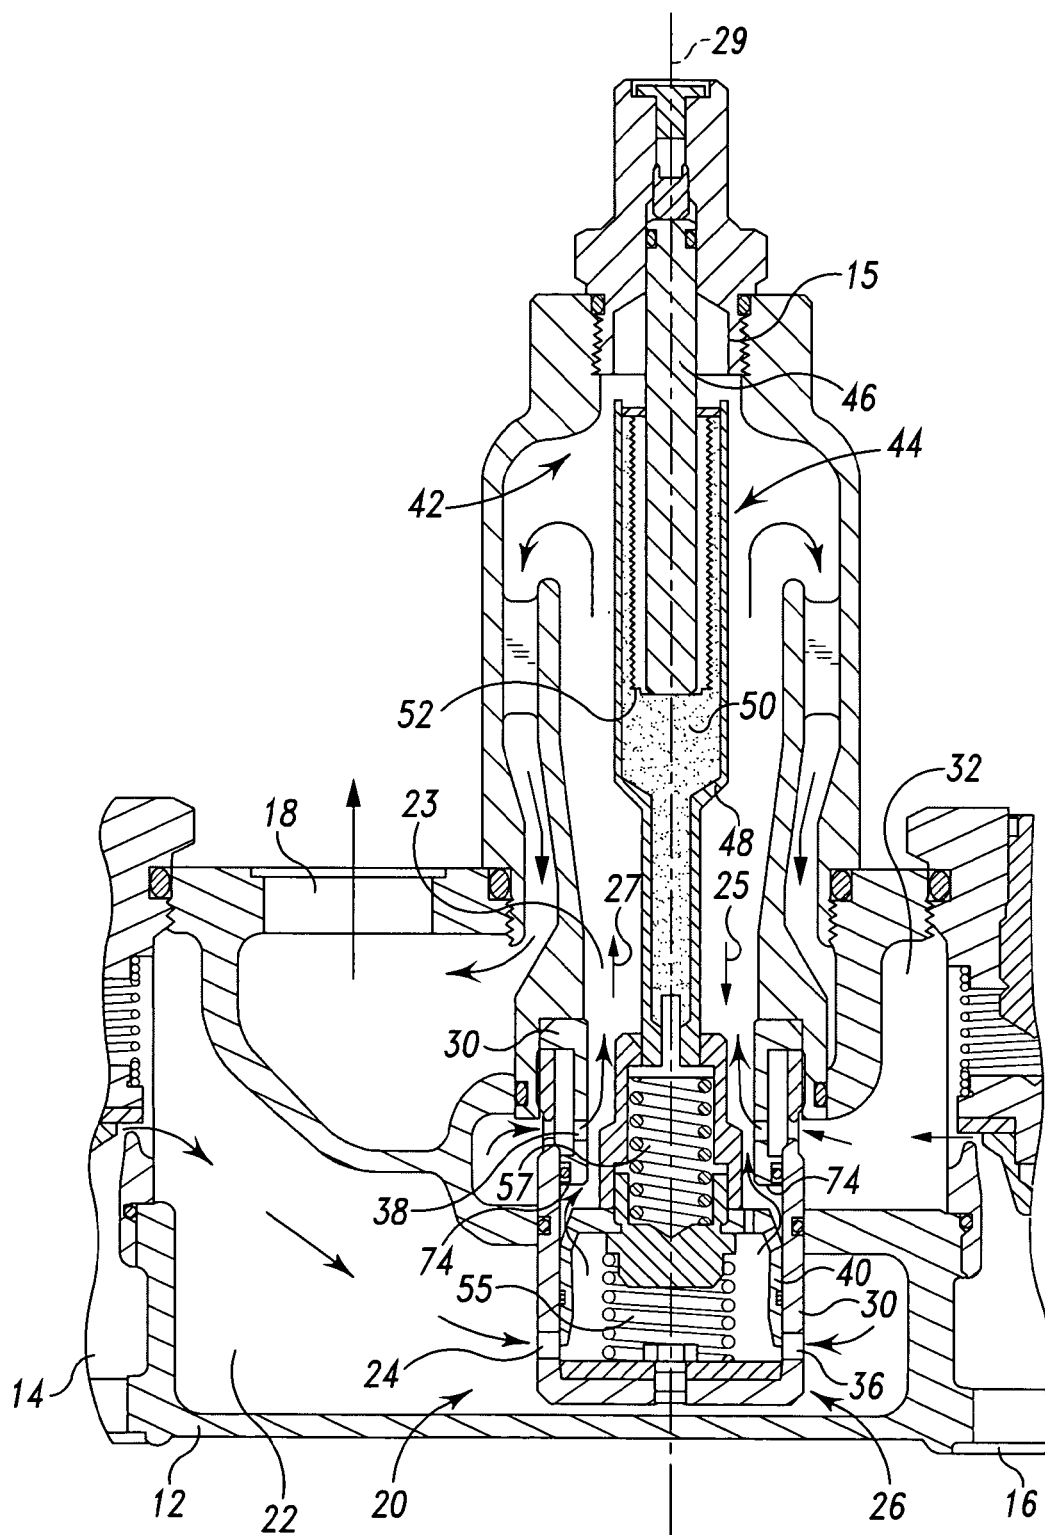


Fig. 2

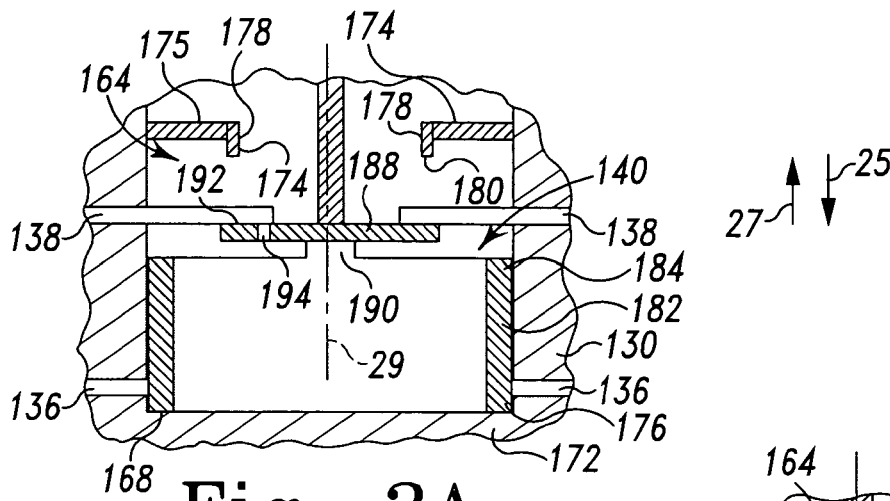


Fig. 3A

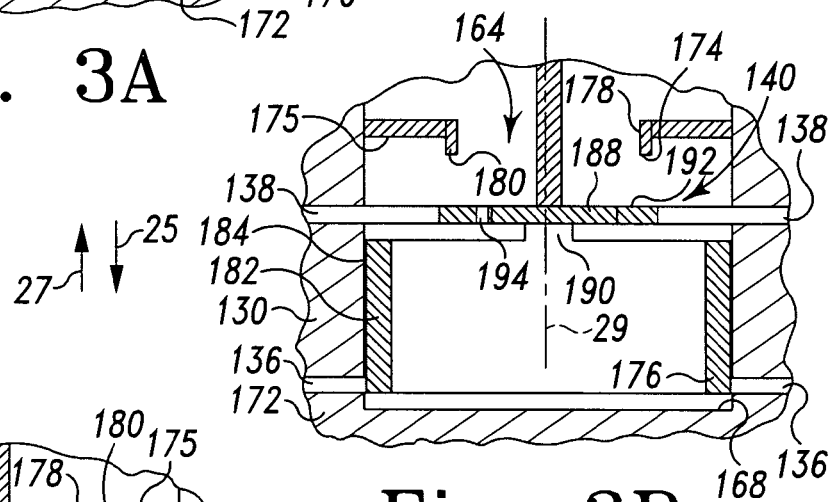


Fig. 3B

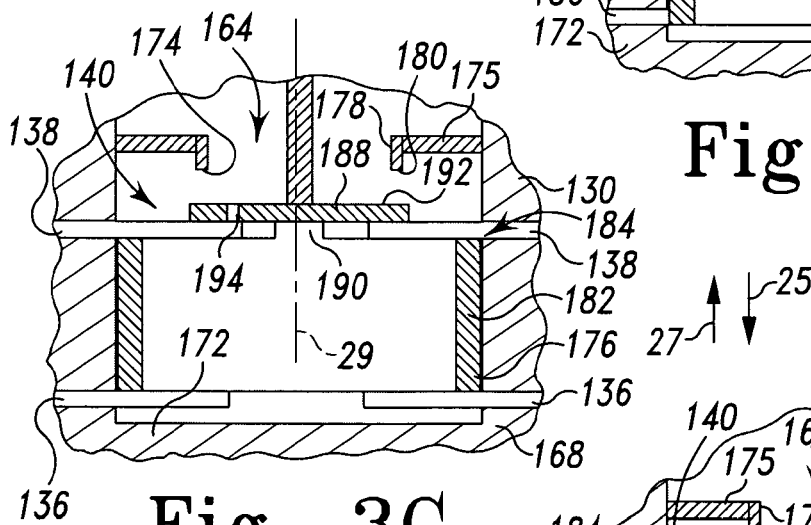


Fig. 3C

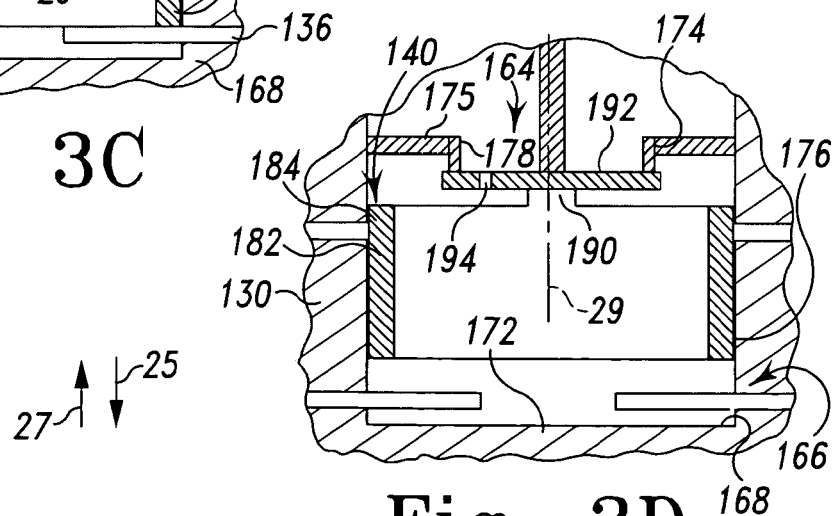


Fig. 3D

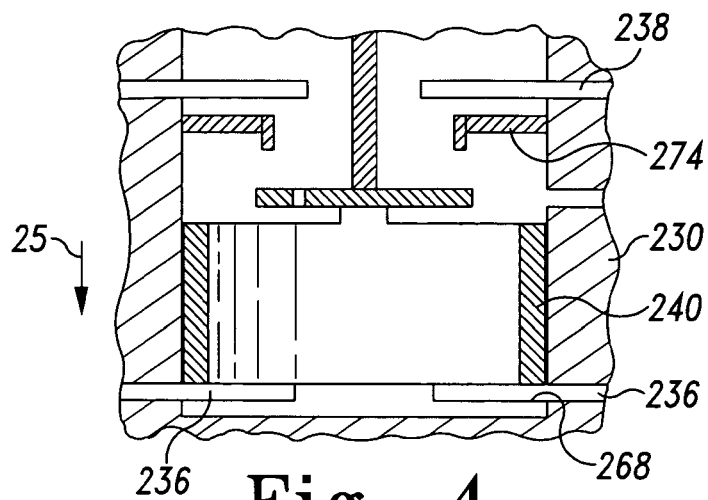


Fig. 4

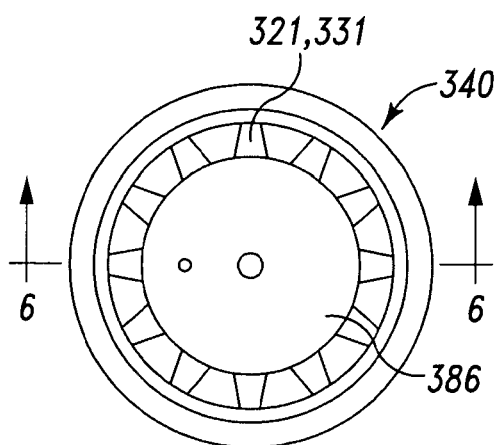


Fig. 5

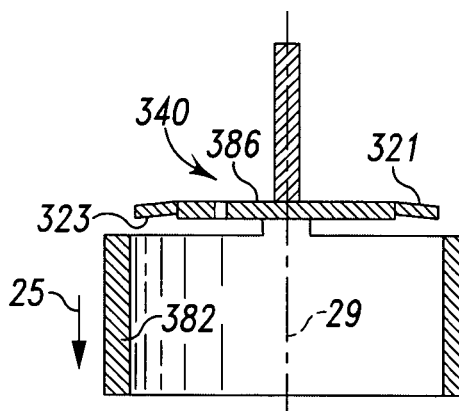


Fig. 7

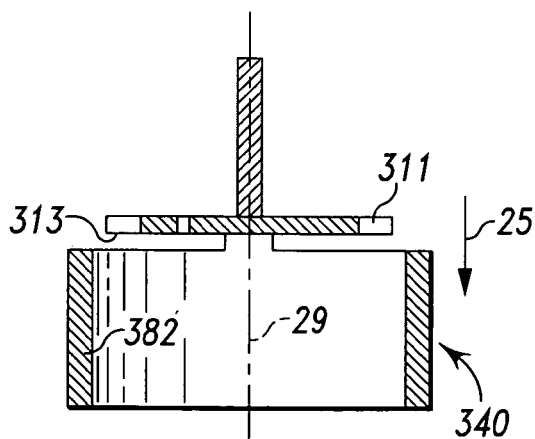


Fig. 6

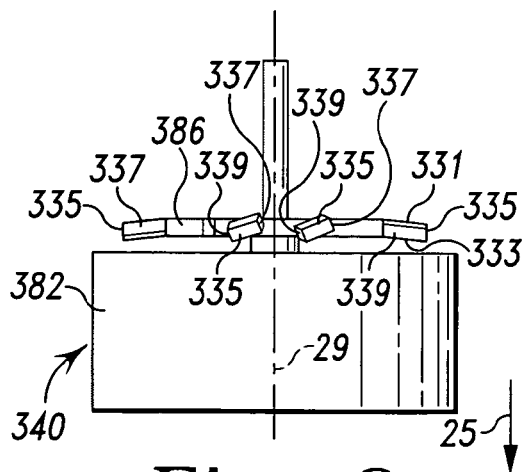


Fig. 8

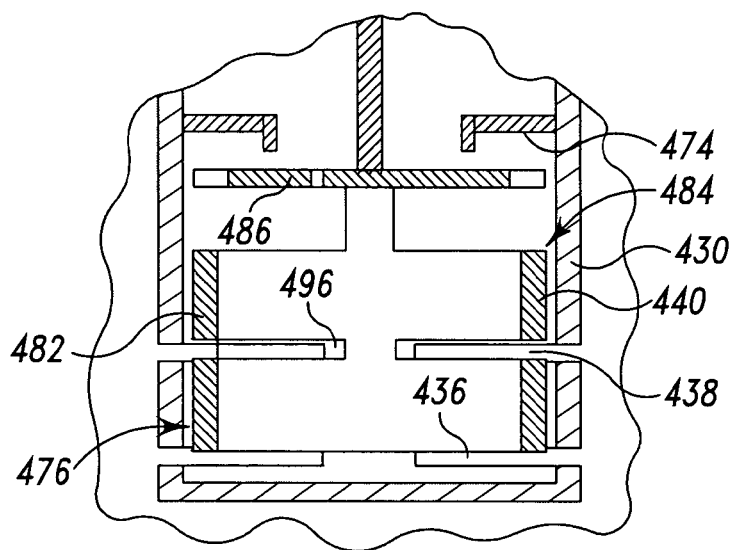


Fig. 9

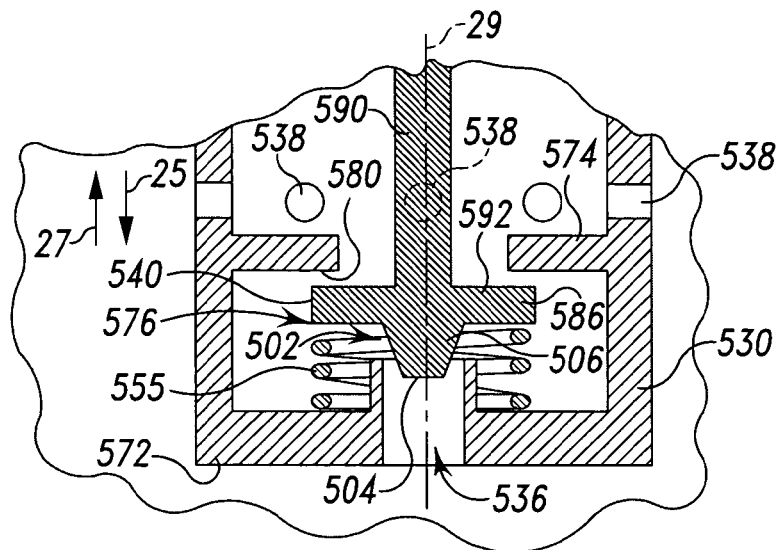


Fig. 10

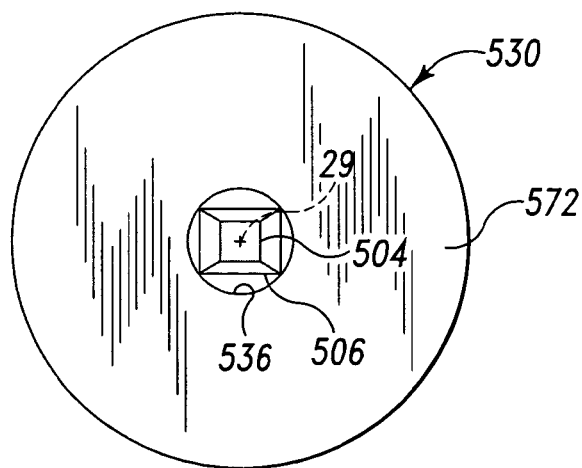


Fig. 11

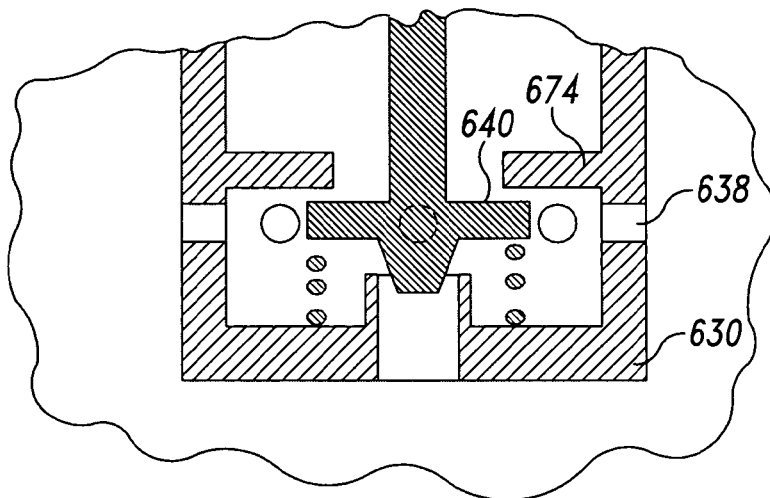


Fig. 12

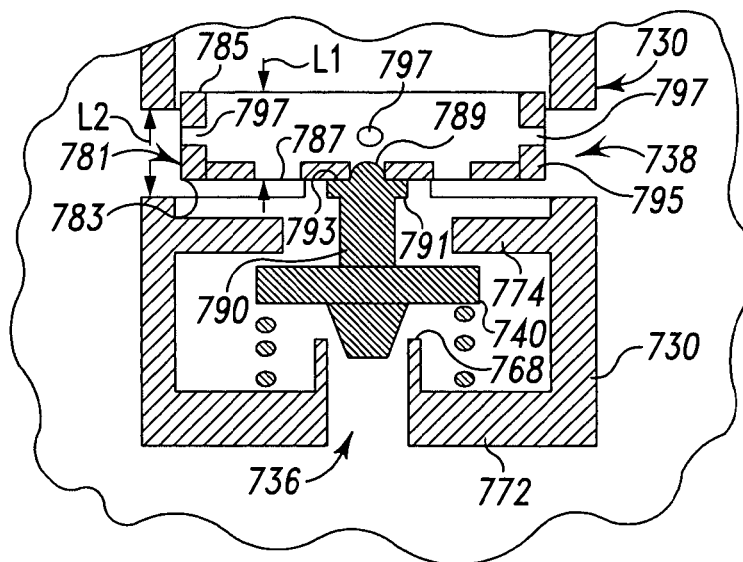


Fig. 13

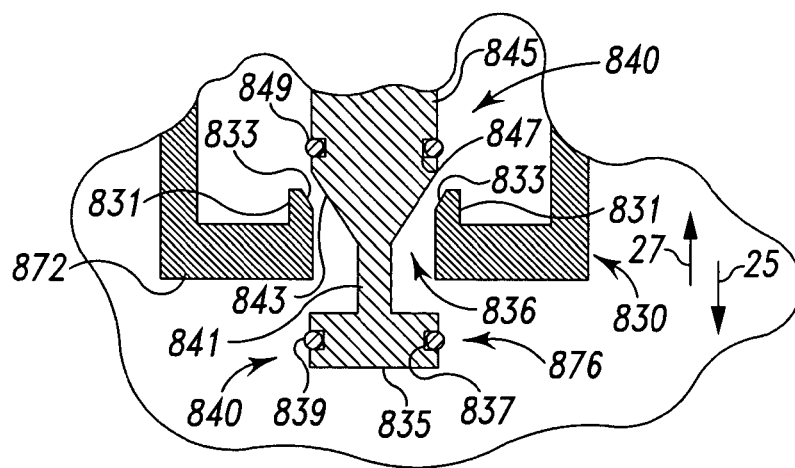


Fig. 14

1

MIXING VALVE**CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a continuation of U.S. patent application Ser. No. 15/479,948, filed Apr. 5, 2017, now issued as U.S. Pat. No. 10,216,203; which is a continuation of U.S. patent application Ser. No. 14/797,899, filed Jul. 13, 2015, now issued as U.S. Pat. No. 9,625,920; which is a continuation U.S. patent application Ser. No. 14/040,115, filed Sep. 27, 2013, now issued as U.S. Pat. No. 9,081,392; which is a continuation of U.S. patent application Ser. No. 13/403,593, filed on Feb. 23, 2012, now issued as U.S. Pat. No. 8,544,760; which is a continuation of U.S. patent application Ser. No. 12/762,942, filed Apr. 19, 2010, now issued as U.S. Pat. No. 8,123,140, which is a divisional of U.S. patent application Ser. No. 10/783,502, filed Feb. 20, 2004, now issued as U.S. Pat. No. 7,717,351, which is a nationalization of PCT/US02/27056 having International Publication Number WO 03/019315 A1, filed 23 Aug. 2002, which claims the benefit of U.S. Provisional Patent Application Ser. No. 60/314,803 filed 24 Aug. 2001.

FIELD OF THE INVENTION

This disclosure relates to mixing valves. More particularly, this disclosure relates to valves for mixing a first fluid with a second fluid.

BACKGROUND AND SUMMARY

Mixing valves having valve bodies configured to combine flows of hot and cold fluids to provide a controlled mixed fluid temperature are known. Examples of such mixing valves using thermostatic control are shown in U.S. Pat. Nos. 6,315,210, 5,647,531, 5,379,936, 5,323,960, 5,203,496, and 5,011,074, the disclosures of which are hereby expressly incorporated by reference herein, the applicant/inventor in the present application being an inventor in each of these patents.

A mixing valve includes a valve body having a hot fluid inlet, a cold fluid inlet, and a mixed fluid outlet. The valve body includes a cavity between the inlets and the outlet. In one embodiment, a first seat and a second seat are in the cavity, and a valve member in the cavity is movable between a first position engaging the first seat and a second position engaging the second seat.

In one aspect of the disclosure, a liner in the cavity includes the first and second seats. In another aspect of the disclosure, the valve member includes a weep opening to permit restricted flow of at least the hot fluid. In another aspect of the disclosure, the valve member includes a plurality of spaced apart mixing fins.

In another aspect of the disclosure the mixing valve includes a liner in the cavity, the liner including a hot liner inlet and a cold liner inlet. In one implementation of this aspect, the second seat is between the cold liner inlet and the first seat. In another implementation of this aspect, the cold liner inlet is between the first seat and the second seat. In another implementation of this aspect, the valve member is a poppet-style valve member and the hot liner inlet is a bore in a floor of the liner.

Additional features will become apparent to those skilled in the art upon consideration of the following detailed

2

description of illustrative embodiments exemplifying the best mode of carrying out the drop leaf support apparatus as presently perceived.

5

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a sectional view taken through a valve body of a thermostatic mixing valve to expose hot and cold fluid inlets and a mixed fluid outlet in communication with a liner in the valve body shown in section to reveal a valve member movable in the liner to restrict flow from the hot and cold liner inlets in response to movement of a thermostat assembly that senses the mixed fluid temperature;

FIG. 2 illustrates a fragmentary sectional view similar to FIG. 1 showing the thermostat assembly in section to reveal a thermostat body, a bellows sealably coupled thereto, a thermally responsive fluid in the thermostat body, and an actuator coupled to the thermostat to cooperate with the valve member to move the valve member in the liner;

FIGS. 3A-3D illustrate a sequence in which a valve member moves in a liner having a hot liner inlet, a second seat, and a cold liner inlet between the second seat and the hot liner inlet, the valve member being movable between a first position engaging a first seat in the liner to close the hot liner inlet and a second position engaging a second seat to restrict flow of fluid from the hot liner inlet;

FIG. 3A illustrates a cross sectional view taken through a center of the liner and valve member showing the valve member in the first position engaging the first seat and spaced apart from the second seat;

FIG. 3B illustrates the liner and valve member of FIG. 3A spaced apart from the first and second seats, with sides of the valve member still blocking flow through the hot liner inlet;

FIG. 3C illustrates the liner and valve member of FIG. 3A positioned between the first and second seats and oriented to permit flow of hot and cold fluids through the hot and cold liner inlets;

FIG. 3D illustrates the liner and valve member of FIG. 3A in the second position engaging the second seat, and a disc at a downstream end of the valve member engaging the second seat, the disc formed to include a weep opening to permit restricted flow of the hot and cold fluids therethrough when the valve member engages the second seat;

FIG. 4 is a sectional view taken through the center of an alternative liner and valve member, the second seat positioned between the hot liner inlet and the cold liner inlet;

FIG. 5 is a top view of an alternative valve member having mixing fins extending radially outwardly from the valve member,

FIG. 6 is a sectional view taken generally along section line 6-6 of FIG. 5, through the center of a valve member showing mixing fins extending from a disc at a downstream end of the valve member, the mixing fins including a surface generally perpendicular to an axis through the liner,

FIG. 7 is a sectional view through the center of a valve member similar to that of FIG. 6, the mixing fins including a surface facing radially inwardly and in an upstream direction;

FIG. 8 is a front view of a valve member similar to that of FIG. 6, the mixing fins including a surface that is slanted;

FIG. 9 is a sectional view through the center of an alternative liner and valve member, the cold liner inlet being between the second seat and the hot liner inlet, and the valve member including a cold inlet slot, the cold liner inlet being closer to the hot liner inlet than the second seat;

FIG. 10 is a sectional view through the center of an alternative liner and valve member, the hot liner inlet being

3

a bore in the floor of the liner, the second seat being between the cold liner inlet and the bore, and the valve member being a poppet movable between a first position engaging the first seat to close the bore and a second position engaging the second seat, the valve member including a centering portion;

FIG. 11 illustrates a bottom view of the liner and valve member of FIG. 10 showing the floor of the liner and the centering portion of the valve member in the bore;

FIG. 12 illustrates a sectional view similar to FIG. 10 of an alternative liner with the cold liner inlet being between the hot liner inlet and the second seat;

FIG. 13 illustrates a fragmentary sectional view of a portion of an alternative liner and valve member, the hot liner inlet being a bore and the valve member including a downstream portion engaging the bore to close the hot liner inlet when the valve member is in a first position, and a disc outside the liner when the valve is in the first position and engaging the bore to close the hot liner inlet when the valve member is in a second position; and

FIG. 14 illustrates a sectional view through the center of an alternative liner and valve member, the liner including a first seat adjacent a hot liner inlet formed as a bore, a cold liner inlet, and a second seat between the hot and cold liner inlets, the valve member being a poppet and including an upper piston to throttle the flow of cold fluid, the poppet movable between a position engaging the first seat and a position engaging the second seat.

DETAILED DESCRIPTION

Referring now particularly to FIGS. 1 and 2, a mixing valve 10 includes a valve body 12 having a hot fluid inlet 14 coupled to a source of relatively hot fluid and a cold fluid inlet 16 coupled to a source of relatively cold fluid. Valve body 12 also includes a mixed fluid outlet 18 and a cavity 20 formed in valve body 12 between the mixed fluid outlet 18 and the hot and cold fluid inlets 14, 16. A hot fluid passageway 22 extends between hot fluid inlet 14 and a hot inlet port 24 to cavity 20. Hot inlet port 24 is adjacent a first end 26 of cavity 20. A cold fluid passageway 32 extends between cold fluid inlet 16 and a cold inlet port 34 to cavity 20. Cold inlet port 34 is positioned downstream relative to hot inlet port 24. Cavity 20 includes a mixing region or chamber 23 in which hot and cold fluids are mixed prior to exiting valve 10 through mixed fluid outlet 18.

As shown in FIGS. 1 and 2, a liner 30 is positioned in cavity 20. Liner 30 includes a hot liner inlet 36 in communication with the hot inlet port 24 and a cold liner inlet 38 in communication with the cold inlet port 34. Illustratively, liner 30 is cylindrical about a central axis 29 extending through liner 30. It is within the scope of this disclosure that liner 30 may comprise more than one piece, as shown in FIGS. 1 and 2.

As shown in FIGS. 1 and 2, a valve member 40 moves along axis 29 in liner 30 from a position permitting flow of hot fluid through the hot liner inlet to a position inhibiting flow of the hot fluid into mixing valve 10. Valve member 40 moves either in an axially upstream direction 25 or an axially downstream direction 27. It is within the scope of this disclosure that the valve member may comprise more than one piece, as shown in FIG. 13.

In thermostatic mixing valves, such as that shown in FIGS. 1 and 2, a thermostat assembly 42 cooperates with valve member 40 to move the valve member in response to changes in the mixed fluid temperature. As shown in FIG. 2, thermostat assembly 42 is positioned in valve body 12 and includes a thermostat 44 and an actuator or pushrod 46

4

coupled to thermostat 44. Thermostat 44 includes a thermostat body 48. A thermally responsive fluid 50 is held in a cavity 54 formed in thermostat body 48 by a bellows 52 sealed to the body 48. As the mixed fluid flows around and contacts thermostat 44, the volume of thermally responsive fluid 50 changes in response to changes in the mixed fluid temperature, moving bellows 52. As bellows 52 moves, bellows 52 moves actuator 46 relative to body 48 along central axis 29. It is understood that other types of thermostats, as are known in the art, may be used within the scope of this disclosure.

As shown in FIG. 2, a first spring 55 biases valve member 40 in a downstream direction 27 toward a second or downstream valve seat 74. A second or return spring 57 is operatively coupled to thermostat 44 and valve member 40. Return spring 57 cooperates with bellows 52 to limit travel of valve member 40 so that, under normal operating conditions, valve member 40 does not travel far enough downstream to seat against second seat 74. Upon failure of bellows 52, first spring 55 moves valve member 40 upstream and seats valve member 40 against second seat 74, preventing or reducing the flow of hot fluid into the mixing chamber 23.

Referring now to FIGS. 3A-3D, a liner 130 and valve member 140 moveable in liner 130 are shown. Liner 130 is generally cylindrical and has a bore 164 therethrough in which valve member 140 moves to open and close hot liner inlet 136 and inhibit flow of hot fluid into the mixing valve. Valve member 140 cooperates with liner 130 to inhibit hot fluid flow through hot liner inlet 136 when the mixed fluid temperature is too high. Valve member 140 also cooperates with liner 130 to inhibit flow of hot fluid past valve member 140 when the thermostat fails. As depicted in FIGS. 3A-3D, valve member 140 moves in liner 130 between a first position shown in FIG. 3A wherein the flow of hot fluid is restricted by valve member 140 covering hot liner inlet 136, and a second position shown in FIG. 3D wherein valve member 140 engages second seat 174 to restrict at least a majority of the flow of hot fluid.

Liner 130 includes an upstream region 166 having a first seat 168. Illustratively, a floor 172 of liner 130 provides first seat 168. However, other configurations are possible within the scope of this disclosure. Hot liner inlet 136 is shown in FIGS. 3A-3D as a slot formed in the side of liner 130. Cold liner inlet 138 is a slot formed in the side of liner 130 downstream of hot liner inlet 136. As shown in FIGS. 3A-3D, liner 130 includes second seat 174 downstream of first seat 168 and downstream of hot and cold liner inlets 136, 138. Second seat 174 is illustratively an annular flange 175 extending radially inwardly toward central axis 29. Illustratively, a wall 178 extends upstream from flange 175 toward valve member 140, providing a seating surface 180 against which valve member seats upon failure of the thermostat.

Valve member 140 includes a generally cylindrical portion 182 having a downstream end 184 and an upstream end 176. Upstream end 176 engages first seat 168 to close hot liner inlet 136. As valve member 140 moves toward engagement with first seat 168, cylindrical portion 182 covers hot liner inlet 136, restricting flow of hot fluid into valve body. Valve member 140 further includes a disc 188 coupled to downstream end 184 of cylindrical portion 182 with a connection member 190. Disc 188 includes an engagement surface 192 facing downstream to engage seating surface 180 of second seat 174.

When the temperature of the mixed fluid increases, thermally responsive fluid 50 expands, moving valve member

140 in an upstream direction. As valve member **140** moves upstream, valve member **140** moves toward a first position shown in FIG. **3A** in which hot liner inlet **136** is closed by engagement of upstream end **176** and first seat **168**. As valve member **140** moves upstream, it covers increasing portions of hot liner inlet **136** until it closes the inlet **136**. In the first position, valve member **140** closes hot liner inlet **136** and permits flow of cold fluid through cold liner inlet **138**. As the temperature of mixed fluid decreases, thermally responsive fluid **50** contracts, and first spring (not shown) biases valve member **140** in downstream direction **27**. Valve member **140** thus moves through a position such as that shown in FIG. **3B**, to an intermediate or third position, such as the position shown in FIG. **3C**, opening hot liner inlet **136** to permit hot fluid to flow therethrough. As shown in FIG. **3B**, as valve member **140** moves in upstream direction **25**, the sides of upstream end **176** of cylindrical portion **182** cover hot liner inlet **136** prior to engagement with first seat **168**.

To prevent lock-up of valve **10**, a weep opening or port **194** may be formed in disc **186** as shown in FIGS. **3A-3D** to permit a substantially restricted flow of fluid therethrough when valve member **140** engages second seat **174**. In operation, if the source of relatively hotter fluid fails, and no hot fluid flows into valve body **12**, thermostat assembly **42** may move an amount so that valve member **140** engages second seat **174**. Without weep port **194** permitting restricted flow of fluid therethrough, upon return of hot fluid flow, valve **10** would remain in the position shown in FIG. **3D**. By permitting restricted flow of fluid through weep port **194**, the thermostat assembly **42** can respond to the return of hot fluid and can move valve member **140** from the position shown in FIG. **3D**.

It is within the scope of this disclosure to provide a weep opening such as weep port **194** in a wide variety of valve configurations.

Referring now to FIG. **4**, an alternative liner **230** is shown. Liner **230** is formed to include a cold liner inlet **238** downstream of second seat **274**. In this arrangement, valve member **240** shown in FIG. **4** cooperates with liner **230**, specifically first and second seats **268**, **274** and sides of liner **230** adjacent hot liner inlet **236** to restrict hot fluid flow past valve member **240**. Flow of cold fluid through cold liner inlet **238** is not directly restricted by movement of valve member **240**. Cold liner inlet **238** allows cold fluid to be provided regardless of failure of thermostat or hot fluid supply.

Referring now to FIGS. **5-8**, a valve member **340** is shown including mixing fins to increase turbulence and encourage mixing of fluids. As shown in FIGS. **5-8**, valve member **340** includes a plurality of mixing fins. Different shapes of mixing fins **311**, **321**, and **331** are shown associated with valve member **340** in FIGS. **6**, **7**, and **8** respectively. Each of fins **311**, **321**, and **331** extends radially outwardly from disc **386**. Fins **311** of FIG. **6** have lower surfaces **313** that are generally perpendicular to central axis **29**. Fins **321** of FIG. **7** have lower surfaces **323** that face radially inwardly and in upstream direction **25**, toward cylindrical portion **382** of valve member **340**.

Fins **331** of FIG. **8** have lower surfaces **333** that face substantially upstream toward cylindrical portion **382** of valve member **340**. Lower surfaces **333** of fins **331** are on a slant so that, when viewed looking toward a front **335** of one of fins **331**, an upstream edge of first side **337** is oriented downstream of an upstream edge of an opposite second side **339** to form the slant. It is thought that such a slant could cause valve member **340** to spin with sufficient flow of hot and/or cold fluid flowing past fins **331**. Mixing fins **311**, **321**,

331 are illustratively formed integral with disc **386**, and investment casting is one manufacturing technique contemplated to form disc **386** and fins **311**, **321**, **331**.

Referring now to FIG. **9**, liner **430** is configured to encourage earlier mixing of hot and cold fluids in a mixing valve. Liner **430** includes hot and cold liner inlets **436**, **438** upstream of second seat **474**. Slots **496** in the side of valve member **440** align with cold liner inlet **438** to permit flow of cold fluid past valve member **440**. Cold liner inlet **438** of liner **430** is positioned closer to hot liner inlet **436** than to second seat **474**. Slots **496** in valve member **440** are positioned closer to upstream end **476** than to either downstream end **484** of cylindrical portion **482** or disc **486**.

Referring now to FIG. **10**, liner **530** is configured so that hot liner inlet **536** is a bore formed in floor **572** thereof. First seat **568** projects as a wall up from floor **572** to border the bore. Cold liner inlet **538** is positioned in liner **530** downstream of the second seat **574**, and is shown as a plurality of holes provided in the sides of liner **530**. Second seat **574** is illustratively an annular flange extending radially inwardly toward central axis **29**. Seating surface **580** of second seat **574** is provided on a surface of seat **574** that faces upstream.

Valve member **540** is a "poppet" style valve member. Valve member **540** includes disc **586**, a centering portion **502** extending from an upstream end **576** of disc **586**, and a connection member **590** extending from engagement surface **592** of disc **586**. Connection member **590** extends beyond second seat **574** to engage an actuator (not shown). During thermostat failure, first spring **555** biases valve member **540** such that engagement surface **592** of valve member **540** engages seating surface **580** of second seat **574**, and these two surfaces engage to restrict the flow of hot fluid. In normal operation, when the mixed fluid temperature increases, the thermostat assembly moves valve member **540** in upstream direction **25** toward a first position in which upstream end **576** of disc **586** engages first seat **568**, closing hot liner inlet **536**.

As shown in FIGS. **10** and **11**, centering portion **502** of valve member **540** is illustratively a frustum of a right rectangular pyramid; the upstream end **504** of centering portion **502** has an area less than the area of the downstream end **506** connected to disc **586**. Illustratively, as shown in FIG. **11**, both of the ends **504**, **506** of centering portion **502** fit in hot liner inlet **536** so that upstream end **576** can engage first seat **568**. The smaller upstream end **504** and the pyramidal shape of centering portion **502** assist with centering disc **586** so that the hot liner inlet **536** can be closed. Although shown as a pyramid, other shapes would also properly orient disc **586** as disc **586** moves toward engagement with first seat **568**. Such shapes may include, but are not limited to, conical shapes, frustoconical shapes, paraboloidal shapes, or the like.

As shown in FIG. **12**, liner **630** is modified from liner **530** of FIG. **10** by moving the second seat **674** downstream of the cold liner inlet **638**. Upon failure of the thermostat, this arrangement restricts flow of both hot and cold fluid. During normal operation, valve member **640** throttles the flow of hot fluid to control the temperature of the mixed fluid.

Referring now to FIG. **13**, liner **730** is similar to liner **530** of FIG. **10**. Liner **730** includes a cold liner inlet **738** downstream of second seat **774**. Connection member **790** is coupled to an upper piston **781** that moves in liner **730** adjacent cold liner inlet **738**. Instead of permitting unrestricted flow of cold fluid as with certain previously described liners, upper piston **781** throttles the flow of cold fluid during its movement in liner **730**.

Upper piston **781** is generally cylindrical in shape and has an upstream end **783** and a downstream end **785**. Upstream end **785** includes inlet ports **787** to permit flow of hot fluid from the hot liner inlet **736** through upper piston **781**. A central opening **789** is formed in upstream end **783** and receives connection member **790** therein. A flange **791** is coupled to connection member **790** and provides an engagement surface **793** which contacts upstream end **783** so that upper piston **781** and valve member **740** move together. Sides **795** of the generally cylindrical upper piston **781** are formed to include cold inlet holes **797** so that when sides **795** otherwise cover cold liner inlet **738**, flow of cold fluid enters through cold inlet holes **797**.

Cold liner inlet **738** is illustratively somewhat oversized compared with other cold liner inlets previously disclosed herein. In axial length, cold liner inlet has a length **L2** that approximates the axial length **L1** of upper piston **781**. As such, when valve member **740** is seated against first seat **768**, cold fluid flows through cold inlet holes **797** and between downstream end **785** and the downstream end of liner **730**. When valve member **740** is seated against second seat **774**, cold fluid flows through cold inlet holes **797** and inlet ports **787** in upstream end **785** of upper piston **781**. Thus, valve member **740** permits flow of cold fluid from cold liner inlet **738** regardless of the position of upper piston **781**.

Referring now to FIG. **14**, liner **830** is configured so that hot liner inlet **836** is a bore formed in floor **872** thereof. A wall **831** projects upstream from floor **872** to border the bore. Wall **831** includes an interior edge **833** that is illustratively beveled. Upstream end **876** of valve member **840** is a disc-shaped structure **835** and includes a groove **837** around the outside thereof to receive a first o-ring **839**. A connection member **841** extends from the disc-shaped structure **835** to a frustoconical region **843**, which is connected to a generally cylindrical downstream region **845** of valve member **840**. Downstream region **845** is formed to include a groove **847** to receive a second o-ring **849** therein.

In operation, as the thermostat moves valve member **840** to close hot liner inlet **836**, frustoconical region **843** cooperates with beveled interior edge **833** to center second o-ring **849** with hot liner inlet bore **836** as second o-ring **849** approaches the bore. Second o-ring **849** seats against the axially inwardly-facing walls that define hot liner inlet **836** to restrict flow of hot fluid therethrough. Upon failure of the thermostat, a spring (not shown) biases valve member **840** in a downstream direction **27** to a position wherein disc-shaped structure **835** is in hot liner inlet bore **836**, and first o-ring **839** seats against the axially inwardly-facing walls that define hot liner inlet **836** to restrict flow of hot fluid therethrough. Because first and second o-rings **839**, **849** seat against the inwardly facing wall of the bore, assembly is simplified as valve member **840** can be simply “dropped in” liner **830**.

It should be understood that some of the valve members—as drawn in FIGS. **3A–9**—are not drawn in proportion relative to the liners, but rather the sides of the valve members are drawn spaced apart from the inner walls of the liners to facilitate discussion. In practice, as would be appreciated by one of ordinary skill in the art, the diameter of the valve members is only slightly less than the diameter of the bores through the liners so that the valve members can move in the liners and provide the necessary degree of closure of the liner inlet(s). As would be understood by one

of ordinary skill in the art, it is within the scope of this disclosure to provide first and second seats in a liner that is a separate component coupled to the valve body or as part of the valve body that serves as a liner. Although various openings to the liners and the valve members disclosed herein are shown as slots or holes, it should be understood that other suitable shapes and sizes are within the scope of this disclosure. As used herein, the terms “upstream” and “downstream” are used in the sense relative to the direction of the flow of hot fluid through the cavity of the valve body during normal operation of the mixing valve. Although specific features may be shown in association with particular structure disclosed in certain embodiments, it should be understood that some of these features can be included in other embodiments, and the inclusion of these specific features with only some of the embodiments should not be considered as limiting.

Although a mixing valve has been described in detail with reference to certain preferred embodiments, variations and modifications exist within the scope and spirit of the invention as described and defined in the following claims.

The invention claimed is:

1. A mixing valve comprising:

- a valve body providing a hot water inlet, a cold water inlet, a mixed water outlet, and an interior located within said valve body, the interior being in fluid communication with each said inlet and said mixed outlet;
- a thermostat located in a mixing region within the interior receiving cold water from said cold water inlet and the hot water;
- a valve member movable along a central axis in the interior between a first position restricting flow from said hot water inlet and a second position restricting flow from said cold water inlet, said thermostat coupled to said valve member to move said valve member in response to changes in temperature of the mixed water;
- a liner received in the interior, said liner having a liner hot inlet in fluid communication with the hot water inlet and a liner cold inlet in fluid communication with the cold water inlet, said valve member being movable relative to said liner, said liner having a bottom and the hot water inlet and the first position are proximate the bottom of said liner; and
- a coil spring adapted and configured to urge said valve member toward said second position, said spring being located proximate to the bottom of said liner, hot water from the hot water inlet passing around at least some of the coils of said coil spring before entering the mixing region, the second position being axially displaced in the same direction from both the hot water inlet and the first position.

2. The mixing valve of claim **1** wherein the valve member includes a plurality of fins and which further comprises spinning the water within the cavity by the fins.

3. The mixing valve of claim **1** wherein the valve member is aligned about a central axis, and the valve member is adapted and configured to induce spinning about the axis of water flowing over the valve member.

4. The mixing valve of claim **1** wherein the valve member includes a plurality of fins to increase the turbulence of water flowing over the valve member.

* * * * *