



(51) International Patent Classification:

H01L 23/528 (2006.01) H01L 21/768 (2006.01)

(21) International Application Number:

PCT/CN2018/077546

(22) International Filing Date:

28 February 2018 (28.02.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/601,416 22 March 2017 (22.03.2017) US

(71) Applicant: THE HONG KONG UNIVERSITY OF SCIENCE AND TECHNOLOGY [CN/CN]; Clear Water Bay, Kowloon, Hong Kong (CN).

(72) Inventors: RAJU, Salahuddin; 122A, Tai Po Tsai, Village, Clear Water Bay Road, Kowloon, Hong Kong (CN). CHAN, Man Sun John; 6A, T11, SSQ, HKUST, Clear Water Bay, Kowloon, Hong Kong (CN). PRAWOTO, Clarissa, Cyrilla; Flat 3H, Block D, Junior Staff Quarters, HKUST, 660 Clear Water Bay Road, Kowloon, Hong Kong (CN).

(74) Agent: CHINA PAT INTELLECTUAL PROPERTY OFFICE; 2nd Floor, Zhongguancun Intellectual Property Building, Block B, No. 21 Haidian South Road, Haidian, Beijing 100080 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IC STRUCTURE WITH AIR GAPS AND PROTECTIVE LAYER AND METHOD FOR MANUFACTURING THE SAME

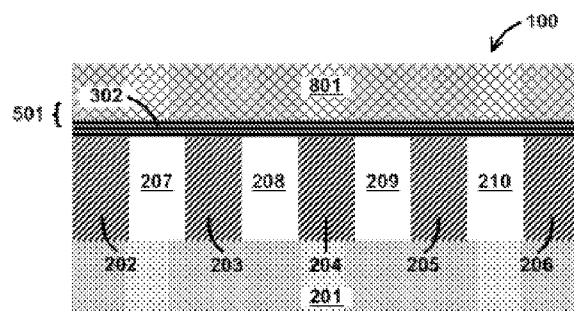


FIG. 1

(57) Abstract: Provided is an integrated circuit structure and a method for manufacturing the same. The integrated circuit structure comprises a substrate; a plurality of interconnecting structures on the substrate, each of the interconnecting structures comprises side surfaces and a top surface, the side surfaces directly define air gaps therebetween isolating the interconnecting structures from each other; and a planar protective layer on top of the plurality of interconnecting structures covering all of the air gaps. The protective layer comprises a sheltering film and a supporting film.



# **IC STRUCTURE WITH AIR GAPS AND PROTECTIVE LAYER AND METHOD FOR MANUFACTURING THE SAME**

## **CROSS-REFERENCE TO RELATED APPLICATIONS**

- 5 [0001] The present application claims priority to and the benefit of U.S. Provisional Patent Application Ser. No. 62/601,416, entitled AIR-GAP STRUCTURE IN INTEGRATED CIRCUITS, which was filed on March 22, 2017, and is hereby incorporated by reference in its entity.

## **FIELD OF THE INVENTION**

- 10 [0002] The present disclosure generally relates to integrated circuit (IC) structures and methods for manufacturing the same, and in particular, to IC structures with air gaps and a protective layer, and methods for manufacturing the same.

## **BACKGROUND OF THE INVENTION**

- 15 [0003] The evolution of integrated circuits has led to higher complexity and decreased size. Numerous semiconductor components or devices are packed onto a single small semiconductor substrate. These semiconductor components or devices are typically joined together using interconnecting structures to create an integrated circuit. The interconnecting structures are typically made from conductors, such as copper (Cu), aluminum (Al); or dielectric materials, such as silicon  
20 dioxide (SiO<sub>2</sub>). Electrical isolation between the interconnecting structures is an important and integral part of integrated circuit design for preventing unwanted electrical coupling and cross

talking between the adjacent interconnecting structures. Gap structures and dielectric materials are typically positioned between the interconnecting structures for electrical isolation.

[0004] The speed of the interconnecting structures can be roughly assumed to be inversely proportional to the product of the line resistance  $R$  and the capacitance  $C$  (parasitic capacitance)

5 between the interconnecting structures. RC (resistance-capacitance resonant) losses in the wiring levels of the integrated circuits is a significant limiting factor of the final performance of the final semiconductor product. As the integrated circuits scale, the RC delay contributes more to the overall delay of the semiconductor product than the transistor delay. There are further issues such as cross-talking between the interconnecting structures. To improve the final performance of the  
10 semiconductor product, it is essential to reduce the RC losses. This can be done by reducing the capacitance  $C$ , and more particularly by reducing the dielectric constant ( $k$ ) of the dielectric material between the interconnecting structures.

[0005] However, using low- $k$  dielectric materials, such as pure  $\text{SiO}_2$  (with a  $k$  of 4.2), porous carbon doped silicon oxide (with a  $k$  of 2.4 to 2 depending on the porosity), aerogels and polymers,

15 between the interconnecting structures can be problematic. Use of these materials may lead to issues with materials reliability, manufacturability and integration challenges. Air gaps or voids formed between the interconnecting structures address some of the concerns associated with the use of low- $k$  dielectric materials. Air has a low dielectric constant close to 1, it is therefore a suitable low- $k$  dielectric material.

20 [0006] Nevertheless, current techniques employing air gaps have their own concerns. One major issue is the malfunction or even failure of integrated circuits as a result of contamination of the air gaps. The contamination may be from various processes in the manufacture of the IC structure. Some techniques use dielectric materials in forming and enclosing the air gaps. However, residual

dielectric materials remaining in the air gaps may still cause contamination. In addition, some techniques forming the air gaps, such as methods sacrificing materials to form air gaps, usually employ many processing steps requiring a long processing time. The removal of such sacrificial materials can also be complex and difficult.

5 [0007] Hence, there is a need for an integrated circuit structure with air gaps to reduce the parasitic capacitance between the interconnecting structures. Further, there is a need to improve such an integrated circuit structure in the art so that the problems inherent in the current structures and manufacture thereof can at least be partly remedied.

## 10 **SUMMARY OF THE INVENTION**

[0008] The present disclosure provides for an integrated circuit structure comprising: a substrate; a plurality of interconnecting structures on the substrate, wherein each of the interconnecting structures comprises side surfaces and a top surface and the side surfaces directly define air gaps therebetween isolating the interconnecting structures from each other; and a planar protective layer  
15 on top of the plurality of interconnecting structures covering all of the air gaps.

[0009] In certain embodiments, the air gaps extend substantially the entire thickness of the interconnecting structures.

[0010] In certain embodiments, the air gaps have an aspect ratio in the range of 0.5 to 5.

[0011] In certain embodiments, the protective layer is continuous.

20 [0012] In certain embodiments, the protective layer comprises a sheltering film sealing the air gaps to prevent material deposition inside the air gaps.

[0013] In certain embodiments, the sheltering film is a planar single-layer or multi-layer structure comprising one or more two-dimensional materials selected from semiconductors, dielectric materials and any combination thereof.

[0014] In certain embodiments, the one or more two-dimensional materials of the sheltering film  
5 are selected from graphene, hexagonal boron nitride, polyimide, and any combination thereof.

[0015] In certain embodiments, the one or more materials of the sheltering film have a Young Modulus greater than 50 GPa.

[0016] In certain embodiments, the protective layer further comprises a supporting film on top of the sheltering film to strengthen the sheltering film.

10 [0017] In certain embodiments, the supporting film is a planar single-layer or multi-layer structure comprising one or more materials selected from insulating materials, semiconductors, conducting materials and any combination thereof.

[0018] In certain embodiments, the supporting film is made from aluminum oxide.

[0019] In certain embodiments, the interconnecting structures are generally vertically aligned lines,  
15 wires, plugs, posts, pillars, or a combination thereof.

[0020] In certain embodiments, the interconnecting structures comprise one or more material selected from the group consisting of conductors, semiconductors, dielectric materials, and any combination thereof.

[0021] In certain embodiments, the interconnecting structures have an aspect ratio in the range of  
20 0.5 to 5.

[0022] The present disclosure provides for a method of manufacturing an integrated circuit structure comprising the steps of: a) providing a substrate; b) creating a plurality of interconnecting structures on the substrate, wherein each of the interconnecting structures comprises side surfaces

and a top surface and the side surfaces directly define air gaps therebetween isolating the interconnecting structures from each other; and c) adding a planar protective layer on top of the plurality of interconnecting structures to cover all of the air gaps.

[0023] In certain embodiments, wherein the step c) comprises adding a sheltering film atop the plurality of interconnecting structures by: d) depositing the sheltering film on a base; e) coating a holding layer on the sheltering film; f) removing the base from the sheltering film; g) transferring a stack of the holding layer and the sheltering film onto the substrate with the sheltering film atop the interconnecting structures; and h) removing the holding layer from the sheltering film.

[0024] In certain embodiments, the steps d) to f) of forming the stack of the holding layer and the sheltering film are performed away from the substrate and the plurality of interconnecting structures.

[0025] In certain embodiments, the base is made from a copper foil or a silicon wafer.

[0026] In certain embodiments, the holding layer is made from one or more materials that are dissolvable in organic solutions or decomposable by plasma treatment.

[0027] In certain embodiments, the holding layer is made from PMMA.

[0028] In certain embodiments, the step e) further comprises baking the holding layer after it is coated on the sheltering film.

[0029] In certain embodiments, the step g) comprises positioning the stack of the holding layer and the sheltering film onto the substrate with the sheltering film atop the interconnecting structures, and heating the sheltering film and the interconnecting structures to improve the adhesion between the sheltering film and the top surfaces of the interconnecting structures.

[0030] In certain embodiments, the holding layer is a thermal release tape.

[0031] In certain embodiments, the step g) comprises positioning the stack of the holding layer and the sheltering film onto the substrate with the sheltering film atop the interconnecting structures,

and inserting them between two rollers at mild heat to transfer the sheltering film onto the top surfaces of the interconnecting structures.

[0032] In certain embodiments, the sheltering film is a planar single-layer or multi-layer structure comprising one or more two-dimensional materials selected from semiconductors, dielectric materials and any combination thereof.

[0033] In certain embodiments, the sheltering film is deposited on the base by chemical vapor deposition, plasma enhanced chemical vapor deposition, low pressure chemical vapor deposition, metal organic chemical vapor deposition, atomic layer deposition, evaporation, plasma vapor deposition, or molecular beam epitaxy.

[0034] In certain embodiments, the step c) further comprises depositing a supporting film on the sheltering film to strengthen the sheltering film.

[0035] In certain embodiments, the supporting film is a planar single-layer or multi-layer structure comprising one or more materials selected from insulating materials, semiconductors, conducting materials and any combination thereof.

[0036] In certain embodiments, the supporting film is deposited on the sheltering film by chemical vapor deposition, plasma enhanced chemical vapor deposition, low pressure chemical vapor deposition, metal organic chemical vapor deposition, atomic layer deposition, evaporation, plasma vapor deposition, or molecular beam epitaxy.

[0037] In certain embodiments, the steps a) to c) are repeated to create a multi-level integrated circuit structure.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

[0038] The present disclosure can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

[0039] FIG. 1 is a cross-sectional illustration of an integrated circuit structure in accordance with certain embodiments of the present disclosure.

5 [0040] FIG. 2 is a cross-sectional illustration of a substrate having a plurality of interconnecting structures thereon in accordance with certain embodiments of the present disclosure.

[0041] FIG. 3 is a cross-sectional illustration of a base on which a sheltering film is grown or deposited in accordance with certain embodiments of the present disclosure.

10 [0042] FIG. 4 is a cross-sectional illustration of the structure of FIG. 3 with a holding layer on the sheltering film in accordance with certain embodiments of the present disclosure.

[0043] FIG. 5 is a cross-sectional illustration of the structure of FIG. 4 with the base removed in accordance with certain embodiments of the present disclosure.

[0044] FIG. 6 is a cross-sectional illustration of the structure of FIG. 2 having the structure of FIG. 5 transferred thereon in accordance with certain embodiments of the present disclosure.

15 [0045] FIG. 7 is a cross-sectional illustration of the structure of FIG. 6 with the holding layer removed in accordance with certain embodiments of the present disclosure.

[0046] FIG. 8 is a cross-sectional illustration of structure of FIG. 7 with an additional supporting film on the sheltering film in accordance with certain embodiments of the present disclosure.

## 20 **DETAILED DESCRIPTION OF THE INVENTION**

[0047] For the purposes of the present disclosure, a single-level IC structure with air gaps between interconnecting structures and a protective layer atop the interconnecting structures is illustrated. It should be appreciated the configuration and use of the structure are not intended to be limited as

such. For instance, with proper modification, the air gaps and protective layer can be equally applied to a multi-level IC structure. Further, although the present disclosure generally describes forming air gaps between the interconnecting structures and measures sheltering or protecting the air gaps, the air-gaps can be equally provided between non-interconnecting features or between interconnecting features and non-interconnecting features, and the sheltering or protecting measures can equally apply thereto. Other modifications without departing from the spirit and virtue of the present disclosure are therefore also within the scope of the present disclosure.

[0048] Additionally, to assist in the description of the structural configuration, words such as top, atop, vertical, width, thickness and the like are used. Unless their contextual usage indicates otherwise, these words are to be understood herein as having no structural, functional or operational significance and as merely reflecting the arbitrarily chosen orientation.

### **Structural Configuration of the Integrated Circuit Structure**

[0049] An integrated circuit structure **100** according to certain embodiments of the present disclosure is shown in Fig. 1. The integrated circuit structure **100** comprises a substrate **201**, a plurality of interconnecting structures **202, 203, 204, 205** on the substrate **201**, and a protective layer **501** atop the interconnecting structures **202-205**.

[0050] An improvement of the present disclosure lies in that no low-k dielectric material other than air is provided in the gaps **207, 208, 209, 210** (hereafter also referred to as air gaps) defined between the adjacent interconnecting structures **202-205**. As air has a low dielectric constant close to 1, it effectively isolates the adjacent interconnecting structures **202-205**, even for interconnecting structures **202-205** with a high aspect ratio. The method of manufacture is also greatly simplified, as described below.

[0051] The term “substrate” throughout the present disclosure, unless the context indicates otherwise, is intended to denote any surface generated when making an integrated circuit. When reference is made to a substrate herein, certain unspecified process steps may have been utilized to form devices, regions or junctions in the substrate. As a result, the substrate can have one or more layers that include various conductors (e.g. metals and alloys), semiconductors, dielectrics, insulators, etc. For example, the substrate can comprise conductors, such as metals and alloys, to form one or more conductive layers on the substrate. The substrate can comprise active and passive devices that are formed thereon, such as transistors, capacitors, resistors, diffused in junctions, gate electrodes, local interconnects, etc. The substrate can also comprise insulating materials, such as silicon dioxide either doped or undoped with phosphorus or boron and phosphorus, silicon nitride, silicon oxynitride and polymer, that separate the active and passive devices from the conductive layer or layers that are formed adjacent them.

[0052] In certain embodiments, the term “substrate” can refer to any construction having semiconductive material, which, by way of example and not by way of limitation, can include bulk semiconductive materials, such as a semiconductive wafer (e.g., alone or in assemblies including other materials thereon), and semiconductive material layers (e.g., alone or in assemblies including other materials). In certain embodiments, the construction includes any semiconductor-based structure that has an exposed silicon surface. Such structure can include silicon-on insulator (SOI), silicon-on sapphire (SOS), doped and undoped semiconductors, and/or epitaxial layers of silicon supported by a base semiconductor foundation, among other semiconductor structures. In addition, the semiconductor needs not be silicon-based. The semiconductor can, in various embodiments, be silicon-germanium, germanium, and/or gallium-arsenide, among other compounds.

[0053] The term “interconnecting structure” throughout the present disclosure, unless the context indicates otherwise, is intended to denote any conductive element that is used to transport electrical current between interconnects, such as various components and devices associated with the integrated circuit.

5 [0054] In certain embodiments, each of the interconnecting structures **202-206** has a height allowing it to project from the substrate **201**. The interconnecting structures **202-206** may assume any appropriate configuration, such as generally vertically extending lines, wires, plugs, posts, pillars, etc., so long as it achieves the interconnecting function. Each interconnecting structure **202-206** defines side surfaces and a top surface. The dimension of the interconnecting structures **202-206** may vary with the feature size of the microelectronic structures of the IC structure **100** and may be different for the various interconnecting structures **202-206**. In certain embodiments, the interconnecting structure **202-206** has a width between about 5 nm to about 5,000 nm, between about 50 nm to about 2,500 nm, between about 200 nm to about 1,500 nm, or between about 500 nm to about 1,000 nm. In certain embodiments, each of the interconnecting structures **202-206** has a thickness between about 10 nm to about 5,000 nm, between about 200 nm to about 2,500 nm, or between 500 nm to about 1,000 nm. The thicknesses of various interconnecting structures **202-206** can be the same or different. In certain embodiments, each of the interconnecting structures **202-206** has an aspect ratio (width-to-thickness ratio) in a range of 0.5 to 5, a range of 1 to 4, or a range of 2 to 3.

20 [0055] In certain embodiments, e.g. where the IC structure **100** is applied to back-end-of-line (BEOL) IC manufacturing, the interconnecting structures **202-206** may be formed from one or more conductors (e.g. metals or alloys), such as copper (Cu), aluminum (Al), tantalum (Ta), tungsten (W), titanium (Ti), tantalum nitride (TaN), tungsten nitride (WN), titanium nitride (TiN), and any

combination thereof. In certain embodiments, e.g. where the IC structure **100** is applied to front-end-of-line (FEOL) IC manufacturing, the interconnecting structures **202-206** may be formed from one or more semiconductors, such as doped polysilicon or silicide, e.g., silicide comprising tungsten (W), titanium (Ti), Nickel (Ni) or cobalt (Co). In certain embodiments, the interconnecting structures **202-206** can be formed from dielectric materials, such as silicon nitride (SiN), silicon carbide (SiC), silicon dioxide (SiO<sub>2</sub>), carbon doped oxides, and any combination thereof. In certain embodiments, the interconnecting structures **202-206** can be formed from a combination of any two or more of conductors, semiconductors and dielectric materials.

[0056] The interconnecting structures **202-206** define therebetween air gaps **207-210** directly.

There are no other materials or structures between the interconnecting structures **202-206** besides air. In particular, there are generally no residual solid or liquid materials from earlier processes (e.g. lithography or etching) between the interconnecting structures **202-206**, unless such materials are intentionally left in the air gaps **207-210**. In other words, there is only air between the interconnecting structures **202-206**. As a result, the air functions as the only dielectric material and the interconnecting structures **202-206** are effectively isolated from each other by the air gaps **207-210** therebetween. As shown in Fig. 1, the air gaps **207-210** are formed directly between side surfaces of the interconnecting structures **202-206**, as a result of the creation of the interconnecting structures **202-206** rather than by way of using additional low-k dielectric materials. The dimension of the air gaps **207-210** may vary with the feature size of the microelectronic structures of the IC structure **100** and may vary between the various air gaps **207-210**. In certain embodiments, the air gap **207-210** has a width between about 2 nm to about 5,000 nm, between about 20 nm to about 3,000 nm, between about 50 nm to about 1,000 nm, between about 200 nm to about 600 nm, or between about 300 nm to about 500 nm. The air gaps **207-210** extend substantially the entire

thickness of the interconnecting structures **202-206**. In certain embodiments, the air gaps **207-210** extend approximately 100% of the entire thickness of the interconnecting structures **202-206**. In certain embodiments, the air gaps **207-210** extend 85% to 100%, 88% to 98%, 90% to 96%, or 92% to 94% of the entire thickness of the interconnecting structures **202-206**. In certain embodiments, the air gaps **207-210** intentionally extend a lower percentage of the entire thickness of the interconnecting structures **202-206**. The thicknesses of various air gaps **207-210** can be the same or different. In certain embodiments, each of the air gaps **207-210** has an aspect ratio (width-to-thickness ratio) in a range of 0.5 to 5, a range of 1 to 4, or a range of 2 to 3. As a result, the interconnecting structures **202-206** can be more effectively isolated.

[0057] The protective layer **501** lies atop the interconnecting structures **202-206** and covers the air gaps **207-210**. In certain embodiments, the protective layer **501** effectively seals the air gaps **207-210**. In certain embodiments, the protective layer **501** comprises a sheltering film **302** on the top surfaces of the interconnecting structures **202-206**. The sheltering film **302** is pre-fabricated and transferred to lie on the top surfaces of the interconnecting structures **202-206**. In certain embodiments, the sheltering film **302** is continuous so that it covers most or all of the air gaps **207-210**. In certain embodiments, the sheltering film **302** is patterned so that it covers all or a selected number of air gaps **207-210**. The sheltering film **302** protects the air gaps **207-210** from external materials that may otherwise fall inside or deposit in the air gaps **207-210**. The external materials include any undesired matters that may otherwise fall inside or deposit in the air gaps **207-210** either in the manufacturing processes or during use of the IC structure **100**. Examples of such external materials include silicon dioxide ( $\text{SiO}_2$ ), silicon nitride ( $\text{SiN}$ ), organosilicate ( $\text{SiOCH}$ ), fluorine-doped silicon glass (FSG) and polymers. It is particularly advantageous of the present disclosure that the sheltering film **302** is capable of covering all air gaps **207-210** between the

interconnecting structures **202-206** on the substrate **201**, so that no single air gap may be particularly vulnerable to external contamination. In addition, the entire substrate **201** where the sheltering film **302** covers can be made full use of without worrying about RC delay peak at a particular location. The sheltering film **302** can be a single-layer structure or a multiple-layer structure made from semiconductors, dielectric materials or any combination thereof. In certain embodiments, the sheltering film **302** is made from one or more materials having a high Young Modulus for it to be mechanically strong. The Young Modulus of materials can be greater than 50 GPa. In certain embodiments, the sheltering film **302** is made from one or more two-dimensional materials, such that it is capable of being transferring to atop the interconnecting structures **202-206** after it is produced elsewhere. In certain embodiments, the sheltering film **302** is made from graphene, hexagonal boron nitride (h-BN), polyimide, a combination of two or more of graphene, h-BN and polyimide, or a combination of boron nitride (BN) particularly h-BN, aluminum oxide ( $\text{Al}_2\text{O}_3$ ) and silicon dioxide ( $\text{SiO}_2$ ). Any other two-dimensional materials that facilitate transfer of the sheltering film **302** to the interconnecting structures **202-206** are also possible and within the contemplation of the present disclosure. In certain embodiments, the sheltering film **302** has a thickness of around 0.3nm to 50 nm, around 5 nm to 40 nm, or around 10-30 nm. The thickness of the sheltering film **302** or the number of layers of the sheltering film **302** is largely positively correlated with the width of the air gaps **207-210**. As the width of the air gaps **207-210** increases, so will the thickness of the sheltering film **302** or the number of layers of the sheltering film **302**.

[0058] In certain embodiments, the sheltering film **302** is a planar membrane atop the interconnecting structures **202-206**. The membrane has a smooth surface. In certain embodiments, as the spacing between the interconnecting structures **202-206**, i.e. the width of the air gaps **207-210**, is relatively large, e.g. when the width is close to or larger than  $5\mu\text{m}$ , the sheltering film **302** may

sag in between the interconnecting structures **202-206**. However, the effect of sagging is minuscule in view of the scaled IC structure. Therefore, its effect on the dielectric constant is negligible.

[0059] In certain embodiments, the protective layer further comprises a supporting film **801** on top of the sheltering film **302**. The supporting film **801** is meant to enhance the mechanical strength of the sheltering film **302** so that it can sustain the rigor of the following processes, e.g. chemical mechanical polishing. The supporting film **801** can be a single-layer structure or a multiple-layer structure made from insulating materials, semiconductors, conducting materials, or a combination thereof. In certain embodiments, the supporting film **801** is made from one or more materials having a high Young Modulus for it to be mechanically strong. In certain embodiments, the supporting film **801** is made from one or more materials that allow layer-by-layer deposition (e.g. deposition by each atomic layer) on the sheltering film **302**. In certain embodiments, the supporting film **801** can be made from aluminum oxide ( $\text{Al}_2\text{O}_3$ ). In certain embodiments, the supporting film **801** can be made from the same material that forms the sheltering film **302**. The supporting film **801** generally has a spread that is similar or identical to the sheltering film **302**. In certain embodiments, the supporting film **801** has a thickness larger than that of the sheltering film **302**. In certain embodiments, the supporting film **801** has a thickness between 30 nm to 5,000 nm, between 200 nm to 2,500 nm, between 500 nm to 1,000 nm or between 600 nm to 800 nm.

[0060] The protective layer **501** including the sheltering film **302** and preferably also the supporting film **801** protects the air gaps **207-210** as the low-k dielectric material between the interconnecting structures **202-206**, so that the air gaps **207-210** will not be contaminated by external undesired materials. As a result, the risks of malfunction or failure of integrated circuits due to contamination of such air gaps **207-210** can be minimized. This structural arrangement also facilitates manufacture

by dispensing with complicated steps such as material deposition or sacrifice associated with air gaps formation in the prior art.

### **Method for Manufacturing the Integrated Circuit Structure**

5 [0061] Figs. 2-8 illustrate the method of manufacturing the IC structure **100** with air gaps **207-210** and a protective layer **501**. The method has a bottom-up approach. A substrate **201** as described above is provided, and a plurality of interconnecting structures **202-206** are created on the substrate **201** as shown in step **200** of Fig. 2. The interconnecting structures **202-206** can be created in various ways. In certain embodiments, the interconnecting structures **202-206** can be created by  
10 deposition of a planar metal or other composing material followed by a lithography process which patterns a masking layer, and then etching away the unpatterned material. Alternatively, the interconnecting structures **202-206** can be created with a damascene process, in which a metal pattern is created in a base dielectric, and the base dielectric is then etched away exposing the patterned metal. These methods are well known in the art and are therefore not discussed in detail  
15 herein.

[0062] The creation of the interconnecting structures **202-206** leads to the formation of a plurality of air gaps **207-210** therebetween. It is an advantage of the present disclosure that no additional steps are required in forming the air gaps **207-210**. In addition, the processes employed in the present disclosure for creating the interconnecting structures **202-206** generally do not cause any  
20 residuals to remain in the air gaps **207-210** therebetween. As a result, the risk of residual materials remaining in the air gaps **207-210** is minimized, and there is no need of extra steps to remove any residuals.

[0063] Figs. 3-5 show the formation of the protective layer **501**, particularly the sheltering film **302** of the protective layer **501**. The formation of the sheltering film **302** is a process independent of creation of the interconnecting structures **202-206**. As a result, the process can be performed concurrently with creation of the interconnecting structures **202-206**, and at a location away from the interconnecting structures **202-206**, thereby expediting the entire manufacture and avoiding contamination of the air gaps **207-210**. It also avoids any contamination to the air gaps **207-210** from the process. The sheltering film **302** can be grown or deposited on a base **301**, as shown in step **300** of Fig. 3. The base is selected according to the material(s) used to form the sheltering film **302** and the growth condition thereof. Where the sheltering film **302** is made of two-dimensional materials such as graphene and h-BN, the base **301** may be made from copper foil or silicon wafer. The growing or deposition process can be done by any one or more of chemical vapor deposition (CVD), such as plasma enhanced chemical vapor deposition (PEVCD), low pressure chemical vapor deposition (LPCVD) and metal organic chemical vapor deposition (MOCVD); atomic layer deposition (ALD); evaporation; plasma vapor deposition (PVD), molecular beam epitaxy (MBE) or any other methods suitable for growing or depositing two-dimensional materials. Where the sheltering film **302** comprises multiple layers, they may be grown or deposited gradually. The deposited sheltering film **302** is then coated with a holding layer **401**, as shown in step **400** of Fig. 4.

[0064] The holding layer **401** can be made from materials that can be dissolved in organic solutions, such as acetone, or materials that can be decomposed by plasma treatment (e.g. O<sub>2</sub> plasma, particularly at 300W, 70°C and 280mTorr for 2 minutes). In certain embodiments, the holding layer **401** can be made from PMMA. The holding layer **401** can be coated onto the sheltering film **302** by any suitable process, such as spin coating, spray coating, dip coating, etc. To increase the adhesion between the holding layer **401** and the sheltering film **302**, an assembly of the holding layer **401**, the

sheltering film **302** and the base **301** can be baked mildly subsequent to the coating so as to harden the holding layer **401**. In certain embodiments, the sheltering film **302** and the base **301** are baked at 120°C and 1atm for 15 minutes. The mild treatment generally will not deteriorate the performance of the IC structure **100** as it is done under a low temperature. The holding layer **401** and the sheltering film **302** can then be separated from the base **301**, e.g. by means of dissolving the base **301** or by mechanical exfoliation, as shown in step **500** of Fig. 5. In certain embodiments where the base **301** is formed from copper foil, it can be dissolved by hydrogen peroxide and sulphuric acid ( $\text{H}_2\text{O}_2\text{-H}_2\text{SO}_4$ ) which do not react with the holding layer **401** and the sheltering film **302**. This leaves a stack of the holding layer **401** and the sheltering film **302**.

[0065] The remaining stack of holding layer **401** and sheltering film **302** can then be transferred onto the substrate **201** atop the interconnecting structures **202-206** to cover or seal the air gaps **207-210**, as shown in step **600** of Fig. 6. In certain embodiments, the stack of holding layer **401** and sheltering film **302** are physically positioned to rest on the interconnecting structures **202-206**. The entire structure, particularly the sheltering film **302** and the interconnecting structures **202-206**, then goes through a thermal treatment, such as under a temperature of 120°C-200°C for 3-10 minutes, e.g. at 180°C for 5 minutes, to improve the adhesion between the sheltering film **302** and the top surfaces of the interconnecting structures **202-206**. As a result, the sheltering film **302** stays in sealed contact with the interconnecting structures **202-206** so that it effectively protects the air gaps **207-210** from external contamination. The holding layer **401** can then be removed from the stack, e.g. by dissolving the holding layer **401** in an organic solution or by oxygen plasma, as shown in step **700** of Fig. 7. In certain embodiments where the holding layer **401** is made from PMMA, it may be dissolved by acetone which does not react with the sheltering film **302**.

[0066] In certain embodiments, the holding layer **401** is a thermal release tape. Having formed the stack of the thermal release tape and the sheltering film **302**, it is transferred onto the substrate **201** atop the interconnecting structures **202-206**, and the entire structure is inserted between two rollers at mild heat (e.g. between 90°C and 120°C), such that the sheltering film **302** can be transferred  
5 from the thermal release tape onto the interconnecting structures **202-206**. The thermal release tape can be removed thereafter. Other suitable transfer methods are also possible and within the contemplation of the present disclosure.

[0067] In certain embodiments, a further supporting film **801** can be coated onto the sheltering film **302**, as shown in step **800** of Fig. 8. The supporting film **801** can be coated, e.g. by means of  
10 chemical vapor deposition (CVD), such as plasma enhanced chemical vapor deposition (PEVCD), low pressure chemical vapor deposition (LPCVD) and metal organic chemical vapor deposition (MOCVD); atomic layer deposition (ALD); evaporation; plasma vapor deposition (PVD), molecular beam epitaxy (MBE) or any other suitable method. The thickness of the supporting film **801** can largely be controlled by the time of the coating process. Where the supporting film **801**  
15 comprises multiple layers, they may be coated gradually. The separate depositions of the sheltering film **302** and the supporting film **801** make the thickness of each film reasonably small to avoid too much stress accumulation within each film as a result of deposition.

[0068] By repeating the above steps, it is possible to produce a multi-level IC structure, where each level can have air gaps **207-210** between interconnecting structures **202-206** and a protective layer  
20 **501** atop the interconnecting structures **202-206** and the air gaps **207-210**. Different levels of the IC structure can be the same or different. Other steps forming the IC structure **100** may follow, but they are not addressed in the present disclosure in detail.

[0069] The manufacturing method of the present disclosure is advantageous in many ways over the existing methods for forming air gaps in IC structures. No additional materials such as low-k dielectric materials are necessary for forming the air gaps **207-210**. Therefore the air gaps **207-210** can occupy as much space between the interconnecting structures **202-206** as possible. This means  
5 a lower dielectric constant between and more effective isolation of the interconnecting structures **202-206**. In certain embodiments, simulations show up to 40% improvement in terms of air gaps volume and parasitic capacitance reduction, as compared with air gaps fabricated using non-conformal deposition which results in deposition of dielectric materials on sidewalls of the interconnecting structures. In addition, no additional steps such as deposition, sacrifice and high  
10 temperature treatment are necessary for forming the air gaps **207-210** and having the air gaps sufficiently protected. This usually means less complexity and lower costs for the entire process, shorter manufacture duration, and no temperature tradeoff (e.g. there is no circumstance the temperature will go up to 450°C). The manufacturing method is therefore considerably simplified. Also, the formation of the protective layer **501**, particularly the sheltering film **302** is done  
15 independently from the substrate **201** and the interconnecting structures **202-206**. Hence, there will not be any issue of cross contamination.

[0070] While the IC structure **100** and method for manufacturing such structure are set forth here in the context of accompanying drawings, it should be mentioned that the invention is not limited to the specific form shown here. The present invention may be implemented with various changes and  
20 substitutions to the exemplified embodiments without departing from the spirit and virtue of the present disclosure, especially the selection of materials and the manufacturing processes can be varied depending on the application of the IC structure. Therefore, the scope of protection of the present disclosure is only intended to be limited by the appended claims.

## CLAIMS

1. An integrated circuit structure comprising:

a substrate;

a plurality of interconnecting structures on the substrate, wherein each of the  
5 interconnecting structures comprises side surfaces and a top surface and the  
side surfaces directly define air gaps therebetween isolating the  
interconnecting structures from each other; and

a planar protective layer on top of the plurality of interconnecting structures  
covering all of the air gaps.

10

2. The integrated circuit structure of claim 1, wherein the air gaps extend substantially the  
entire thickness of the interconnecting structures.

3. The integrated circuit structure of claim 1, wherein the air gaps have an aspect ratio in  
15 the range of 0.5 to 5.

4. The integrated circuit structure of claim 1, wherein the protective layer is continuous.

5. The integrated circuit structure of claim 1, wherein the protective layer comprises a  
20 sheltering film sealing the air gaps to prevent material deposition inside the air  
gaps.

6. The integrated circuit structure of claim 5, wherein the sheltering film is a planar single-  
layer or multi-layer structure comprising one or more two-dimensional materials  
25 selected from semiconductors, dielectric materials and any combination thereof.

7. The integrated circuit structure of claim 6, wherein the one or more two-dimensional  
materials of the sheltering film are selected from graphene, hexagonal boron nitride,  
polyimide, and any combination thereof.

30

8. The integrated circuit structure of claim 6, wherein the one or more materials of the  
sheltering film have a Young Modulus greater than 50 GPa.

9. The integrated circuit structure of claim 5, wherein the protective layer further comprises a supporting film on top of the sheltering film to strengthen the sheltering film.
- 5 10. The integrated circuit structure of claim 9, wherein the supporting film is a planar single-layer or multi-layer structure comprising one or more materials selected from insulating materials, semiconductors, conducting materials and any combination thereof.
- 10 11. The integrated circuit structure of claim 9, wherein the supporting film is made from aluminum oxide.
12. The integrated circuit structure of claim 1, wherein the interconnecting structures are generally vertically aligned lines, wires, plugs, posts, pillars, or any combination thereof.
- 15 13. The integrated circuit structure of claim 1, wherein the interconnecting structures comprise one or more materials selected from the group consisting of conductors, semiconductors, dielectric materials, and any combination thereof.
- 20 14. The integrated circuit structure of claim 1, wherein the interconnecting structures have an aspect ratio in the range of 0.5 to 5.
15. A method of manufacturing an integrated circuit structure comprising the steps of:
- 25 a) providing a substrate;
- b) creating a plurality of interconnecting structures on the substrate, wherein each of the interconnecting structures comprises side surfaces and a top surface and the side surfaces directly define air gaps therebetween isolating the interconnecting structures from each other; and
- 30 c) adding a planar protective layer on top of the plurality of interconnecting structures to cover all of the air gaps.
16. The method of claim 15, wherein the step c) comprises adding a sheltering film atop the plurality of interconnecting structures by:

- d) depositing the sheltering film on a base;
- e) coating a holding layer on the sheltering film;
- f) removing the base from the sheltering film;
- g) transferring a stack of the holding layer and the sheltering film onto the substrate with  
5 the sheltering film atop the interconnecting structures; and
- h) removing the holding layer from the sheltering film.

17. The method of claim 16, wherein the steps d) to f) of forming the stack of the holding  
layer and the sheltering film are performed away from the substrate and the  
10 plurality of interconnecting structures.

18. The method of claim 16, wherein the base is made from a cooper foil or a silicon wafer.

19. The method of claim 16, wherein the holding layer is made from one or more materials  
15 that are dissolvable in organic solutions or decomposable by plasma treatment.

20. The method of claim 19, wherein the holding layer is made from PMMA.

21. The method of claim 19, wherein step e) further comprises baking the holding layer  
20 after it is coated on the sheltering film.

22. The method of claim 19, wherein the step g) comprises positioning the stack of the  
holding layer and the sheltering film onto the substrate with the sheltering film atop  
the interconnecting structures, and heating the sheltering film and the  
25 interconnecting structures to improve the adhesion between the sheltering film and  
the top surfaces of the interconnecting structures.

23. The method of claim 16, wherein the holding layer is a thermal release tape.

30 24. The method of claim 23, wherein the step g) comprises positioning the stack of the  
holding layer and the sheltering film onto the substrate with the sheltering film atop  
the interconnecting structures, and inserting them between two rollers at mild heat  
to transfer the sheltering film onto the top surfaces of the interconnecting structures.

25. The method of claim 16, wherein the sheltering film is a planar single-layer or multi-layer structure comprising one or more two-dimensional materials selected from semiconductors, dielectric materials and any combination thereof.

5

26. The method of claim 16, wherein the sheltering film is deposited on the base by chemical vapor deposition, plasma enhanced chemical vapor deposition, low pressure chemical vapor deposition, metal organic chemical vapor deposition, atomic layer deposition, evaporation, plasma vapor deposition, or molecular beam epitaxy.

10

27. The method of claim 16, wherein the step c) further comprises depositing a supporting film on the sheltering film to strengthen the sheltering film.

15 28. The method of claim 27, wherein the supporting film is a planar single-layer or multi-layer structure comprising one or more materials selected from insulating materials, semiconductors, conducting materials and any combination thereof.

20 29. The method of claim 27, wherein the supporting film is deposited on the sheltering film by chemical vapor deposition, plasma enhanced chemical vapor deposition, low pressure chemical vapor deposition, metal organic chemical vapor deposition, atomic layer deposition, evaporation, plasma vapor deposition, or molecular beam epitaxy.

25 30. The method of claim 15, wherein the steps a) to c) are repeated to create a multi-level integrated circuit structure.

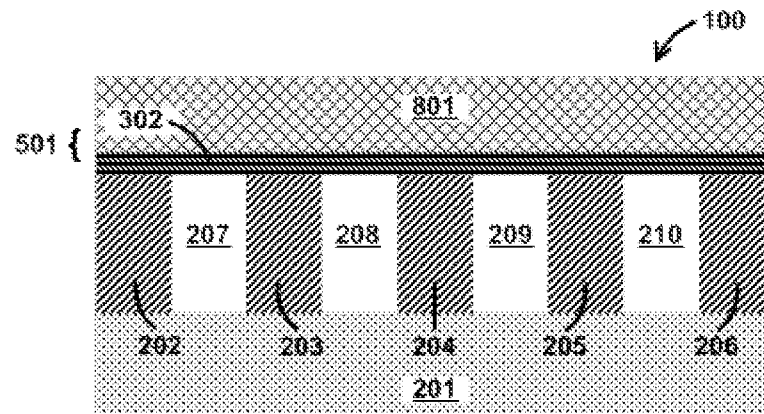


FIG. 1

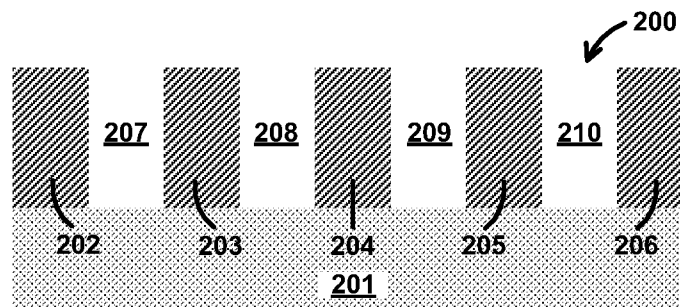


FIG. 2



FIG. 3

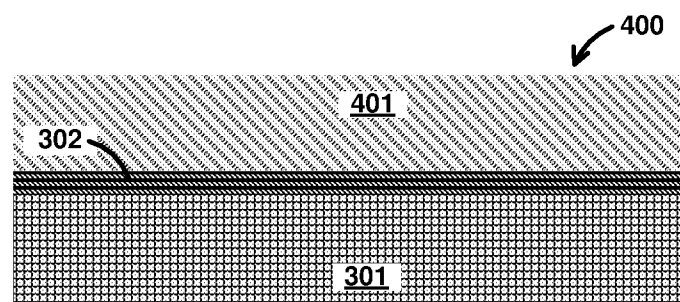


FIG. 4



FIG. 5

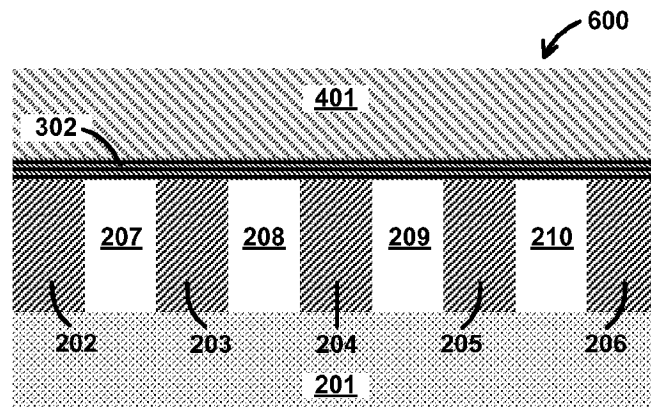


FIG. 6

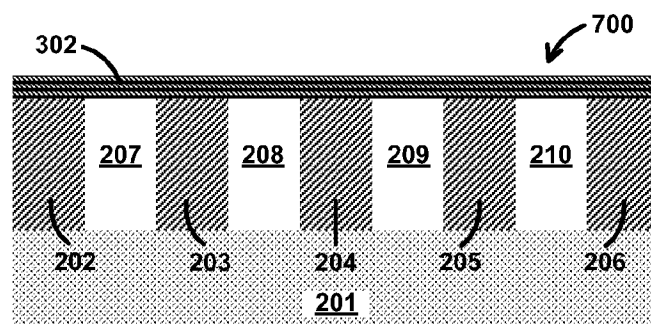


FIG. 7

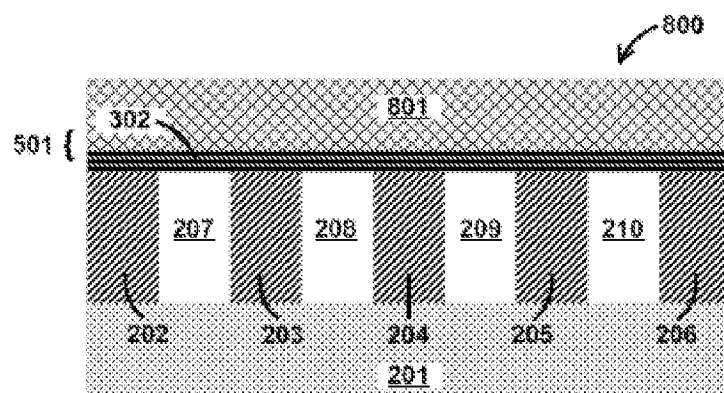


FIG. 8

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2018/077546

**A. CLASSIFICATION OF SUBJECT MATTER**

H01L 23/528(2006.01)i; H01L 21/768(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, CNPAT, CNKI: air, gap, sidewall, top, interconnect+, copper, Cu, support, shelter, dielectric, insulator, low, K

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                       | Relevant to claim No. |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | JP 2008277437 A (RENESAS TECHNOLOGY K.K.) 13 November 2008 (2008-11-13)<br>description, paragraphs [0014]-[0039], figure 1               | 1-14                  |
| X         | CN 103178002 A (SEMICONDUCTOR MFG INT SHANGHAI CORP.) 26 June 2013<br>(2013-06-26)<br>description, paragraphs [0002]-[0005], figures 1-3 | 15-30                 |
| X         | US 2003064577 A1 (HSU, SHENGTEG ET AL.) 03 April 2003 (2003-04-03)<br>description, paragraphs [0018]-[0034], figures 1-12                | 1-14                  |
| X         | CN 102881643 A (SHANGHAI IC R & D CENT CO., LTD.) 16 January 2013 (2013-01-16)<br>description, paragraphs [0032]-[0053], figures 1-2     | 1-14                  |
| A         | US 2010206842 A1 (QUALCOMM INCORPORATED) 19 August 2010 (2010-08-19)<br>the whole document                                               | 1-30                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&amp;” document member of the same patent family

Date of the actual completion of the international search

14 May 2018

Date of mailing of the international search report

25 May 2018

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE  
P.R.CHINA  
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing  
100088  
China

Authorized officer

LUO,Huijing

Facsimile No. (86-10)62019451

Telephone No. 86-(10)-53961204

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/CN2018/077546**

| Patent document<br>cited in search report |            |    | Publication date<br>(day/month/year) | Patent family member(s) |            |    | Publication date<br>(day/month/year) |
|-------------------------------------------|------------|----|--------------------------------------|-------------------------|------------|----|--------------------------------------|
| JP                                        | 2008277437 | A  | 13 November 2008                     | None                    |            |    |                                      |
| CN                                        | 103178002  | A  | 26 June 2013                         | CN                      | 103178002  | B  | 16 March 2016                        |
| US                                        | 2003064577 | A1 | 03 April 2003                        | US                      | 2003127740 | A1 | 10 July 2003                         |
|                                           |            |    |                                      | JP                      | 2003163264 | A  | 06 June 2003                         |
|                                           |            |    |                                      | US                      | 6555467    | B2 | 29 April 2003                        |
|                                           |            |    |                                      | JP                      | 2007074004 | A  | 22 March 2007                        |
|                                           |            |    |                                      | US                      | 6841844    | B2 | 11 January 2005                      |
|                                           |            |    |                                      | JP                      | 4656803    | B2 | 23 March 2011                        |
|                                           |            |    |                                      | US                      | 6642138    | B2 | 04 November 2003                     |
|                                           |            |    |                                      | US                      | 2003064581 | A1 | 03 April 2003                        |
| CN                                        | 102881643  | A  | 16 January 2013                      | CN                      | 102881643  | B  | 19 April 2017                        |
| US                                        | 2010206842 | A1 | 19 August 2010                       | TW                      | 201101392  | A  | 01 January 2011                      |
|                                           |            |    |                                      | WO                      | 2010096577 | A1 | 26 August 2010                       |