




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/12/23
(87) **Date publication PCT/PCT Publication Date:** 2011/06/30
(45) **Date de délivrance/Issue Date:** 2014/01/07
(85) **Entrée phase nationale/National Entry:** 2011/08/04
(86) **N° demande PCT/PCT Application No.:** US 2009/069492
(87) **N° publication PCT/PCT Publication No.:** 2011/078869

(51) **Cl.Int./Int.Cl.** **G01V 8/02** (2006.01),
E21B 49/00 (2006.01), **G01N 15/02** (2006.01),
G01N 21/25 (2006.01), **G01N 21/55** (2006.01),
G01N 21/59 (2006.01), **G01N 9/24** (2006.01)
(72) **Inventeurs/Inventors:**
MORYS, MARIAN L., US;
ZANNONI, STEVE A., US;
JONES, CHRISTOPHER M., US
(73) **Propriétaire/Owner:**
HALLIBURTON ENERGY SERVICES, INC., US
(74) **Agent:** EMERY JAMIESON LLP

(54) **Titre : OUTIL D'ANALYSE DE FOND PAR INTERFEROMETRIE**
(54) **Title: INTERFEROMETRY-BASED DOWNHOLE ANALYSIS TOOL**

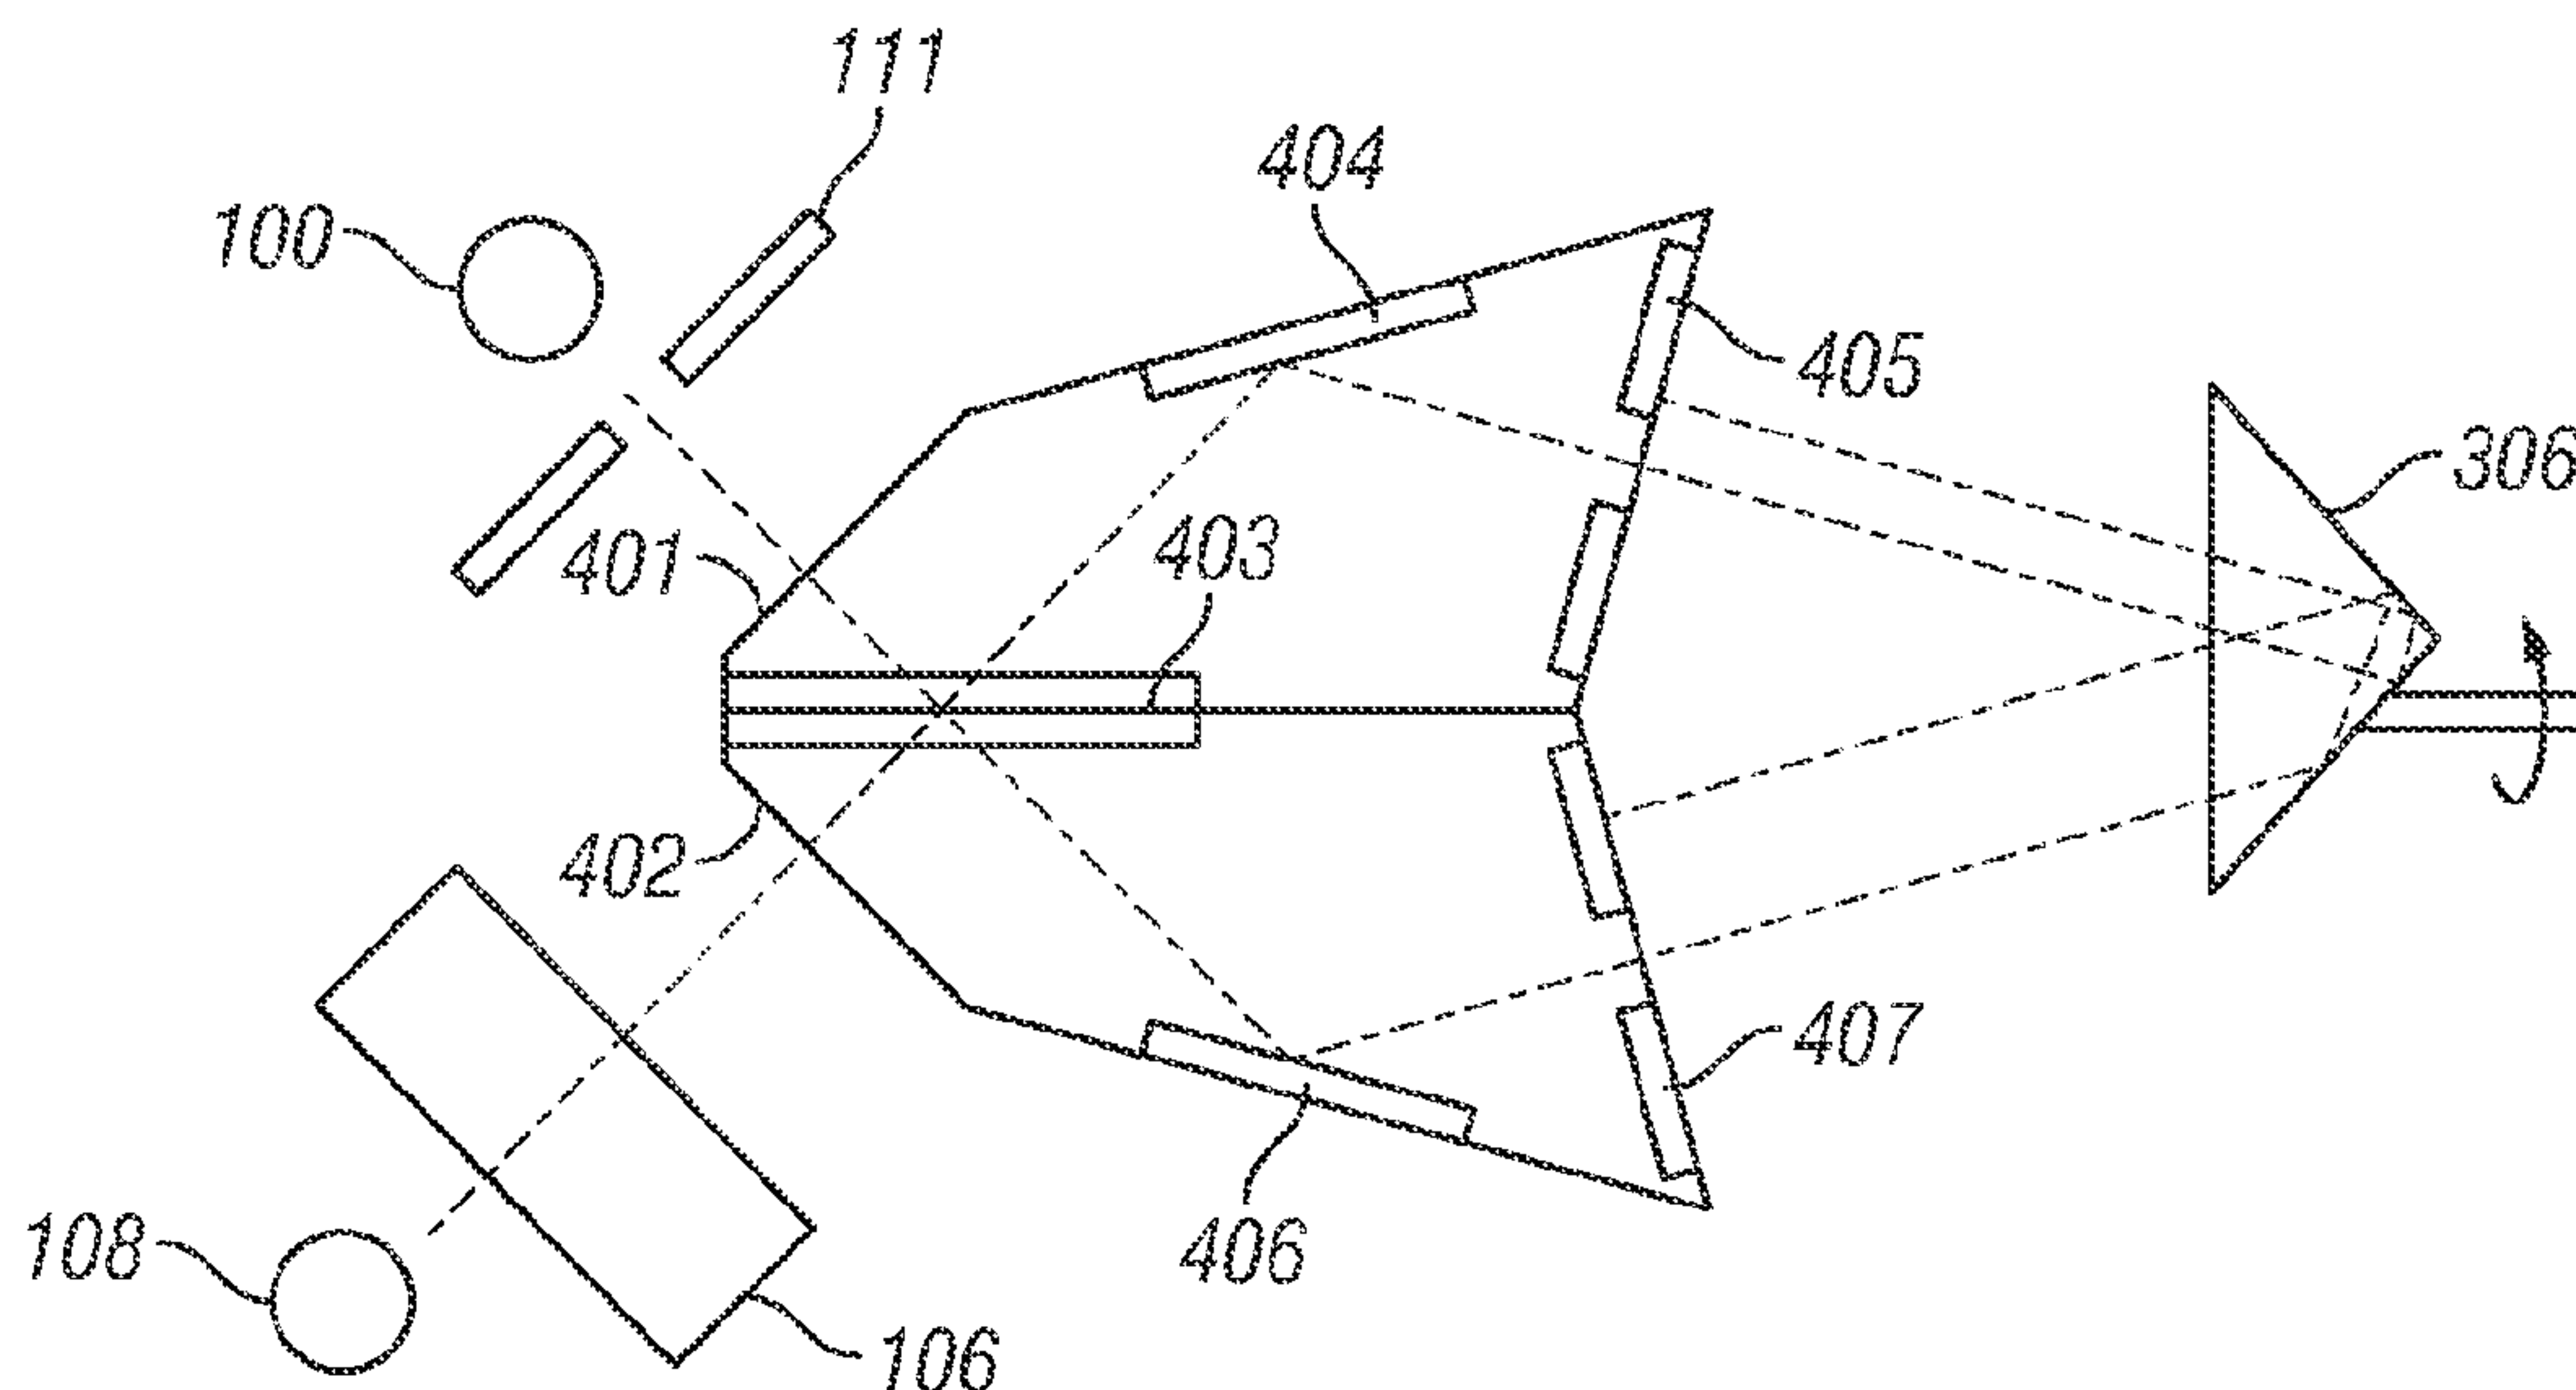

(57) **Abrégé/Abstract:**

Various systems and methods for performing optical analysis downhole with an interferogram (a light beam having frequency components with a time variation that identifies those frequency components). The interferogram is produced by introducing an interferometer into the light path, with the two arms of the interferometer having a propagation time difference that varies as a function of time. Before or after the interferometer, the light encounters a material to be analyzed, such as a fluid sample from the formation, a borehole fluid sample, a core sample, or a portion of the borehole wall. The spectral characteristics of the material are imprinted on the light beam and can be readily analyzed by processing electronics that perform a Fourier Transform to obtain the spectrum or that enable a comparison with one or more templates. An interferometer designed to perform well in the hostile environments downhole is expected to enable laboratory-quality measurements.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
30 June 2011 (30.06.2011)

PCT

(10) International Publication Number
WO 2011/078869 A1(51) International Patent Classification:
G01N 21/21 (2006.01)(21) International Application Number:
PCT/US2009/069492(22) International Filing Date:
23 December 2009 (23.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MORYS, Marian, L.** [US/US]; 835 Tremont Drive, Downingtown, PA 19335 (US). **ZANNONI, Steve, A.** [US/US]; 634 West 17th Street, Houston, TX 77008 (US). **JONES, Christopher, M.** [US/US]; 3218 Cobblestone Creeky Way, Houston, TX 77084 (US).(74) Agents: **KRUEGER, Daniel, J.** et al.; Krueger Iselin LLP, P.O. Box 1906, Cypress, TX 77410-1906 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: INTERFEROMETRY-BASED DOWNHOLE ANALYSIS TOOL

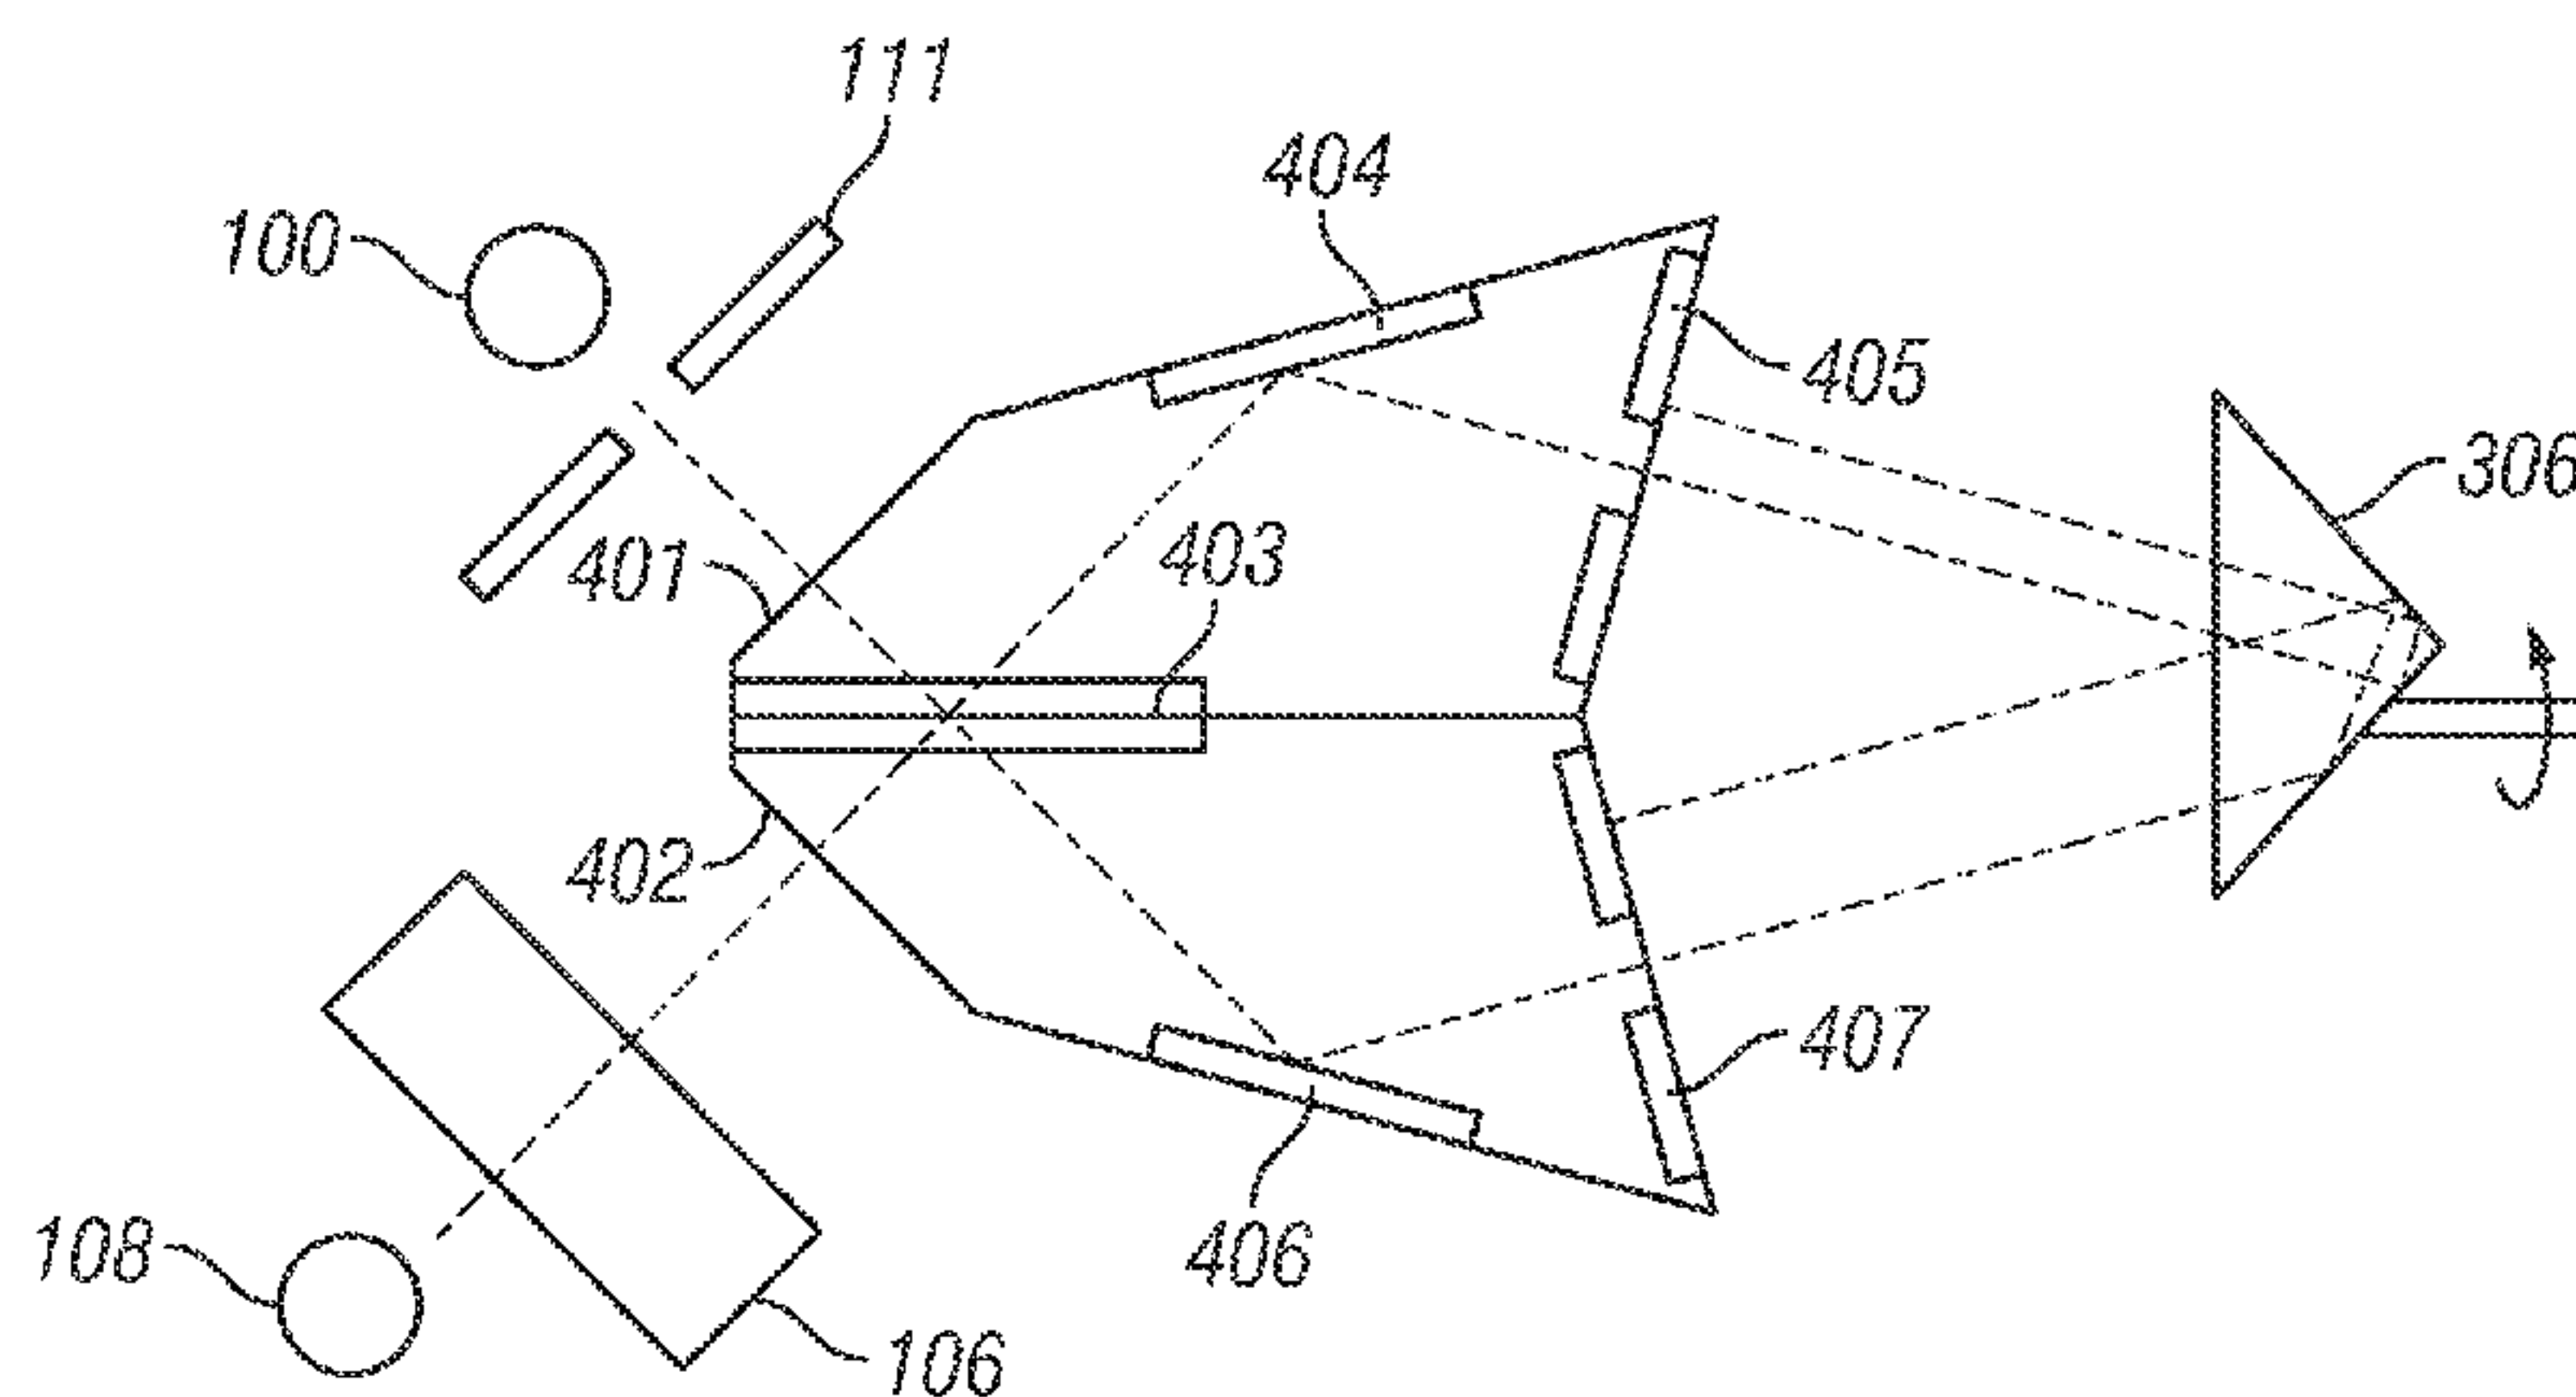


FIG. 8

(57) **Abstract:** Various systems and methods for performing optical analysis downhole with an interferogram (a light beam having frequency components with a time variation that identifies those frequency components). The interferogram is produced by introducing an interferometer into the light path, with the two arms of the interferometer having a propagation time difference that varies as a function of time. Before or after the interferometer, the light encounters a material to be analyzed, such as a fluid sample from the formation, a borehole fluid sample, a core sample, or a portion of the borehole wall. The spectral characteristics of the material are imprinted on the light beam and can be readily analyzed by processing electronics that perform a Fourier Transform to obtain the spectrum or that enable a comparison with one or more templates. An interferometer designed to perform well in the hostile environments downhole is expected to enable laboratory-quality measurements.

WO 2011/078869 A1

INTERFEROMETRY-BASED DOWNHOLE ANALYSIS TOOL

BACKGROUND

[0001] Modern oil field operators demand access to a great quantity of information regarding the parameters and conditions encountered downhole. Such information typically includes characteristics of the earth formations traversed by the borehole and data relating to the size and configuration of the borehole itself. The collection of information relating to conditions downhole, which commonly is referred to as "logging," can be performed by several methods including wireline logging, "logging while drilling" (LWD), and tubing-conveyed logging.

[0002] In wireline logging, a probe or "sonde" is lowered into the borehole after some or all of the well has been drilled. The sonde hangs at the end of a long cable or "wireline" that provides mechanical support to the sonde and also provides an electrical connection between the sonde and electrical equipment located at the surface of the well. In accordance with existing logging techniques, various parameters of the earth's formations are measured and correlated with the position of the sonde in the borehole as the sonde is pulled uphole.

[0003] In LWD, the drilling assembly includes sensing instruments that measure various parameters as the formation is being penetrated, thereby enabling measurements of the formation while it is less affected by fluid invasion. While LWD measurements are desirable, drilling operations create an environment that is generally hostile to electronic instrumentation, telemetry, and sensor operations.

[0004] Tubing-conveyed logging, like wireline logging, is performed in an existing borehole. Unlike wireline logging, tubing-conveyed logging enables a logging tool to travel where a wireline-suspended tool cannot, e.g., in a horizontal or ascending borehole. Tubing-conveyed logging tools typically suffer from restricted communications bandwidths, meaning that acquired data is generally stored in memory and downloaded from the tool when the tool returns to the surface.

[0005] In these and other logging environments, measured parameters are usually recorded and displayed in the form of a log, i.e., a two-dimensional graph showing the measured parameter as a function of tool position or depth. In addition to making parameter measurements as a function of depth, some logging tools also provide parameter measurements as a function of azimuth. Such tool measurements have often been displayed as two-dimensional images of the borehole wall, with one dimension representing tool position or depth, the other dimension representing azimuthal orientation, and the pixel intensity or color representing the parameter value.

[0006] Once a borehole has been drilled, operators often wish to perform downhole formation testing before finalizing a completion and production strategy. Fluid sampling tools enable operators to draw fluid samples directly from the borehole wall and measure contamination levels, compositions, and phases, usually based on the properties (e.g., optical properties, electrical properties, density, NMR, and PVT properties) of the materials drawn into the sample chamber.

DESCRIPTION OF THE DRAWINGS

[0007] A better understanding of the various disclosed embodiments can be obtained when the following detailed description is considered in conjunction with the attached drawings, in which:

[0008] Fig. 1 shows an illustrative environment for logging while drilling (“LWD”);

[0009] Fig. 2 shows an illustrative environment for wireline logging;

[0010] Fig. 3 shows an illustrative environment for tubing-conveyed logging;

[0011] Fig. 4 shows an illustrative formation fluid sampling tool;

[0012] Fig. 5 shows an illustrative interferometer-based fluid analyzer;

[0013] Fig. 6 shows an illustrative interferometer with an integrated (“monolithic”) light path component;

[0014] Fig. 7 shows an illustrative interferometer employing a spinning retroreflector;

[0015] Fig. 8 shows a second illustrative interferometer-based fluid analyzer; and

[0016] Fig. 9 shows an illustrative interferometer-based analysis method.

[0017] While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that the drawings and detailed description thereto are not intended to limit the disclosure, but on the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the plain-language scope of the claims.

DETAILED DESCRIPTION

[0018] Accordingly, there are disclosed herein various systems and methods for performing optical analysis downhole with an interferogram (a pattern of interference created by superposition of light waves). The interferogram is produced by introducing an interferometer into the light path, with the two arms of the interferometer having a propagation time difference that varies as a function of time. Before or after the interferometer, the light encounters a material to be analyzed, such as a fluid sample from the formation, a borehole fluid sample, a core sample, or a portion of the borehole wall. The encounter can take various forms, including transmission/attenuation through the sample, reflection off the sample, attenuated total reflectance (evanescent wave), scattering from the sample, and fluorescence excitation. In any event, the spectral characteristics of the material are imprinted on the light beam and can be readily analyzed by processing electronics that perform a Fourier Transform to obtain the spectrum or that enable a comparison with one or more templates. An interferometer designed to perform well in the hostile environments downhole is expected to enable laboratory-quality measurements.

[0019] The disclosed systems and methods are best understood in the context of the larger systems in which they operate. Fig. 1 shows an illustrative logging while drilling (LWD) environment. A drilling platform 2 supports a derrick 4 having a traveling block 6 for raising and lowering a drill string 8. A kelly 10 supports the drill string 8 as it is lowered through a rotary table 12. A drill bit 14 is driven by a downhole motor and/or rotation of the drill string 8. As bit 14 rotates, it creates a borehole 16 that passes through various formations 18. A pump 20 circulates drilling fluid through a feed pipe 22

to kelly 10, downhole through the interior of drill string 8, through orifices in drill bit 14, back to the surface via the annulus around drill string 8, and into a retention pit 24. The drilling fluid transports cuttings from the borehole into the pit 24 and aids in maintaining the borehole integrity.

[0020] A LWD tool 26 is integrated into the bottom-hole assembly near the bit 14. As the bit extends the borehole through the formations, logging tool 26 collects measurements relating to various formation properties as well as the tool orientation and various other drilling conditions. The logging tool 26 may take the form of a drill collar, i.e., a thick-walled tubular that provides weight and rigidity to aid the drilling process. As explained further below, tool assembly 26 includes an optical fluid analysis tool that monitors wellbore fluid properties. A telemetry sub 28 may be included to transfer measurement data to a surface receiver 30 and to receive commands from the surface. In some embodiments, the telemetry sub 28 does not communicate with the surface, but rather stores logging data for later retrieval at the surface when the logging assembly is recovered.

[0021] At various times during the drilling process, the drill string 8 may be removed from the borehole as shown in Fig. 2. Once the drill string has been removed, logging operations can be conducted using a wireline logging tool 34, i.e., a sensing instrument sonde suspended by a cable 42 having conductors for transporting power to the tool and telemetry from the tool to the surface. A wireline logging tool 34 may have pads and/or centralizing springs to maintain the tool near the axis of the borehole as the tool is pulled uphole. As explained further below, tool 34 can include a formation fluid sampler that extends a probe against a borehole wall to draw fluids into a sample

analysis chamber. A surface logging facility 44 collects measurements from the logging tool 34, and includes a computer system 45 for processing and storing the measurements gathered by the logging tool.

[0022] An alternative logging technique is logging with coil tubing. Fig. 3 shows an illustrative coil tubing-conveyed logging system in which coil tubing 54 is pulled from a spool 52 by a tubing injector 56 and injected into a well through a packer 58 and a blowout preventer 60 into the well 62. (It is also possible to perform drilling in this manner by driving the drill bit with a downhole motor.) In the well, a supervisory sub 64 and one or more logging tools 65 are coupled to the coil tubing 54 and optionally configured to communicate to a surface computer system 66 via information conduits or other telemetry channels. An uphole interface 67 may be provided to exchange communications with the supervisory sub and receive data to be conveyed to the surface computer system 66.

[0023] Surface computer system 66 is configured to communicate with supervisory sub 64 during the logging process or alternatively configured to download data from the supervisory sub after the tool assembly is retrieved. Surface computer system 66 is preferably configured by software (shown in Fig. 3 in the form of removable storage media 72) to process the logging tool measurements (including the interferogram measurements described further below). System 66 includes a display device 68 and a user-input device 70 to enable a human operator to interact with the system software 72.

[0024] In each of the foregoing logging environments, the logging tool assemblies preferably include a navigational sensor package that includes directional sensors for

determining the inclination angle, the horizontal angle, and the rotational angle (a.k.a. "tool face angle") of the bottom hole assembly. As is commonly defined in the art, the inclination angle is the deviation from vertically downward, the horizontal angle is the angle in a horizontal plane from true North, and the tool face angle is the orientation (rotational about the tool axis) angle from the high side of the wellbore. In accordance with known techniques, wellbore directional measurements can be made as follows: a three axis accelerometer measures the earth's gravitational field vector relative to the tool axis and a point on the circumference of the tool called the "tool face scribe line". (The tool face scribe line is typically drawn on the tool surface as a line parallel to the tool axis.) From this measurement, the inclination and tool face angle of the logging assembly can be determined. Additionally, a three axis magnetometer measures the earth's magnetic field vector in a similar manner. From the combined magnetometer and accelerometer data, the horizontal angle of the logging assembly can be determined.

[0025] Fig. 4 shows an illustrative formation fluid sampler tool 80. Tool 80 can be a drill collar, a coil tubing joint, or a drilling tubular, but most commonly it is expected to be part of a wireline sonde. Tool 80 extends a probe 82 and a foot 84 to contact the borehole wall 16, typically driving them outward from the tool body using hydraulic pressure. The probe 82 and foot 84 cooperate to seat the probe firmly against the borehole wall and establish a seal that keeps borehole fluids from being drawn into the sampling tool. To improve the seal, the wall-contacting face of the probe includes an elastomeric material 85 that conforms to the borehole wall. A pump 86 draws down the pressure, prompting fluid to flow from the formation through a probe channel 88, a sample chamber 90 in fluid analyzer 92, and a sample collection chamber 94. The

pump 86 exhausts fluid into the borehole through a port 96 and continues pumping until the sampling process is completed. Typically, the sampling process continues until the tool determines that the sample collection chamber 94 is full and any contaminants have been exhausted. Thereafter the sample collection chamber is sealed and the probe and foot are retracted. If desired, the tool can repeat the process at different positions within the borehole. Sample collection chamber 94 may be one of many such sample collection chambers in a cassette mechanism 98, enabling the tool to return many fluid samples to the surface.

[0026] Fig. 5 shows an illustrative interferometer-based fluid analyzer. A broadband light source 100 radiates light through an optional aperture 111. For the purposes of this disclosure, the term “broadband” is used to distinguish from narrowband sources that provide only isolated peaks in their spectrum. The broadband sources contemplated for use downhole have continuous spectrums in the range of 200-400 nm (for UV absorption and fluorescence spectroscopy), 1500-2300 nm (for special purpose spectroscopy, e.g. GOR determination), and 400-6000 nm (for general purpose VIS-IR spectroscopy). These examples are merely illustrative and not limiting. One readily available source suitable for this purpose is a tungsten-halogen incandescent source with a quartz envelope, generating light across the 300-3000 nm range.

[0027] A collimation mirror 101 parallelizes the light rays from the light source 100 and directs the light to a beam splitter 102 in an interferometer 110. The beam splitter is directs half of the light to a fixed mirror 103 and the other half to a movable mirror 104. (Mirrors 103 and 104 are shown as retroreflectors, which exhibit improved tolerance for misalignment errors than do flat mirrors.) The mirrors reflect the light back to the beam

splitter 102. At this point, the beams have traveled path lengths having a difference that depends on the position of the movable mirror 104. Movable mirror 104 oscillates back and forth, causing the combined beam leaving the beam splitter to suffer interference in a manner that makes the different frequency components of the light beam undergo intensity oscillations at rates that are related to their frequencies. This combined beam is herein termed a “spectralized” beam, because it makes the spectral composition of the beam measurable from the time variation of its intensity. (In the literature, this spectralized beam is sometimes referred to as an “interferogram”.)

[0028] As it exits the interferometer 110, the spectralized beam travels from the beam splitter 102 (via an intermediate mirror 113) to a focusing mirror 105. The focusing mirror 105 focuses the light at a point in a sample chamber 106, after which a second focusing mirror 107 directs the light onto a detector 108. The detector 108 measures the time variation of the incident light intensity. In some embodiments, the electronics process the measured time variation, determining a Fourier Transform that reveals the transmission spectrum of the material in the sample chamber 106. Note, however, that the Fourier Transform is not obligatory. In some embodiments, the electronics operate on the interferogram in the time-domain to measure characteristics of the material in the sample chamber.

[0029] The rate of intensity variation for each of the frequency components depends on the speed of the movable mirror 104. To compensate for variations in this speed, the processing electronics can track the position of the movable mirror. Alternatively, a narrowband light beam can be added to the broadband light beam. In Fig. 5, this is done by passing light from a laser 109 (or other gas discharge source having well-

defined spectral peaks) through a hole in collimating mirror 101 or being inserted via one or more mirrors 112. The oscillations in the interferogram from the laser source provide means for accurate position tracking of the moving mirror. Well-defined peaks in the gas discharge spectrum similarly enable the processing electronics to detect and compensate minor irregularities in the motion of mirror 104 and/or provide diagnostic measurements of the system performance.

[0030] Fig. 6 shows an illustrative interferometer with an integrated (“monolithic”) light path component. The integrated component provides reduced sensitivity to temperature changes, pressure changes, vibrations, and shock. A solid block of transparent material (e.g., quartz, sapphire, zinc selenide) is used as the body of the integrated component. Mirrors and a beam splitter, also made of the same material, are fused or otherwise attached to this body. An optional compensator can also be fused into place.

[0031] The input light beam 201 enters through a polished surface of the body and impinges on a beam splitter 202. Half of the light is reflected (via the optional compensator 203) off of a fixed mirror 204, from which it returns to the beam splitter 202. The other half of the light travels outside the integrated component, via a retroreflector 205, to reflect off of a fixed mirror 206 attached to the body of the integrated component. From the fixed mirror 206, the light returns (again via the retroreflector) to the beam splitter 202, where it combines with light from the other path to form an output beam 206.

[0032] As before, motion of the movable retroreflector causes the output beam to be spectralized. The movable element can be reciprocated by various mechanisms. In some embodiments, the movable element is mounted on a spring and driven with an

inductive field acting on a magnet. In other embodiments, a piezoelectric element is used to convert voltage into axial motion. Similarly, a magnetic field can drive a magnetostrictive element. The speed of the movable retroreflector can be tracked directly or measured using a reference light beam injected as before. Although the monolithic construction offers improved stability, the speed of the retroreflector can still be affected by vibration, shock, or imperfections in the drivers. A rotary motion can often be more precisely controlled and suffer less sensitivity to vibration or shock.

[0033] Accordingly, Fig. 7 shows an illustrative interferometer employing a spinning retroreflector. Light from a source 310 strikes a beam splitter 301, which routes half of the light to a spinning retroreflector 306 via a first fixed mirror 302 and a mirror with a hole 304. (Fig. 7 actually shows two positions of the retroreflector – for the moment we assume the retroreflector is in the upper position shown with dark shading.) The retroreflector 306 bounces this light off of the mirror with a hole 304, which returns the light back along this path to the beam splitter 301. The other half of the light is similarly routed to the spinning retroreflector 306 via a second fixed mirror 303 and a second mirror with a hole 305. The retroreflector bounces the light off of the mirror with a hole 305, which returns the light along this path to the beam splitter 301. The combined light from both paths exits the interferometer at 311 to illuminate the sample and be measured by the detector.

[0034] This configuration makes use of two properties of the corner reflector. First – corner reflectors are a type of retroreflector, meaning that incident light is reflected in a direction parallel to the incoming light, regardless of the direction of incidence. Second – when the light strikes the retroreflector from an off-axis direction, the distance traveled

by the light varies based on the light's offset distance from the axis in the base plane. (The base plane includes the apex of the corner reflector and is oriented perpendicular to the axis of the corner reflector.) Thus, when a corner reflector spins around an offset axis, the light path of light striking the corner reflector from an angle undergoes a periodic oscillation in length. The light path for light striking from an opposite angle as shown in Fig. 7 undergoes a periodic oscillation that is 180° out of phase with the oscillation of the first light path, thereby doubling the difference in lengths of the two light paths.

[0035] The use of a spinning corner reflector 306 provides improved performance because rotary motion can be precisely controlled even in the presence of vibration, and the position of a rotating object can be easily measured, e.g., using a rotary position encoder. With the ability to track the position of the moving mirror, the need for a reference light beam is eliminated.

[0036] Fig. 8 shows an illustrative interferometer-based fluid analyzer that combines a spinning corner reflector with an integrated light path component. In Fig. 8, two integrated components 401 and 402 can be manufactured separately and then fused to form a single component. The combined component includes a beam splitter 403, two fixed mirrors 404, 406, and two fixed mirrors with a central hole 405, 407. It operates similarly to the embodiment of Fig. 7, with a corner reflector spinning on an offset axis to provide a periodically varying difference between the lengths of the two light paths in the interferometer, thereby spectralizing the broadband light passing from the interferometer to the sample cell 106 and thence to the detector 108. In the illustrated system, the light path passes through the sample chamber 106 after the interferometer. However, the

light path could equally well pass through the sample chamber 106 prior to entering the interferometer. With the combined features, the illustrated fluid analyzer is expected to provide highly accurate measurements even in the downhole environment.

[0037] Note that other techniques for varying light path differences can be employed in place of the spinning corner reflector. Examples include fibers or waveguides with electrically controlled index of refraction or fibers with controlled stretch, e.g., by varying a magnetic field around an optical fiber clad in a magnetostrictive material or mounted on a magnetostrictive member, or by varying an electrical field across a piezoelectric element to achieve the stretch.

[0038] Fig. 9 shows an illustrative interferometer-based analysis method. Starting in block 502, the tool generates a broadband light. This can be done in a number of ways including an incandescent light with or without a transparent envelope and/or surrounded by a halogen gas, a broadband fluorescent source, a broadband quantum light source, or a combination of a number of relatively narrowband light sources such as LEDs. In block 504, the tool collimates the light and directs it along the light path through the device using some combination of one or more apertures, reflectors and lenses. Somewhere along the light path, the tool employs an interferometer to spectralize the light beam, as indicated by block 506. The interferometer is designed to operate in the downhole environment, e.g., by employing an integrated light path component that maintains the alignment and spacing of mirrors and beamsplitter(s) over a wide range of temperature, pressure, vibration, and shock conditions. Also, the movable component can take the form of a corner reflector that spins off-axis and is oriented at an angle to the light path, thereby providing an oscillatory variation of the

length difference between light paths through the interferometer. The total variation is expected to be in the range between 10^{-4} and 10^{-2} meter. This mechanism provides for precise control and measurement of the reflector position over a wide range of operating conditions.

[0039] Elsewhere along the light path, the tool directs the light to a material that is to be analyzed, as indicated by block 508. The material can take the form of a gas, fluid, or mixed phase flow captured within a sample cell or flowing past a window. Alternatively, the material can be a solid that is visible through a window or aperture, such as a core sample or a portion of the borehole wall adjacent to the tool. In block 510, the tool collects transmitted light, reflected light, scattered light, and/or emitted light or fluorescence from the sample and directs it to a detector of light intensity. The detector can take the form of a photodiode, a thermal detector (including thermopiles and pyroelectric detectors), a Golay cell, or a photoconductive element. Cooling can be employed to improve the signal-to-noise ratio of the detector.

[0040] In block 512, the tool tracks the motion of the movable element used in the interferometer (or the variation of some other element used to provide light path length variation) and uses it to determine the appropriate compensation to the measured signal. In block 514, the tool employs a digital signal processor, a general purpose processor, or other processing electronics to digitize the light intensity signal and process it in combination with the motion measurements to determine the spectrum of the light striking the detector. This spectrum is stored in memory for later use, possibly in association with a measurement time and/or tool position.

[0041] In block 516, the tool processes the measured interferograms or spectra to analyze one or more parameters of the illuminated material. That parameter is stored, displayed, or used as the basis for a subsequent tool operation (e.g., the decision to stop pumping after the contamination level drops sufficiently. Illustrative analyses include determining contamination levels in a sampled fluid, identifying fluid composition, identifying fluid type, identifying PVT properties, etc. The composition analysis might include determining concentrations of compounds such as CO₂, H₂S, etc., or determining hydrocarbon fractions of saturated, aromatics, resins, and asphaltenes. Fluid type determination can be finding volume percentages of oil, water, and gas. PVT properties can include bubble point determination, gas/oil ratio, density variation with pressure, etc. Measurements can be communicated to the surface for display to an operator and further processing.

[0042] Various processing techniques are known for determining composition or type information from a spectrum of reflected, transmitted, or scattered light. They include Inverse Least Squares Regression and Principal Component Analysis. However, other techniques can also be used, such as operating directly on the time-domain signal rather than converting to the spectral domain. (Correlation of measured interferograms with template interferograms is expected to be an effective way to measure concentrations of the substances from which the templates are derived.)

[0043] Various other features can be incorporated into the tool, including outfitting the tool with a reservoir of a reference fluid for downhole calibration of the system and for compensating for contamination on the windows of the flow cell. A shock and vibration monitoring system (e.g., an accelerometer that is mounted to the tool and periodically

sensed by the processing electronics) can be used to detect periods of high vibration that might make measurements less reliable. Measurements collected during these periods can be discarded or given a lower weighting that reflects their reduced reliability. Scattered light can be analyzed to determine the size distribution of particles entrained in a fluid flow. An ultraviolet light source can be included to induce fluorescence in the material, which fluorescence can be analyzed to aid in determining composition of the sample. To monitor the spectrum and intensity of the light source, a bypass path can be provided to direct light to a detector without passing through the sample cell. In some embodiments, a collection of varied detector types can be used, with filters, dichroic mirrors or other distribution means used to split the received light into bands best suited to be measured by the individual detectors.

[0044] Numerous variations and modifications will become apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

CLAIMS

What is claimed is:

1. A downhole tool that comprises:

5 a downhole light detector;

a downhole interferometer on an optical path between a broadband light source and the light detector, wherein the interferometer produces, from light received along the optical path, a spectralized beam having a spectral composition measurable from the spectralized beam's time-variant intensity;

10 a window on the optical path that enables light received along the optical path to illuminate a material to be analyzed; and

processing electronics coupled to the light detector to detect an electrical signal representing the spectralized beam's time-variant intensity and to determine therefrom a parameter of the material.

15

2. The tool of claim 1, wherein the material is a fluid drawn from a port seated against a borehole wall.

3. The tool of claim 2, wherein the window is on a sample cell that stores the fluid for transport to the surface, and the optical path passes through the fluid.

20

4. The tool of claim 2, wherein the parameter is a contamination level for the fluid.

25 5. The tool of claim 2, wherein the parameter includes a quantity of at least one fluid type.

6. The tool of claim 2, wherein the parameter includes a concentration of at least one substance.

5 7. The tool of claim 2, wherein the parameter is a size distribution of particles in the fluid.

8. The tool of claim 1, wherein the material is a borehole fluid, and the parameter is a fluid density or a quantity of at least one fluid type.

10

9. The tool of claim 1, wherein the material is a part of a borehole wall.

10. The tool of claim 1, wherein the light detector senses light reflected from the material.

15

11. The tool of claim 1, wherein the light detector senses light transmitted through the material.

12. The tool of claim 1, wherein the interferometer includes an integrated light
20 path component comprised on a solid block of a transparent material.

13. The tool of claim 1, wherein the interferometer includes a spinning retroreflector having a position encoder coupled to the processing electronics.

25 14. The tool of claim 1, further comprising a reference light source providing light that traverses at least that portion of the light path that includes the interferometer

and the light detector, wherein the processing electronics determine a motion compensation based on measurements of light from the reference light source.

15. The tool of claim 1, wherein the tool is adapted to be part of at least one of: a
5 wireline logging assembly, a drilling assembly, and a tubing-conveyed logging assembly.

16. The tool of claim 1, wherein the processing electronics correlate the signal
with one or more templates to determine a relative concentration of at least one
10 substance.

17. The tool of any one of claims 1 to 16 wherein the interferometer comprises a
fixed mirror and a movable mirror, wherein the movable mirror is movable as a
function of time to spectralize the light received along the optical path to produce
15 the spectralized beam's time-variant intensity.

18. The tool of any one of claims 1 to 16 wherein the spectral composition has
multiple frequency components measurable from the spectralized beam's time-
variant intensity, and wherein the processing electronics detect the electrical signal
20 and determine therefrom the multiple frequency components and the parameter of
the material.

19. The tool of claim 18 wherein the interferometer produces the spectralized
beam using a reciprocating mirror or a rotating mirror, and wherein the processing
25 electronics determine the multiple frequency components using mirror position as a
function of time.

20. A downhole analysis method that comprises:

directing collimated light from a downhole light source along an optical path that includes a downhole interferometer and a window for downhole sample

5 illumination;

modulating one arm length of the interferometer as a function of time to produce a spectralized beam before the light reaches a downhole detector, the spectralized beam having a spectral composition measurable from the spectralized beam's time-variant intensity;

10 measuring the spectralized beam's time-variant intensity with the downhole detector; and

using the measured intensity to determine a property of the downhole sample.

15 21. The method of claim 20, wherein the downhole sample is a fluid drawn from a port seated against a borehole wall.

22. The method of claim 20, wherein the downhole sample is a borehole fluid or a portion of a borehole wall.

20

23. The method of claim 20, wherein the property is at least one of: a contamination level, a quantity of at least one fluid type, a concentration of at least one substance, and a size distribution of particles.

25 24. The method of any one of claims 20 to 23 wherein the spectral composition has multiple frequency components measurable from the spectralized beam's time-

variant intensity, and wherein using the measured intensity comprises using the measured intensity to determine the multiple frequency components and the property of the downhole sample.

- 5 25. The method of claim 24, wherein modulating one arm length of the interferometer as a function of time comprises reciprocating or rotating a mirror, and wherein mirror position as a function of time is used to determine the multiple frequency components.

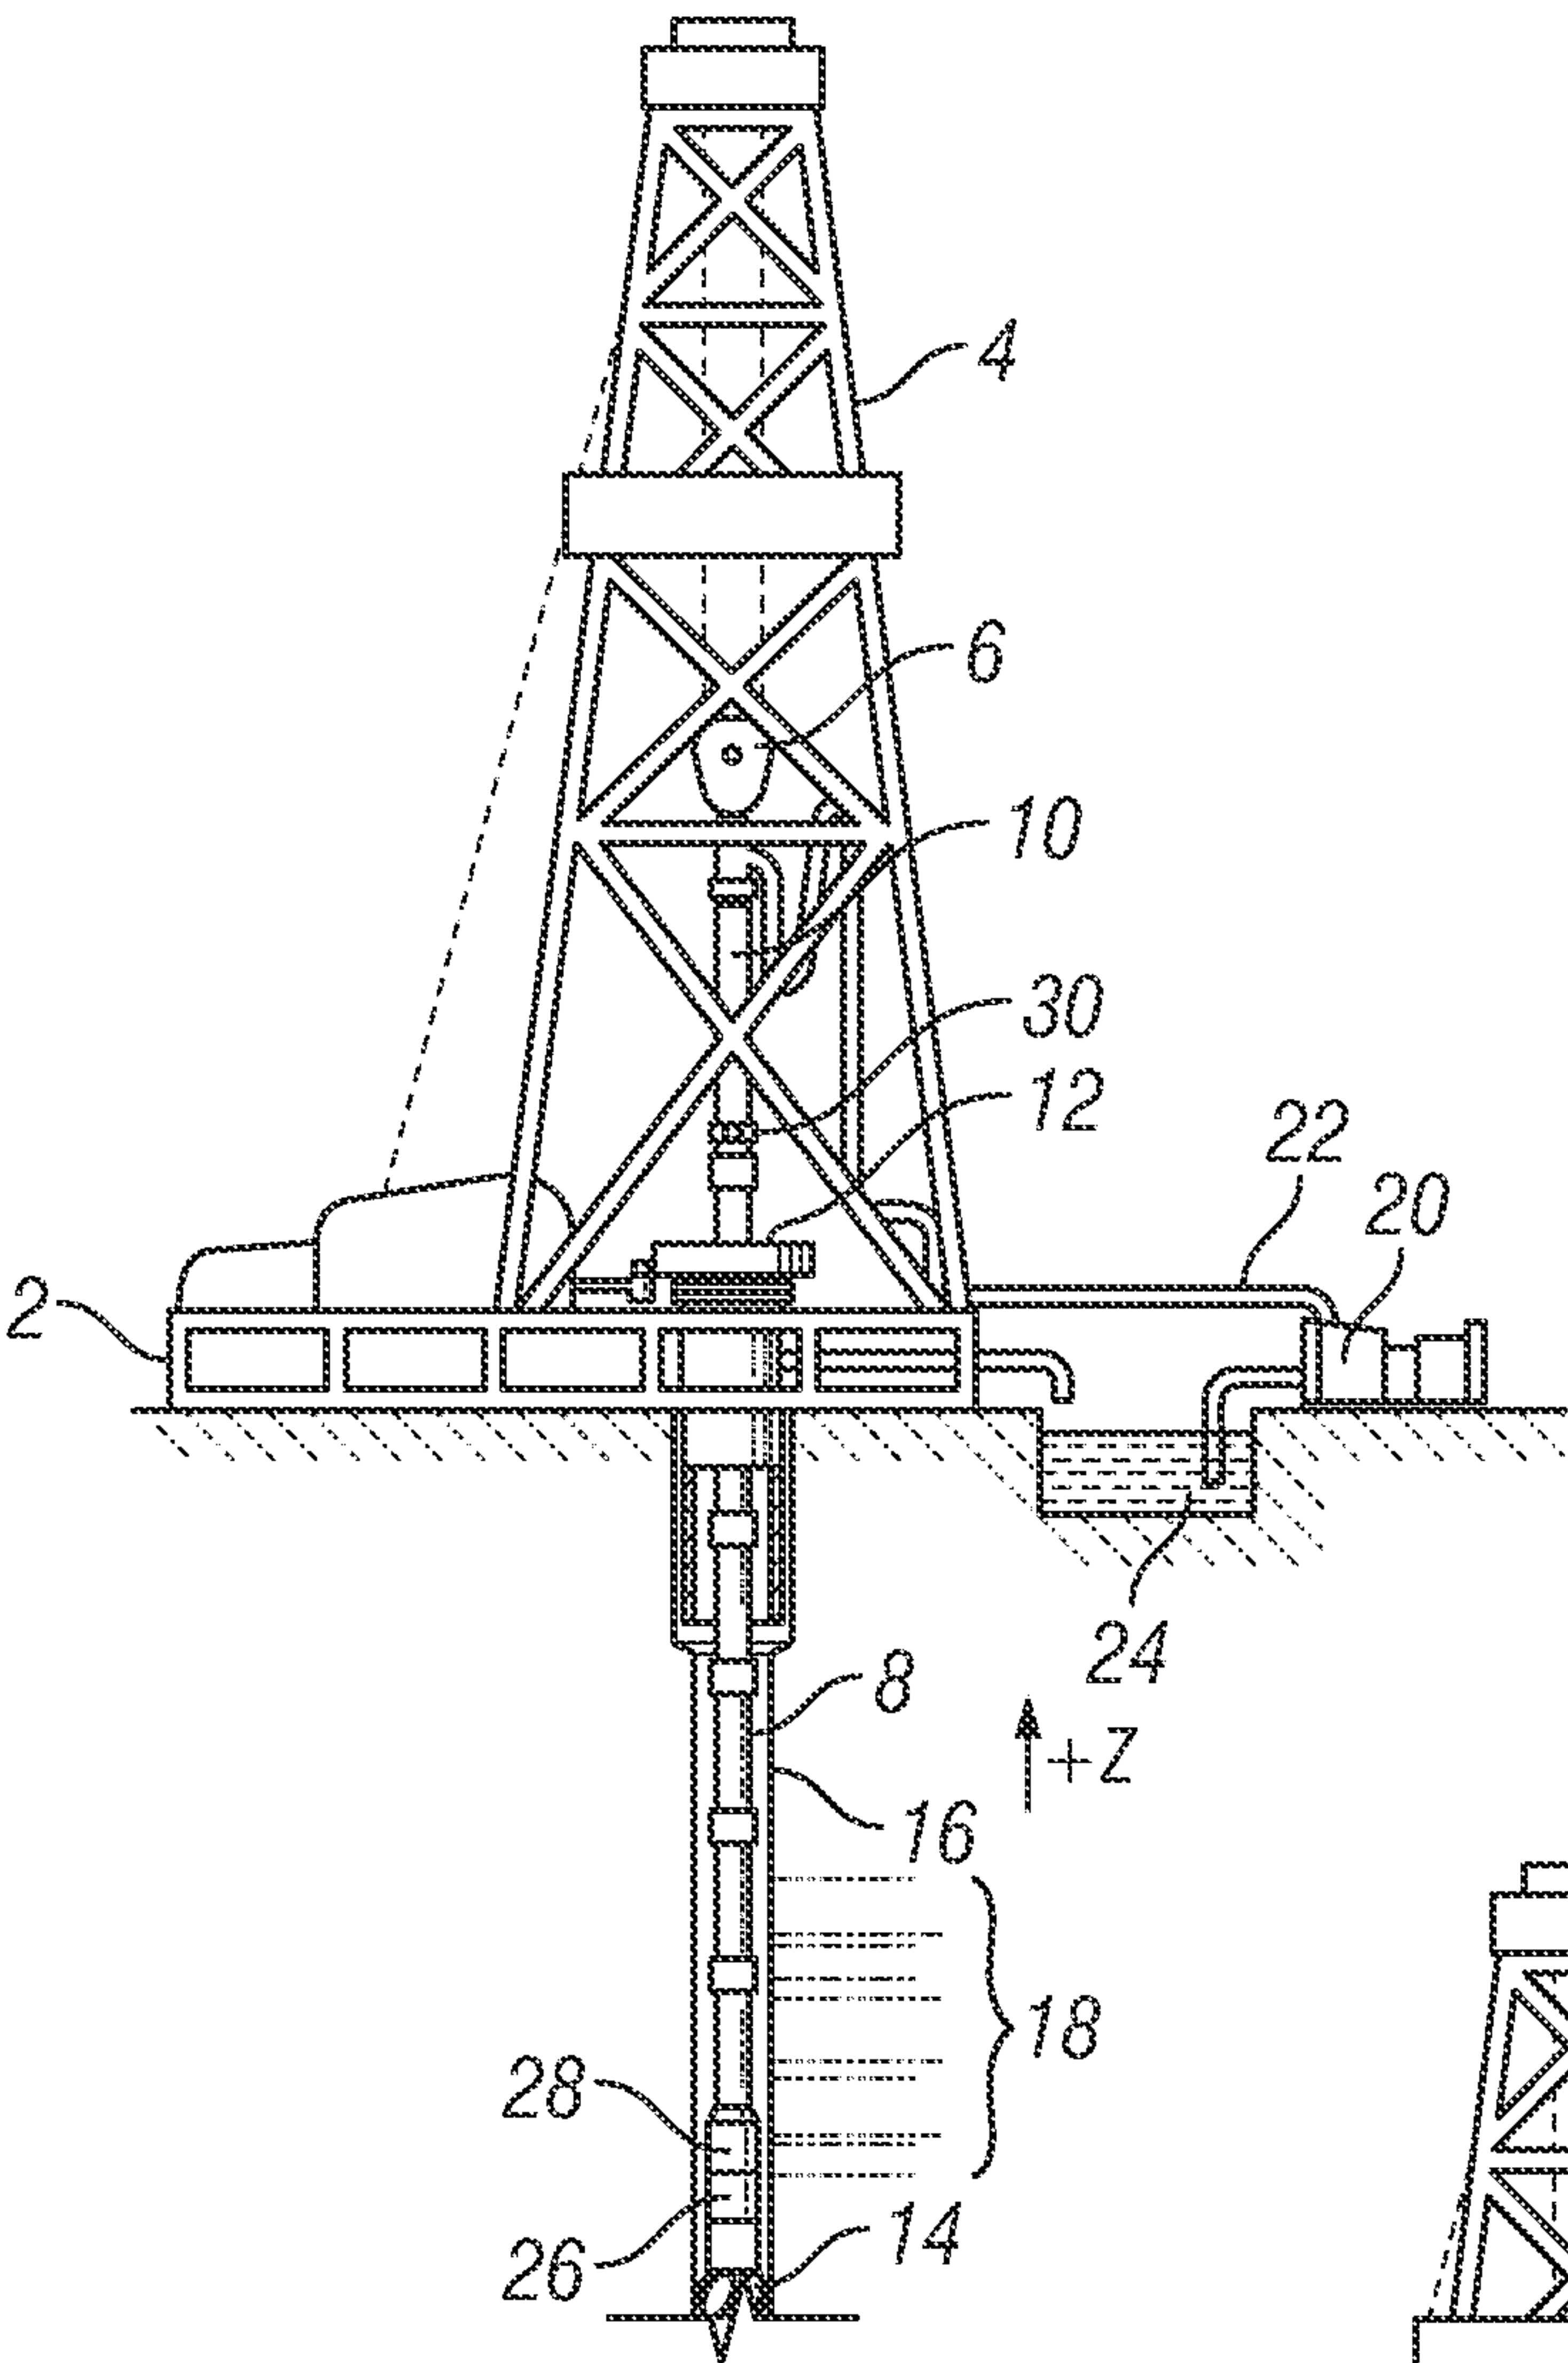


FIG. 1

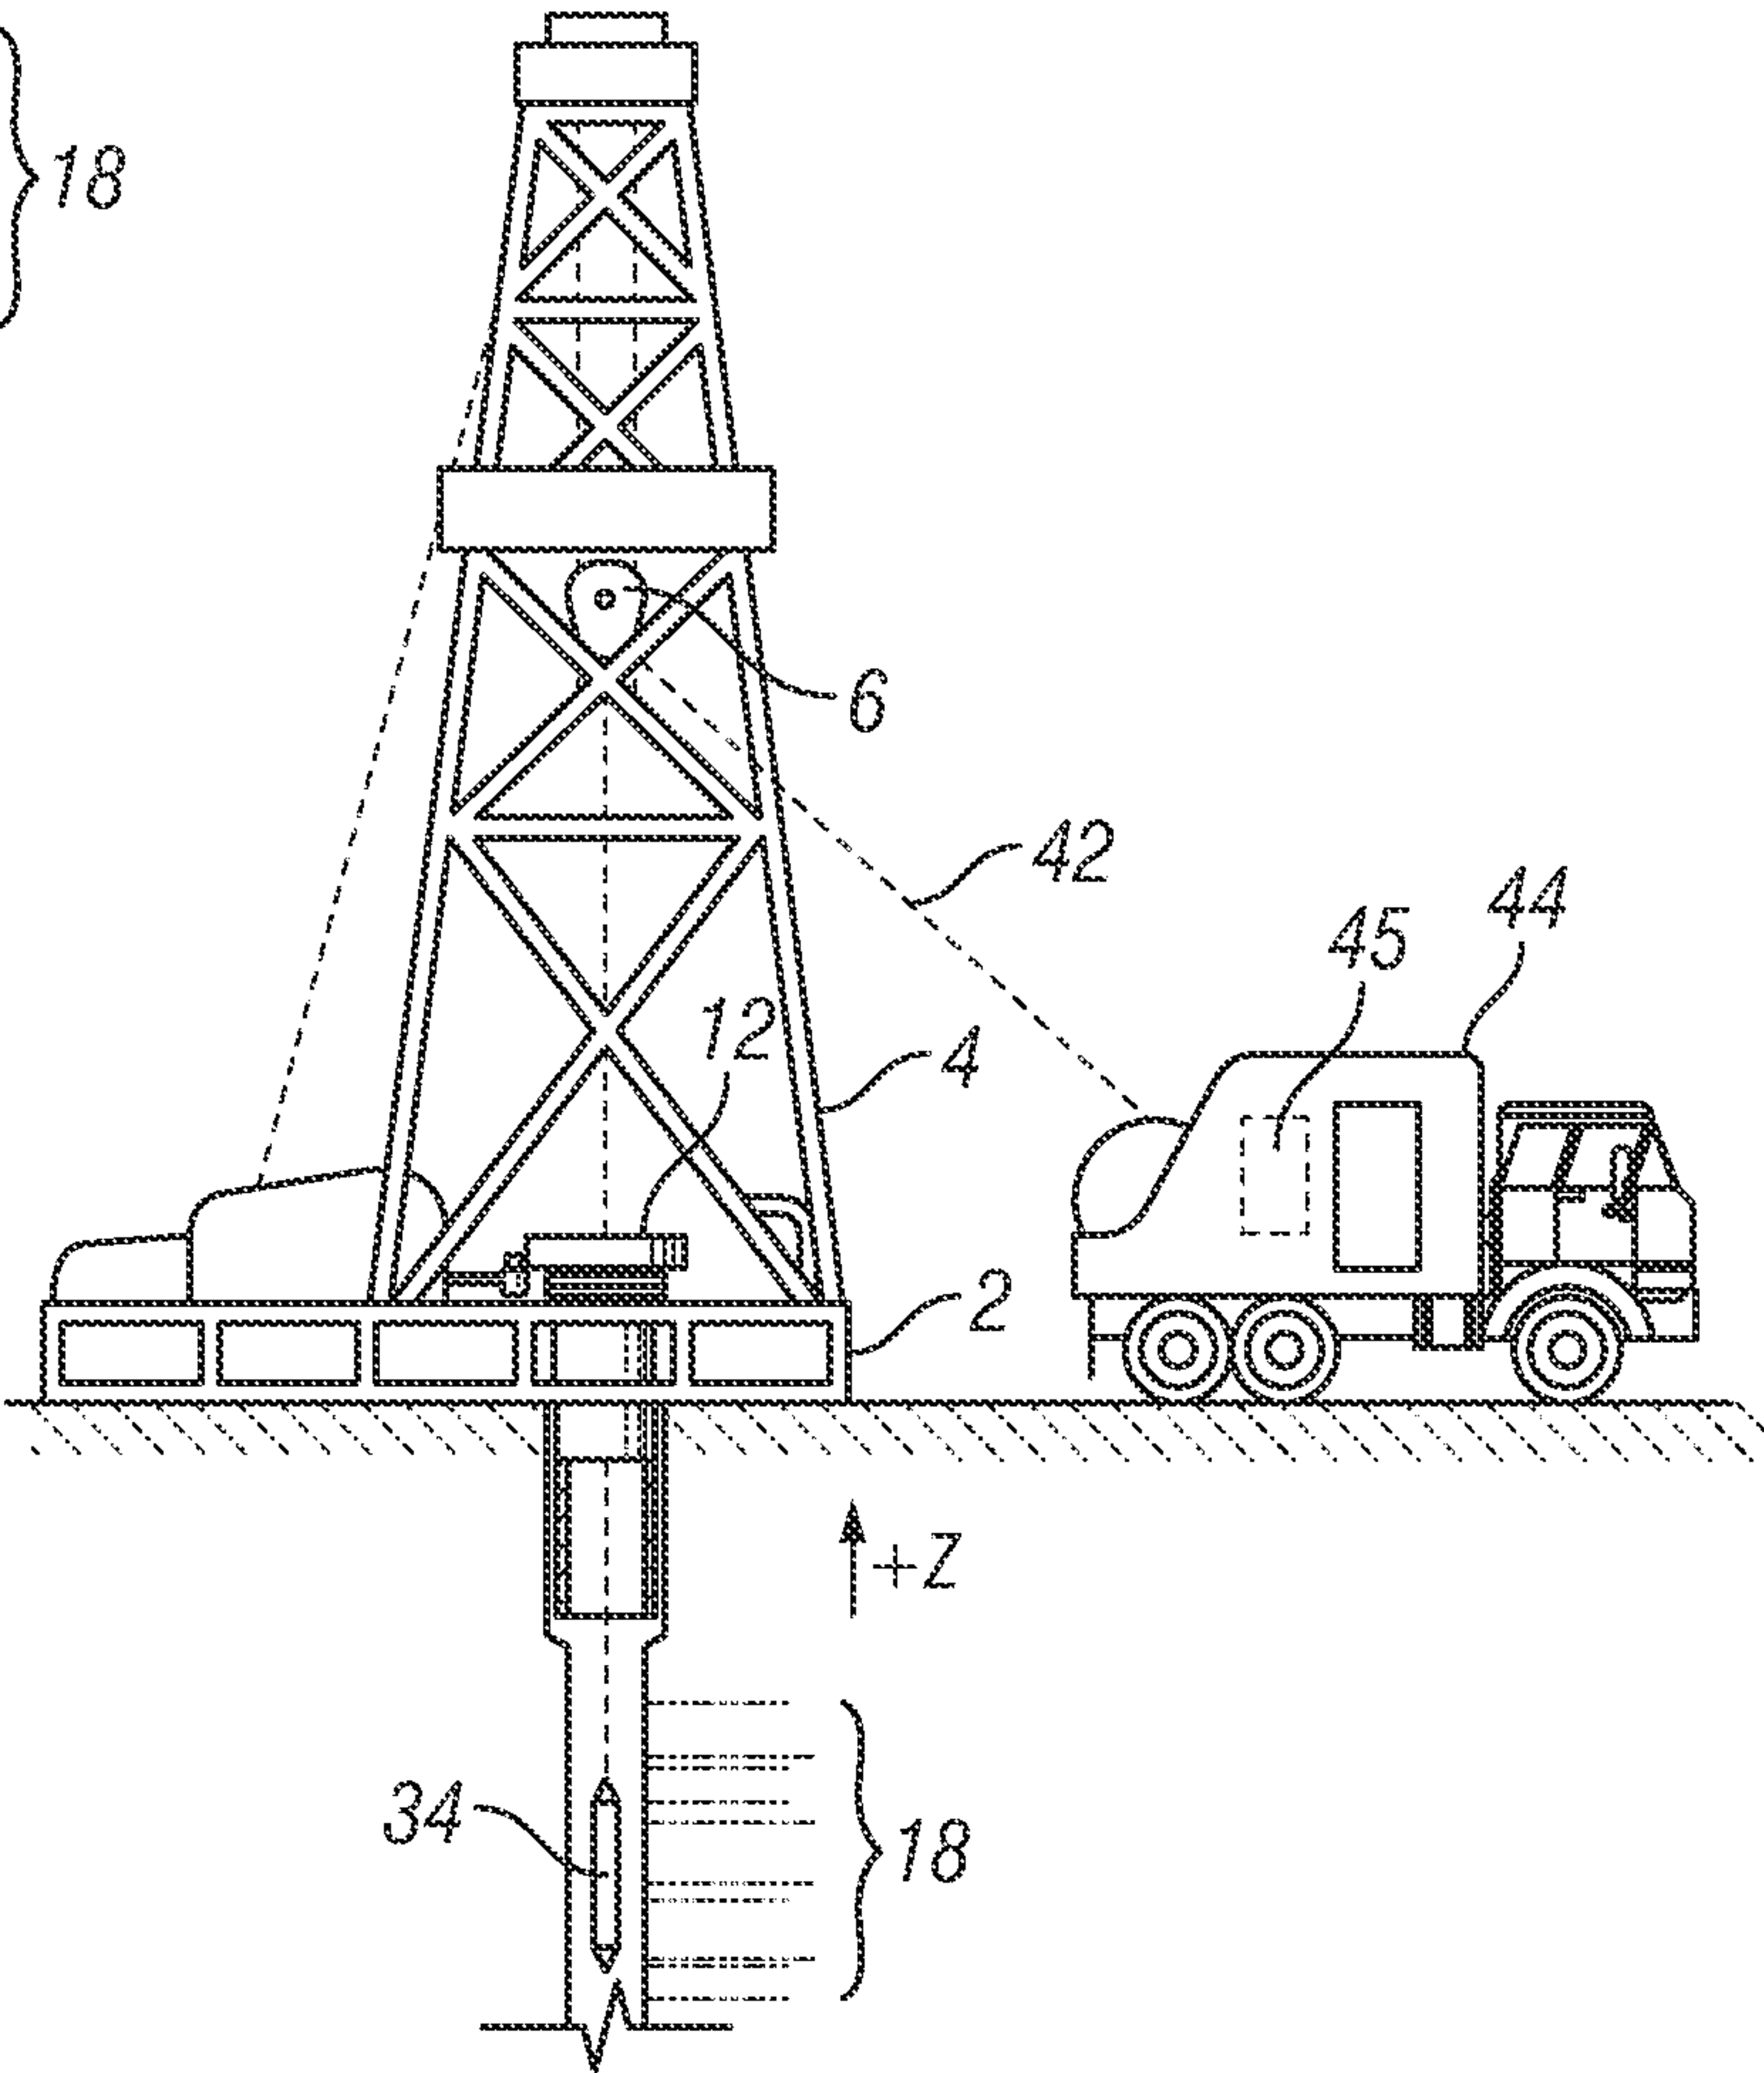


FIG. 2

2/5

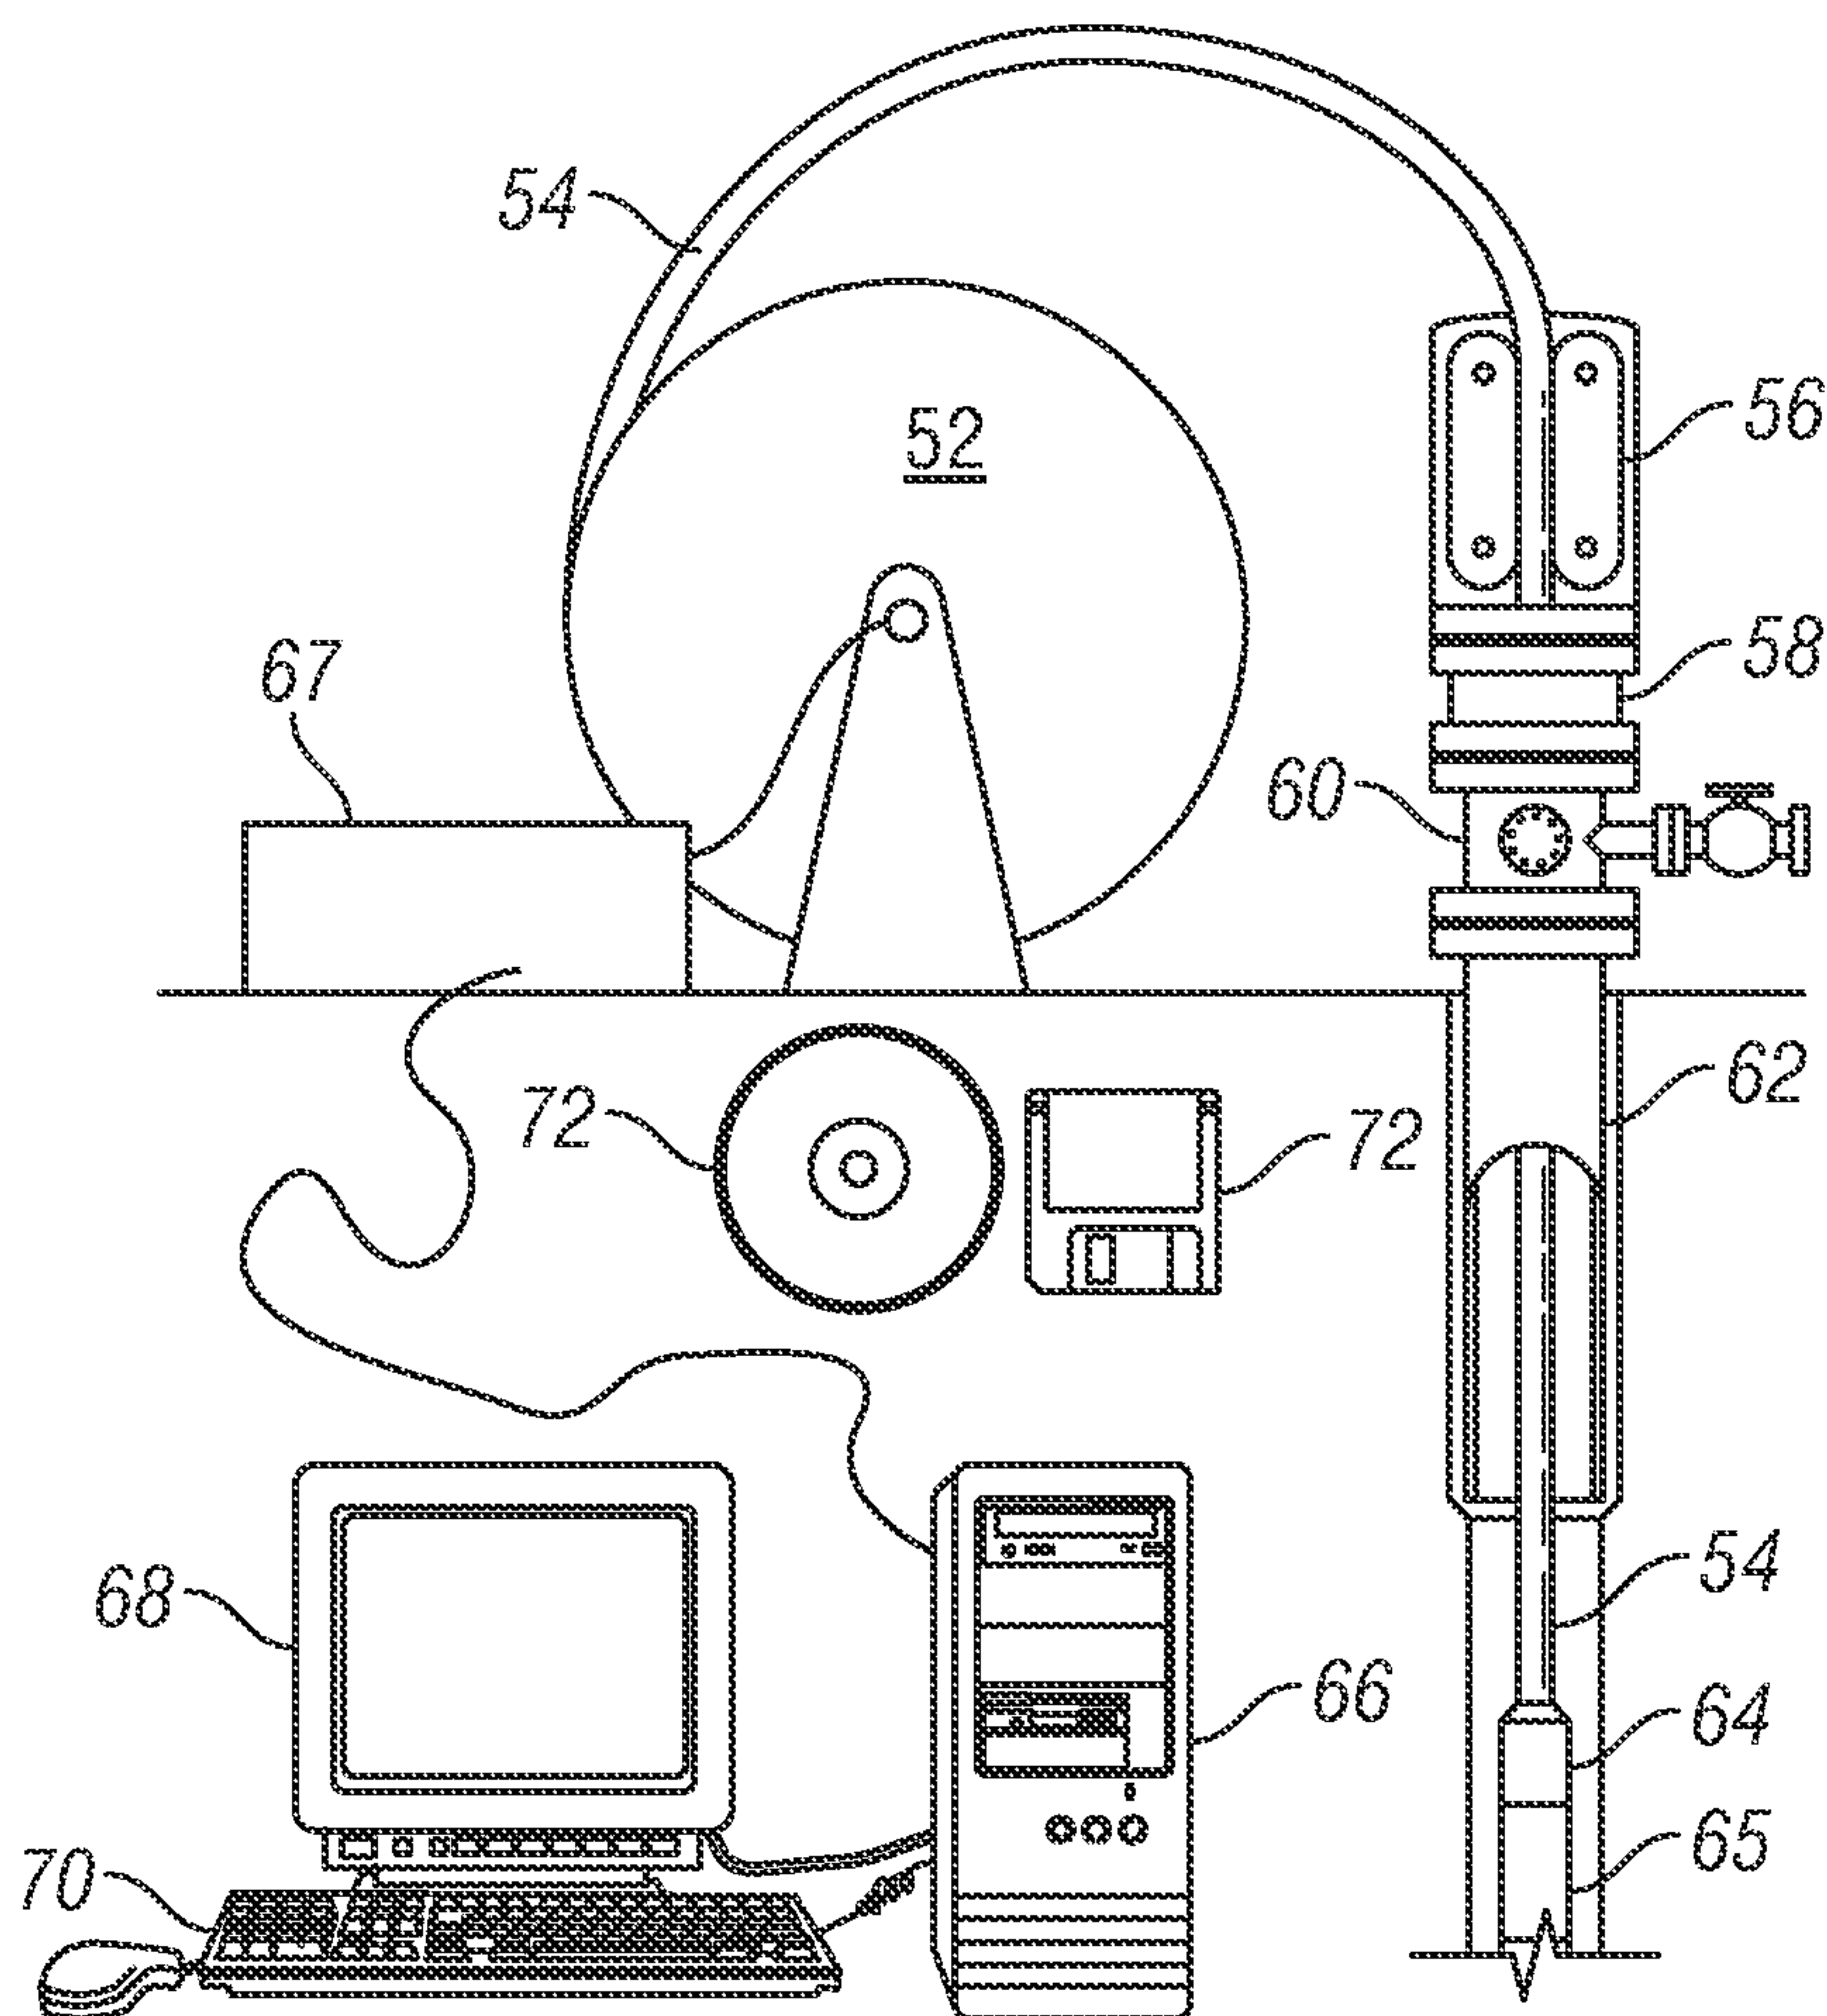


FIG. 3

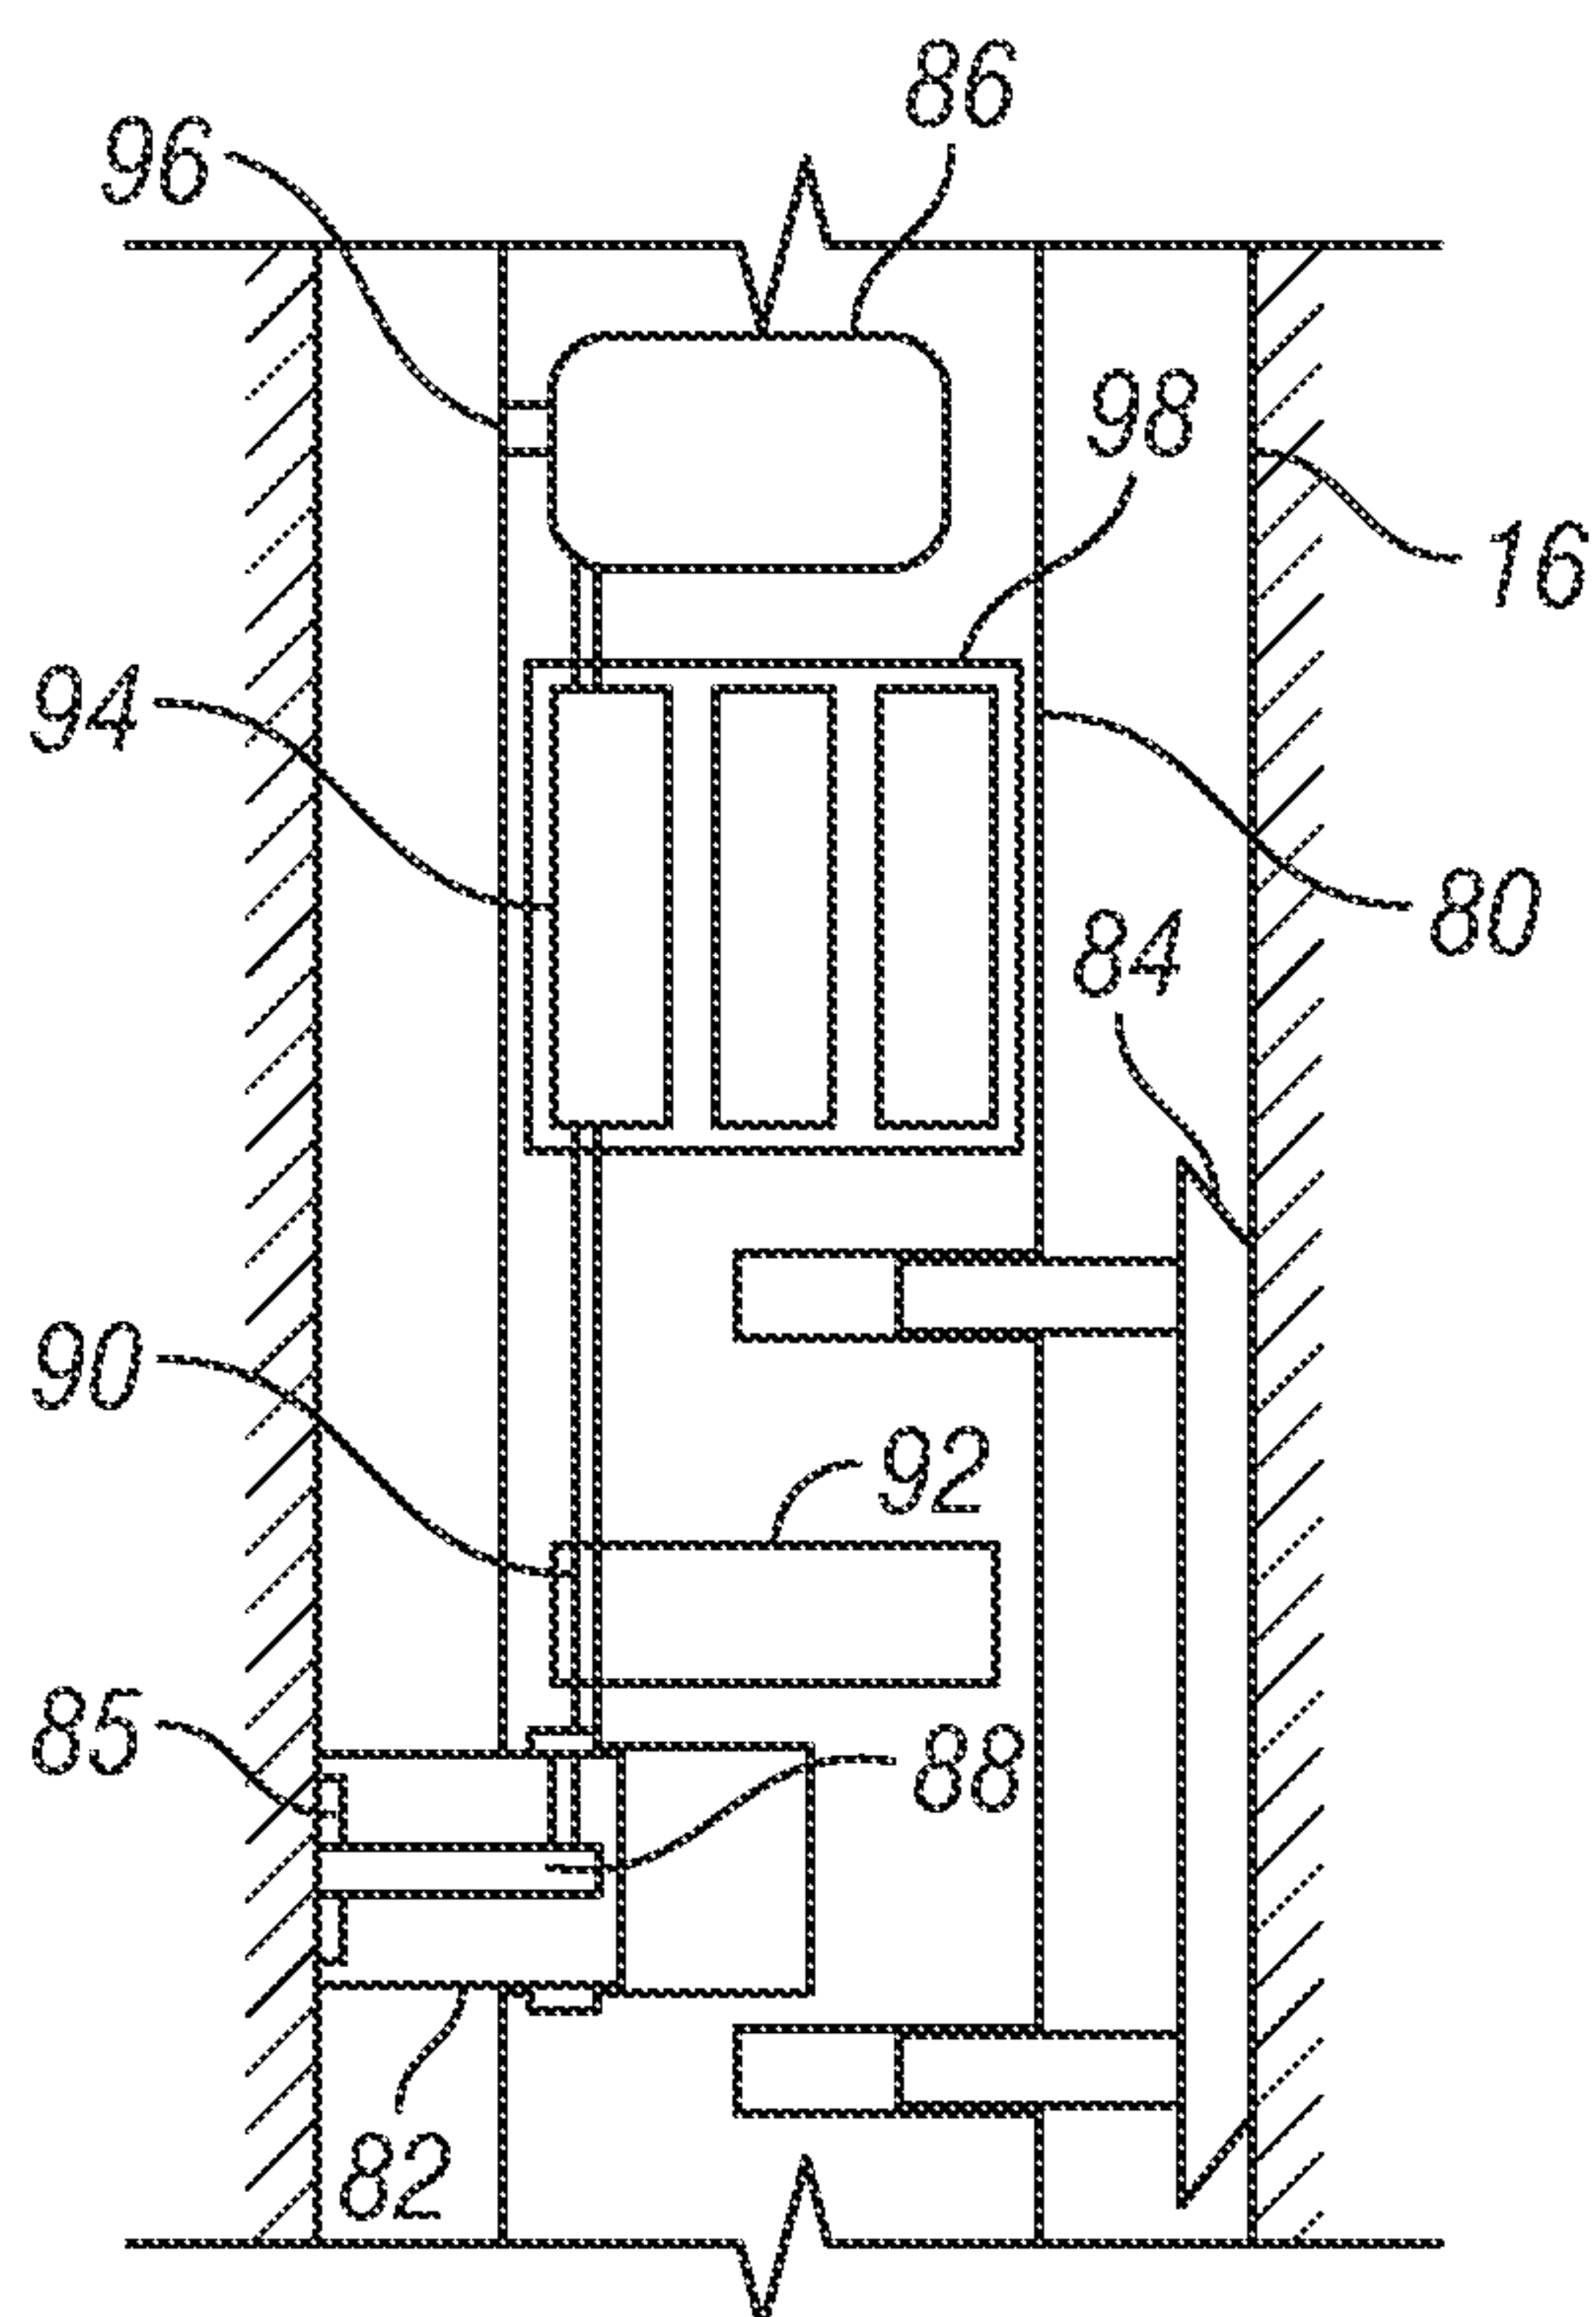


FIG. 4

3/5

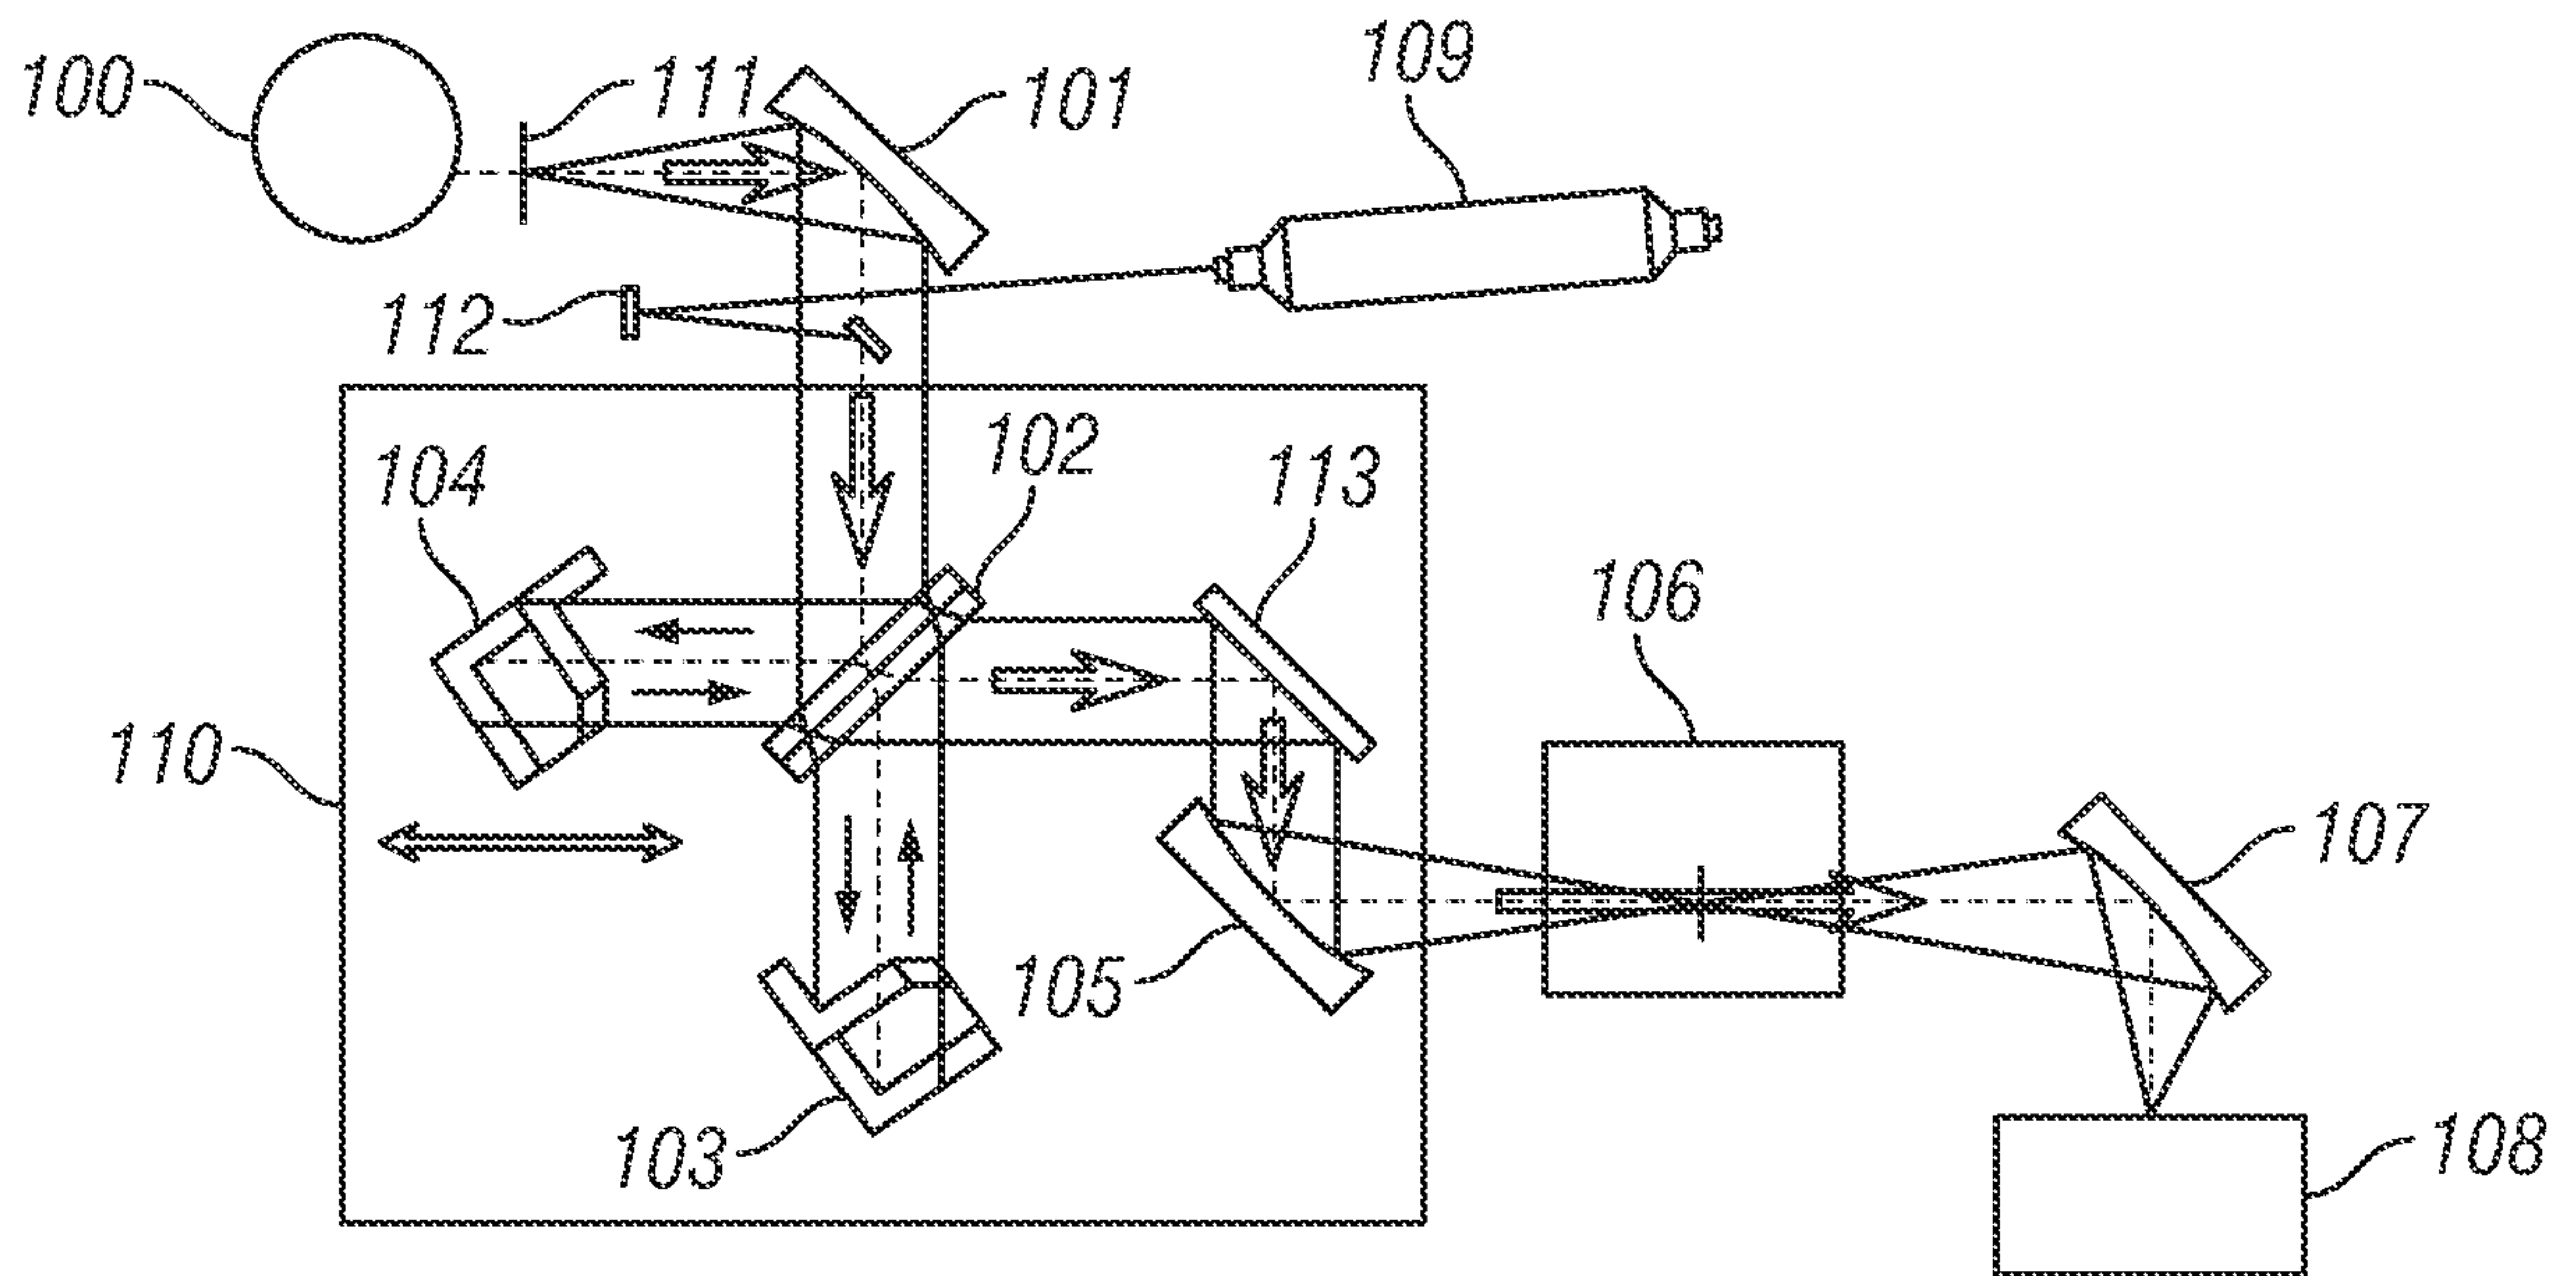


FIG. 5

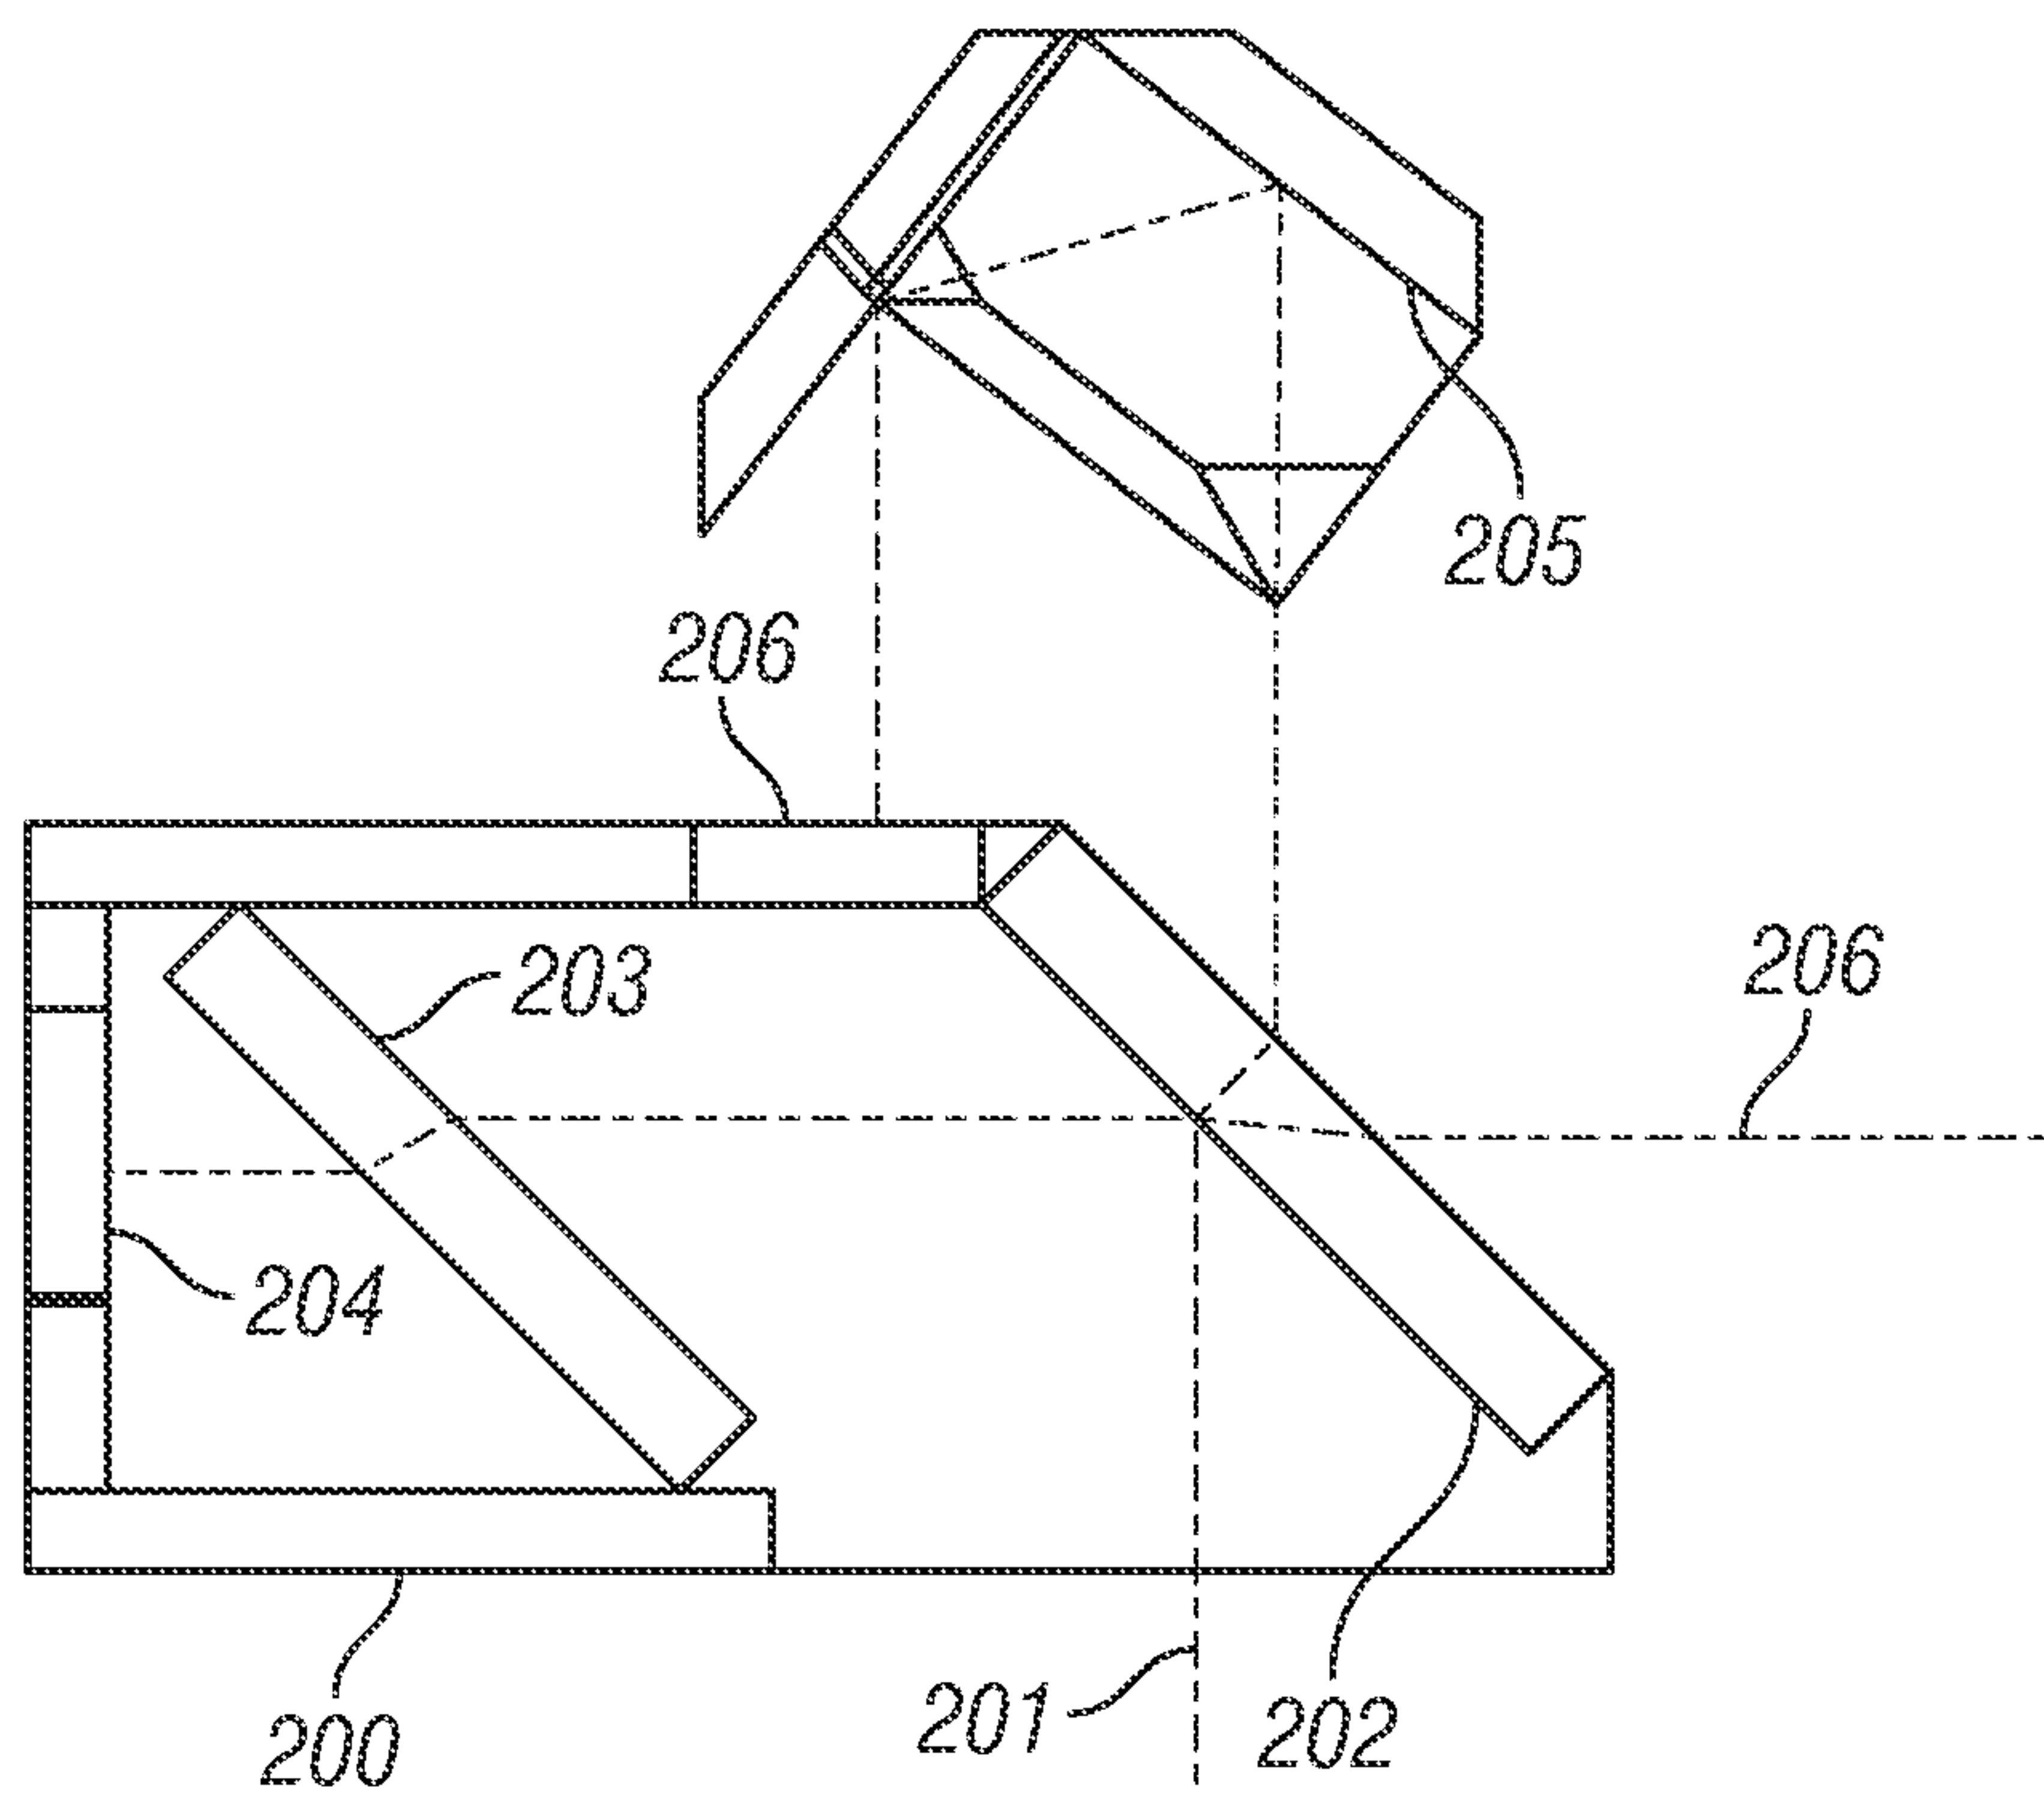


FIG. 6

4/5

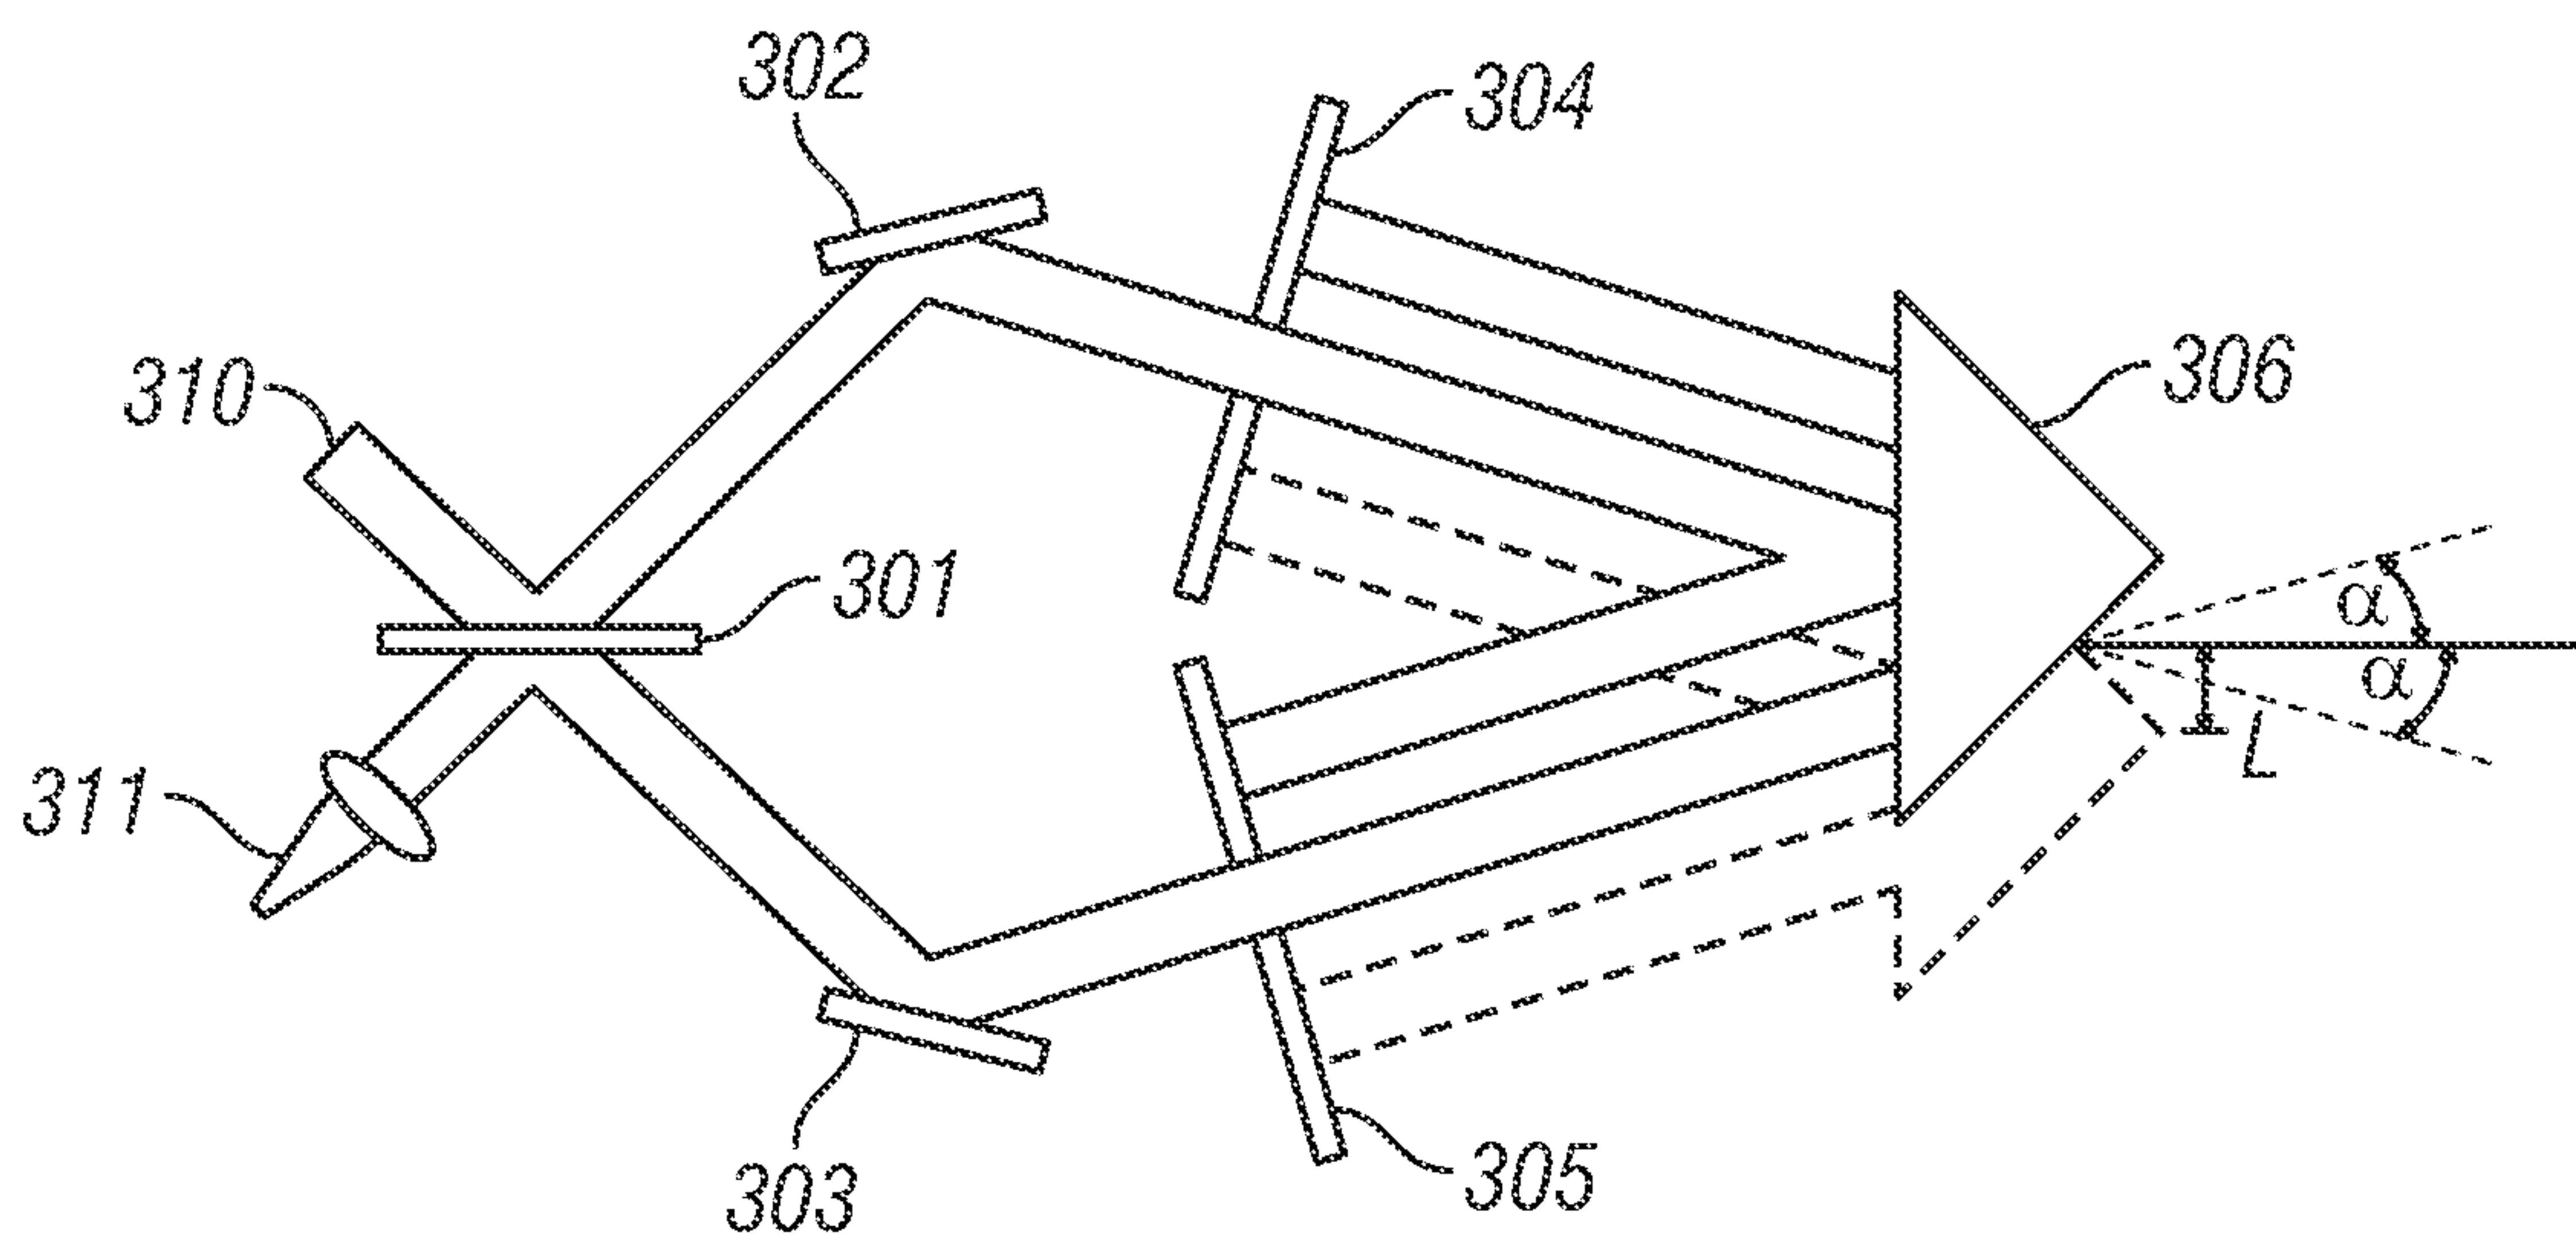


FIG. 7


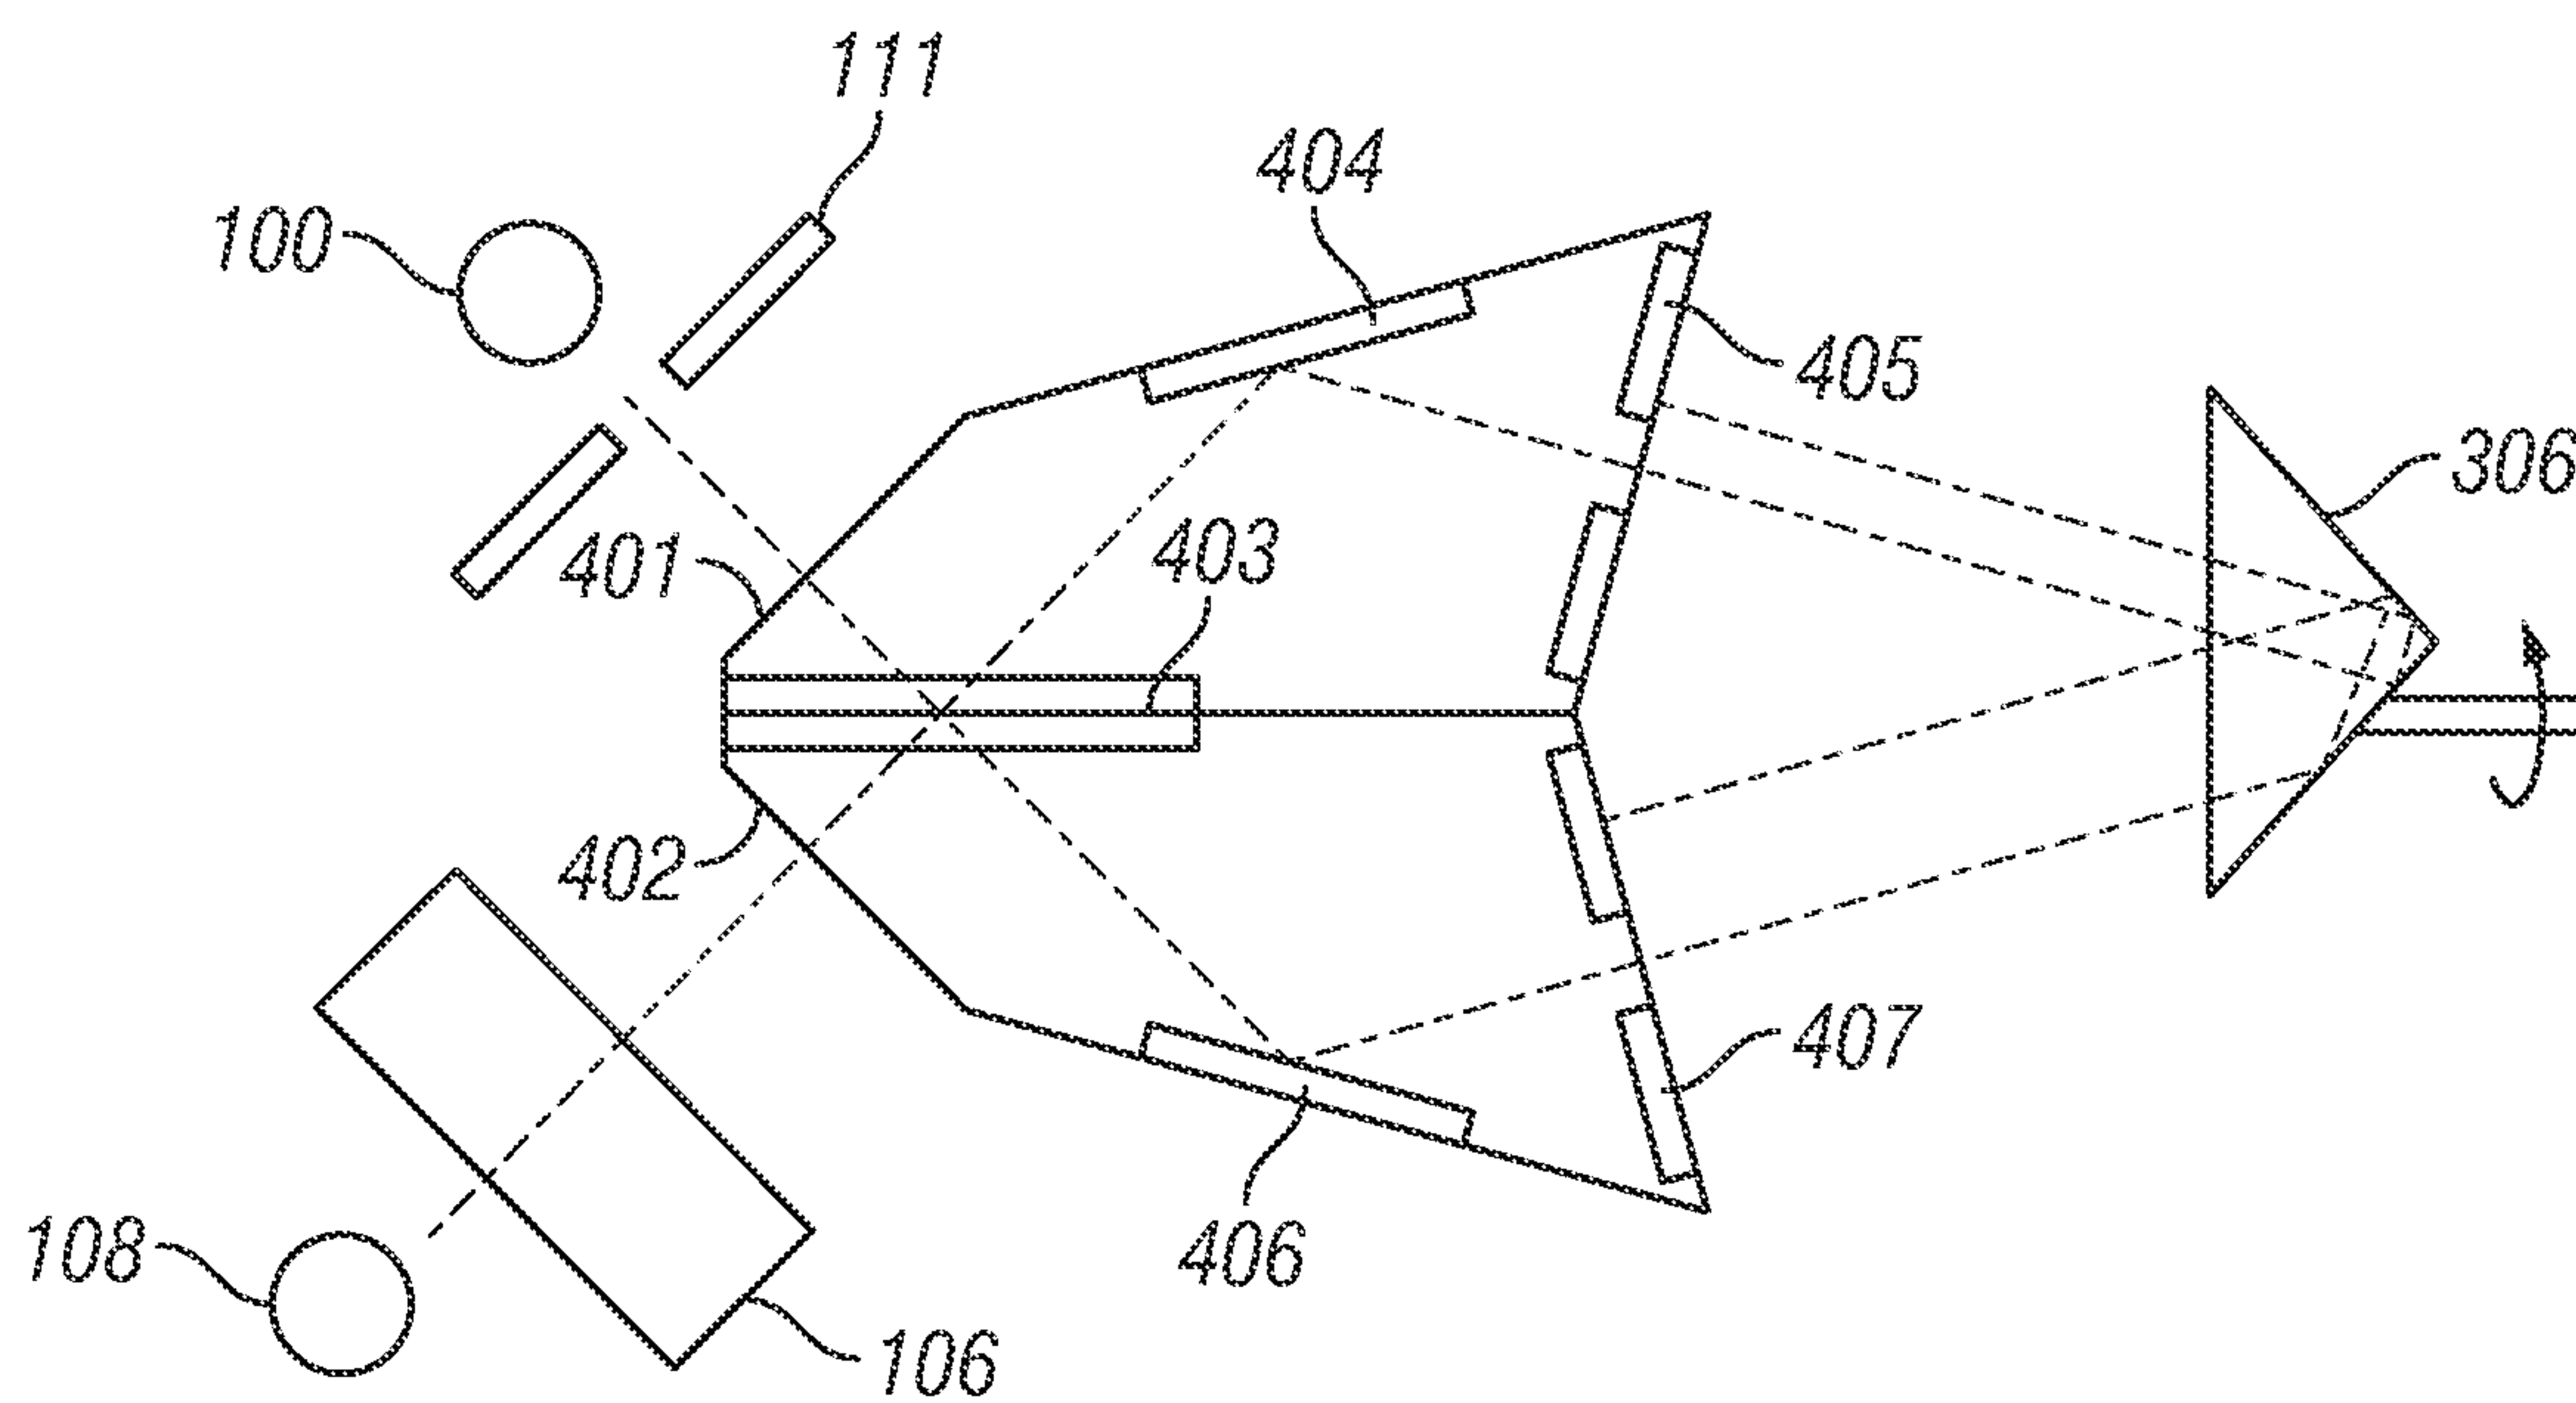


FIG. 8

5/5**FIG. 9**

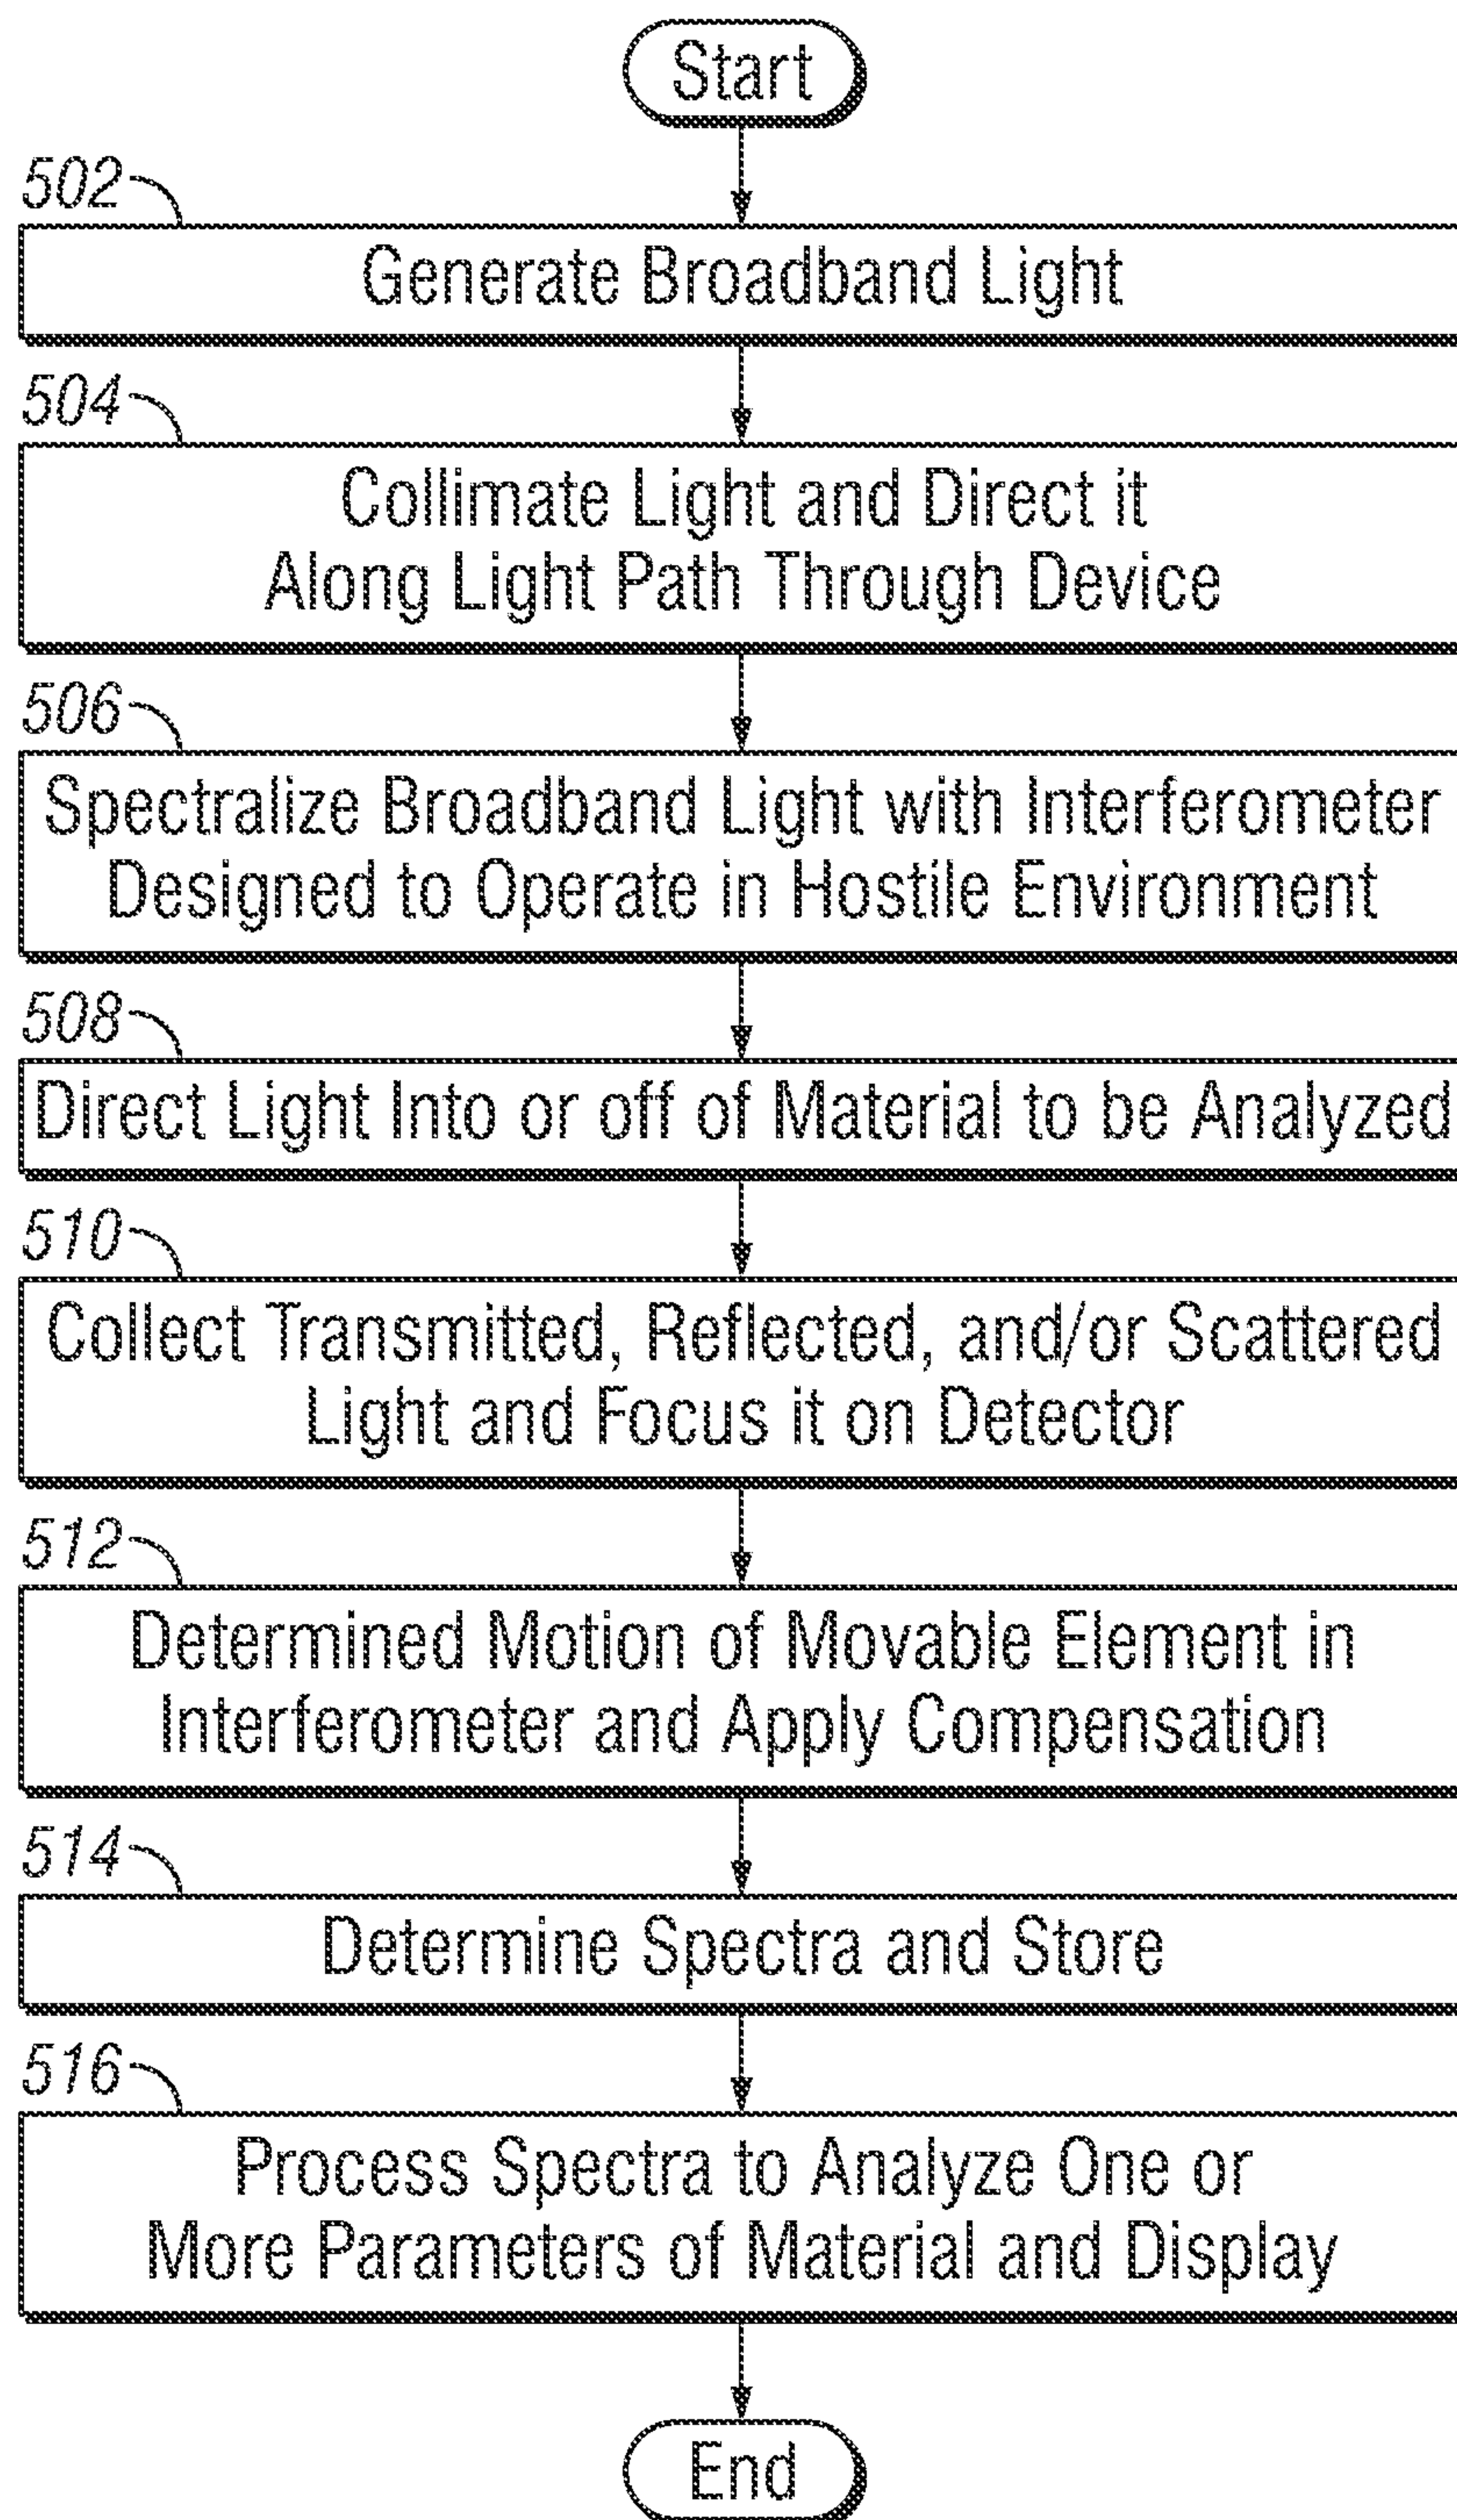