

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 442 682 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

09.09.1998 Bulletin 1998/37

(51) Int Cl.⁶: **G06F 17/17, G06T 15/00**

(21) Application number: **91301074.0**

(22) Date of filing: **11.02.1991**

(54) System and method for displaying of colour images

System und Verfahren zur Farbbilderanzeige

Système et méthode pour afficher des images en couleur

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **13.02.1990 US 480190**

(43) Date of publication of application:
21.08.1991 Bulletin 1991/34

(73) Proprietor: **INTERNATIONAL BUSINESS
MACHINES CORPORATION**
Armonk, NY 10504 (US)

(72) Inventors:

- **Minor, Barry Lawrence**
Austin, Texas 78759 (US)
- **Wilkinson, Jeffrey Allen**
Austin, Texas 78728 (US)

(74) Representative: **Burt, Roger James, Dr.**
IBM United Kingdom Limited
Intellectual Property Department
Hursley Park
Winchester Hampshire SO21 2JN (GB)

(56) References cited:

- **COMPUTER GRAPHICS** vol. 18, no. 3, July 1984,
**NEW-YORK U.S. pages 119 - 127 HECKBERT
AND HANRAHAN 'BEAM TRACING
POLYGONAL OBJECTS'**
- **EUROGRAPHICS 4** September 1989,
**AMSTERDAM pages 39 - 50 AKIMOTO ET AL
'PIXEL SELECTED RAY TRACING'**

EP 0 442 682 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The present invention relates generally to the area of computer graphics and more particularly to methods and means for displaying of colour images on display hardware. There are at least two distinct methods of placing colour values (r,g,b) into the single picture elements (pixels) contained on a hardware screen: "rendering of geometry," and "displaying of image." "Rendering of geometry" is a method in which objects to be displayed on the screen are expressed as polygons. Vertices of these polygons have associated colour values determined by calculations (lighting operations) performed at each rendering. Pixels, chosen at each rendering, are given these colour values to display the vertices. Remaining pixels are given colour values via "shading". "Shading" is the process of filling in the rest of the pixels that comprise a polygon during "rendering of geometry." Color values for these pixels are calculated from information known about the vertices of the polygon. "Gouraud shading" is one method of shading in which the colour values of the vertices are colour interpolated to derive the colour values for the remaining pixels of the polygon. There are other methods of shading which do not involve colour interpolation. In contrast to "rendering of geometry," pixels may be given colour values by simply filling them in from an array of colour values called an "image." In this case there are no established objects or polygons expressed to the display hardware. Such an image may have been obtained from a camera, or from a process of calculating colour values such as "ray tracing." "Ray tracing" is a computation intensive method of calculating colour values for a pixel. Typically, a computer system central processing unit (CPU) is utilized to perform these imaging computations. In these conventional systems, the CPU performs all of the imaging (ray tracing) computations for each and every pixel on a display screen in sequential order. For a detailed discussion of ray tracing, see "An Overview of Ray Tracing," Andrew S. Glassner. It can be seen that imaging computations in general and ray tracing in particular are extremely time consuming and may take a matter of hours, or even days to complete this colour imaging, depending upon the description of the screen being displayed. The combination of calculating and displaying an image, may be called "colour imaging".

EUROGRAPHICS 4 September 1989, AMSTERDAM, pages 39-50, AKIMOTO ET AL "PIXEL SELECTED RAY TRACING" discloses an acceleration method of image generation by ray tracing based on pixel reduction (Pixel Selected Ray Tracing PSRT). Only the intensities of those pixels requiring precise calculation are obtained by computationally intensive ray-tracing. The values of other pixels are derived by interpolation.

Generally, a number of currently available computer display adapter hardware devices are capable of per-

forming rendering of geometry, including Gouraud shading. Gouraud shading is a graphics technique unrelated to colour imaging, or ray tracing. Since Gouraud shading is implemented through colour interpolation, these display adapters are capable of performing colour interpolation. The present invention utilizes this colour interpolation capability to achieve a goal not contemplated by the conventional and standard uses of Gouraud shading.

During the period when a CPU is performing the ray tracing calculation, all other associated computer graphics hardware remains idle, awaiting completion of these computations. Therefore, it would be extremely desirable to provide a method which would optimize the efficiency of a computer graphics system by utilizing the capabilities of this idle graphics hardware in conjunction with the processing being conducted by the system CPU.

Viewed from a first aspect, the present invention provides a method of displaying a colour image on a computer system having a central processing unit and a display adapter, by interpolating pixel colour values, said method comprising the steps of:

determining a number of pixels to be colour imaged; computing, by said central processing unit colour imaged values for each of said pixels included within the determined number; and

characterised by

interpolating, by said display adapter, colour values for each pixel not included within the determined number, based upon the computed colour imaged pixels.

Viewed from a second aspect, the present invention provides a computer system for displaying a colour image by interpolating pixel colour values, comprising:

interface means responsive to user input to determine a number of pixels to be colour imaged; a central processing unit to compute colour imaged values for each of said pixels included within the determined number; and characterised by a display adapter for using the colour imaged values to interpolate colour values for each pixel not included within the determined number.

In contrast to the prior art, the present invention allows a microprocessor included within an associated display adapter to be used to alleviate a portion of the computational burden imposed upon the system CPU during colour imaging calculations. The present invention utilizes the colour interpolation capability of associated display hardware to increase the speed of a computer graphics system performing colour imaging.

Initially, the system CPU performs colour imaging

(e.g. ray tracing) on a predetermined plurality of pixels. At this point, the CPU then transmits the (r,g,b) values for each of these pixels to the processor of the display adapter hardware. the transmission (i.e. communication between the CPU and display adapter) to the hardware, of these colour values is in terms of a polygon to be Gouraud shaded, even though "rendering of geometry" is not the method being used. Upon receipt of these pixel colour values, the display adapter processor then performs colour interpolation for all of the pixels included within a geometric figure bounded by the colour imaged pixels. Thus, it can be seen that the number of calculations required to be performed for a given screen description is vastly reduced. This reduction in calculations greatly improves the speed with which the scene can be colour imaged.

The present invention will be described further, by way of example only, with reference to an embodiment thereof as illustrated in the accompanying drawings, in which:

Figure 1 is a block diagram depicting the elements utilized by a preferred embodiment of the present invention;

Figure 2, is a flowchart showing the steps required by the preferred embodiment to implement the capabilities of the display adapter hardware; and

Figure 3 is a diagram of a portion of a display showing those pixels which may be colour interpolated and those being colour imaged by a system utilizing the preferred embodiment.

Typically, a computer graphics user that wishes to perform lighting calculations will utilize a three-dimensional (3D) display adapter hardware device 16, such as a 2781 (High-Performance 3D Color Graphics Processor), sold by IBM. Included within the 3D lighting hardware is a portion which is dedicated to performing shading operations. Usually, this shading hardware supports Gouraud shading, as discussed above, however other shading hardware utilizing colour interpolation methods are contemplated by the scope of the present invention. During a normal lighting operation, the shading hardware is utilized as a hardware assist to aid the system CPU in achieving the desired lighting of a displayed image. The present invention utilizes this hardware assist capability during non-lighting calculations, in particular during colour imaging, such as ray tracing operations.

Referring to Figure 1, a block diagram of a system capable of utilizing the present invention is shown. A display 10, such as a CRT, or the like is shown having a plurality of picture elements (pixels) which are depicted by reference numerals 1, 2, 3, 4, 5, 6, 7, 8, 9, 11, 13 and N. A display adapter 16 typically used for performing rendering of geometry is illustrated and includes a shading processor 12 and all other associated hardware 14.

This hardware may include buffers, such as a frame buffer, window buffer, Z-buffer or the like. A system CPU 18 is provided which performs all colour imaging, such as ray tracing calculations. Also shown in Figure 1 is the system main memory 20. It should be noted that the present invention is suited for use in all types of colour imaging applications, however ray tracing is the primary method discussed herein.

Conventionally, an application program interface (API) 22, via bus 26, instructs the 3D lighting display adapter 16 to perform rendering of geometry. This may include determining the location and consequences of a light source, as well as colour interpolating a surface for shading purposes. It should be noted that in conventional systems, no colour imaging is performed by CPU 18 during rendering of geometry. Similarly, no rendering of geometry can be performed by prior art systems during the time colour imaging computations are being implemented by CPU 18.

To perform colour imaging in a ray tracing environment a scene description is first stored in main memory 20. This scene description is a textual, or alphanumeric representation of the scene to be displayed. For example, a scene description will include geometric descriptions of all objects as well as their colour (r,g,b) values and surface type. Additionally, the nature of each object, is included within the scene description, that is, whether the object is transparent, opaque, reflective or the like.

Upon implementation of a ray tracing operation, a program application user, via API 22 and bus 23, instructs the system CPU 18 to perform a series of vector (ray) calculations for each pixel on display 10. System CPU 18 begins at pixel 1 and back traces a ray from a view point directly in front of that pixel, through the pixel in the image plane, and into the scene. For example, if a ray 1 (corresponding to pixel 1) is found to initially intersect the surface of the ocean, then a lighting calculation is computed at the point of intersection between ray 1 and the surface and CPU 18 colours pixel 1 the computed shade. Furthermore, if at pixel N the corresponding scene description is a convex reflective object, such as a mirrored sphere, then the ray tracing calculation includes back tracing along a first ray from the view point through pixel N to the point of intersection with the reflective surface, calculating the angle of reflection to create a reflection ray which is then traced to find its nearest intersection with an object. These reflection rays are created and traced until an intersection is found with a non-reflective object, at which point a shadow ray is created which is a ray from the point of intersection to the light source. If any intervening intersections are found along this ray, i.e. intersection with other objects, then the primary intersection point is found to be in a shadow and the lighting calculation performed by the CPU 18 is adjusted accordingly. Upon completion of the lighting calculation at this point of intersection, pixel N is coloured with the calculated shade.

Thus, it can be seen how a number of reflective ob-

jects in the scene description can create an extremely time consuming and burdensome number of calculations to be performed by CPU 18. It is not uncommon for a period of hours or even days to elapse before a scene description is totally displayed on a CRT 10. This time lapse can cause a enormous burden on users of computer graphics systems. For example, a user of a computer graphics animation system may have to wait all day for the scene contemplated to be actually displayed such that it can be determined whether the scene description needs to be altered. It should be noted that display adapter 16 represents the previously described lighting hardware and processor 12, the shading hardware portion of display adapter 16.

Upon completion of the ray tracing computation, the CPU 18 then transmits, via bus 24, the calculated colour for that pixel to the display 10. Again, during the ray tracing calculation, display adapter 16, including shading processor 12 remains idle.

In order to increase rendering speed, or more efficiently perform colour imaging, a preferred embodiment of the present invention utilizes shading processor 12 to colour a percentage of an image's pixels through colour interpolations of a subset of the ray traced pixels.

A number of display adapters, such as the aforementioned 3D lighting hardware 16, are capable of filling (colouring) polygons onto display 10. Under typical colour image operating conditions CPU 18 resolves individual pixels, as specified by a program application and then turns these pixels directly over to the CRT 10 for display. However, adapter 16, through shading processor 12, is capable of colouring polygons by interpolation methods, such as Gouraud shading, or the like. Generally, these polygons are simple polygons, such as squares, rectangles, triangles, and trapezoids. Therefore, the present invention exploits this capability of the display adapter hardware 16 to colour interpolate simple polygons.

Specifically, a user of the computer graphics system of Figure 1 determines the number (or percentage) of pixels to be colour imaged, or ray traced, prior to the colour interpolation being performed therebetween. For example, a user may desire that every other (one out of two) pixels be ray traced, such that pixels 1, 3, 5, and 7 are subjected to ray tracing calculations in sequential order. Upon completion of these four computations by CPU 18, their respective colour values are passed to the shading processor 12, via bus 28, of display adapter 16. In this example pixels 1, 3, 5 and 7 are the boundaries of a square, which is a polygon the display adapter 16 is capable of filling. Thus the CPU 18 is now free to continue ray tracing for another portion of the scene description, such as that portion bounded by pixels 3, 5, 11 and 13. Meanwhile, shading processor 12 of display adapter 16 has interpolated the colour of pixels 2, 4, 6, 8 and 9 from the known ray traced colours of pixels 1, 3, 5 and 7. Thus, it is apparent how the present invention greatly increases the speed with which a ray traced im-

age in a graphics system is rendered. That is, of pixels, 1 through 9, shown in Figure 1, only four pixels 1, 3, 5 and 7 are actually ray traced, whereas five pixels 2, 3, 6, 8 and 9 are coloured by another processor. It should be noted that a user may choose the number and configuration of pixels to be ray traced. At one extreme, the four corner pixels of a display 10 may be ray traced with the remaining pixels of the screen being colour interpolated. The other extreme may provide for ray tracing a high percentage of the total pixels, along the rows and columns of pixels on display 10 (see Fig. 3). By ray tracing one out of every 2 pixels, only 25 percent of the total pixels are eventually subject to ray tracing operations. Ray tracing every other pixel, as discussed above, has greatly increased rendering speed with an extremely minor deterioration in resolution. This minor deterioration in resolution is far outweighed by the increased rendering speed.

Figure 2 is a flowchart showing the steps required by the preferred embodiment to invoke and utilize the capability of the shading processor 12.

At step 1, the hardware utilization method is initiated by a user of a computer graphics system. Next the user, or perhaps an associated program application, will determine a percentage of pixels which are to be ray traced. This percentage may range from a minute portion of the total pixels, up to 100% in which case the entire screen (all pixels) will be ray traced and the present invention will not be used. As noted above, approximately 25% has been determined to give good resolution and a vastly increased rate of imaging. Step 3 determines the configuration of ray traced pixels which will be turned over to the display adapter 16 for filling. That is, the configuration of the ray traced pixels as a square, circle, rectangle, trapezoid or other polygon will be determined, thus allowing the display adapter to fill the area (pixels) lying between these polygonally configured ray traced pixels.

The actual ray tracing computations are then performed by CPU 18 of the computer graphics system (step 4). At step 5, the colour values for these ray traced pixels and their configuration is then transmitted to the display adapter 16 from CPU 18 and via bus 28. Also at step 5, shading processor 12 fills (colour interpolates) the pixels lying between these ray traced pixels and displays the ray traced and colour interpolated pixels as a filled polygon, on display 10. Step 6 determines whether the percentage of pixels to be ray traced (determined at step 2) have actually been ray traced. If so, then the method of the present invention proceeds to step 7 and ends. However, if there are pixels remaining to be ray traced, then the method returns to step 4 where additional ray tracing is performed. Also, it should be noted that step 7 ends the process of the present invention, but the CPU 18 may continue ray tracing, and colour image the previously colour interpolated pixels.

Figure 3 shows another configuration of pixels on display 10. It should be noted that dots represent ray

traced pixels and X's represent colour interpolated pixels. To invoke the configuration of Fig. 3, CPU 18 would ray trace every other pixel along the first line (row 0) of display 10, i.e. pixels 0, 2, 4, 6, 8, 10, 12.... Next, CPU 18 will ray trace pixels 0,2 of row 2 such that a polygon (in this case a square) is bounded by pixels 0,2 of row 0 and pixels 0,2 of row 2. This polygon is then transmitted to shading processor 12 which colour interpolates values for pixel 1 of row 0, pixels 0,1,2 of row 1 and pixel 1 of row 2. This block of pixels is then displayed on CRT 10.

Simultaneously to display of the first block of pixels, CPU 18 colour images pixel 4 of row 2, which forms another square, since the remaining three bounding pixels have previously been ray traced. This second block is then colour interpolated by shading processor 12 and values for pixel 3 of row 0, pixels 3,4 of row 1 and pixel 3 of row 2 are found. Therefore, it can be seen how by ray tracing one additional pixel, such as pixel 4 of row 2, four pixels may then be colour interpolated. Further, it can be seen how imaging pixel 6 of row 2 would allow another four pixels to be colour interpolated and so forth. In this manner, i.e. using processor 12 as a hardware assist to colour imaging, the thousands of pixels present on a typical CRT can be colour imaged and colour interpolated to display a complex scene which would otherwise take a matter of hours or even days to display.

Claims

1. A method of displaying a colour image on a computer system having a central processing unit (18) and a display adapter (16), by interpolating pixel colour values, said method comprising the steps of:
 - determining a number of pixels to be colour imaged (step 2,3);
 - computing, by said central processing unit (18) colour imaged values for each of said pixels included within the determined number (step 4); and characterised by
 - interpolating, by said display adapter (16), colour values for each pixel not included within the determined number, based upon the computed colour imaged pixels (step 5).
2. A method as claimed in Claim 1 wherein said display adapter (16) comprises a processor (12) adapted to perform colour shading, in which said interpolation step is performed by said processor (12).
3. A method as claimed in Claim 1 or 2 wherein said step of determining comprises the step of subdividing the image into configuration areas, each containing a portion of the determined number of pixels to be colour imaged (step 3).
4. A method as claimed in Claim 3 wherein the interpolation step comprises the steps of:
 - interpolating colour values for only those pixels that are contained within a chosen configuration area and have not been colour imaged;
 - displaying the colour imaged pixels and the colour interpolated pixels included within said chosen configuration area; and
 - returning to said step of computing colour imaged values for another configuration area until the determined number of pixels have been displayed.
5. A method as claimed in any preceding claim, wherein said step of computing colour imaged values comprises the step of performing ray tracing operations.
6. A computer system for displaying a colour image by interpolating pixel colour values, comprising:
 - interface means (22) responsive to user input to determine a number of pixels to be colour imaged;
 - a central processing unit (18) to compute colour imaged values for each of said pixels included within the determined number; and characterised by
 - a display adapter (12) for using the colour imaged values to interpolate colour values for each pixel not included within the determined number.
7. A system as claimed in Claim 6 in which said display adapter (12) comprises a processor adapted to perform colour shading.
8. A system as claimed in Claim 6 or 7 wherein said interface means is adapted to subdivide the image into configuration areas, each containing a portion of the determined number of pixels to be colour imaged.
9. A system as claimed in Claim 8 wherein said display adapter (12) is adapted to interpolate colour values for only those pixels that are contained within a chosen configuration area and have not been colour imaged, and wherein a display (10) displays the colour imaged pixels and the colour interpolated pixels included within said chosen configuration area.

10. A system as claimed in any of Claims 6 to 9 wherein said central processing unit (18) comprises means for performing ray tracing operations.

nung der Farbbildwerte den Schritt der Durchführung der Strahlverfolgungsoperationen umfaßt.

Patentansprüche

1. Ein Verfahren zum Anzeigen eines Farbbilds auf einem Rechnersystem mit einer Zentraleinheit (18) und einem Anzeigeadapter (16), durch Interpolieren der Pixel-Farbwerte, wobei das Verfahren die folgenden Schritte umfaßt:

Bestimmen einer Anzahl Pixel, die zur Farbbildgebung vorgesehen sind (Schritt 2, 3);

Berechnen der Farbbildwerte für jedes der Pixel, das zu der bestimmten Anzahl (Schritt 4) gehört, durch die Zentraleinheit (18); und gekennzeichnet durch

Interpolieren von Farbwerten für jedes Pixel, das nicht zu der bestimmten Anzahl gehört, auf der Grundlage der berechneten Farbbildpixel (Schritt 5) durch den Anzeigeadapter (16).

2. Ein Verfahren gemäß Anspruch 1, in dem der Anzeigeadapter (16) einen Prozessor (12) enthält, der zur Ausführung der Farbschattierung eingerichtet ist, wobei der Interpolationsschritt durch den Prozessor (12) ausgeführt wird.

3. Ein Verfahren gemäß Anspruch 1 oder 2, in dem der Schritt des Bestimmens den Schritt der Unterteilung des Bildes in Konfigurationsbereiche umfaßt, die jeder einen Teil der bestimmten Anzahl Pixel enthält, die zur Farbbildgebung vorgesehen sind (Schritt 3).

4. Ein Verfahren gemäß Anspruch 3, in dem der Interpolationsschritt die folgenden Schritte umfaßt:

Interpolieren von Farbwerten nur für solche Pixel, die innerhalb eines ausgewählten Konfigurationsbereichs enthalten sind und nicht farbig dargestellt sind;

Anzeigen der farbig dargestellten Pixel und der farbinrepolierten Pixel, die im gewählten Konfigurationsbereich enthalten sind; und

Zurückkehren zu dem Schritt der Berechnung der Farbbildwerte für einen anderen Konfigurationsbereich, bis die bestimmte Anzahl Pixel angezeigt worden ist.

5. Ein Verfahren gemäß einem beliebigen der vorstehenden Ansprüche, in dem der Schritt der Berech-

- 5 6. Ein Rechnersystem zur Anzeige eines Farbbilds durch Interpolieren von Pixelfarbwerten, enthaltend:

Schnittstellenmittel (22), die auf Anwendereingaben ansprechen, um eine Anzahl Pixel festzulegen, die mit Bildfarbe versehen werden sollen;

eine Zentraleinheit (18) zum Berechnen der Farbbildwerte für jedes einzelne Pixel, das in der bestimmten Anzahl enthalten ist; und gekennzeichnet durch

einen Anzeigeadapter (12) zum Anwenden der Farbbildwerte zum Interpolieren der Farbwerte für jedes Pixel, das nicht in der bestimmten Anzahl enthalten ist.

7. Ein System gemäß Anspruch 6, in dem der Anzeigeadapter (12) einen Prozessor aufweist, der zum Ausführen des Farbschattierens eingerichtet ist.

8. Ein System gemäß Anspruch 6 oder 7, in dem das Schnittstellenmittel so eingerichtet ist, daß es das Bild in Konfigurationsbereiche unterteilt, wobei jeder derselben einen Teil der bestimmten Anzahl Pixel enthält, die als Farbbild aufgebaut werden sollen.

9. Ein System gemäß Anspruch 8, in dem der Anzeigeadapter (12) so eingerichtet ist, daß er Farbwerte nur für diese Pixel interpoliert, die innerhalb eines ausgewählten Konfigurationsbereichs enthalten sind und nicht farbig dargestellt sind; und in dem eine Anzeige (10) die farbbildausgerichteten Pixel und die in dem gewählten Konfigurationsbereich enthaltenen farbinterpolierten Pixel zeigt.

10. Ein System gemäß einem beliebigen der Ansprüche 6 bis 9, in dem die Zentraleinheit (18) Mittel enthält, um Strahlverfolgungsoperationen durchzuführen.

50 Revendications

1. Un procédé d'affichage d'une image couleur sur un système d'ordinateur ayant une unité de traitement centrale (18) et un adaptateur d'affichage (16), par interpolation de valeurs de couleur de pixel, ledit procédé comprenant les étapes consistant à :

déterminer un nombre de pixels devant être re-

présenté en couleur dans l'image (étape 2, 3);

calculer, à l'aide de ladite unité de traitement centrale, les valeurs représentées en couleur dans l'image pour chacun desdits pixels, comprises dans le nombre prédéterminé (étape 4); et caractérisé par

l'interpolation, à l'aide dudit adaptateur d'affichage (16), des valeurs de couleur pour chaque pixel non-inclus dans le nombre prédéterminé, en se basant sur les pixels couleur calculés et représentés dans l'image (figure 5).

2. Un procédé selon la revendication 1, dans lequel ledit adaptateur d'affichage (16) comprend un processeur (12) adapté pour effectuer une correction de couleur, dans lequel ladite étape d'interpolation est exécutée par ledit processeur (12).

3. Un procédé selon la revendication 1 ou 2, dans lequel ladite étape de détermination comprend l'étape de subdivision de l'image en des zones de configuration, chacune contenant une partie du nombre déterminé de pixels devant être représentés en couleur dans l'image (étape 3).

4. Un procédé selon la revendication 3, dans lequel l'étape d'interpolation comprend les étapes consistant à :

interpoler les valeurs de couleur, seulement pour les pixels contenus dans une zone de configuration choisie et n'ayant pas été représentés en couleur dans l'image;

afficher les pixels couleur représentés dans l'image et les pixels couleur interpolés compris dans ladite zone de configuration choisie; et

revenir à l'étape de calcul des valeurs de couleur représentées dans l'image pour une autre zone de configuration, jusqu'à ce que le nombre déterminé de pixels aient été affichés.

5. Un procédé selon l'une quelconque des revendications précédentes, dans laquelle ladite étape de calcul des valeurs de couleur représentées dans l'image comprend l'étape consistant à exécuter des opérations de traçage de rayons.

6. Un système d'ordinateur conçu pour l'affichage d'une image couleur par interpolation de valeurs de couleur de pixels, comprenant :

des moyens d'interface (22), réagissant à une entrée utilisateur pour déterminer un nombre de pixels devant être représentés en couleur

dans l'image;

une unité de traitement central (18), conçue pour calculer des valeurs de couleur devant être représentées en image, pour chacun desdits pixels compris dans le nombre déterminé; et caractérisé par un adaptateur d'affichage (12), conçu pour utiliser les valeurs de couleur représentées en image, pour interpoler des valeurs de couleur pour chaque pixel non-inclus dans le nombre déterminé.

7. Un système selon la revendication 6, dans lequel ledit adaptateur d'affichage (12) comprend un processeur adapté pour effectuer un nuancier de couleur.

8. Un système selon la revendication 6 ou 7, dans lequel lesdits moyens d'interface sont adaptés pour subdiviser l'image en des zones de configuration, chacune contenant une partie du nombre déterminé de pixels devant être représentés en couleur dans l'image.

9. Un système selon la revendication 8, dans lequel ledit adaptateur d'affichage (12) est adapté pour interpoler les valeurs de couleur seulement pour les pixels qui sont contenus dans une zone de configuration choisie et n'ayant pas été représentée en couleur, et dans lequel un affichage (10) affiche les pixels couleur représentés en image et les pixels couleur interpolés, inclus dans ladite zone de configuration choisie.

10. Un système selon l'une quelconque des revendications 6 à 9, dans lequel ladite unité de traitement centrale (18) comprend des moyens conçus pour exécuter des opérations de traçage de rayons.

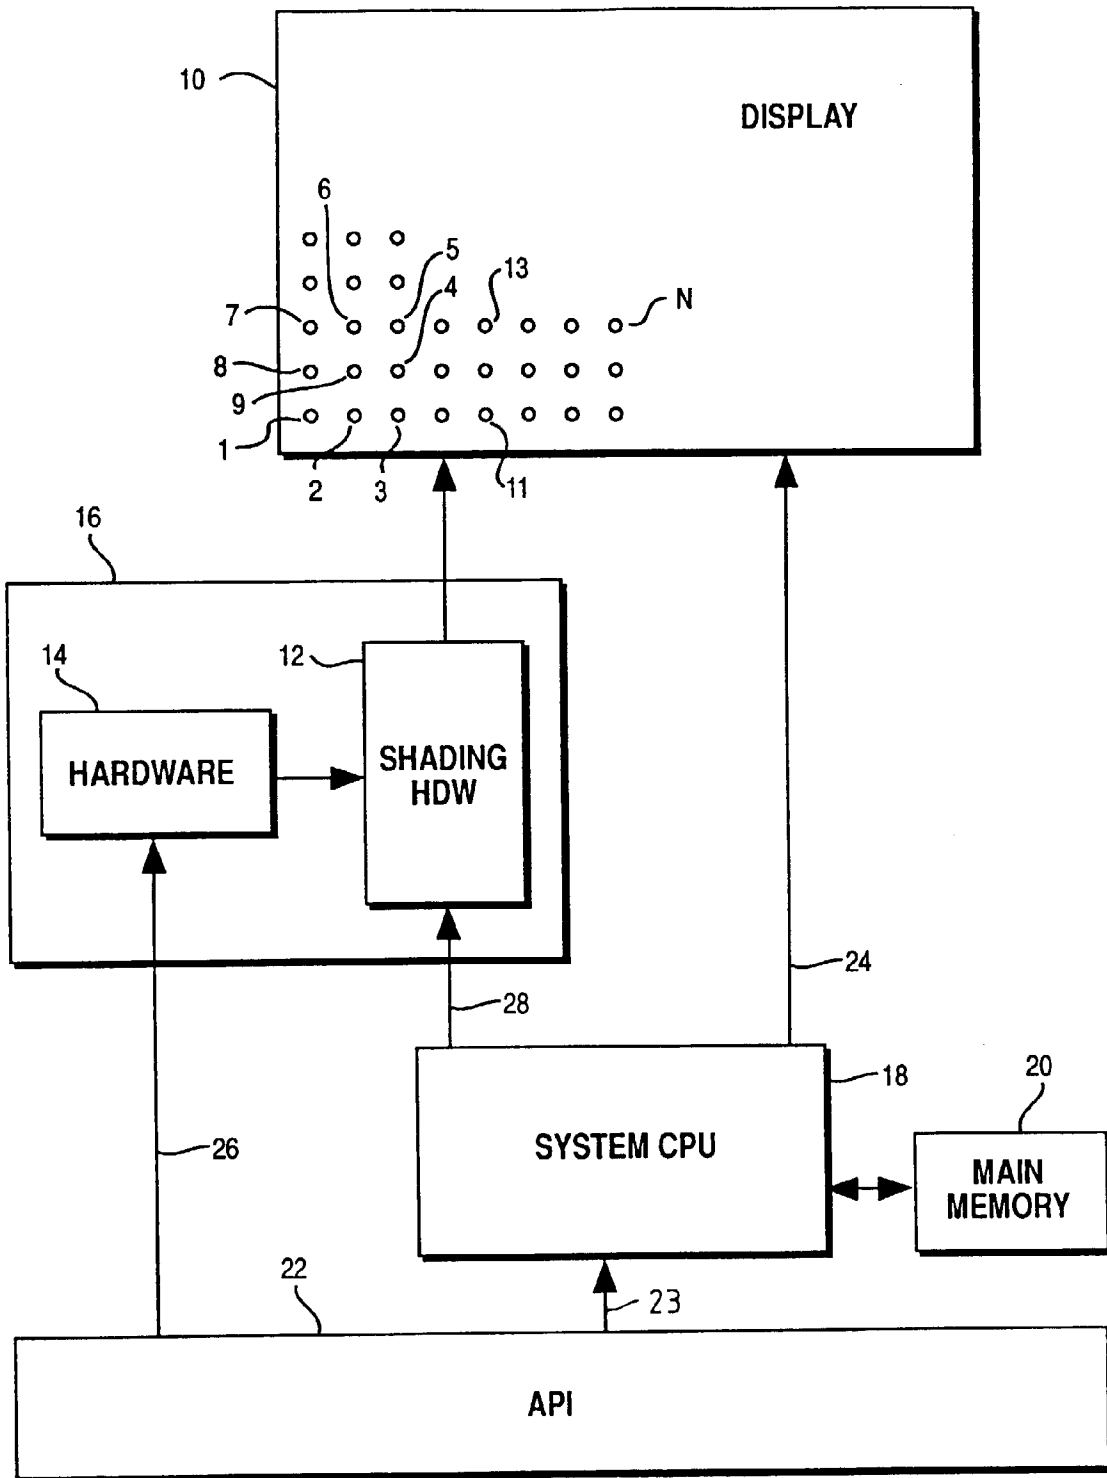


FIG. 1

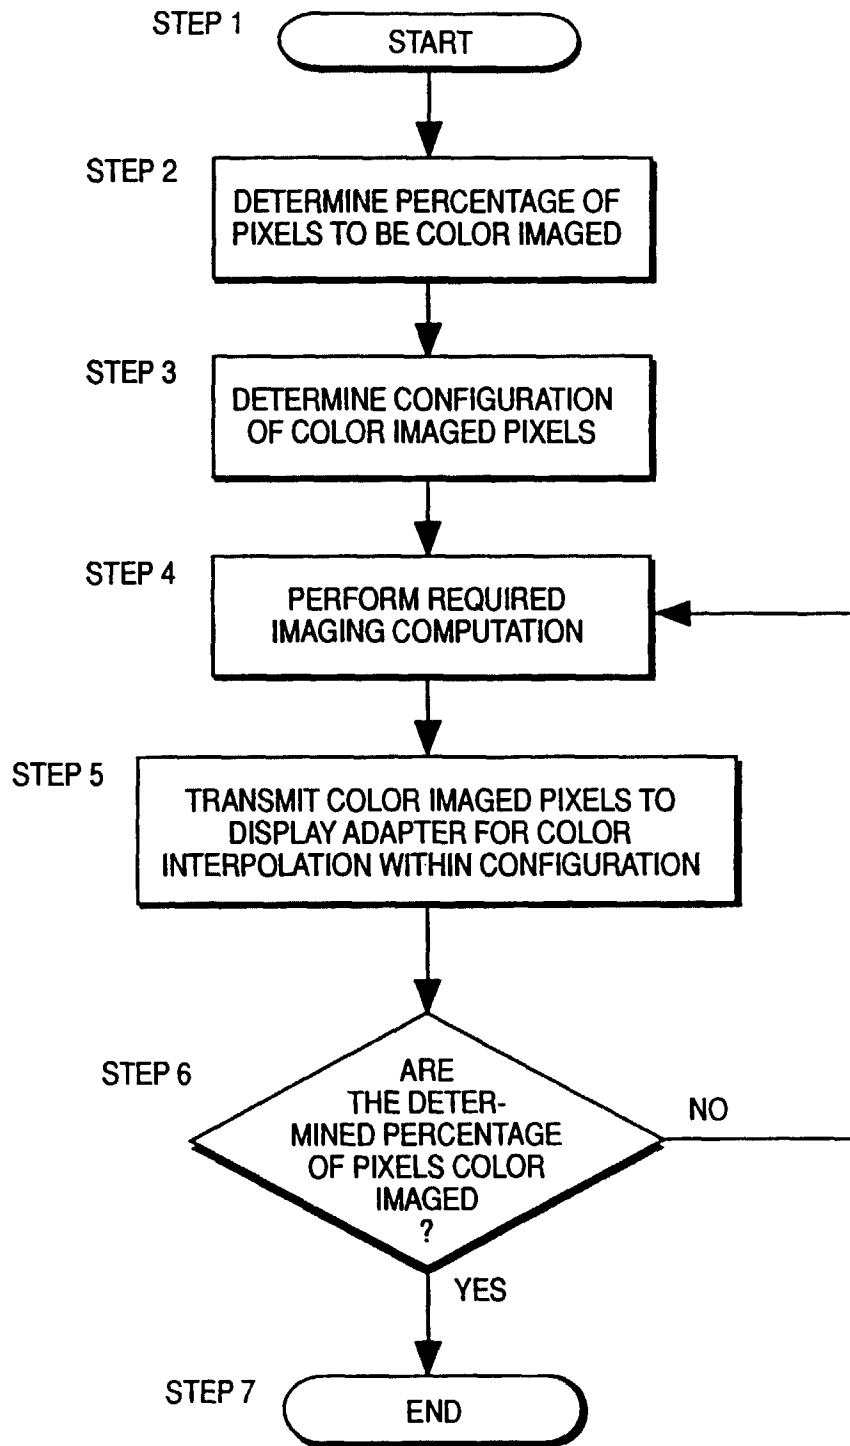


FIG. 2

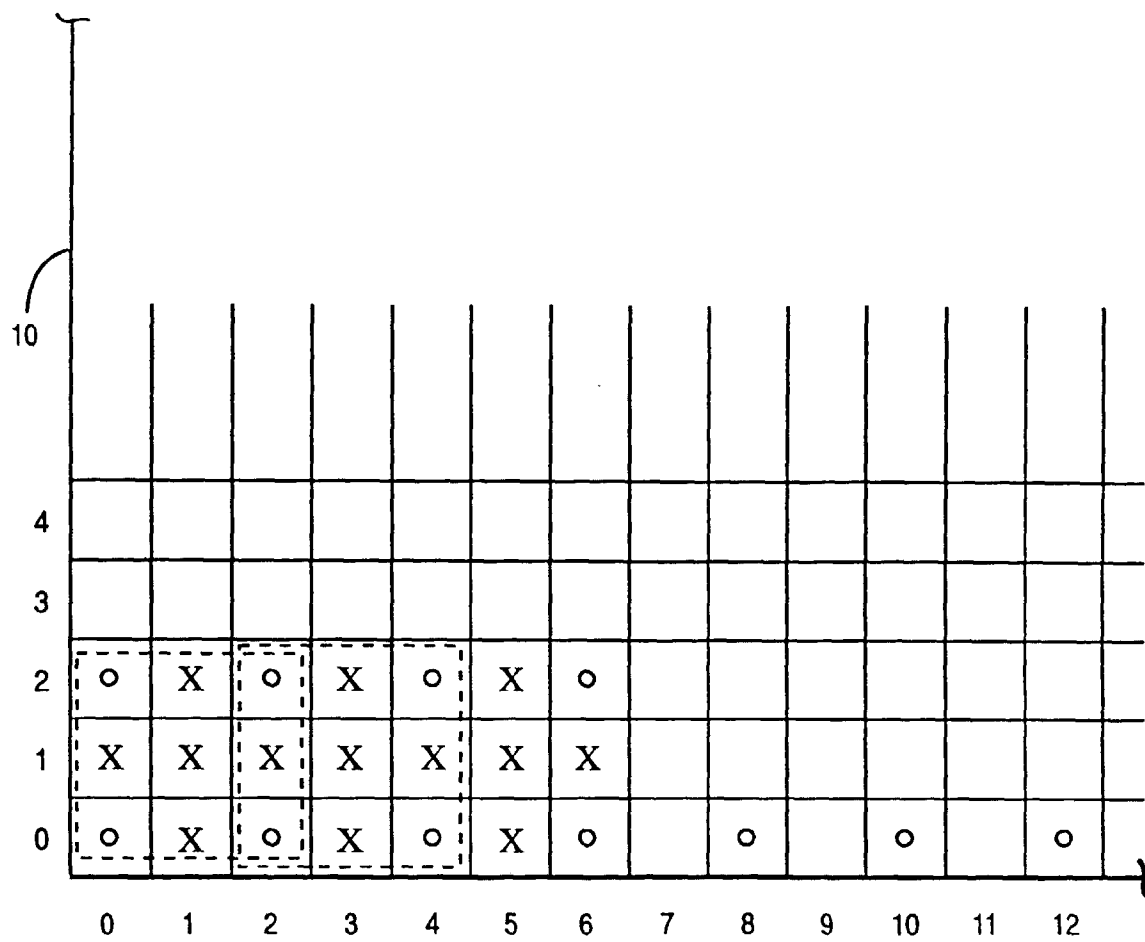


FIG. 3