

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

29 August 2019 (29.08.2019)



(10) International Publication Number

WO 2019/162145 A1

(51) International Patent Classification:

B27N 1/00 (2006.01) *B27N 3/18* (2006.01)

B27K 3/02 (2006.01) *B27N 3/12* (2006.01)

B27N 3/04 (2006.01) *B27N 7/00* (2006.01)

(21) International Application Number:

PCT/EP2019/053408

(22) International Filing Date:

12 February 2019 (12.02.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18157665.3 20 February 2018 (20.02.2018) EP

(71) Applicant: **BASF SE** [DE/DE]; Carl-Bosch-Strasse 38, 67056 Ludwigshafen am Rhein (DE).

(72) Inventors: **LEIFELD, Ferdinand**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE). **BOTH, Sabine**; Rheinpromenade 1, 40789 Monheim (DE). **FESSENBECKER, Achim**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE).

(74) Agent: **BASF IP ASSOCIATION**; BASF SE, G-FLP - C006, 67056 Ludwigshafen (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: METHOD FOR PRODUCING WOOD FIBERBOARDS

(57) Abstract: The invention relates to a method for the production of wood fiberboards such as MDF boards.



WO 2019/162145 A1

Method for producing wood fiberboards

The invention relates to a method for producing wood fiberboards such as MDF boards.

5

The market for medium-density fiberboards (MDF) and high-density fiberboards (HDF) has been growing for years. MDF and HDF boards can be processed like conventional particleboards. Because of their uniform structure, however, they are also suitable for producing profiled parts, and their use is becoming increasingly widespread in furniture construction.

10

For the production of fiberboards, wood is defibrated into wood particles, glued and pressed into boards. Wood of various types is used in this process, wherein coniferous woods such as spruce and pine are chiefly used. Other types of wood, such as beech or eucalyptus, can also be used.

15

The wood for fiber production is debarked and crushed into wood chips. After this, the wood chips are defibrated into wood particles in a milling apparatus, the so-called refiner.

20

The refiner can consist of two metal disks provided with a radial relief that are directly adjacent to each other. One of these disks may move, or both can turn in opposite directions. Refiners ordinarily operate under positive pressure. The wood chips are defibrated between these two disks, wherein the fineness of the fibers depends on the milling gap between the disks.

25

The defibration of wood chips consumes energy. The energy consumption in the refiner is up to 400 KW/h per ton of wood. The energy costs of defibration can account for up to 20% of the production costs of an MDF board. In order to reduce energy consumption, the wood chips can be subjected to hydrothermal pretreatment. For this purpose, the wood chips are ordinarily pretreated in a boiler at temperatures of 100 to 180° C and a pressure of up to 10 bar. This treatment softens the middle lamella and facilitates defibration in the refiner.

30

In the next step, a binder such as urea-formaldehyde resin (UF resin), a mixed resin composed of urea and melamine (MUF resin), phenol formaldehyde resin (PF resin) or diisocyanate adhesive is added to the wood fiber pulp. The binder is ordinarily added to the

35

2

still-wet fibers, but can also be added after drying. Addition to the wet fibers is ordinarily carried out in the so-called "blow line." Waxes can also be added together with the binder.

5 After this, the fibers are dried in a dryer to a residual moisture content of approximately 7% to 15%. In the following steps, the bonded fibers are scattered to form mats and precompacted (pre-pressed). After this, the precompacted mats are pressed into boards in heated presses at temperatures of 170 to 240° C.

10 Ordinarily, the boards must then be ground and polished in order to obtain a smooth surface, which can be lacquered or provided with a decorative layer. The grinding step is necessary because the boards often show insufficient fiber binding and rough areas on their surface resulting from uneven distribution.

15 An object of the invention is therefore to provide a method for producing wood fiberboards that alleviates or completely avoids the above-mentioned drawbacks. In particular, the aim is to provide a method for producing wood fiberboards in which the complexity of grinding is reduced and/or in which a better internal fiber bond and/or a smoother surface of the wood fiberboard produced is/are achieved and/or the wood fiberboards produced show better stability. A further object is to reduce the penetration of water into the fiberboard.

20 This is achieved according to the invention by the use of surfactants.

Although EP 2168738 does describe the use of surfactants in the production of wood fiberboards, the purpose of the surfactants in this case is to facilitate the penetration of an
25 impregnated fluid into raw wood fiberboards. In this way, a predetermined final moisture is to be achieved. The type of surfactant used is not further specified.

EP 2619016 B1 discloses a method for producing wood panels, wherein in an embodiment, an additive is added prior to pressing of the wood material cake. The additive can contain a
30 surfactant, but the surfactant is not further specified.

"Advantages of Alkylpolyglycoside Surfactants in Mechanical Pulping", IPCOM000230969D, describes the use of alkyl polyglycosides in the production of wood pulp for paper manufacturing.

3

Nevertheless, the above-mentioned publications do not contribute to achieving the above-mentioned object.

5 However, the above-mentioned object is achieved by the method according to the invention for producing wood fiberboards comprising the following steps:

a) crushing wood into wood chips,

10 b) hydrothermal pretreatment of the wood chips with steam in a pre-steaming bin at a temperature of 100 to 180° C and a pressure of 1 to 10 bar,

c) grinding the pre-treated wood chips into fine wood particles in a refiner in the presence of steam at a temperature of 150° C to 200° C and a pressure of 4.5 to 16 bar,

15

d) gluing and drying the fine wood particles, wherein the drying of the wood particles can also be carried out prior to gluing,

e) forming mats from the bonded fibers and precompacting the mats,

20

f) pressing the glued and dried wood particles at a temperature of 170 to 240° C into wood fiberboards,

wherein grinding c) of the pre-treated wood chips into fine wood particles and/or gluing (as a rule in the so-called blow line (d)) and/or forming and precompacting the fibers (e) is carried out in the presence of one or a plurality of surfactants.

25

The object is further achieved by means of a method for producing fine wood particles comprising the following steps:

30

a) crushing wood into wood chips,

b) hydrothermal pretreatment of the wood chips with steam in a pre-steaming bin at a temperature of 100 to 180° C and a pressure of 1 to 10 bar,

4

c) grinding the pre-treated wood chips into fine wood particles in a refiner in the presence of steam at a temperature of 150° C to 200° C and a pressure of 4.5 to 16 bar,

5 d) gluing and drying the fine wood particles, wherein drying of the wood particles can also be carried out prior to gluing, and wherein optionally one or a plurality of surfactants are injected with the glue into the blow line,

10 e) forming mats from the bonded fibers and precompacting the mats, wherein optionally one or a plurality of surfactants is/are sprayed on or under the precompressed mat, and

optionally f) pressing the glued and dried wood particles at a temperature of 170 to 240° C into wood fiberboards.

15 Addition of the surfactants can be carried out in all steps of the process, or only in one or more steps of the process. For example, at least one surfactant can be added in step d) and/or in step e).

20 Surprisingly, several technical advantages are achieved by means of the method according to the invention.

The surface of the wood fiberboards surprisingly becomes more hydrophobic because of the addition of surfactants according to the invention. The surface of the wood fiberboards also becomes smoother, and grinding can be shortened or even dispensed with altogether. The
25 subsequent coating process is also functionally improved.

Finally, in use of the method according to the invention, the wood fiberboards also show a more optically attractive appearance and increased stability.

30 In use in the refiner step, the surfactants can be added to the wood chips either in the pre-steaming bin or in the feeding screw upstream of the refiner. In use in the gluing step, the surfactants can be injected into the blow line as an aqueous solution. Aqueous solutions of the surfactants are also used for spraying onto or under the precompacted mat.

5

The amounts of the surfactants used are ordinarily 0.05% by weight to 5% by weight, preferably 0.1% by weight to 3% by weight, based on bone-dry (bd) wood.

The surfactants used can be anionic or nonionic. Combinations of a plurality of different surfactants can also be used.


Combinations containing nonionic surfactants or nonionic surfactants alone are preferably used.

10 The anionic surfactants can be sulfates, sulfonates or phosphates of branched or unbranched fatty alcohols or oxo alcohols, branched or unbranched fatty alcohol oxylates or oxo alcohol oxylates. Sulfates, sulfonates or phosphates of naphthyl alcohol or ethoxylated naphthyl alcohol, arylalkyl alcohols or arylalkyl ethoxylates are also possible.

15 Suitable anionic surfactants are fatty alcohol ether sulfates with branched or unbranched C₈-C₂₀ alkyl chains and 2 to 50 ethylene oxide (EO) units. Particularly preferred are fatty alcohol ether sulfates with a C₈-C₁₄ alkyl chain and 2 to 12 ethylene oxide units.

Also suitable are fatty alcohol ether sulfates with a C₈-C₁₄ alkyl chain and 2 to 12 ethylene oxide units.

The nonionic surfactants can be alkyl alcohol alkoxylates with an unbranched or branched, primary or secondary alkyl chain, or aryl alkoxylates. Preferred are alkyl or aryl alkoxylates of formula (I)

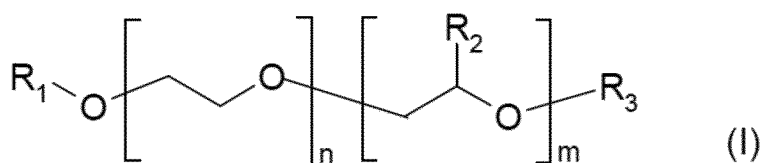

where

R₁ = linear or branched, primary or secondary C₄-C₂₄ alkylphenyl and naphthyl,

30 R₂ = linear or branched C₁-C₁₆ alkyl,

R₃ = H, benzyl, linear or branched C₁-C₁₈ alkyl,

n = 1-200,

6

m = 0-80,

wherein the alkylene oxide units can be arranged blockwise or statistically in any desired order.

5

Further usable nonionic surfactants are branched or unbranched C₈ to C₁₅ alkyl ethoxylates with 3 to 20 ethylene oxide units.



10

Further usable nonionic surfactants are branched or unbranched C₈ to C₁₅ alkyl ethoxylates with 3 to 20 ethylene oxide units.

The nonionic surfactants can be PO/EO block copolymers.

15

In a preferred embodiment, the nonionic surfactants can be alkyl polyglycosides based on C₅ sugars or C₆ sugars or mixtures thereof, preferably of the general formula (IIa) or (IIb)



20

where

R₁ = linear or branched C₄-C₃₀ alkyl,

R₂ = C₂-C₄ alkylene,

Z = independently of one another, a sugar radical, preferably glucose or xylose,

25

b = 0-12,

a = 1-15, fractional numbers are also possible.

30

In preferred alkyl polyglycosides, R₁ is a linear or branched C₈ to C₁₆ alkyl radical, b = 0 and a = 1.1-4.

In the context of the present invention, "wood particles", "wood chips", "fine wood particles", "fibres" is understood to refer to finely particulate cellulose-containing particles. This includes for example fibers and chips of wood and other cellulose-containing materials. All fibrous materials obtainable from plants can be used as a base material for the wood

7

particles and wood fiberboards. For example, wood is ordinarily used as a raw material, but suitable cellulose-containing particles can also be obtained from palms and annual plants such as bagasse or straw. Agricultural waste products are a further source. Preferred base materials are light wood types, in particular spruce or pine, but darker wood types such as
5 beech or eucalyptus can also be used.

The wood materials (cellulose-containing raw materials) are crushed and optionally washed in step a) of the method according to the invention. This is followed by hydrothermal pretreatment of the wood chips with steam.
10

In step b) of the method according to the invention, the crushed wood materials are pre-treated with steam in a pre-steaming bin (boiler). This is preferably carried out at a pressure of 1 to 10 bar and a temperature of 100 to 180° C. The exact temperatures and pressures depend on the respective raw materials used. For crushing of annual plants, lower
15 temperatures than those required for crushing perennial plants such as wood are ordinarily sufficient.

In step c), the hydrothermally pre-treated crushed wood material is transferred to a so-called refiner, where it is ground into fine particulate particles. A refiner is ordinarily a grinding
20 apparatus with rotating and optionally stationary blades or disks for grinding fiber materials, and preferably comprises two metal disks equipped with radial relief that are closely adjacent to each other. Of these two disks, one can move and the other can be stationary, but both disks can also turn in opposite directions. The refiner is ordinarily operated under positive pressure.

25 Grinding of the pre-treated crushed wood materials can also be carried out in other apparatuses suitable for this purpose.

The production of wood fibers for MDF boards in the refiner generally takes place at
30 temperatures of 150 to 180° C, and preferably at approx. 170° C.

The surfactants can be added according to the invention at various points in the process. The first dosing possibility is the refiner or the pre-steaming bin upstream of the refiner. The

8

amount of the surfactants used is 0.05% by weight to 5% by weight, preferably 0.1% by weight to 3% by weight, based on bone-dry (bd) wood.

5 In step d) of the method according to the invention, the fine wood particles are glued and dried, wherein drying of the wood particles can also be carried out prior to gluing. In an embodiment of the invention, surfactants can be added at this point.

10 Ordinarily, the wood particles are discharged from the refiner by the positive pressure prevailing in the refiner via a blow line. The wood particles can then be directly, i.e. while still wet, glued in the blow line. The second possibility for dosing the surfactants according to the invention is the blow line. The surfactants can be added as an aqueous solution by injection into the blow line. The amount of the surfactants used is 0.05% by weight to 5% by weight, preferably 0.1% by weight to 3% by weight, based on bone-dry (bd) wood. After this, they pass through a dryer, in which they are dried to a residual moisture content of 8 to 15%.

15 In another embodiment, the wood particles are first dried, and then glued in a dry state and further processed.

20 The wood materials produced according to the invention can be MDF, HDF, chipboard or OSB boards. Preferred are MDF and HDF boards, and particularly preferred are MDF boards.

25 MDF, HDF, OSB and particleboards are also referred to as wood material boards. They are produced by pouring bonded fibers or chips into mats, optionally cold-precompacting them, and pressing them into boards in heated presses at temperatures of 170 to 240° C. At this point in the method, in an embodiment of the present invention, surfactants can also be added, preferably by spraying the surfactants as an aqueous solution onto or under the precompacted mat.

30 The binders used as a glue are ordinarily urea-formaldehyde resins that are partially reinforced with melamine, urea-melamine-formaldehyde resins, melamine-formaldehyde resins, phenol-melamine resins and phenol-formaldehyde resins. Isocyanates are used as a further binder, ordinarily based on polymethylene diisocyanate.

9

The wood particles can be directly glued, i.e. while still wet, in the blow line. However, pre-dried wood particles can also be glued in mixers, preferably continuously operating mixers. Gluing in mixers is particularly preferred in the production of particleboard and OSB, and gluing is preferably carried out in the blow line in production of HDF and MDF boards. A further possible method of gluing is so-called dry gluing, in which the dried wood particles are sprayed with glue.

If the wood particles are glued in the blow line, they then pass through a dryer, in which they are dried to a residual moisture content of 8 to 15% by weight.

In step e) of the method according to the invention, the glued and dried wood particles are then poured into mats, optionally cold-precompacted and pressed into boards in heated presses at temperatures of 170 to 240° C.

A further possible manner of dosing the surfactants according to the invention is that of precompacting the fiber mats upstream of the heated press. The surfactants can be sprayed as an aqueous solution onto or under the fiber mat. The amount of the surfactants used is 0.05% by weight to 5% by weight, preferably 0.1% by weight to 3% by weight, based on bone-dry (bd) wood.

Several aspects of the present invention will now be explained in further detail by means of the following illustrative examples.

For all tests, spruce wood chips were defibrated in the refiner and glued in the blow line using the glue formulation shown in Table 1.

The wood chips were defibrated in a refiner at a temperature of approx. 180° C, a pressure of approx. 9 bar, and with a milling gap of 0.12 mm. The dwell time in the boiler upstream of the refiner was 3 to 4 minutes. The energy required was measured during the milling process.

The unit of defibration energy is kWh/t bd. Bd stands for "bone-dry wood."

Table 1

Glue formulation	
------------------	--

10

Urea-melamine formaldehyde resin, 66.5% in water	100.0 parts by weight
Paraffin dispersion, 60% by weight in water	4.0 parts by weight
Water	33.8 parts by weight
Solid resin content of liquor	48%
Solid resin / bone-dry fibers	14%
Liquor per 100 kg bd fiber weight	29.2 kg

Example 1

The bonded fibers are then dried in a dryer to a moisture content of approx. 8% by weight, poured to form a mat, precompressed and pressed at 220° C into a board approx. 4 mm thick.

The MDF boards have a rough surface with dark areas.

In order to test the hydrophobicity of the surfaces, a drop of water is dripped onto the surface, and the time required for the drop to be completely absorbed into the board is measured.

In a second test, the transverse tensile strength of the board is measured (according to EN 319); the results are shown in Table 2.

Table 2

MDF board	Transverse tensile strength (N/mm ²)	Drop absorption time in sec
Example 1	0.88	68

Example 2

In example 2, spruce wood chips are defibrated in the presence of C₈-C₁₀ alkyl polyglycoside. The surfactant is dosed directly into the refiner as a 25% aqueous solution containing 1% of active surfactant based on the amount of wood.

11

The bonded fibers are then dried in a dryer to a moisture content of approx. 8% by weight, poured into a mat, precompacted and pressed at 220° C into a board approx. 4 mm in thickness.

- 5 The boards have a smooth, glossy and homogeneous surface (also see Table 3).

Table 3

MDF board	Transverse tensile strength (N/mm ²)	Drop absorption time in sec
Example 2	1.02	476

Example 3

10

In example 3, spruce wood chips are defibrated in a refiner and glued together in the blow line. At the same time, a 20% solution of a C₈-C₁₄ alkyl polyglycoside containing 0.5% of active surfactant based on the amount of wood is injected into the blow line.

- 15 The bonded fibers are then dried in a dryer to a moisture content of approx. 8% by weight, poured into a mat, precompacted and pressed at 220° C into a board approx. 4 mm in thickness.

The boards have a smooth, glossy and homogeneous surface (also see Table 4).

20

Table 4

MDF board	Transverse tensile strength (N/mm ²)	Drop absorption time in sec
Example 3	1.21	780

Example 4

- 25 In example 4, spruce wood chips are defibrated in a refiner and glued together in the blow line. At the same time, a 20% solution of a C₁₃oxo alcohol ethoxylate + 12 EO units containing 0.5% active surfactant based on the amount of wood is injected into the blow line.

12

The bonded fibers are then dried in a dryer to a moisture content of approx. 8% by weight, poured into a mat, precompacted and pressed at 220° C into a board approx. 4 mm in thickness.

- 5 The boards have a smooth, glossy and homogeneous surface (also see Table 5).

Table 5

MDF board	Transverse tensile strength (N/mm ²)	Drop absorption time in sec
Example 4	0.98	346

Example 5

10

In example 5, spruce wood chips are defibrated in a refiner and glued together in the blow line.

- 15 The bonded fibers are then dried in a dryer to a moisture content of approx. 8% by weight, poured into a mat and precompacted. A 20% solution of a C₈-C₁₄ alkyl polyglycoside is sprayed onto the precompacted mats, wherein 0.4% of active surfactant is used based on the amount of wood. After this, the mat is pressed at 220° C into a board approx. 4 mm in thickness.

- 20 The treated side of the board is smooth, glossy and homogeneous. The untreated side is rough and spotted (also see Table 6).

Table 6

MDF board	Transverse tensile strength (N/mm ²)	Drop absorption time in sec
Example 5, treated side	1.26	720
Example 5, untreated side	1.26	93

- 25 Example 6

13

In example 6, spruce wood chips are defibrated in a refiner and glued together in the blow line. At the same time, a 20% solution of the sodium salt of a fatty alcohol ether sulfate with 12 EO units containing 0.7% active surfactant based on the amount of wood is injected into the blow line.

The bonded fibers are then dried in a dryer to a moisture content of approx. 8% by weight, poured into a mat, precompacted and pressed at 220° C into a board approx. 4 mm in thickness.

The boards have a smooth, glossy and homogeneous surface (also see Table 7).

Table 7

MDF board	Transverse tensile strength (N/mm ²)	Drop absorption time in sec
Example 6	1.07	423

14

Patent claims

1. A method for the production of wood fiberboards, comprising the following steps:


- 5 a) crushing wood into wood chips,
- b) hydrothermal pretreatment of the wood chips with steam in a pre-steaming bin at a temperature of 100 to 180° C and a pressure of 1 to 10 bar,
- 10 c) grinding the pre-treated wood chips into fine wood particles in a refiner in the presence of steam at a temperature of 150 to 200° C and a pressure of 4.5 to 16 bar,
- d) gluing and drying the fine wood particles, wherein the drying of the wood particles can also be carried out prior to gluing,
- 15 e) forming mats from the bonded fibers and precompacting the mats,
- f) pressing the glued and dried wood particles at a temperature of 170 to 240° C into wood fiberboards,
- 20

wherein at least one of steps d) to e) is carried out in the presence of one or a plurality of surfactants.

- 25 2. The method according to claim 1, wherein step d) is carried out in the presence of one or a plurality of surfactants.
3. The method according to claim 1 or 2, wherein step e) is carried out in the presence of one or a plurality of surfactants.
- 30 4. The method according to one of claims 1 to 3, wherein the surfactants are anionic or nonionic surfactants.

15

5. The method according to one of the preceding claims, wherein the amount of surfactants in step c) is 0.05 to 5% by weight based on bone-dry wood.
6. The method according to one of the preceding claims, wherein the fine wood particles are reductively bleached.
7. The method according to one of the preceding claims, wherein the wood fiberboards are medium-density fiberboards.
8. The method according to one of the preceding claims, wherein the surfactants are selected from fatty alcohol ether sulfates with branched and/or unbranched C₈ to C₂₀ alkyl chains and 2 to 50 ethylene oxide units.
9. The method according to one of claims 1 to 7, wherein the surfactants are selected from alkyl- and/or aryl alkoxylates of the general formula (I)

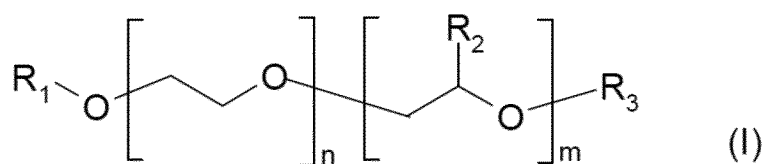

where

R₁ = linear or branched, primary or secondary C₄–C₂₄ alkylphenyl or naphthyl,

R₂ = linear or branched C₁–C₁₆ alkyl,

R₃ = H, benzyl, linear or branched C₁–C₁₈ alkyl,

n = 1-200,



m = 0-80,

wherein the alkylene oxide units can be arranged blockwise or statistically in any desired order.

10. The method according to one of claims 1 to 7, wherein the surfactants are selected from C₈–C₁₅ alkyl ethoxylates with 3 to 20 ethylene oxide units.

16

11. The method according to one of claims 1 to 7, wherein the surfactants are selected from alkyl polyglycosides of the general formula (IIa) or (IIb)



where

R_1 = linear or branched C_6 - C_{30} alkyl,

R_2 = C_2 - C_4 alkylene,

Z = independently, one sugar radical each with 5 or 6 carbon atoms,

b = 0-12,

a = 1-10.

12. The method according to claim 11, wherein R_1 is a C_8 - C_{16} alkyl chain, $b = 0$ and $a = 1$ -4.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/053408

A. CLASSIFICATION OF SUBJECT MATTER

INV. B27N1/00 B27K3/02 B27N3/04 B27N3/18
ADD. B27N3/12 B27N7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B27N B27K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 3 059 056 A1 (BASF SE [DE]) 24 August 2016 (2016-08-24)	1-12
Y	paragraphs [0012], [0013], [0015], [0028], [0045], [0046], [0050]; claims 1-10; examples 2-5	1
Y	----- WO 2016/091797 A1 (BASF SE [DE]) 16 June 2016 (2016-06-16) claims 1,14 page 10, lines 16-20,28-30	1
Y	----- WO 2015/104349 A2 (BASF SE [DE]) 16 July 2015 (2015-07-16) claims 1,3,7 page 7, lines 7-14 ----- -/-	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 April 2019

Date of mailing of the international search report

26/04/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Baran, Norbert

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2019/053408

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2016/156226 A1 (BASF SE [DE]) 6 October 2016 (2016-10-06) claim 3 page 42, lines 30-33 page 43, lines 28-30 -----	1
T	JP 2008 023919 A (CHUKYO YUSHI KK) 7 February 2008 (2008-02-07) -----	1
Y	JP H06 63913 A (IIDA KOGYO KK) 8 March 1994 (1994-03-08) paragraphs [0009], [0012], [0015] -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/053408

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 3059056	A1	24-08-2016	NONE
WO 2016091797	A1	16-06-2016	EP 3230027 A1 18-10-2017 US 2017361489 A1 21-12-2017 WO 2016091797 A1 16-06-2016
WO 2015104349	A2	16-07-2015	CA 2936607 A1 16-07-2015 US 2017021525 A1 26-01-2017 WO 2015104349 A2 16-07-2015
WO 2016156226	A1	06-10-2016	EP 3274143 A1 31-01-2018 US 2018071946 A1 15-03-2018 WO 2016156226 A1 06-10-2016
JP 2008023919	A	07-02-2008	NONE
JP H0663913	A	08-03-1994	JP H0663913 A 08-03-1994 JP H0720609 B2 08-03-1995