

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2003278251 B2**

(54) Title
Posterior vertebral support assembly

(51) International Patent Classification(s)
A61B 17/70 (2006.01)

(21) Application No: **2003278251** (22) Date of Filing: **2003.09.03**

(87) WIPO No: **WO04/024010**

(30) Priority Data

(31) Number	(32) Date	(33) Country
02.11189	2002.09.10	FR

(43) Publication Date: **2004.04.30**

(43) Publication Journal Date: **2004.05.20**

(44) Accepted Journal Date: **2009.03.05**

(71) Applicant(s)
Jean Taylor

(72) Inventor(s)
Taylor, Jean

(74) Agent / Attorney
PIZZEYS, ANZ Centre Level 14 324 Queen Street, Brisbane, QLD, 4000

(56) Related Art
FR 2818530 A
FR 2722088 A
US 2003/045940 A1

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)

(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international



(43) Date de la publication internationale
25 mars 2004 (25.03.2004)

PCT

(10) Numéro de publication internationale
WO 2004/024010 A1

(51) Classification internationale des brevets⁷ :
A61B 17/70, A61F 2/44

(21) Numéro de la demande internationale :
PCT/FR2003/002635

(22) Date de dépôt international :
3 septembre 2003 (03.09.2003)

(25) Langue de dépôt : français

(26) Langue de publication : français

(30) Données relatives à la priorité :
02.11189 10 septembre 2002 (10.09.2002) FR

(71) Déposant et

(72) Inventeur : TAYLOR, Jean [FR/FR]; 141 rue d'Antibes,
Eden Palace, F-06400 CANNES (FR).

(81) États désignés (national) : AE, AG, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ,
DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) États désignés (régional) : brevet ARIPO (GH, GM, KE,
LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), brevet
eurasien (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), brevet
européen (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), brevet OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).


Publiée :

— avec rapport de recherche internationale

[Suite sur la page suivante]

(54) Title: POSTERIOR VERTEBRAL SUPPORT ASSEMBLY

(54) Titre : ENSEMBLE DE SOUTIEN VERTEBRAL POSTERIEUR

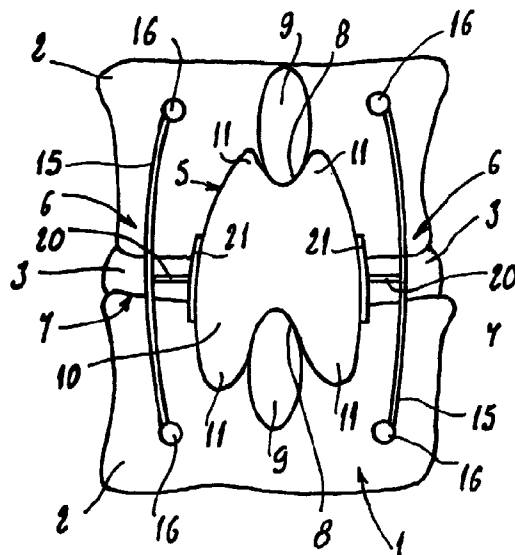

(57) Abstract: The invention concerns an assembly (1) comprising an interspinous wedge (5) configured to be inserted between the spinous processes (9) of two vertebrae (2) to be treated, whereof at least one zone designed to be placed between the spinous processes of the vertebrae is made of an elastically deformable material. The assembly (1) further comprises: two compressive lateral elements (6), designed to be placed on either side of the wedge (5) in the longitudinal direction, said compressive lateral elements (6) being deformable between releasing positions, wherein they are relatively spaced apart from the wedge (5) in the transverse direction, and compressive positions, wherein they are relatively close to the wedge (5) in the transverse direction; and two lateral transmission elements (7), placed between the compressive lateral elements (6) and the wedge (5), configured to press against the wedge (5) in the transverse direction thereof, at the interspinous zone (10) of the wedge (5).

(57) Abrégé : Cet ensemble (1) comprend une cale interépineuse (5) conformée pour pouvoir être insérée entre les apophyses épineuses (9) de deux vertèbres (2) à traiter, dont au moins la zone destinée à être placée entre les apophyses épineuses des vertèbres est en un matériau élastiquement déformable. L'ensemble (1) comprend en outre : deux éléments

latéraux de compression (6), destinés à être placés de part et d'autre de la cale (5) dans le sens longitudinal, ces éléments latéraux de compression (6) étant déformables entre des positions de relâchement, dans lesquelles ils sont comparativement éloignés de la cale (5) dans le sens transversal, et des positions de compression, dans lesquelles ils sont comparativement rapprochés de la cale (5) dans le sens transversal ; et deux éléments latéraux de transmission (7), placés entre les éléments latéraux de compression (6) et la cale (5), conformés pour appuyer contre la cale (5) dans le sens transversal de celle-ci, à hauteur de la zone inter-épineuses (10) de la cale (5)

WO 2004/024010 A1



— avant l'expiration du délai prévu pour la modification des revendications, sera republiée si des modifications sont reçues

En ce qui concerne les codes à deux lettres et autres abréviations, se référer aux "Notes explicatives relatives aux codes et abréviations" figurant au début de chaque numéro ordinaire de la Gazette du PCT.

WO 2004/024010

PCT/FR2003/002635

POSTERIOR VERTEBRAL SUPPORT ASSEMBLY

5

The present invention concerns a posterior vertebral support assembly.

In the case of degeneration of the intervertebral disc of two vertebrae and/or of ligament distension, it is known to place a wedge between the spinous processes of the two vertebrae concerned, making it possible to support the vertebrae. In this regard, reference may be made to French Patent Applications Nos. FR 94 03716 and FR 98 02300 filed in the name of the proprietor of the present application.

The wedges according to these earlier patent applications are connected to the spinous processes of the two treated vertebrae by two independent ligaments, each of the ligaments passing through the wedge and tightly surrounding the corresponding spinous process. In the case of flexion of the spinal column in a forward direction, the spinous processes move away from one another, thereby causing longitudinal stretching of the wedge.

A drawback of this longitudinal stretching is that of stressing the wedge in longitudinal traction. The conditions of exertion of this traction can however be perfected, in particular in order to obtain assisted and contained control of the movement of the vertebrae, inasmuch as the repetition of this traction threatens to affect the durability of the wedge.

The present invention aims to remedy this drawback.

The assembly which it concerns comprises, in a manner known per se, an interspinous wedge configured to

be inserted between the spinous processes of two vertebrae to be treated, whereof at least the zone designed to be placed between the spinous processes of the vertebrae is made of an elastically deformable material.

According to the invention, the assembly further comprises:

- two compressive lateral elements, designed to be placed on either side of the wedge in the longitudinal direction, the compressive lateral elements being deformable between releasing positions, which they occupy when the vertebrae are in lordosis or when the spinal column is extended, and wherein they are relatively spaced apart from the wedge in the transverse direction, and compressive positions, which they occupy when the spinal column is in flexion, and wherein they are relatively close to the wedge in the transverse direction; and

- two lateral transmission elements, placed between the compressive lateral elements and the wedge, configured in order, when the compressive lateral elements are displaced in said compressive position, to press against the wedge in the transverse direction thereof, at the zone of the wedge designed to be placed between the spinous processes of the vertebrae.

The assembly according to the invention thus makes it possible to exert a progressive transverse compression on the wedge during the movement of flexion of the spinal column. This compression will reduce the shear stresses which are exerted on the wedge during intervertebral distancing combining tilting and forward sliding movements, owing to the containment of the displacements effected by the wedge.

The transverse compression of the wedge is preferable to pure longitudinal traction from the point of view of durability of the wedge, since it compensates the stressing of the wedge in the longitudinal direction.

5 The zone of the wedge designed to be placed between the spinous processes may be made of a material having limit of compressibility in the transverse direction of the wedge, and the assembly may then be configured such that this limit is reached when the treated vertebrae
10 attain a predetermined tilted position.

 It is also possible to configure the compressive lateral elements so that the elements have a limit of deformation in the transverse direction, this limit of deformation being reached when the treated vertebrae
15 attain a predetermined tilted position.

 The compressive lateral elements may be deformed nonelastically or elastically between said releasing and compressive positions. In the latter case, the return force of the elements to their neutral form contributes
20 to the damping of the tilting movement of the treated vertebrae.

 The compressive lateral elements may likewise be elastically deformable in the longitudinal direction of the compressive lateral elements, to the same end.

25 According to one embodiment of the invention, the compressive lateral elements are independent of one another, and each is connected to one of the treated vertebrae by one end and to the other treated vertebra by its other end. The connection of the ends of the
30 compressive lateral elements to the vertebrae may in particular be effected at the pedicles of the vertebrae, by means of pedicular screws engaged in eyelets or anchorage pieces included in the compressive lateral elements.

The connection of the compressive lateral elements to the vertebrae may also be effected, in the case of the overlying vertebra, by means of the passage of the elements beneath the laminae of that vertebra. This sub-
5 laminal passage makes it possible to preserve the pedicles and to be as central as possible in order, during the longitudinal elongation, to optimize the transverse thrust exerted on the wedge. In the case of the underlying vertebra, these same compressive lateral
10 elements may also be connected to an interpedicular transverse connecting bar, placed in position especially in the case of laminectomy on this vertebra, thus making it possible to reduce the concentration of strains. Similarly, the compressive lateral elements may be
15 connected to a connecting bar joined to a system of arthrodesis of the two underlying vertebrae.

According to another embodiment of the invention, the compressive lateral elements are formed by the two lateral portions of a circular strap engaged round the
20 spinous processes of the two treated vertebrae.

The lateral transmission elements themselves may be constituted by small bars bearing on the one hand against the compressive lateral elements and on the other hand against the wedge, especially via small support plates.

25 These same lateral transmission elements may likewise be constituted by bosses connected either to the compressive lateral elements or to the wedge. In the latter case, the bosses may be integral with the wedge.

The wedge may be made entirely of an elastically
30 deformable material such as a silicone; it may in particular comprise a core made of such a material and a textile envelope containing the core.

The wedge may also be formed by a band of resilient material, suitably curved.

The wedge may comprise a spring placed transversely at its zone designed to be placed between the spinous processes.

For greater understanding thereof, the invention is described again hereinafter with reference to the appended diagrammatic drawing representing, by way of non-limiting example, several possible embodiments of the assembly concerned.

Figure 1 is a rear view, very simplified, after the positioning on two vertebrae;

Figure 2 is a view similar to Figure 1, according to the second embodiment;

Figure 3 is a view similar to Figure 1, according to the third embodiment, only the spinous processes of the vertebrae being shown, and

Figure 4 is a view similar to Figure 3, according to a variant.

Figure 1 represents a posterior vertebral support assembly 1 placed in position on two vertebrae 2 affected by degeneration of the disc 3 and/or ligament distension.

The assembly 1 comprises an interspinous wedge 5, two compressive lateral elements 6 and two lateral transmission elements 7.

The wedge 5 is made of an elastically flexible material and comprises two curved recesses 8 allowing it to be inserted between the spinous processes 9 of the two vertebrae 2. It may in particular conform to the wedge according to French Patent Application No. FR 98 02300, that is to say:

- comprising a core made of silicone and an envelope made of polyester fabric,
- having an interspinous portion 10 having a height greater than the distance separating the spinous processes 9 when the vertebrae 2 are in lordosis in order

to be compressed when the wedge 5 is inserted between the processes 9 and to permit relief of the disc 3 and also restoration of the ligaments to functional tension, and

- having lugs 11 which bound the curved recesses 8, the lugs 11 broadly enveloping the processes 9 and being self-tightened round the processes 9 when said interspinous portion 10 is compressed.

The wedge 5 shown in Figure 1 differs, however, from the wedge according to the aforesaid French Patent Application No. FR 98 02300 in that it has domed lateral walls, imparting to it a relatively large width at said interspinous portion 10.

Each element 6 is formed by a lamina 15 made of elastically deformable synthetic material and by two eyelets 16 connected to the ends of the lamina 15. The latter is curved and comprises the element 7 at the median portion of its concave face, the concave face being designed to be turned towards the wedge 5.

The eyelets 16 are designed to receive pedicular screws permitting the anchorage of the elements 6 to the vertebrae 2.

Each element 7 is formed by a small rigid bar 20 fixed to an element 6, and is oriented substantially perpendicularly to the zone of the element 6 to which it is connected. The bar 20 is placed, after implantation, at the interspinous portion 10 of the wedge 5.

Each bar 20 is rigidly connected with a small plate 21 for bearing against the portion 10.

The assembly 1 according to the invention is in the position shown in Figure 1 when the vertebrae 2 are in lordosis.

In the case of extension of the spinal column, the vertebrae 2 pivot in a direction in which the processes 9 are brought closer to one another, thereby leading to

compression of the wedge 5 up to the limit of elasticity of the material constituting the core of the wedge. A damping of the pivoting movement of the vertebrae 2 is thus obtained as long as said limit of elasticity is not
5 reached, then the arresting of that same movement is obtained when the limit of elasticity is reached. During this compression of the wedge 5, the elements 6 are deformed in the direction in which their curvature is increased, contributing to the damping of the movement of
10 the vertebrae 2. The elements 6 likewise provide a perfect guarantee of maintenance of the position of the wedge 5 between the processes 9.

In the case of flexure of the spinal column, the vertebrae 2 pivot in a direction in which the processes 9
15 are spaced from each other, thereby leading to a reduction in the curvature of the elements 6. The elements 7 then press against the wedge 5 transversely, thereby also making it possible to dampen the movement of the vertebrae 2 then to arrest that movement when the
20 limit of elasticity of the material forming the core of the wedge 5 is reached and/or when the elements come close to a substantially rectilinear form.

Figure 2 shows an assembly 1 similar to that just described, except that the elements 6 are formed by the
25 two lateral portions of a circular strap 25 engaged round the processes 9 of the vertebrae 2. The other portions or elements already described, which are to be found again in this second embodiment, are not described again and are designated by the same numerical references as
30 before.

The strap 25 may be made of a slightly elastically stretchable material, and thus also contributes to the damping and then blocking of the pivoting movement of the vertebrae 2 in the case of flexion of the spinal column.

Figures 3 and 4 show a third embodiment of the assembly 1, in which the latter is similar to that shown in Figure 2, except that the small bars 20 and plates 21 are replaced by bosses 30 along which pass the lateral portions of the strap 25. The bosses 30 may be fixed to the wedge 5 or be integral therewith, as shown in Figure 3, or may be rigidly connected with the strap 25 and bear against the wedge 5, optionally at lateral recesses which the wedge includes to receive them, as shown in Figure 4.

As it appears from the foregoing, the invention provides a decisive improvement on the prior art, by providing a posterior vertebral support assembly which does not stress the wedge in the longitudinal direction during the movement of flexion of the spinal column. Perfect control of the movement of the vertebrae is obtained by means of this assembly, and the durability of the wedge is not affected by the repeated movements of the vertebrae.

It is self-evident that the invention is not limited to the embodiment described above by way of example, but that on the contrary it encompasses all the variants of embodiment coming within the scope of protection defined by the appended claims.

C L A I M S

1. A posterior vertebral support assembly (1), comprising an interspinous wedge (5) configured to be inserted between the spinous processes (9) of two vertebrae (2) to be treated, whereof at least the zone designed to be placed between the spinous processes of the vertebrae is made of an elastically deformable material;
- 10 an assembly (1) characterized in that it comprises:
- two compressive lateral elements (6), designed to be placed on either side of the wedge (5) in the longitudinal direction, the compressive lateral elements (6) being deformable between releasing positions, which they occupy when the vertebrae (2) are in lordosis or when the spinal column is extended, and wherein they are relatively spaced apart from the wedge (5) in the transverse direction, and compressive positions, which they occupy when the spinal column is in flexion, and wherein they are relatively close to the wedge (5) in the transverse direction; and
 - two lateral transmission elements (7), placed between the compressive lateral elements (6) and the wedge (5), configured in order, when the compressive lateral elements (6) are displaced in said compressive position, to press against the wedge (5) in the transverse direction thereof, at the zone (10) of the wedge (5) designed to be placed between the spinous processes (9) of the vertebrae (2).
- 20
2. A support assembly (1) according to claim 1, characterized in that the material constituting the zone of the wedge (5) designed to be placed between the spinous processes has a limit of compressibility in the transverse direction of the wedge (5), and in that the
- 30

assembly (1) is configured such that this limit is reached when the treated vertebrae (2) attain a predetermined tilted position.

3. A support assembly (1) according to claim 1 or
5 claim 2, characterized in that the compressive lateral elements (6) are configured so as to have a limit of deformation in the transverse direction, this limit of deformation being reached when the treated vertebrae (2) attain a predetermined tilted position.

10 4. A support assembly (1) according to any one of claims 1 to 3, characterized in that the compressive lateral elements (6) are configured so as to be elastically deformable between said releasing and compressive positions.

15 5. A support assembly (1) according to any one of claims 1 to 4, characterized in that the compressive lateral elements (6) are configured so as to be elastically deformable in the longitudinal direction of the compressive lateral elements (6).

20 6. A support assembly (1) according to any one of claims 1 to 5, characterised in that the compressive lateral elements (6) are independent of one another, and in that each is connected to one of the treated vertebrae (2) by one end and to the other treated vertebra (2) by
25 its other end.

7. A support assembly (1) according to claim 6, characterised in that the compressive lateral elements (6) comprise eyelets (16) or anchorage pieces designed to receive pedicular anchorage screws for anchoring the
30 compressive lateral elements (6) to the vertebrae (2).

8. A support assembly (1) according to any one of claims 1 to 5, characterized in that the compressive lateral elements are configured so as to be able to pass beneath the laminae of the overlying vertebra.

9. A support assembly (1) according to any one of claims 1 to 5, characterized in that the compressive lateral elements are configured so as to be able to be connected to an interpedicular transverse connecting bar, placed in position on the underlying vertebra especially in the case of laminectomy.

10. A support assembly (1) according to any one of claims 1 to 5, characterized in that the compressive lateral elements are configured so as to be able to be connected to a connecting bar joined to a system of arthrodesis of the two underlying vertebrae.

11. A support assembly (1) according to any one of claims 1 to 5, characterized in that the compressive lateral elements (6) are formed by the two lateral portions of a circular strap (25) engaged round the spinous processes (9) of the two treated vertebrae (2).

12. A support assembly (1) according to any one of claims 1 to 11, characterized in that the lateral transmission elements (7) are constituted by small bars (2) bearing on the one hand against the compressive lateral elements (6) and on the other hand against the wedge (5).

13. A support assembly (1) according to any one of claims 1 to 11, characterized in that the lateral transmission elements (7) are constituted by bosses (30) connected either to the compressive lateral elements (6) or to the wedge (5).

FIG 1

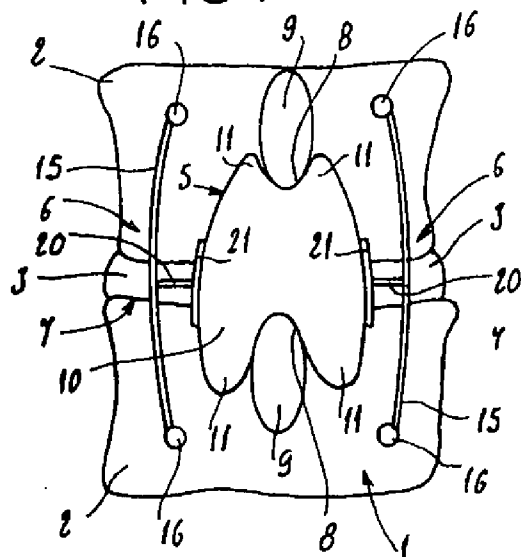


FIG 2

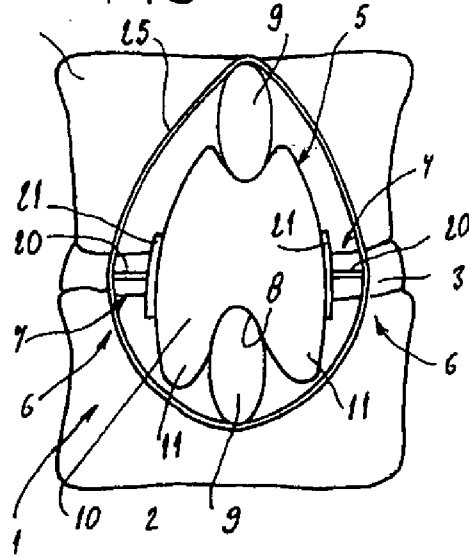


FIG 3

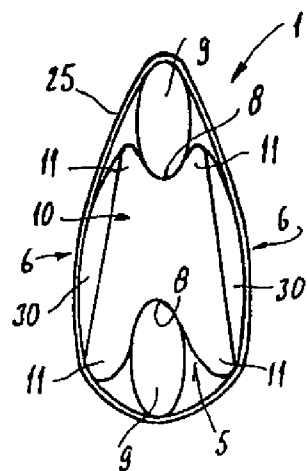


FIG 4

