



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 404 574 B1

(12)

EUROPEAN PATENT SPECIFICATION

(49) Date of publication of patent specification: **26.10.94** (51) Int. Cl.⁵: **A61G 5/10, A61G 5/12**

(21) Application number: **90306802.1**

(22) Date of filing: **21.06.90**

Divisional application 94200726.1 filed on
21/06/90.

(54) **Wheelchair.**

(30) Priority: **21.06.89 US 369645**

(43) Date of publication of application:
27.12.90 Bulletin 90/52

(45) Publication of the grant of the patent:
26.10.94 Bulletin 94/43

(84) Designated Contracting States:
DE SE

(56) References cited:
WO-A-88/07944
DE-A- 2 540 054
DE-U- 7 235 052
FR-A- 2 454 800
US-A- 4 487 453

(73) Proprietor: **INVACARE CORPORATION**
899 Cleveland Street
Elyria, Ohio 44036 (US)

(72) Inventor: **Quintile, Mark J.**
719 Salem Lane
Brunswick, Ohio 44212 (US)

(74) Representative: **Jones, Colin et al**
W.P. THOMPSON & CO.
Coopers Building
Church Street
Liverpool L1 3AB (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 404 574 B1

Description

The present invention relates to wheelchairs. In particular, the present invention relates to wheelchairs having reclinable seat backs.

As is well known in the art, the comfort of a person using a wheelchair often can be enhanced by adjusting the angle of the wheelchair's seat back. Consequently, many arrangements have been proposed and employed to provide a wheelchair with a reclining seat back.

In a typical construction, the seat back panel is supported by a pair of side posts pivotally connected to the wheelchair chassis proximate to the rear edge of the seat bottom. A telescoping strut is connected between the upper end of each side post and a point on the chassis. The struts elongate as the seat back is moved towards an upright position and contract as the seat back is reclined.

In one seat back arrangement presently in use, each strut comprises a tubular lower member pivotally connected to the chassis below and behind the seat bottom and a rod-shaped upper member pivotally connected to one of the side posts and received in the lower member. The handles for the wheelchair are fixed to the upper ends of the upper strut members, which are rotatable about the strut axes. The outer surface of the upper strut member received in the lower strut member has a longitudinally extending flat formed therein and includes threads formed over the remainder of its circumference. These threads mesh with a threaded engagement member brazed on the lower strut member to lock the seat back in a desired angular position relative to the seat bottom. When the wheelchair attendant rotates the handles outwardly, the threads of the upper members disengage from the engagement members of the lower members, and the attendant can elongate or contract the struts to adjust the inclination of the seat back.

Although the above-described reclining wheelchair design has met with commercial success, it can be unwieldy when the attendant attempts to adjust the position of the seat back while the wheelchair is occupied, particularly when occupied by a heavy patient. Releasing the engagement between the upper and lower strut members requires the attendant to support the weight of the patient during adjustment. When the attendant rotates the two handles outwardly to unlock the seat back, however, he or she typically exerts a downward force on the seat back just as it is released. Quick reflexes and considerable strength often are required to prevent the seat back from snapping to the reclined position while occupied.

One object of the present invention is to provide a wheelchair with a reclining seat back that can be adjusted easily while the wheelchair is

occupied.

The present invention also is intended to provide a reclining seat back with a release mechanism actuated in a manner that will naturally resist sudden downward movement of the seat back.

FR-A-2454800 discloses a wheelchair having a chassis supporting a substantially horizontal seat bottom and a reclining seat back assembly which comprises:

- a. a frame member having a proximal end pivotally connected to the chassis proximate to the seat bottom, said frame member being pivotable relative to the seat bottom through a range of angles;
- b. an extendible strut including a hollow outer strut member and an inner strut member, said outer strut member having an open end through which one end of said inner strut member is received, one end of said strut being pivotally connected to the chassis and the other end of said strut being pivotally connected to said frame member at a distal end thereof, said inner strut member sliding relative to said outer strut member when said frame member is pivoted relative to the seat bottom; and
- c. means for releasably locking said frame member at a desired angle relative to said seat bottom, said locking means including:
 - an engaging member movably mounted on said outer strut member and having a second engaging surface for engagement with a first engaging surface on said inner strut member,
 - means biasing said engaging surfaces into engagement with one another for preventing movement of said strut members relative to one another,
 - actuating means mounted on said frame member at said distal end thereof, and
 - means linking said actuating means to said engaging member so that movement of said actuating means moves said engaging member against said biasing means to disengage said engaging surfaces and permit movement of said strut members relative to one another.

The wheelchair according to the present invention is characterised in that the said one end of said inner strut member is within said outer strut member and in that the first engaging surface on the inner strut member is adjacent the said one end thereof and has a toothed profile and the second engaging surface on the engaging member has a profile complementary to the first engaging surface.

The wheelchair may include means for urging the frame member to pivot towards the upright position. The urging means preferably includes a lever arm fixed to the frame member at the proximal end thereof, an extendable link assembly in-

cluding a first link member having a first end pivotally connected to the lever arm and a second link member having a second end pivotally connected to the chassis, and a spring connected between the first and second link members. The first and second link members move relative to each other along a common link axis as the frame member is pivoted relative to the seat bottom, with the distance between the first end of the first link member and the second end of the second link member decreasing as the frame member is pivoted towards the upright position and increasing as the frame member is pivoted towards the reclined position. The spring urges the first and second ends towards each other to urge the frame member towards the upright position.

The invention is further described by way of example, with reference to the accompanying drawings, in which:

FIG. 1 is a partially cut away side elevational view of the left side of a wheelchair including a reclining seat back assembly of the present invention;

FIG. 2 is a partially cut away and exploded rear perspective view of a wheelchair chassis including the reclining seat back assembly;

FIG. 3 is a partially cut away side elevational view of the lateral inside aspect of the right side of the wheelchair of FIG. 1, showing the seat back in both upright and reclined positions;

FIG. 4 is a partially cut away elevational view of locking means of the seat back assembly;

FIG. 5 is a cross-sectional view of the locking means, taken along line V-V of FIG. 4;

FIG. 6 is a cross-sectional view of the locking means, taken along line VI-VI of FIG. 5;

FIG. 7 is front view of the spring housing and engaging member of the locking means; and

FIGS. 8 and 9 are partial cross-sectional views of two alternative embodiments of means for urging the frame member to pivot towards the upright position.

Referring to Fig.1, a wheelchair 10, according to the invention incorporates an embodiment of reclining seat back assembly. Wheelchair 10 includes chassis 12, which, as shown in FIG. 2, includes left and right chassis halves 12A and 12B. Chassis halves 12A and 12B are interconnected in a parallel, spaced-apart relationship by a pair of cross braces (not shown). Wheelchair 10 is supported by a pair of driving wheels 14 and a pair of swivelable caster wheels 16. FIG. 1 shows only the left-side driving wheel 14 and caster wheel 16.

Each chassis half 12A, 12B includes lower chassis bar 18, which is substantially horizontal, and L-shaped upper chassis bar 20. Chassis bars 18 and 20 are connected together by vertical connecting bar 22. Lower chassis bar 18, upper chas-

sis bar 20, and connecting bar 22 preferably are connected by welding to provide rigid chassis halves 12A and 12B.

Wheelchair 10 further includes a pair of seat support bars 24, each of which is mounted on the horizontal portion of upper chassis bar 20 of a respective chassis half 12A, 12B. Only one seat support bar 24 is shown in FIG. 1. Wheelchair 10 also includes substantially horizontal seat bottom panel 26 connected between support bars 24. Seat bottom panel 26 preferably is connected to seat support bars 24 by threaded fasteners 27.

Wheelchair 10 also includes a pair of C-shaped armrests 28, one of which is shown with phantom lines in FIG. 1. Each chassis half 12A, 12B includes forward armrest socket 30 mounted on upper chassis bar 20 and rearward armrest socket 32 mounted on connecting bar 22. The ends of armrest 28 fit into and are supported by sockets 30 and 32.

Wheelchair 10 is provided with a reclining seat back assembly 34. The reclining seat back assembly 34 includes frame member 36 having a proximal end 38 and a distal end 40. Proximal end 38 of frame member 36 is pivotally connected to chassis 12 proximate to seat bottom panel 26. With reference to FIG. 3, which shows the inside-facing portion of the right side of wheelchair 10, frame member 36 is pivotable relative to the horizontal seat bottom through a range of angles, from an upright position shown with solid lines to a reclined position shown with phantom lines.

As shown in FIG. 2, frame member 36 preferably includes a pair of parallel, spaced-apart side posts 42, each of which includes a proximal end 44 and a distal end 46. Each proximal end 44 is pivotally connected to upper clevis 48 mounted atop connecting bar 22 of its respective chassis half 12A, 12B. Each side post 42 pivots about pivot pin 50 passing through upper clevis 48 and proximal end 44. Frame member 36 also includes a handle 52 fixed to each side post 42 at distal end 46. A handgrip 53, preferably formed of resilient foam rubber, is fitted over each handle 52 to provide greater comfort for the wheelchair attendant. With reference to FIG. 1, seat back panel 54 is connected between side posts 42. Seat back panel 54 preferably is fastened to side posts 42 by threaded fasteners 55.

With reference to FIG. 2, wheelchair 10 preferably includes connecting bar 56 linking side posts 42 together. Each side post 42 includes connector bracket 58 proximate handle 52. Connector bar 56 is connected to connector brackets 58 by threaded knobs 60, only one of which is shown in FIG. 2.

Seat back assembly 34 includes at least one extendable strut 62 including a hollow outer strut member 64 and an inner strut member 66. The lower end of outer strut member 64 is pivotally

connected to chassis 12, and the upper end of inner strut member 66 is pivotally connected to frame member 36 proximate to distal end 40. As shown in FIG. 3, strut 62 contracts as frame member 36 is pivoted toward the reclined position and elongates as frame member 36 is pivoted toward the upright position.

As shown in FIG. 2, seat back assembly 34 preferably includes a pair of struts 62. Each outer strut member 64 has a lower end 68 pivotally connected to lower clevis 70 mounted on the rearward end of lower chassis bar 18. Lower end 68 preferably is angled rearwardly from the remaining portion of outer strut member 68. Upper end 72 of each inner strut member 66 is pivotally connected to distal end 46 of a side post 42. Specifically, each upper end 72 is pivotally connected via pin 76 to strut bracket 74 mounted on side post 42. Lower end 78 of inner strut member 66 is received within outer strut member 64 through the open upper end 80 of outer strut member 64. As shown with respect to right-side strut 62 in FIG. 2, each inner strut member 66 has adjacent its lower end 78 a first engaging surface 82 with a toothed profile. The toothed profile of first engaging surface 82 preferably comprises helical threads.

Each outer strut member 64 includes means for rotatably supporting a wheelchair driving wheel. As embodied herein, the wheel supporting means includes driving wheel bearings 83, one of which is fixed to each outer strut member 64 proximate its lower end 68, as shown in FIG. 1. Bearings 83 rotatably support driving wheels 14 on outer strut members 64. Consequently, as frame member 36 is pivoted toward its reclined position, as shown in FIG. 3, driving wheels 14 move rearwardly to provide more secure support for the patient sitting in wheelchair 10.

Reclining seat back assembly 34 includes means for releasably locking frame member 36 at a desired angle relative to the seat bottom. As embodied herein and as shown in FIGS. 2 and 4 to 7, the locking means includes engaging member 84 movably mounted on each outer strut member 64. Engaging member 84 includes second engaging surface 86 having a profile complementary to first engaging surface 82 of inner strut member 66. Engaging member 84 preferably is a half nut with second engaging surface 86 comprising helical threads that mate with first engaging surface 82. However, first and second engaging surfaces 82 and 86 can comprise a variety of complementary profiles other than helical threaded profiles. Engaging member 84 is disposed within aperture 88 formed in the inwardly facing surface of each outer strut member 64 to permit engagement between engaging surfaces 82 and 86.

The locking means also includes means for biasing second engaging surface 86 of each engaging member 84 into engagement with first engaging surface 82 of its respective inner strut member 66 to prevent movement of inner strut members 66 relative to outer strut members 64, thereby locking frame member 36 at a desired angle. As embodied herein, the biasing means includes a pair of coil springs 90, each of which is contained within a spring housing 92 mounted on each outer strut member 64 and covering aperture 88. Spring housing 92 is secured to outer strut member 64 by mounting strap 94, bolts 96, and nuts 98. As shown in FIGS. 5 and 6, coil spring 90 is disposed between spring seat 100 of spring housing 92 and spring face 102 of engaging member 84.

The locking means of reclining seat back assembly 34 further includes a pair of actuating levers 104 pivotally mounted on frame member 36 at the distal end thereof. Specifically, each actuating lever 104 is pivotally connected to a lever bracket 106 fixed to distal end 46 of each side post 42 immediately beneath handle 52. The locking means also includes means for linking actuating lever 104 to engaging member 84 so that pivoting actuating lever 104 in a preselected direction moves engaging member 84 against the biasing means of coil spring 90 to disengage first and second engaging surfaces 82, 86 and permit movement of inner strut members 66 relative to outer strut members 64.

As embodied herein, the linking means includes a pair of Bowden cable assemblies 108. Each Bowden cable assembly 108 includes a sheathed wire 110 having engaging lugs 112 and 113 at its upper and lower ends, respectively. Each Bowden wire assembly 108 is connected to a respective side post 42 by straps 114. Engaging lug 112 at the upper end of each Bowden cable assembly is connected to actuating lever 104, and the lower engaging lug 113 is connected to engaging member 84. Actuating levers 104 and engaging members 84 are provided with slots to accommodate engaging lugs 112, 113. Bowden cable assembly 108 also includes upper and lower ferrules 116 and 117, which are threaded into strut bracket 74 and spring housing 92, respectively. Ferrules 116, 117 preferably are secured in place by nuts 118.

When actuator levers 104 are pivoted upwardly toward handles 52, as shown with phantom lines in FIG. 4, each engaging lug 112 is displaced upwardly, which causes lower engaging lug 113 and connected engaging member 84 to be displaced away from inner strut member 66 (to the left as seen in FIGS. 5 and 6), thereby disengaging second engaging surface 86 from first engaging surface 82. As a result, inner strut members 66 are

released from the locking means and frame member 36 can be pivoted to the desired seat back angle. When actuating levers 104 are released, springs 90 force engaging members 84 back into engagement with inner strut members 66, thereby relocking frame member 36.

Although actuating levers 104 can be located in a number of positions, it is preferred to position them immediately beneath handles 52 and to orient the Bowden cable assembly so that upward pivoting of levers 104 disengages engaging member 84. In this preferred configuration, the wheelchair attendant imparts an upward force on the seat back assembly when disengaging the locking means. Consequently, the attendant is better able to support the weight of the released seat back, which is particularly important when the wheelchair is occupied by a patient.

To provide further assistance in supporting frame member 36 when the wheelchair is occupied, the reclining seat back assembly includes means for urging frame member 36 to pivot toward an upright position relative to the seat bottom. As embodied herein, the urging means includes a pair of lever arms 120, each of which is fixed to proximal end 44 of a side post 42. In the embodiments shown in the drawings, with specific reference to FIGS. 2, 3, 8, and 9, lever arm 120 is T-shaped, with its cross arm perpendicular to side post 42. Each lever arm 120 extends beyond pivot pin 50 of its respective side post.

The urging means also includes an extendable link assembly 122. In the embodiment shown in FIGS. 2, 3, and 8, link assembly 122 includes tubular first link member 124 and second tubular link member 126. Second link member 126 has a smaller diameter than first link member 124, is received within first link member 124, and can slide axially with respect to first link member 124 along a link axis 128. Affixed to the upper end of first link member 124 is connecting rod 130, which is pivotally connected to one end of the cross arm of lever arm 120 by pin 132. As shown in FIG. 2, lower end 134 of second link member 126 is pivotally connected to mounting lug 136 affixed to the underside of lower chassis bar 18 by pin 138. As shown in FIG. 3, first and second link members 124, 126 move relative to each other along link axis 128 as frame member 36 is pivoted between the upright position shown with solid lines and the reclined position shown with phantom lines. The distance between connecting bar 130 at the upper end of first link member 124 and lower end 134 of second link member 126 decreases as frame member 36 is pivoted toward the upright position and increases as frame member 36 is pivoted toward the reclined position.

A spring is connected between first link member 124 and second link member 126 to urge contraction of link assembly 122 and urge frame member 36 toward the upright position. In the embodiment shown in FIG. 8, the spring comprises coil tension spring 140, which has one end connected to pin 138 at lower end 134 and a second end connected to pin 142 at the upper end of first link member 124.

In a second embodiment of the urging means shown in FIG. 9, link assembly 122 includes first link member 143, which is comprised of piston rod 144 having its upper end pivotally connected to lever arm 120 by pin 146. Piston head 148 is fixed to the lower end of piston rod 144. First link member 143 is slidably received within tubular second link member 150, which is pivotally connected at its lower end to mounting lug 136 by pin 152. Surrounding piston rod 144 at the upper end of second link member 150 is stopper member 154, which serves as a spring support for compression coil spring 156, which spirals around piston rod 144 between stopper member 154 and the underside of piston head 148. Spring 156 urges piston head 148 towards the lower end of second link member 150, which in turn urges the seat back assembly towards the upright position.

In the embodiment shown in the drawings, lever arm 120 is substantially T-shaped and is connected to the upper end of link assembly 122 at a position spaced forwardly from a plane passing through side post 42. The preferred shape shown in the drawings enables use of the same lever arm on either the right or left side post. L-shaped lever arms also can be used to achieve the same leverage effect as shown in the drawings. Alternatively, a straight lever arm can be used.

Other modifications and variations can be made in the wheelchair of the invention. For example, although the wheelchair shown in the drawings has paired struts, locking mechanisms, and link assemblies, a wheelchair can be provided with only one lockable strut or link assembly. In addition, the orientation of the struts can be reversed so that the outer strut members are connected to the distal ends of the side posts and the inner strut members are connected to the chassis. Linking means other than Bowden cables, for example, rod or bar links, can be used to link the actuating levers to the engaging members. Furthermore, devices other than coil springs, such as elastic bands or gas springs, can be used to operate the urging means. The invention is, therefore, not limited to the specific details and illustrated examples shown and described. Accordingly, the present invention covers such modifications and variations.

Claims

1. A wheelchair having a chassis (12) supporting a substantially horizontal seat bottom (26) and a reclining seat back assembly (34) which comprises:
 - a. a frame member (36) having a proximal end (38) pivotally connected to the chassis (12) proximate to the seat bottom (26), said frame member (36) being pivotable relative to the seat bottom through a range of angles; 10
 - b. an extendible strut (62) including a hollow outer strut member (64) and an inner strut member (66), said outer strut member (64) having an open end through which one end of said inner strut member (66) is received, one end (68) of said strut (62) being pivotally connected to the chassis (12) and the other end (72) of said strut (62) being pivotally connected to said frame member (36) at a distal end (46) thereof, said inner strut member (66) sliding relative to said outer strut member (64) when said frame member (36) is pivoted relative to the seat bottom (26); and 15
 - c. means for releasably locking said frame member (36) at a desired angle relative to said seat bottom (26), said locking means including: 20
 - an engaging member (84) movably mounted on said outer strut member (64) and having a second engaging surface (86) for engagement with a first engaging surface (82) on said inner strut member (66), 25
 - means (90) biasing said engaging surfaces (82,86) into engagement with one another for preventing movement of said strut members (64,66) relative to one another,
 - actuating means (104) mounted on said frame member (36) at said distal end (40) thereof, and 30
 - means (108) linking said actuating means (104) to said engaging member (84) so that movement of said actuating means (104) moves said engaging member (84) against said biasing means (90) to disengage said engaging surfaces (82,86) and permit movement of said strut members (64,66) relative to one another; 35
 - characterised in that the said one end of said inner strut member (66) is within said outer strut member (64) and in that the first engaging surface (82) on the inner strut member (66) is adjacent the said one end thereof and has a toothed profile and the second engaging surface (86) on the engaging member (84) has a profile complementary to the first 40
- engaging surface (82). 45
2. A wheelchair according to claim 1, wherein said profiles of said first and second engaging surfaces (82,86) comprise helical threads.
3. A wheelchair according to claim 1 or 2, wherein said outer strut member (64) has an aperture (88) located between its ends, and said engaging member (84) is mounted within said aperture (88).
4. A wheelchair according to claim 3, wherein said locking means further includes a spring housing (92) covering said aperture (88), and said biasing means includes a coil spring (90) disposed between said housing (92) and said engaging member (84).
5. A wheelchair according to any of claims 1 to 4, wherein said linking means includes a Bowden cable assembly (108) connected by one end (112) to said actuating means (104) and by its other end (113) to said engaging member (84).
6. A wheelchair as claimed in any of claims 1 to 5, wherein said seat back assembly (34) comprises a seat back panel (54) mounted on said frame member (36).
7. A wheelchair according to any of preceding claims which has a pair of rotatable driving wheels (14) and in which the frame member (36) includes a pair of substantially parallel side posts (42) pivotally connected to said chassis (12), each of said side posts (42) being provided with a handle (53) extending substantially orthogonally therefrom at the distal end (46) thereof; the seat back assembly (34) includes a pair of extendable struts (62); said locking means includes a pair of engaging members (84) each movably mounted on the outer strut member (64) of the respective strut (62); and the seat back assembly (34) also includes a pair of actuating levers (104) each pivotally mounted on a respective side post (42) adjacent its respective handle (53).
8. A wheelchair according to claim 7, wherein said actuating levers (104) are moved towards said handles (53) to disengage said engaging surfaces (82,86).
9. A wheelchair according to claim 8, wherein said actuating levers (104) are mounted on said side posts (42) immediately below said handles (53).

10. A wheelchair according to claim 7,8 or 9, wherein each of said outer strut members (64) includes means (83) rotatably supporting a respective one of said driving wheels (14).

5

11. A wheelchair as claimed in claims 1 to 10, further comprising means (140 or 156) for urging said frame member (36) to pivot towards an upright position relative to the seat bottom (26).

10

12. A wheelchair according to claim 11, wherein said means for urging said frame member (36) member to pivot towards said upright position includes a lever arm (120) fixed to said frame member (36) at said proximal end (38) thereof, an extendable link assembly (122) including a first link member (124 or 143) pivotally connected by a first end to said lever arm (120) and a second link member (126 or 150) pivotally connected by a second end to the chassis (12), said first and second link members (124 and 126 or 143 and 150) moving relative to each other along a common link axis as said frame member (36) is pivoted relative to the seat bottom (26), the distance between the ends of said link assembly (122) decreasing as said frame member (36) is pivoted towards said upright position and increasing as said frame member (36) is pivoted towards said reclined position, and a spring (140 or 156) connected between said first and second link members (124 and 126 or 143 and 150), said spring urging said ends of said link assembly (122) towards each other to urge said frame member (36) towards said upright position.

15

20

25

30

35

13. A wheelchair according to claim 12, wherein said spring is a tension spring (140).

40

14. A wheelchair according to claim 12, wherein said spring is a compression spring (156).

15. A wheelchair according to claim 14, wherein said first link member (143) includes a piston rod (144) having a piston head (148) opposite said first end along said link axis; said second link member (150) includes a cylinder having a spring support (154) opposite said second end along said link axis; and said compression spring (156) is a coil spring disposed along said link axis between said piston head (148) and said spring support (154).

45

50

Patentansprüche

55

1. Rollstuhl mit einem Fahrgestell (12), das eine im wesentlichen horizontale Sitzfläche (26) und

eine zurückneigbare Rücklehnenanordnung (34) aufweist, mit den folgenden Merkmalen:

a. ein Rahmenteil (36), mit einem nächstgelegenen Ende (38), das schwenkbar mit dem Fahrgestell (12) nahe der Sitzfläche (26) verbunden ist, wobei das genannte Rahmenteil (36) relativ zur Sitzfläche über einem Bereich von Winkeln schwenkbar ist;

b. eine verlängerbare Strebe (62) mit einem hohlen, äußeren Strebenteil (64) und einem inneren Strebenteil (66), wobei das genannte äußere Strebenteil (64) ein offenes Ende aufweist, durch welches ein Ende des genannten inneren Strebenteils (66) aufgenommen ist, wobei das eine Ende (68) der genannten Strebe (62) schwenkbar mit dem Fahrgestell (12) und das andere Ende (72) der genannten Strebe (62) schwenkbar mit dem Rahmenteil (36) an dessen abgelegtem Ende (46) verbunden ist und wobei das genannte innere Strebenteil (66) relativ zum genannten äußeren Strebenteil (64) verschieblich ist, wenn das genannte Rahmenteil (36) relativ zur Sitzfläche (26) geschwenkt wird; und

c. eine Einrichtung zum lösbaren Verriegeln des genannten Rahmentails (36) bei einem gewünschten Winkel relativ zur genannten Sitzfläche (26), wobei die genannte Verriegelungseinrichtung die folgenden Merkmale aufweist:

ein Eingriffsteil (84), das beweglich am genannten äußeren Strebenteil (64) angebracht ist und eine zweite Eingriffsfläche (86) zum Eingriff mit einer ersten Eingriffsfläche (82) am genannten inneren Strebenteil (66) aufweist,

eine Einrichtung (90), die die genannten Eingriffsflächen (82, 86) zum gegenseitigen Eingriff hin belastet, um die Bewegung der genannten Strebenteile (64, 66) relativ zueinander zu verhindern,

eine Betätigungseinrichtung (104), die am genannten Rahmenteil (36) an dessen abgelegtem Ende (40) angebracht ist, und

eine Einrichtung (108), die die genannte Betätigungseinrichtung (104) mit dem genannten Eingriffsteil (84) so koppelt, daß die Bewegung der genannten Betätigungseinrichtung (104) das genannte Eingriffsteil (84) gegen die genannte Belastungseinrichtung (90) bewegt, um den Eingriff der genannten Eingriffsfläche (82, 86) zu lösen und die Bewegung der genannten Strebenteile (64, 66) relativ zueinander zuzulassen;

dadurch **gekennzeichnet**, daß das genannte eine Ende des inneren Strebenteils (66) innerhalb des genannten anderen Strebenteils (64) liegt und daß die erste Eingriffsfläche (82)

am inneren Strebenteil (66) neben dessen einem Ende liegt und ein gezahntes Profil aufweist, und die zweite Eingriffsfläche (86) am Eingriffsteil (84) ein zur ersten Eingriffsfläche (82) komplementäres Profil aufweist.

2. Rollstuhl nach Anspruch 1, worin die genannte Profile der genannten ersten und zweiten Eingriffsflächen (82, 86) wendelförmige Gewindengänge aufweisen.
3. Rollstuhl nach Anspruch 1 oder 2, worin das genannte äußere Strebenteil (64) eine zwischen seinen Enden angeordnete Öffnung (88) aufweist, und das genannte Eingriffsteil (84) innerhalb der genannten Öffnung (88) angebracht ist.
4. Rollstuhl nach Anspruch 3, worin die genannte Verriegelungseinrichtung ferner ein Federgehäuse (92) aufweist, das die genannte Öffnung (88) abdeckt, und die genannte Belastungseinrichtung eine Schraubenfeder (90) umfaßt, die zwischen dem genannten Gehäuse (92) und dem genannten Eingriffsteil (84) angeordnet ist.
5. Rollstuhl nach irgendeinem der Ansprüche 1 bis 4, worin die genannte Koppelungseinrichtung eine Bowdenzuganordnung (108) aufweist, die mit dem einen Ende (112) an der genannten Betätigungseinrichtung (104) und mit ihrem anderen Ende (113) am genannten Eingriffsteil (84) angesetzt ist.
6. Rollstuhl nach irgendeinem der Ansprüche 1 bis 5, worin die genannte Rücklehnenanordnung (34) eine Rücklehnenplatte (54) aufweist, die am genannten Rahmenteil (36) angebracht ist.
7. Rollstuhl nach irgendeinem vorangehenden Anspruch, der ein Paar drehbarer Antriebsräder (14) aufweist und bei dem das Rahmenteil (36) ein Paar im wesentlichen paralleler Seitenpfosten (42) aufweist, die schwenkbar mit dem genannten Fahrgestell (12) verbunden ist, wobei jeder der genannten Seitenpfosten (42) mit einem Griff (53) versehen ist, der sich im wesentlichen rechtwinklig hiervon an dessen abgelegenen Ende (46) erstreckt; die Rücklehnenanordnung (34) ein Paar verlängerbarer Streben (62) aufweist; die genannte Verriegelungseinrichtung ein Paar Eingriffsteile (84) umfaßt, von denen jedes am äußeren Strebenteil (64) der jeweiligen Strebe (62) angebracht ist; und die Rücklehnenanordnung (34) auch ein Paar Betätigungshebel (104) umfaßt, von denen je-

der schwenkbar am jeweiligen Seitenpfosten (42) neben dessen jeweiligem Griff (53) angebracht ist.

- 5 8. Rollstuhl nach Anspruch 7, worin die genannten Betätigungshebel (104) zu den Griffen (53) hin bewegt werden, um den Eingriff der genannten Eingriffsflächen (82, 86) zu lösen.
- 10 9. Rollstuhl nach Anspruch 8, worin die genannten Betätigungshebel (104) an den genannten Seitenpfosten (42) unmittelbar unter den genannten Griffen (53) angebracht sind.
- 15 10. Rollstuhl nach Anspruch 7, 8 oder 9, worin jedes der genannten äußeren Strebenteile (64) eine Einrichtung (83) umfaßt, die drehbar jeweils eines der genannten Antriebsräder (14) lagert.
- 20 11. Rollstuhl nach Anspruch 1 bis 10, ferner mit einer Einrichtung (140 oder 156), um das genannte Rahmenteil (36) zu zwingen, in eine aufrechte Lage relativ zur Sitzfläche (26) zu schwenken.
- 25 12. Rollstuhl nach Anspruch 11, worin die genannte Einrichtung, um das genannte Rahmenteil (36) zu zwingen, zur genannten aufrechten Lage hin zu schwenken, einen Hebelarm (120) umfaßt, der am genannten Rahmenteil (36) an dessen genanntem, nächstgelegenen Ende (38) befestigt ist, eine verlängerbare Koppelungsanordnung (122), die ein erstes Koppelglied (124 oder 143) umfaßt, das schwenkbar mit dem ersten Ende am genannten Hebelarm (120) angesetzt ist, sowie ein zweites Koppelglied (126 oder 150), das schwenkbar mit einem zweiten Ende am Fahrgestell (12) angesetzt ist, wobei das genannte erste und zweite Koppelglied (124 und 126 oder 143 und 150) sich relativ zueinander längs einer gemeinsamen Koppelungsachse bewegen, wenn das genannte Rahmenteil (36) relativ zur Sitzfläche (26) verschwenkt wird, wobei der Abstand zwischen den Enden der genannten Koppelungsanordnung (122) abnimmt, wenn das genannte Rahmenteil (36) zur genannten aufrechten Lage hin geschwenkt wird, oder zunimmt, wenn das genannte Rahmenteil (36) zur genannten geneigten Lage hin geschwenkt wird, sowie eine Feder (140 oder 156), die zwischen dem genannten ersten und zweiten Koppelglied (124 und 126 oder 143 und 150) angesetzt ist, wobei die genannte Feder die genannten Enden der genannten Koppelungsanordnung (122) aufeinander zu belastet, um das Rahmenteil (36) in seine aufrechte Lage zu
- 30
- 35
- 40
- 45
- 50
- 55

drücken.

13. Rollstuhl nach Anspruch 12, worin die genannte Feder eine Zugfeder (140) ist.

14. Rollstuhl nach Anspruch 12, worin die genannte Feder eine Druckfeder (156) ist.

15. Rollstuhl nach Anspruch 14, worin das genannte erste Koppelglied (143) eine Kolbenstange (144) mit einem Kolbenkopf (148) gegenüber dem genannten ersten Ende längs der genannten Koppelungsachse aufweist; das genannte zweite Koppelglied (150) einen Zylinder umfaßt, der eine Federhalterung (154) gegenüber dem genannten zweiten Ende längs der genannten Koppelungsachse aufweist; und die genannte Druckfeder (156) eine Schraubenfeder ist, die längs der genannten Koppelungsachse zwischen dem genannten Kolbenkopf (148) und der genannten Federhalterung (154) angeordnet ist.

Revendications

1. Chaise roulante ayant un châssis (12) supportant un fond de siège en grande partie horizontal (26) et un ensemble de dossier de siège inclinable (34) qui comprend:

a. un élément de cadre (36) ayant une extrémité proximale (38) connectée de manière pivotante au châssis (12) à proximité du fond de siège (26), ledit élément de cadre (36) étant pivotable par rapport au fond de siège sur plusieurs angles;

b. un support extensible (62) comportant un élément de support externe creux (64) et un élément de support interne (66), ledit élément de support externe (64) ayant une extrémité ouverte par laquelle une extrémité dudit élément de support interne (66) est reçue, une extrémité (68) dudit support (62) étant connectée de manière pivotante au châssis (12) et l'autre extrémité (72) dudit support (62) étant connectée de manière pivotante audit élément de cadre (36) à une extrémité distale (46) de celui-ci, ledit élément de support interne (66) coulissant par rapport audit élément de support externe (64) quand ledit élément de cadre (36) est pivoté par rapport au fond de siège (26); et

c. un moyen pour verrouiller de manière débloable ledit élément de cadre (36) à un angle désiré par rapport audit fond de siège (26), ledit moyen de verrouillage comprenant:

un élément d'accouplement (84) monté de manière mobile sur ledit élément de support

externe (64) et ayant une seconde surface d'accouplement (86) pour l'accouplement avec une première surface d'accouplement (82) sur ledit élément de support interne (66),

un moyen (90) chargeant préliminairement lesdites surfaces d'accouplement (82, 86) pour les accoupler l'une avec l'autre et empêcher le mouvement desdits éléments de support (64,66) l'un par rapport à l'autre,

un moyen de mise en action (104) monté sur ledit élément de cadre (36) à ladite extrémité distale (40) de celui-ci, et

un moyen (108) articulant ledit moyen de mise en action (104) audit élément d'accouplement (84) de sorte que le mouvement dudit moyen de mise en action (104) déplace ledit élément d'accouplement (84) contre ledit moyen de charge préliminaire (90) pour désaccoupler lesdites surfaces d'accouplement (82,86) et permettre le mouvement desdits éléments de support (64,66) l'un par rapport à l'autre;

caractérisée en ce que ladite une extrémité dudit élément de support interne (66) est à l'intérieur dudit élément de support externe (64) et en ce que la première surface d'accouplement (82) sur l'élément de support interne (66) est adjacente à ladite une extrémité de celui-ci et a un profil denté et la seconde surface d'accouplement (86) sur l'élément d'accouplement (84) a un profil complémentaire à la première surface d'accouplement (82).

2. Chaise roulante selon la revendication 1, dans laquelle lesdits profils desdites première et seconde surfaces d'accouplement (82,86) comprennent des filets hélicoïdaux.

3. Chaise roulante selon la revendication 1 ou 2, dans laquelle ledit élément de support externe (64) a une ouverture (88) située entre ses extrémités, et ledit élément d'accouplement (84) est monté à l'intérieur de ladite ouverture (88).

4. Chaise roulante selon la revendication 3, dans laquelle ledit moyen de verrouillage comporte en outre un logement de ressort (92) couvrant ladite ouverture (88), et ledit moyen de charge préliminaire comporte un ressort à boudin (90) disposé entre ledit logement (92) et ledit élément d'accouplement (84).


5. Chaise roulante selon l'une quelconque des revendications 1 à 4, dans laquelle ledit moyen d'articulation comporte un ensemble de câble Bowden (108) connecté par une extrémité (112) audit moyen de mise en action (104) et

par son autre extrémité (113) audit élément d'accouplement (84).

6. Chaise roulante selon l'une quelconque des revendications 1 à 5, dans laquelle ledit ensemble de dossier de chaise (34) comprend un panneau de dossier de siège (54) monté sur ledit élément de cadre (36). 5
7. Chaise roulante selon l'une quelconque des revendications précédentes, qui a une paire de roues motrices rotatives (14) et dans laquelle l'élément de cadre (36) comporte une paire de montants en grande partie parallèles (42) connectés de manière pivotante audit châssis (12), chacun desdits montants (42) étant doté d'une poignée (53) s'étendant en grande partie orthogonalement depuis celui-ci à l'extrémité distale (46) de l'élément de cadre; l'ensemble de dossier de siège (34) comporte une paire de supports extensibles (62); ledit moyen de verrouillage comporte une paire d'éléments d'accouplement (84) chacun monté de manière mobile sur l'élément de support externe (64) du support respectif (62); et l'ensemble de dossier de siège (34) comporte aussi une paire de leviers de mise en action (104) chacun monté de manière pivotante sur un montant respectif (42) adjacent à sa poignée respective (53). 10 15 20 25 30
8. Chaise roulante selon la revendication 7, dans laquelle lesdits leviers de mise en action (104) sont déplacés vers lesdites poignées (53) pour désaccoupler lesdites surfaces d'accouplement (82,86). 35
9. Chaise roulante selon la revendication 8, dans laquelle lesdits leviers de mise en action (104) sont montés sur lesdits montants (42) immédiatement sous lesdites poignées (53). 40
10. Chaise roulante selon la revendication 7, 8 ou 9, dans laquelle chacun desdits éléments de support externes (64) comporte un moyen (83) supportant de manière rotative une roue respective desdites roues motrices (14). 45
11. Chaise roulante selon les revendications 1 à 10, comprenant en outre un moyen (140 ou 156) pour pousser ledit élément de cadre (36) à pivoter vers une position verticale par rapport au fond de siège (26). 50
12. Chaise roulante selon la revendication 11, dans laquelle ledit moyen pour pousser ledit élément de cadre (36) à pivoter vers ladite position verticale comporte un bras de levier (120) 55

fixé audit élément de cadre (36) à ladite extrémité proximale (38) de celui-ci, un ensemble d'articulation extensible (122) comportant un premier élément d'articulation (124 ou 143) connecté de manière pivotante par une première extrémité audit bras de levier (120) et un second élément d'articulation (126 ou 150) connecté de manière pivotante par une seconde extrémité audit châssis (12), lesdits premier et second éléments d'articulation (124 et 126 ou 143 et 150) se déplaçant l'un par rapport à l'autre le long d'un axe d'articulation commun quand ledit élément de cadre (36) pivote par rapport au fond de siège (26), la distance entre les extrémités dudit ensemble d'articulation (122) diminuant quand ledit élément de cadre (36) pivote vers ladite position verticale et augmentant quand ledit élément de cadre (36) pivote vers ladite position inclinée, et un ressort (140 ou 156) connecté entre lesdits premier et second éléments d'articulation (124 et 126 ou 143 et 150), ledit ressort poussant lesdites extrémités dudit ensemble d'articulation (122) l'un vers l'autre pour pousser ledit élément de cadre (36) vers ladite position verticale.

13. Chaise roulante selon la revendication 12, dans laquelle ledit ressort est un ressort tendeur (140).
14. Chaise roulante selon la revendication 12, dans laquelle ledit ressort est un ressort à pression (156).
15. Chaise roulante selon la revendication 14, dans laquelle ledit premier élément d'articulation (143) comporte une tige de piston (144) ayant une tête de piston (148) opposée à ladite première extrémité le long dudit axe d'articulation; ledit second élément d'articulation (150) comporte un cylindre ayant un support de ressort (154) opposé à ladite seconde extrémité le long dudit axe d'articulation; et ledit ressort à pression (156) est un ressort à boudin disposé le long dudit axe d'articulation entre ladite tête de piston (148) et ledit support de ressort (154).

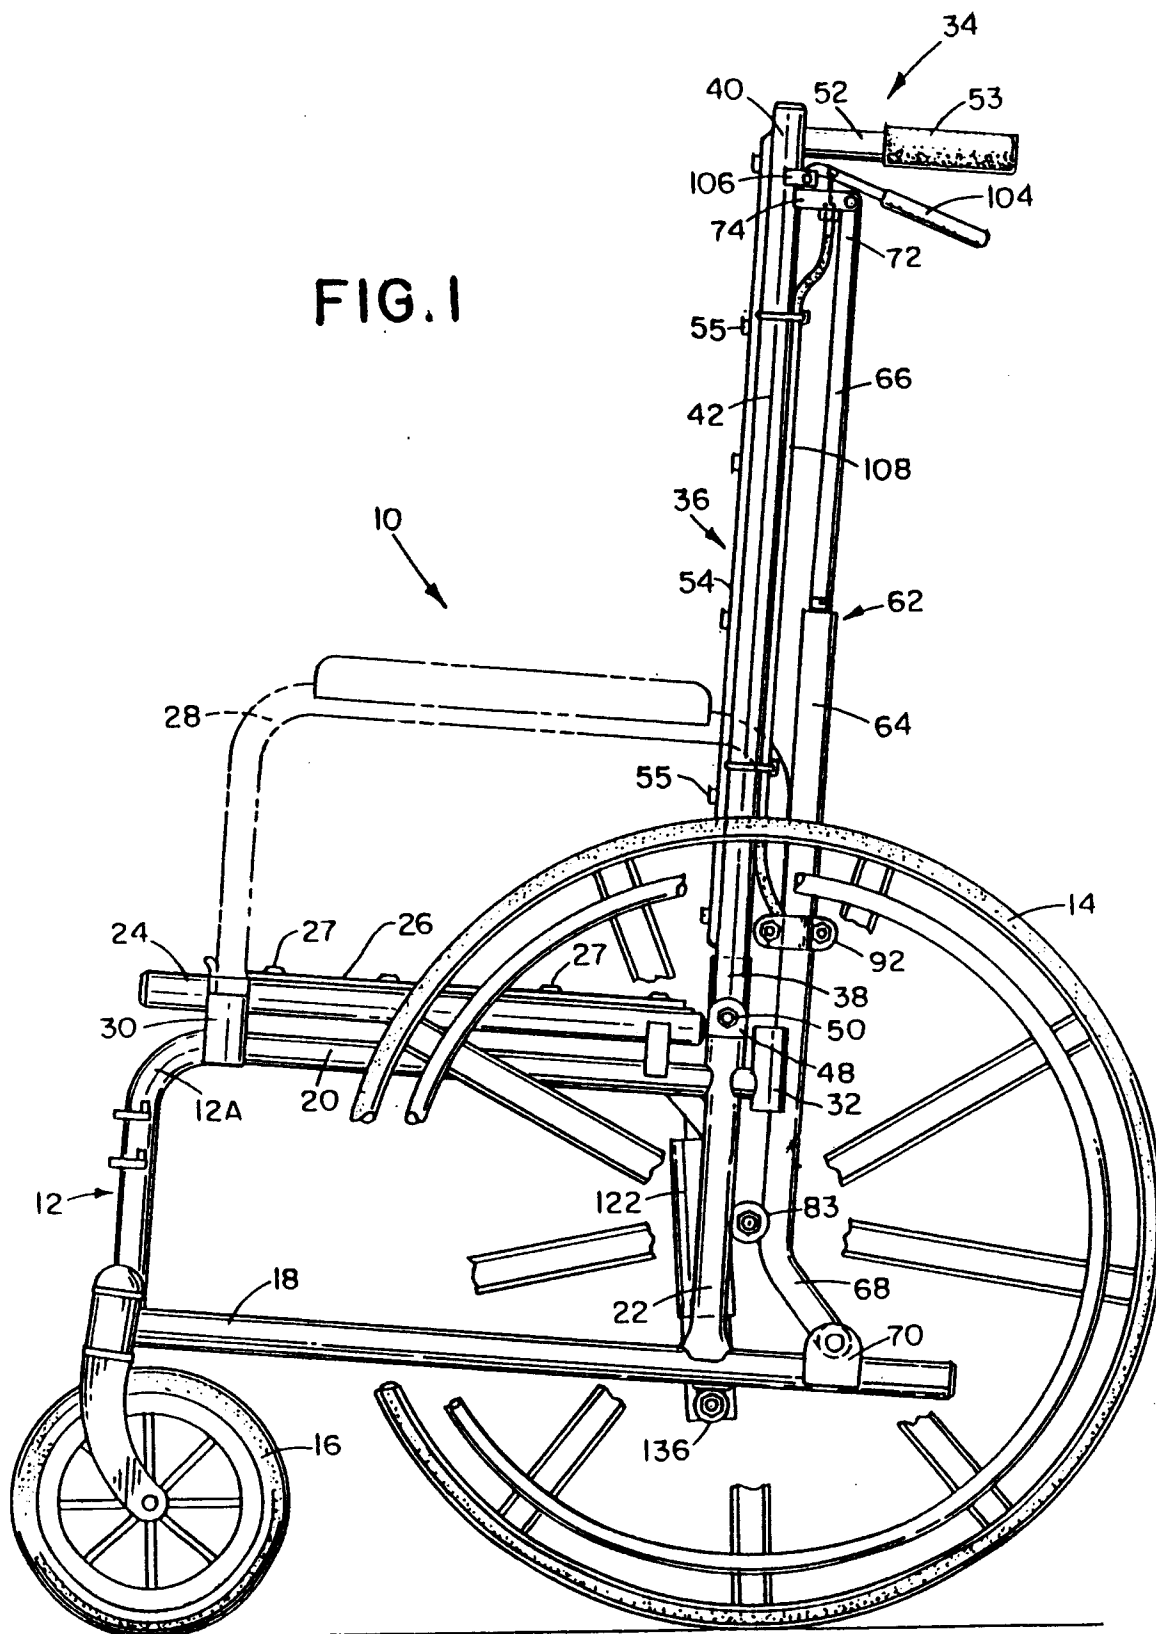

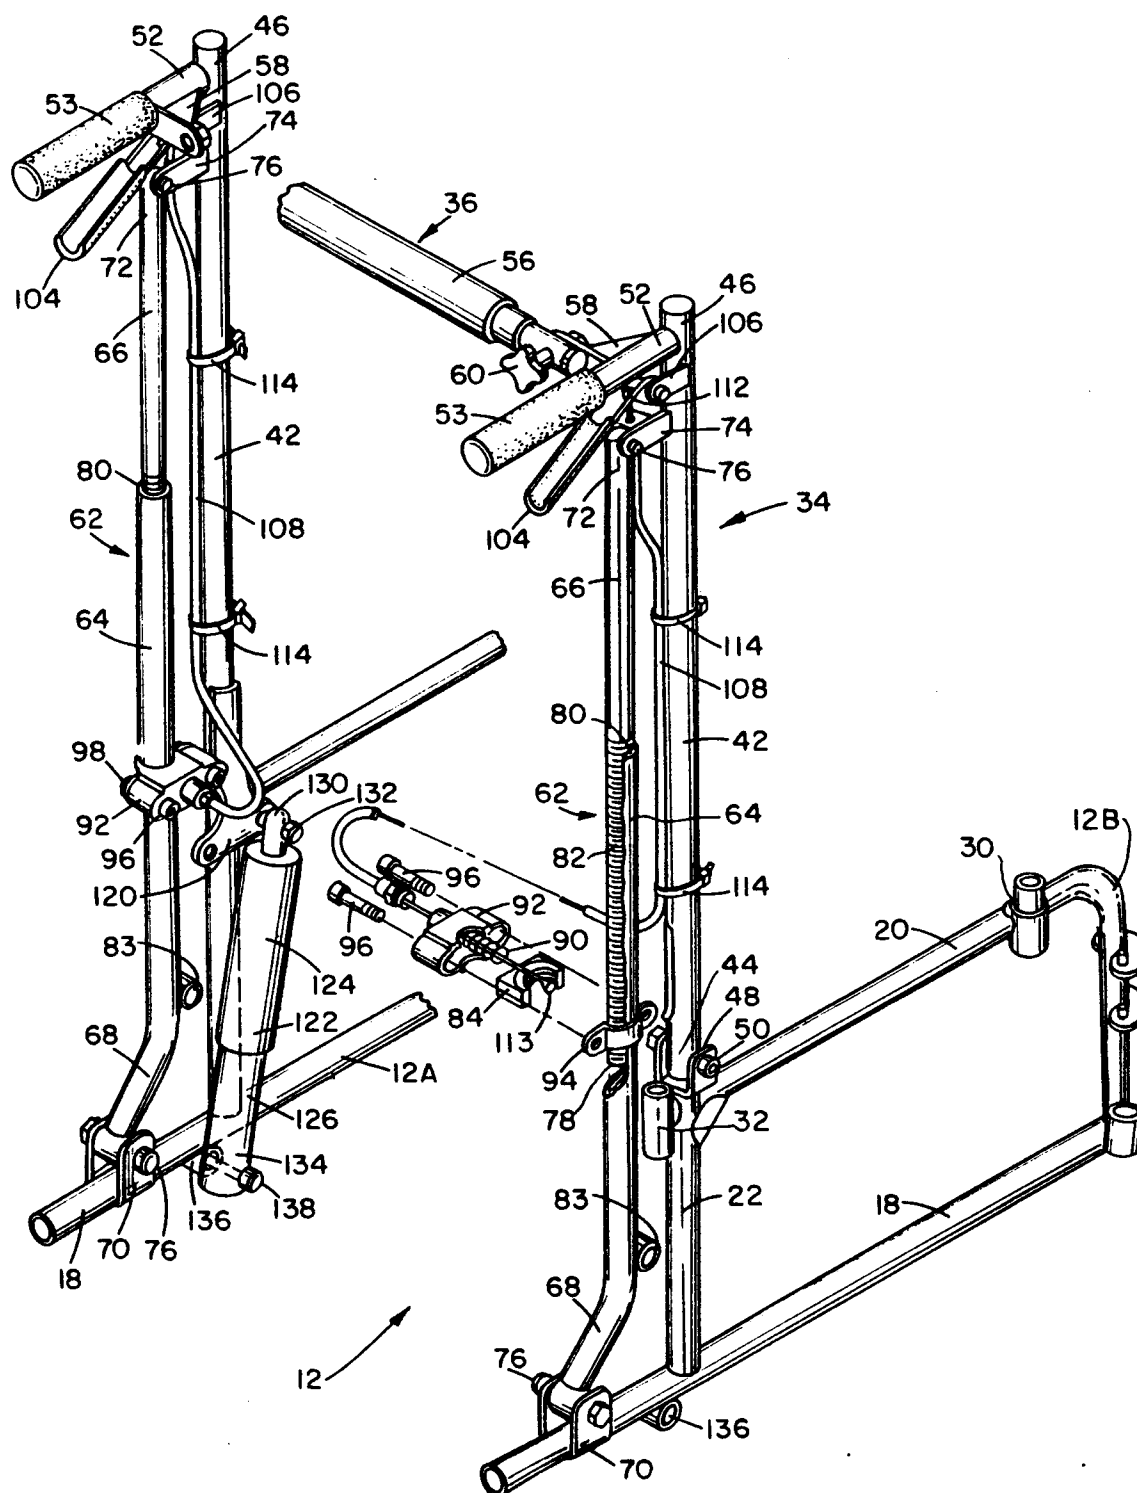


FIG. 2

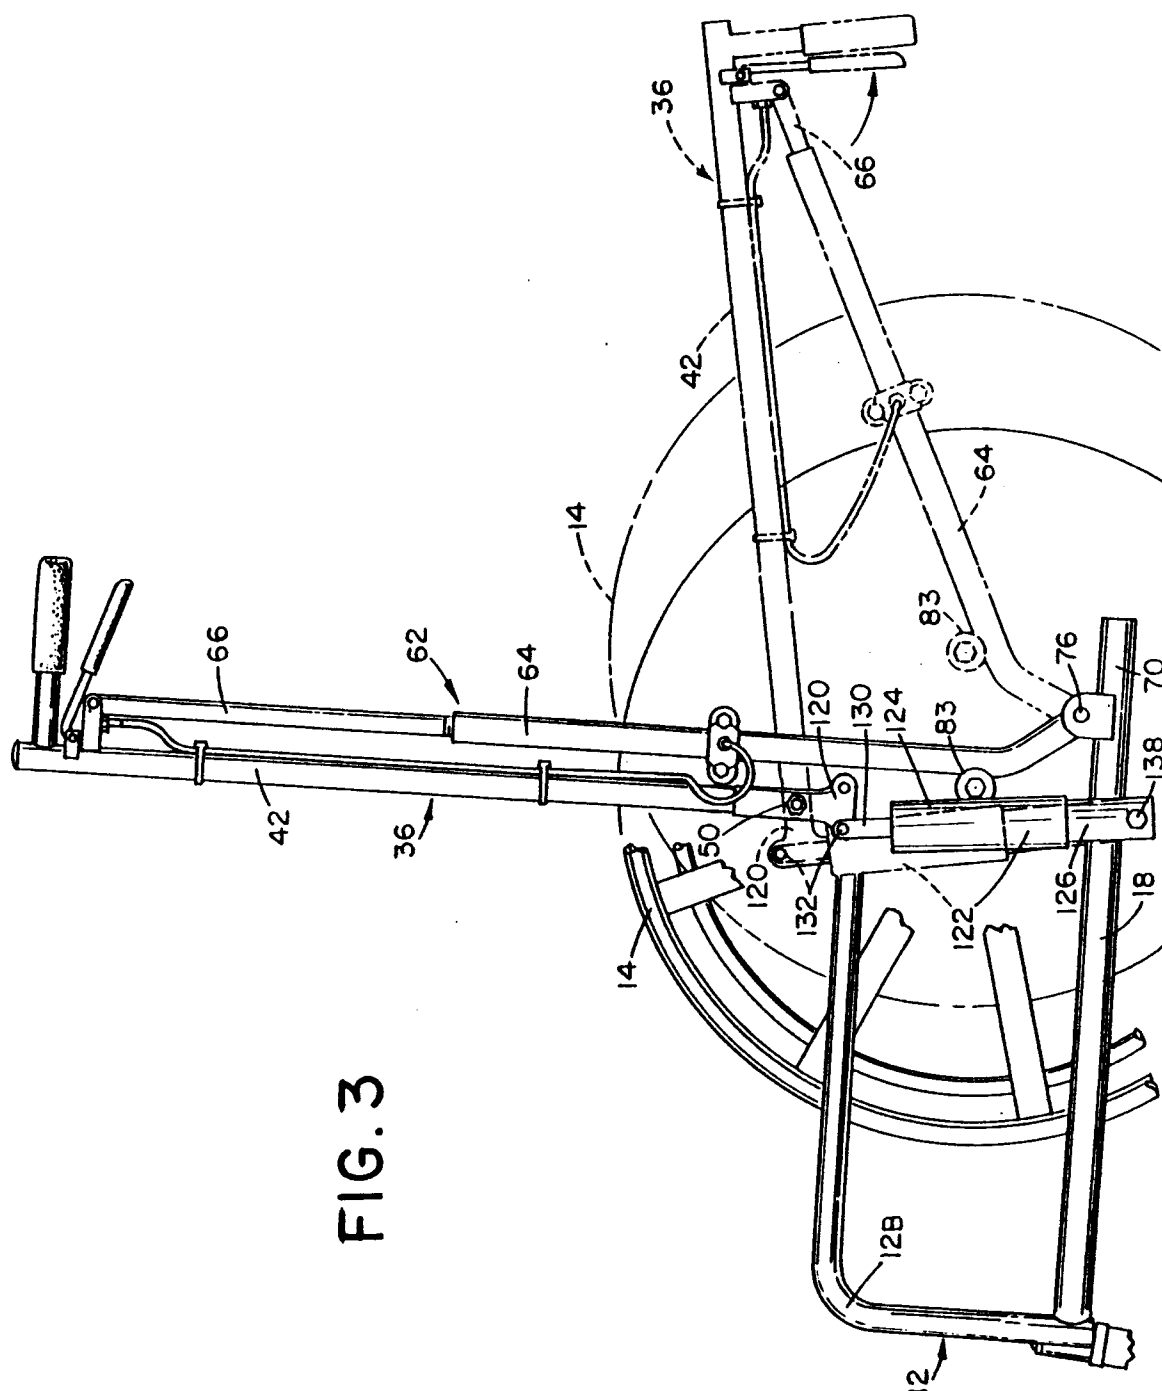


FIG. 3

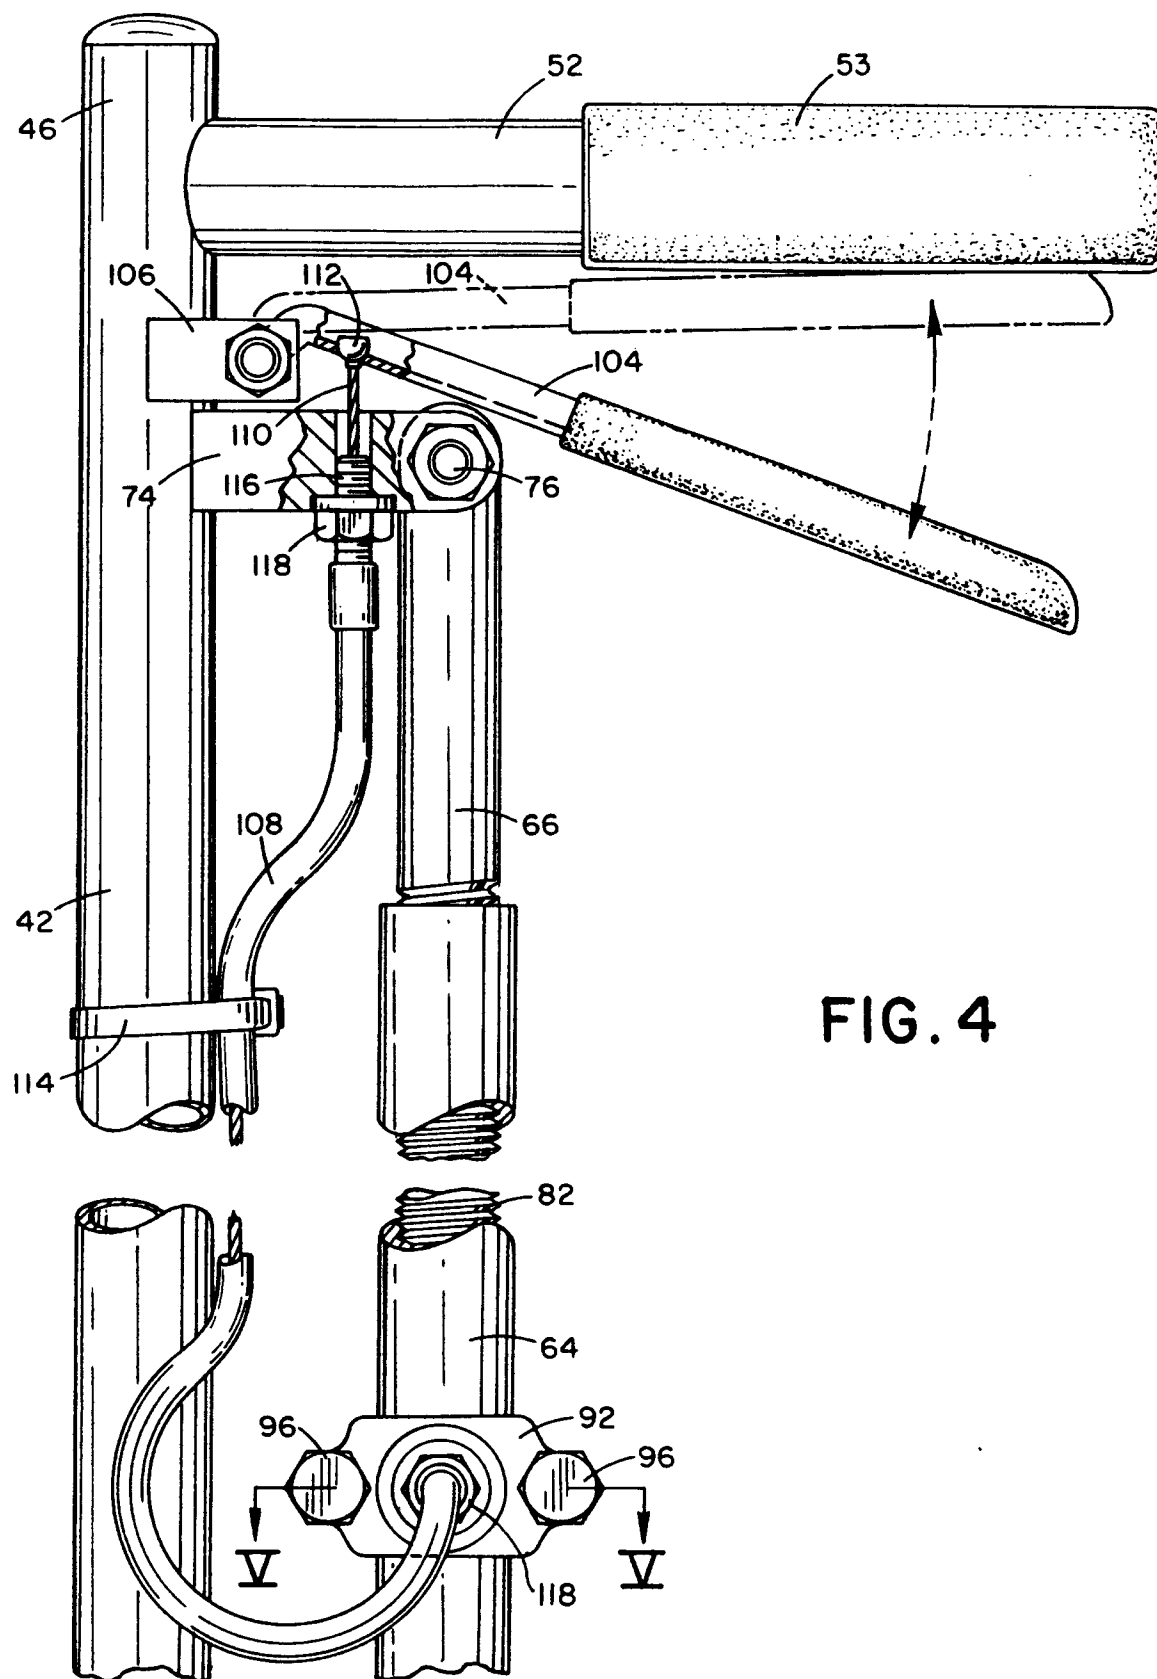


FIG. 4

