

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number  
**WO 03/102862 A1**

(51) International Patent Classification<sup>7</sup>: **G06K 9/22**, 9/03

(21) International Application Number: PCT/US03/16848

(22) International Filing Date: 29 May 2003 (29.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/160,600 31 May 2002 (31.05.2002) US

(71) Applicant (for all designated States except US): **SONY ERICSSON MOBILE COMMUNICATIONS AB** [SE/SE]; Nya Vattentornet, S-221 83 Lund (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HOMILLER, Daniel**, P. [US/US]; 202 Bebington Drive, Cary, NC 27513 (US).

(74) Agent: **MYERS BIGEL SIBLEY & SAJOVEC, P.A.**; P.O. Box 37428, Raleigh, NC 27627 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: APPARATUS, METHODS, COMPUTER PROGRAM PRODUCTS FOR EDITING HANDWRITTEN SYMBOLS USING ALTERNATIVE KNOWN SYMBOLS

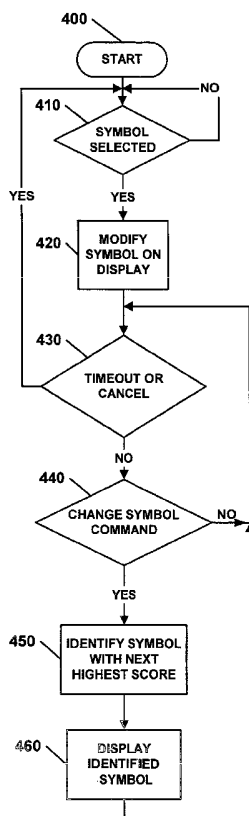

(57) Abstract: A handwritten symbol from a user is sensed and compared to a predetermined set of known symbols. A first one of the known symbols which corresponds to the sensed handwritten symbol is displayed to the user. In response to receiving an indication from the user that the displayed first known symbol does not correspond to the handwritten symbol, a second one of the known symbols which corresponds to the sensed handwritten symbol is selected and displayed to the user.



WO 03/102862 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# APPARATUS, METHODS, COMPUTER PROGRAM PRODUCTS FOR EDITING HANDWRITTEN SYMBOLS USING ALTERNATIVE KNOWN SYMBOLS

## BACKGROUND OF THE INVENTION

### 1. Technical Field

The present invention relates to handwriting recognition apparatus and methods and more particularly, to apparatus and methods for editing handwritten symbols.

### 2. Description of the Related Art

Many computer systems have been introduced that rely on a pen and digitizer pad combination, instead of or in addition to a keyboard, to interface with the computer system. The pen and digitizer pad combination can work particularly well for portable computer systems, such as palmtop computers or cellular phones with integrated personal digital assistant (PDA) functionality, since the arrangement allows a user to hold the portable computer system in one hand while writing onto the digitizer pad with the other hand. Often these pen-based computer systems provide handwriting recognition whereby the user can write on the digitizer pad and the device converts the user's handwriting into a machine readable format.

Unfortunately it may be difficult to accurately recognize handwritten letters since the handwriting style of users can vary tremendously and the accuracy of the digitizer pad may be balanced against pressures to provide low-cost solutions. This difficulty can become particularly apparent for complex character sets such as those used for the Japanese and Chinese written languages.

## SUMMARY OF THE INVENTION

According to some embodiments of the present invention, a symbol provided by a user is sensed and compared to a set of known symbols. A first one of the known symbols which may correspond to the sensed symbol is selected and displayed to the user. In response to receiving an indication from the user that the displayed first known symbol does not correspond to the provided symbol, a second one of the known symbols which may correspond to the sensed symbol is

selected and displayed to the user. In this manner, a user may be provided with an alternative candidate symbol when a displayed symbol does not correspond to a desired symbol.

5 In other embodiments, the user may be simultaneously provided with a plurality of alternative candidate known symbols from which the user may select a known symbol and substitute it for the first known symbol. The first known symbol may be selected as corresponding most closely to the sensed symbol and the second known symbol may be selected as corresponding next most closely to the sensed symbol. The first known symbol may be selected by scoring the  
10 relative closeness of the sensed symbol to the set of known symbols. The scores may be stored and reused to select the second one of the known symbols.

In this manner, apparatus, methods, and computer program products may be provided that facilitate editing of symbols provided by a user, such as symbols which are handwritten by a user.

15

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a wireless mobile terminal including a pen and digitizer pad according to some embodiments of the present invention.

20 FIG. 2 illustrates a block diagram of a symbol recognition and display circuit in the wireless mobile terminal of FIG.1 according to some embodiments of the present invention.

FIG. 3 illustrates operations of the symbol recognition and display circuit of FIG. 2 according to some embodiments of the present invention.

25 FIG. 4 illustrates editing operations for a symbol recognition and display circuit according to some embodiments of the present invention.

FIG. 5 illustrates editing operations for a symbol recognition and display circuit according to other embodiments of the present invention.

#### DETAILED DESCRIPTION

30 The present invention will now be described more fully with reference to the accompanying drawings, in which typical embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and

complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

According to some embodiments of the present invention, symbol recognition apparatus and methods may be provided. FIGs. 1-5 are diagrams illustrating exemplary apparatus and operations according to embodiments of the present invention. It will be understood that operations depicted in the diagrams, and combinations thereof, may be implemented using one or more electronic circuits, such as circuits included in a component of a computer interface which uses handwriting or other symbol recognition. It will also be appreciated that, in general, operations depicted in the diagrams, and combinations thereof, may be implemented in one or more electronic circuits, such as in one or more discrete electronic components, one or more integrated circuits (ICs) and/or one or more application specific integrated circuits (ASICs) and/or application specific circuit modules, as well as by computer program instructions which may be executed by a computer or other data processing apparatus, such as a microprocessor or digital signal processor (DSP).

The computer program instructions may also be embodied in the form of a computer program product in a computer-readable storage medium, *i.e.*, as computer-readable program code embodied in the medium for use by or in connection with an instruction execution system. The computer-readable storage medium may include, but is not limited to, electronic, magnetic, optical or other storage media, such as a magnetic or optical disk or an integrated circuit memory device. Accordingly, FIGs. 1-5 support electronic circuits and other apparatus that perform the specified operations, acts for performing the specified operations, and computer program products configured to perform the specified operations.

Referring to FIG. 1, a wireless mobile terminal 10 according to some embodiments of the present invention can include a pen 20, a touch sensitive display 30, a pointer stick 40, and switches 50. A user can write symbols with the pen 20 on the touch sensitive display 30. Written symbols are digitized and symbol recognition is performed on each digitized symbol to select a known symbol that is displayed to the user on the display 30. The touch sensitive display 30 can be divided between a symbol input area and a symbol display area or a combined area for input and display may be provided. A symbol input area can have separate areas in which individual symbols are written or a continuous

symbol area in which a string of symbols can be written. Strings of symbols may be recognized together by the terminal 10 or first parsed into separate symbols and then recognized individually. Design and operation of a wireless mobile terminal as described in this paragraph is well known to those having skill in the art and will not be described further herein.

FIG. 2 illustrates a symbol recognition and display circuit according to some embodiments of the present invention. FIG. 3 illustrates a flowchart of the operations for receiving, recognizing, and displaying written symbols on, for example, the touch sensitive display 30 according to some embodiments of the present invention or another computer interface.

Upon power-up or activation of the symbol recognition circuit at Block 300, the symbol recognition circuit waits for a symbol to be written on a symbol input area of a touch sensitive display, such as the touch sensitive display 30 of FIG. 1. A written symbol is digitized by an analog-to-digital converter (ADC) 200 and passed to a touch processor 210. The touch processor 210, at Block 320, compares the digitized written symbol to a predetermined list of known symbols in a symbol memory 220 to identify a known symbol that may correspond to the digitized written symbol. Such symbol recognition may be performed using well known conventional symbol recognition algorithms. In some embodiments, the comparison may be made to identify the known symbols which most closely correspond to the digitized written symbol. The predetermined list of known symbols can represent any defined symbols, including a portion or all of a written alphabet, graphical representations of objects, or user-defined symbols. In some embodiments, a score is generated by the comparison which represents the closeness of the match. Tied scores may be resolved, for example, by selecting among the corresponding symbols based upon their relative position within the list of known symbols or based upon their relative frequency of use.

At Block 330, the digitized written symbol and the score from the comparison with the known symbol are stored. In some embodiments, they may be stored by the touch processor 210 in the memory 220. The comparing and storing, Blocks 320 and 330, are repeated through a loop of Blocks 340 and 350 until the digitized written symbol has been sequentially compared to all, or a portion, of the list of known symbols. Instead of storing each score from the comparison at Block 330, the stored scores may be a plurality of the highest

scores or the scores that exceed a predetermined absolute threshold value. When the comparison and storing is completed, the highest score may indicate which one of the known symbols matched the digitized written symbol most closely.

At Block 360, the known symbol having the highest score is displayed.

5 For example in the embodiments of FIG. 2, that known symbol may be passed to a display processor 230, stored in a display memory 240, converted by a digital-to-analog converter (DAC) 250 to an analog signal and displayed on the touch sensitive display 30 to the user. The known symbol can also be passed to a host computer, such as a host computer 260 illustrated in FIG. 2, for further  
10 processing.

After viewing a displayed symbol or string of symbols a user may decide that one or more of the displayed symbols do not correctly match the desired written symbol. Editing a displayed symbol according to some embodiments of the present invention is shown in FIG. 4. A user can use the pen 20 to touch a  
15 symbol on the display 30 and cause it to be edited. Alternatively, a user can select a displayed symbol for editing by navigating among the displayed symbols using the pointer stick 40 (by applying pressure in a column or row direction relative to the displayed symbols or by rotational inputs to scroll through displayed symbols), switches 50, or a combination thereof. A user may also select a displayed symbol  
20 by navigating a cursor or other indicia among displayed symbols and pausing for at least a predetermined time on a desired one of the symbols. In some embodiments, when a symbol is selected for editing, a start-editing loop illustrated by Blocks 400 and 410 is exited, and the selected symbol is visually modified, at Block 420, to indication to the user that the symbol has been selected for editing.  
25 The selected symbol may be visually modified by, for example, providing a graphical highlight to the symbol, an underscore, reversing the color of the symbol and its background, or flashing the symbol.

After a displayed symbol has been selected for editing, a user can cancel the editing mode by providing a predetermined command with the pen 20, stick  
30 40, and/or switches 50 or by providing no input for a predetermined timeout period, in which case the operations return from Block 430 to the waiting loop of Blocks 400 and 410. When editing is cancel or otherwise ended, the visual modification of the symbol, provided at Block 420, is undone. When the user provides a change symbol command (such as by the pen 20, stick 40, and/or

switches 50) at Block 440, Block 450 retrieves from memory the next closest known symbol to the selected displayed symbol (next highest scored symbol) and passes the next closest known symbol for display at Block 460, such as by the display processor 230 on the display 30, in place of the selected displayed symbol.

5           Alternatively, the next closest known symbol can be identified by comparing the digitized written symbol corresponding to the selected displayed symbol, and stored in memory 220, with each of the known symbols, also stored in memory 220, to identify the next closest known symbol. In this manner, the scores developed for each comparison of the digitized written symbol to the  
10       known symbols need not be saved and stored in the memory 220 for each displayed symbol, such as was described for Block 330 of FIG. 3.

          The operations loop then back to Block 430 to wait for another change symbol command at Block 440. When the displayed symbol is still not correct, the user provides another change symbol command and the operations illustrated  
15       by Blocks 440-460 are repeated. When the displayed symbol is correct or when the user otherwise desires to cancel the symbol edit mode, the user can either cancel the mode by providing a predetermined command or allow the operations to timeout at Block 430. In this manner, incorrect displayed symbols may be efficiently replaced with a known symbol which correctly corresponds to the  
20       user's desired written symbol.

          With reference now to FIG. 5, editing a displayed symbol according to other embodiments of the present invention is shown. When a user selects a symbol for editing, a list of next closest known symbols is displayed and the user can select from among the list. The operations begin by waiting at Blocks 500  
25       and 510 for a displayed symbol to be selected. The operations by which a user may select a displayed symbol can include those described for Block 410 in FIG. 4. A selected symbol may be visually modified at Block 520. The user can cancel the editing or allow it to timeout, at Block 530, or can provide a change symbol command at block 540 to indicate a desire to see alternative next closest symbols  
30       to the selected symbol. In response to the change symbol command, a plurality of the next closest known symbols to the digitized written symbol are retrieved at Block 550 and displayed at Block 560. The operations at Block 550 of identifying a list of next closest symbols can be similar to that described for Block 450 of FIG. 4 to select a single closest known symbol. The user can cancel the editing



command or allow a timeout, at Block 570, to leave the selected displayed symbol unchanged or can select one of the displayed list of next closest known symbols, Block 580, to cause the known symbol selected from the list to be substituted for display in the place of the symbol selected for editing, at Block 590.

5           While the symbol recognition circuits and operations have been described with regard to the mobile terminal 10, it will be appreciated to one skilled in the art that they may be embodied in any handwriting recognition apparatus such as those used in user interfaces for computer systems, portable computers, and personal digital assistants (PDA). Moreover, the handwriting interface may be  
10 integrated with the display, such as with a touch sensitive display, or may be separate from the display, such as a writing pad that digitizes pen movements.

          In the drawings and specification, there have been disclosed typical embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the  
15 scope of the invention being set forth in the following claims.

## THAT WHICH IS CLAIMED:

1. A method of operating a symbol recognition system for a set of known symbols, the method comprising:
  - 5 sensing an indication of a desired symbol;
  - selecting a first one of the known symbols which may correspond to the desired symbol;
  - displaying the first one of the known symbols;
  - receiving an indication that the displayed first one of the known symbols
  - 10 does not correspond to the desired symbol;
  - selecting a second one of the known symbols which may correspond to the desired symbol; and
  - displaying the second one of the known symbols.
- 15 2. A method according to Claim 1, further comprising:
  - providing as the set of known symbols a predetermined set of individual characters representing at least a portion of a written alphabet.
- 20 3. A method according to Claim 1, wherein selecting a first one of the known symbols comprises:
  - selecting a first one of the known symbols which most closely corresponds to the desired symbol.
- 25 4. A method according to Claim 3, wherein the selecting a second one of the known symbols comprises:
  - selecting a second one of the known symbols which has the next closest correspondence to the desired symbol.
- 30 5. A method according to Claim 1, wherein the selecting a first one of the known symbols comprises:
  - developing a score indicative of the closeness of a comparison of the desired symbol to each of the predetermined set of known symbols.

6. A method according to Claim 5, further comprising:  
storing a plurality of the scores from the comparisons of the desired  
symbol to each of the predetermined set of known symbols.
- 5 7. A method according to Claim 6, wherein the selecting a second one  
of the known symbols comprises:  
selecting a second one of the known symbols based upon the stored scores  
from the comparisons.
- 10 8. A method according to Claim 5, further comprising:  
storing scores, which exceed a predetermined threshold value, from the  
comparisons of the desired symbol to each of the predetermined set of known  
symbols.
- 15 9. A method according to Claim 8, wherein the selecting a second one  
of the known symbols comprises:  
selecting a second one of the known symbols based upon the stored scores  
from the comparisons.
- 20 10. A method according to Claim 1, wherein the selecting a second one  
of the known symbols comprises:  
developing a score indicative of the closeness of a comparison of the  
desired symbol to the predetermined set of known symbols.
- 25 11. A method according to Claim 1, wherein the displaying the second  
one of the known symbols is followed by receiving an indication from the user  
that the displayed second one of the known symbols does not correspond to the  
desired symbol.
- 30 12. A method according to Claim 11, further comprising:  
selecting a third one of the known symbols which corresponds to the  
desired symbol; and  
displaying the third one of the known symbols to the user.

13. A method according to Claim 1, further comprising:  
receiving an indication from the user that the displayed second one of the  
known symbols corresponds to the desired symbol; and  
substituting the second one of the known symbols for the displayed first  
5 one of the known symbols.
14. A method according to Claim 1, wherein:  
the selecting a second one of the known symbols further comprises  
selecting a plurality of the known symbols which correspond to the desired  
10 symbol; and  
the displaying the second one of the known symbols further comprises  
displaying the selected plurality of known symbols to the user.
15. A method according to Claim 14, further comprising:  
15 receiving a selection indication from the user of one of the displayed  
plurality of known symbols; and  
displaying the selected one of the displayed plurality of known symbols  
without the non-selected ones of the plurality of known symbols.
- 20 16. A method according to Claim 1, further comprising:  
modifying the displayed first one of the known symbols in response to  
receiving an indication from the user that the displayed first one of the known  
symbols does not correspond to the desired symbol.
- 25 17. A symbol recognition apparatus, comprising:  
a memory that is configured to store a predetermined set of known  
symbols;  
a symbol sensing circuit that senses an indication of a desired symbol;  
a symbol selection circuit that is operative to compare the desired symbol  
30 to the known symbols and output a first one of the known symbols that  
corresponds to the desired symbol and, in response to receiving a command,  
output a second one of the known symbols that corresponds to the desired symbol;  
and

a display circuit that displays the known symbol output by the symbol selection circuit.

18. A symbol recognition apparatus according to Claim 17, wherein  
5 the symbol selection circuit is operative to select a first one of the known symbols which most closely corresponds to the desired symbol.

19. A symbol recognition apparatus according to Claim 18, wherein  
10 the symbol selection circuit is operative to select a second one of the known symbols which next most closely corresponds to the desired symbol.

20. A symbol recognition apparatus according to Claim 17, wherein  
the symbol selection circuit is operative to score the closeness of the comparison  
of the desired symbol to the known symbols.

15

21. A symbol recognition apparatus according to Claim 20, wherein  
the symbol selection circuit is operative to store in the memory at least a plurality  
of the scores from the comparisons of the desired symbol to the known symbols.

22. A symbol recognition apparatus according to Claim 21, wherein  
20 the symbol selection circuit is operative, in response to receiving an edit command from a user, to select and output the second one of the known symbols based upon the scores stored in the memory.

23. A symbol recognition apparatus according to Claim 17, wherein  
25 the symbol selection circuit is operative, in response to receiving an edit command from a user, to compare the desired symbol to the known symbols and output the second one of the known symbols.

24. A symbol recognition apparatus according to Claim 17, wherein  
30 the symbol selection circuit is operative, in response to receiving an edit command from a user while the display circuit displays the second one of the known symbols, to output a third one of the known symbols that corresponds to the desired symbol.

25. A symbol recognition apparatus according to Claim 17, wherein:  
the symbol selection circuit is operative, in response to receiving an edit  
command from a user, to select and output a plurality of the known symbols  
which correspond to the desired symbol; and  
5 the display circuit is operative to display the plurality of the known  
symbols output by the symbol selection circuit.
26. A symbol recognition apparatus according to Claim 25, wherein:  
the symbol selection circuit is operative, in response to receiving a  
10 command from a user selecting one of the displayed plurality of the known  
symbols, to output only the selected one of the displayed plurality of the known  
symbols.
27. A symbol recognition apparatus according to Claim 17, wherein:  
15 the symbol selection circuit is operative to modify the displayed first one  
of the known symbols in response to receiving an edit command from a user.
28. A computer program product for operating a symbol recognition  
apparatus for a set of known symbols, the computer program product comprising  
20 program code embodied in a computer-readable storage medium, the computer  
program code comprising:  
program code for sensing an indication of a desired symbol;  
program code for selecting a first one of the known symbols which may  
correspond to the desired symbol;  
25 program code for displaying the first one of the known symbols;  
program code for receiving an indication that the displayed first one of the  
known symbols does not correspond to the desired symbol;  
program code for selecting a second one of the known symbols which may  
correspond to the desired symbol; and  
30 program code for displaying the second one of the known symbols.
29. A computer program product according to Claim 1, wherein the  
program code for selecting a first one of the known symbols comprises:

program code for selecting a first one of the known symbols which most closely corresponds to the desired symbol.

30. A computer program product according to Claim 29, wherein the  
5 program code for selecting a second one of the known symbols comprises:  
program code for selecting a second one of the known symbols which most closely corresponds to the desired symbol.

31. A computer program product according to Claim 28, further  
10 comprising program code for receiving an indication from the user that the displayed second one of the known symbols does not correspond to the desired symbol.

32. A computer program product according to Claim 31, further  
15 comprising:  
program code for selecting a third one of the known symbols which corresponds to the desired symbol; and  
program code for displaying the third one of the known symbols to the  
user.

20  
33. A computer program product according to Claim 28, further comprising:  
program code for receiving an indication from the user that the displayed second one of the known symbols corresponds to the desired symbol; and  
25 program code for substituting the second one of the known symbols for the displayed first one of the known symbols.

34. A computer program product according to Claim 28, further comprising:  
30 program code for selecting a plurality of the known symbols which correspond to the desired symbol; and  
program code for displaying the selected plurality of known symbols to the user.

35. A computer program product according to Claim 24, further comprising:

program code for receiving a selection indication from the user of one of the displayed plurality of known symbols; and

5 program code for displaying the selected one of the displayed plurality of known symbols without the non-selected ones of the plurality of known symbols.



FIG. 1

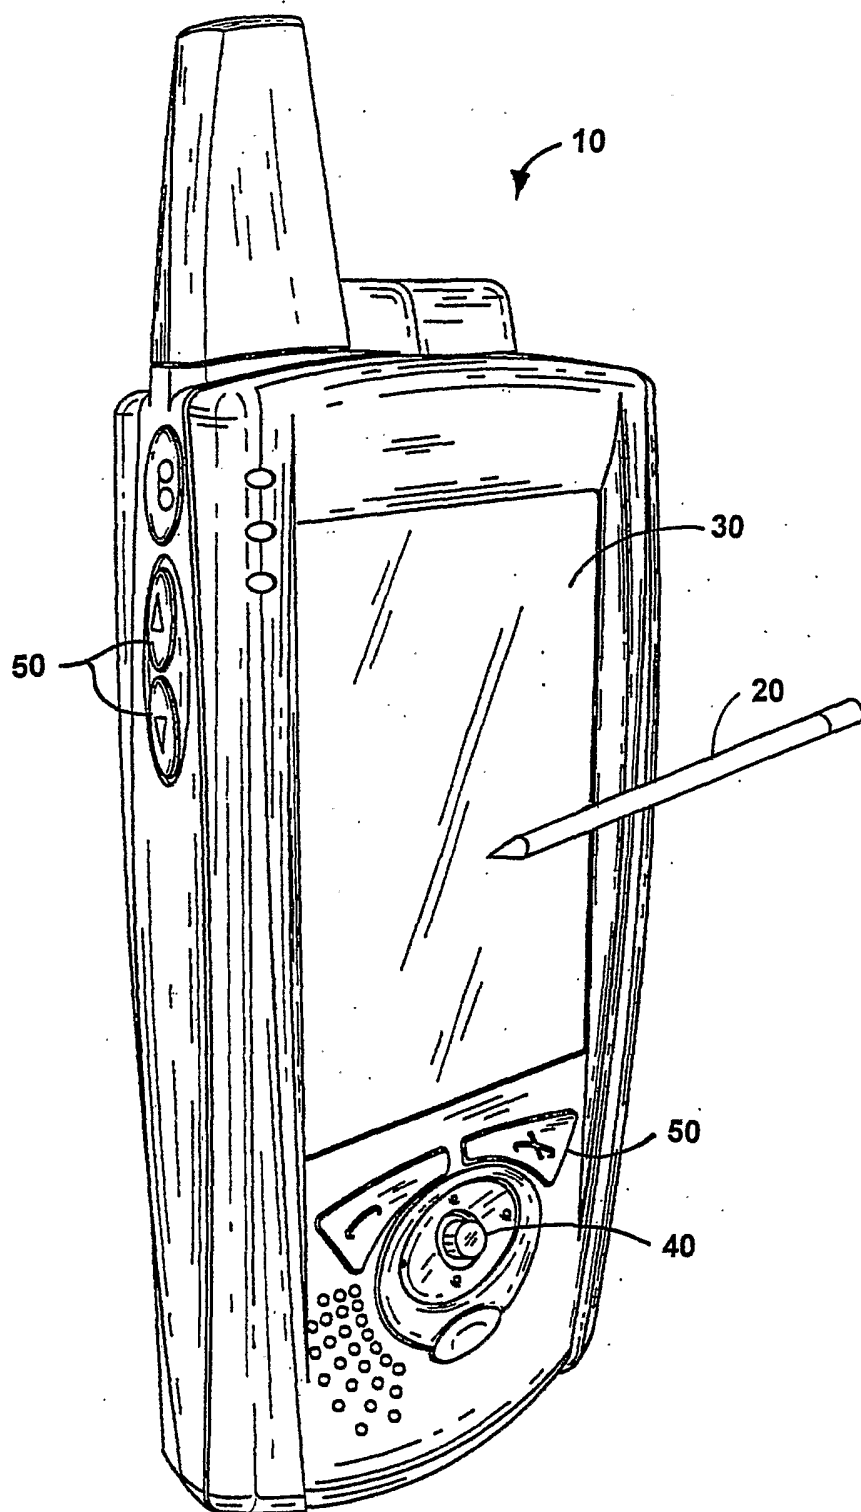


FIG. 2

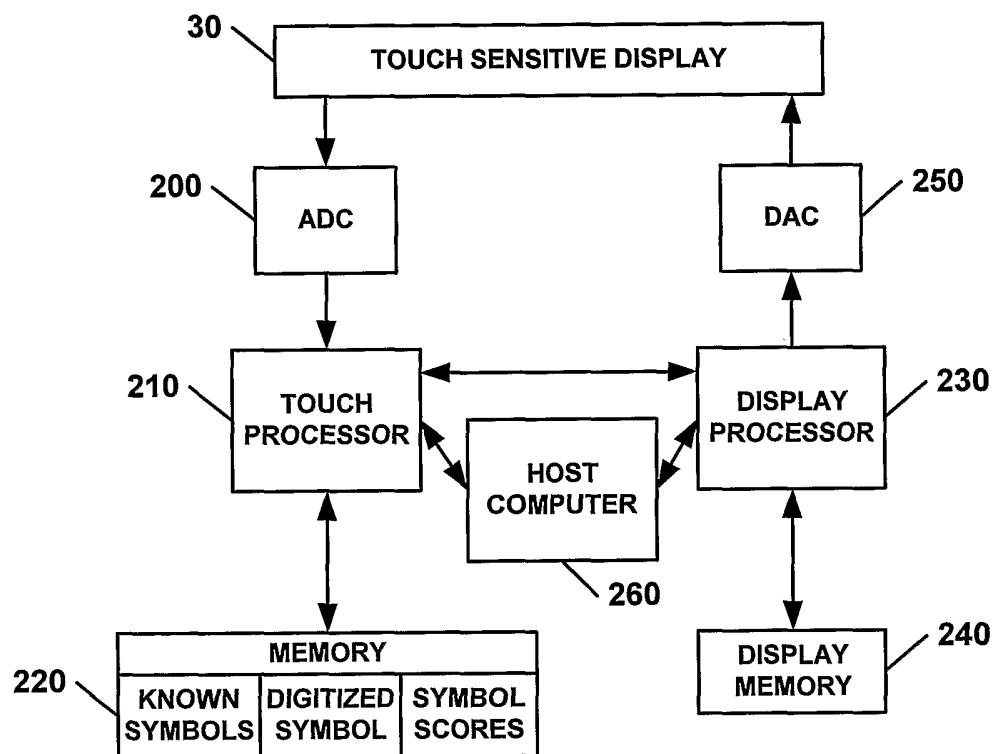


FIG. 3

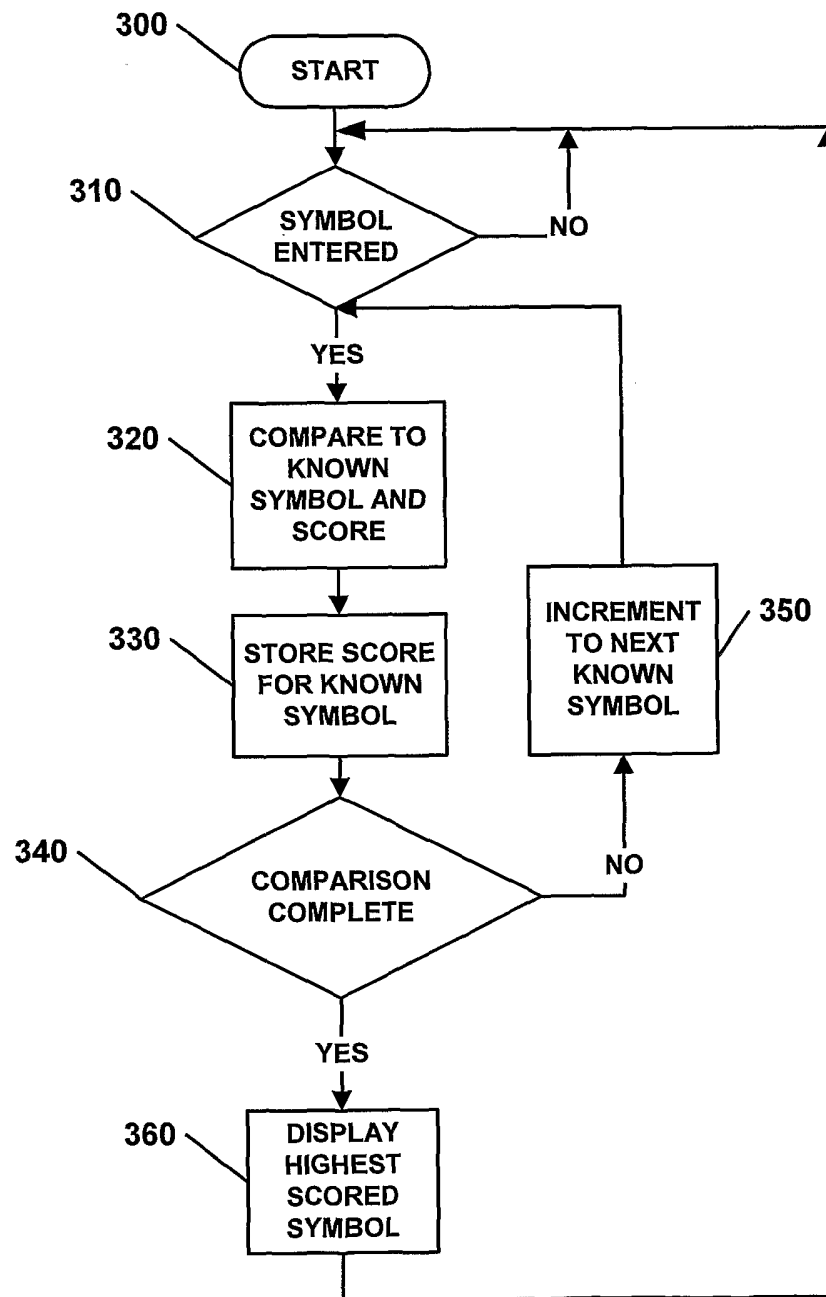
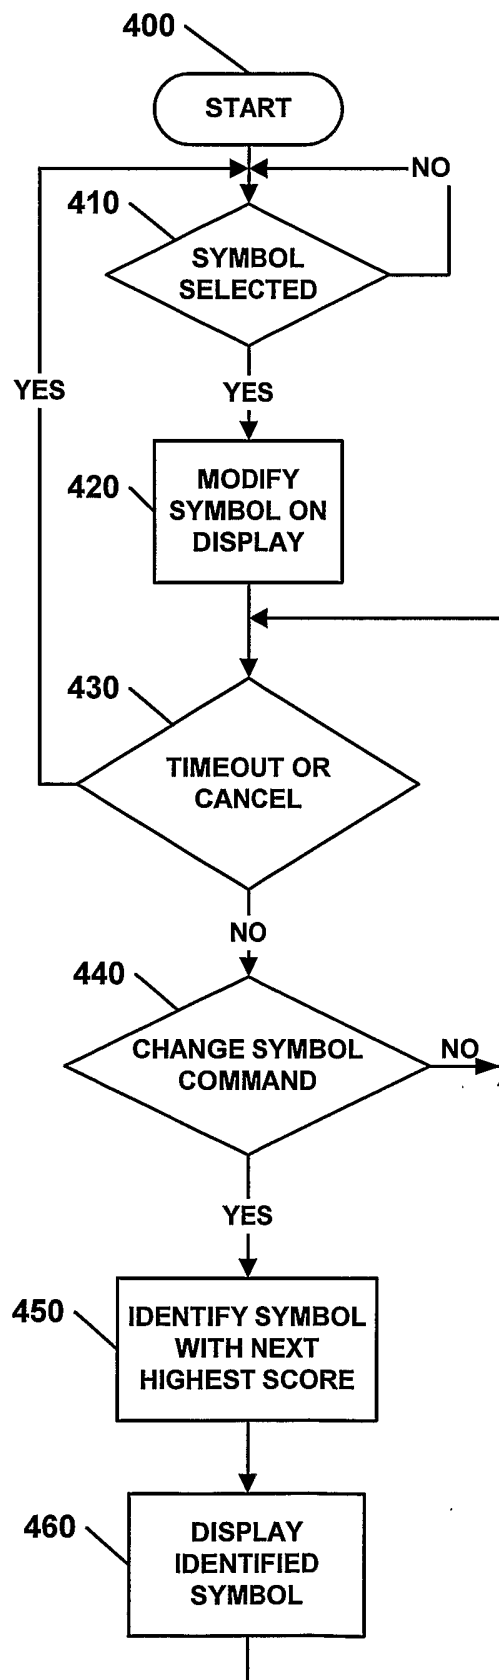


FIG. 4



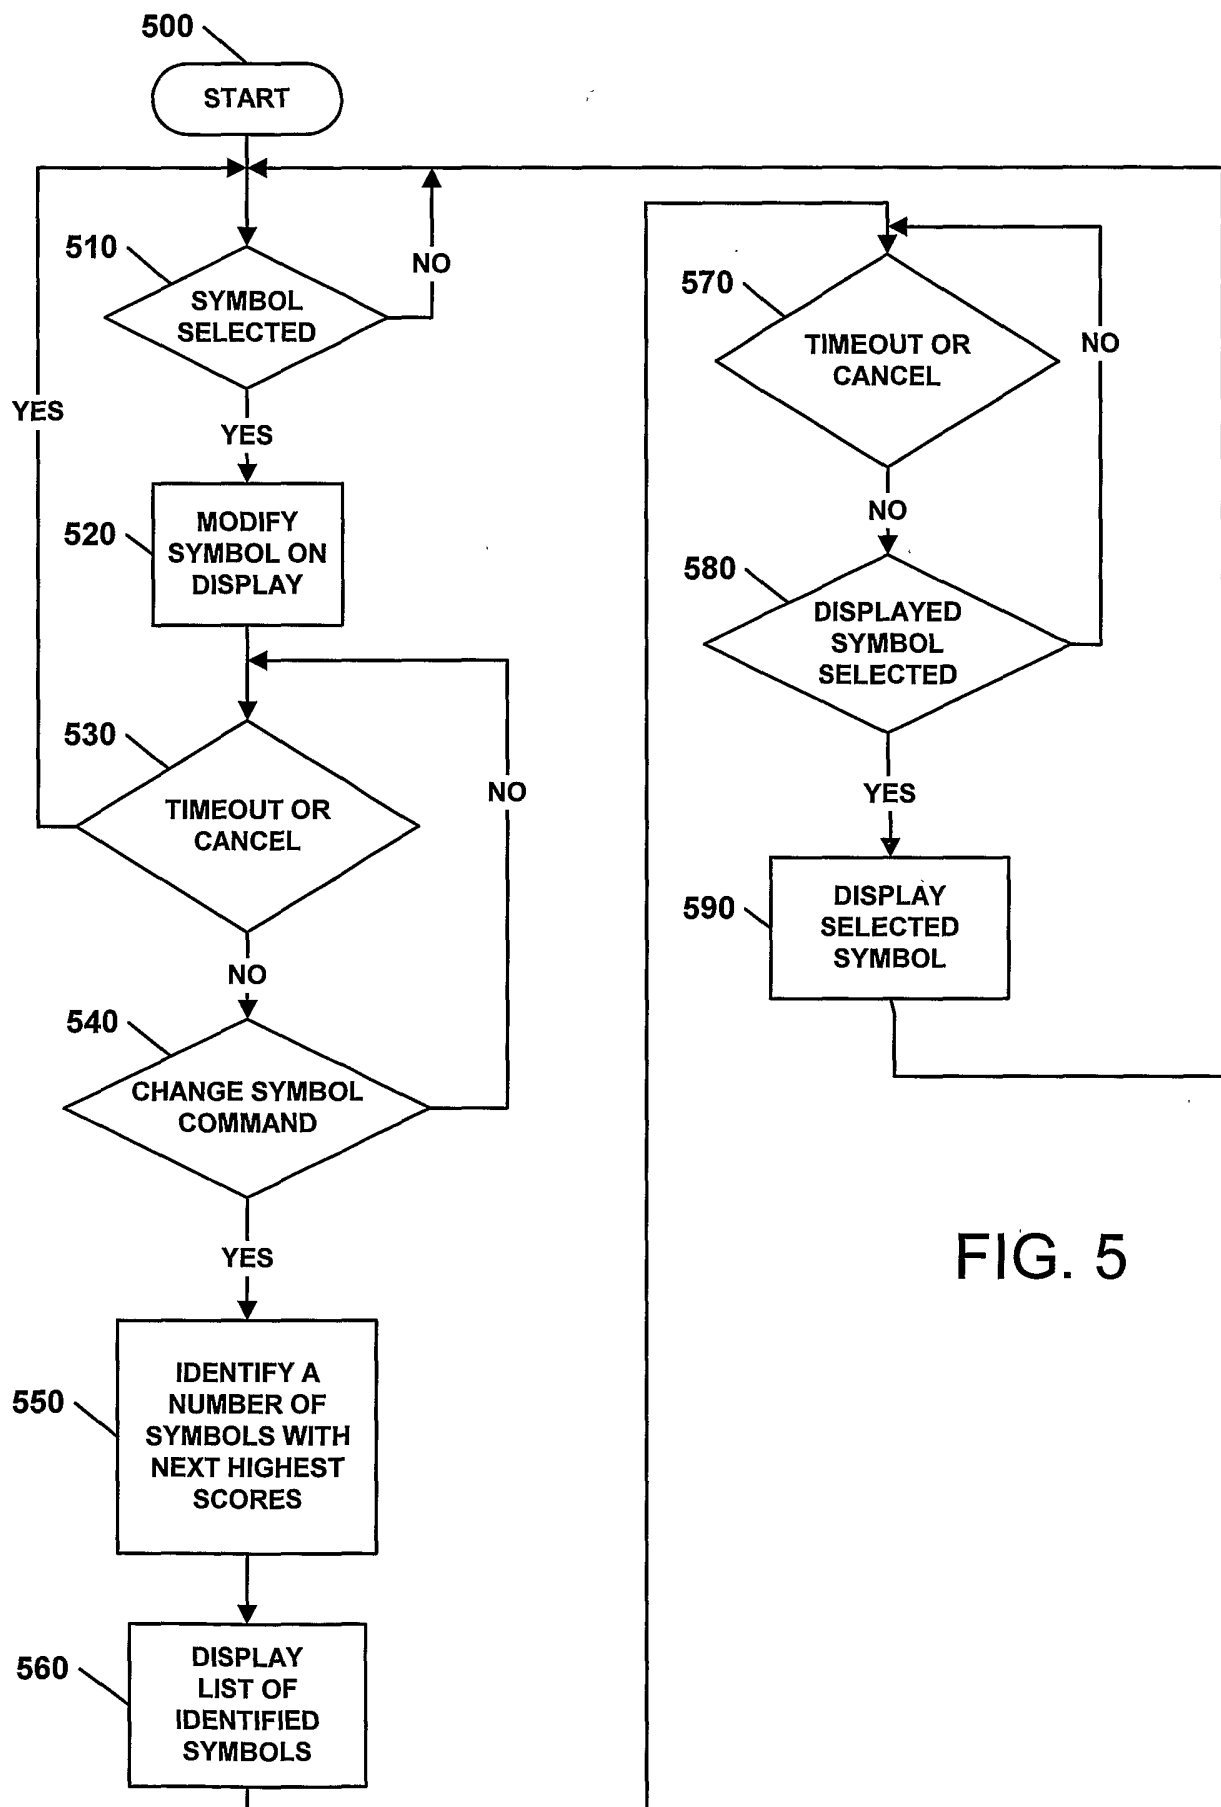


FIG. 5

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/16848

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 G06K9/22 G06K9/03

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, IBM-TDB, PAJ, COMPENDEX, INSPEC, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 04, 30 April 1999 (1999-04-30) & JP 11 025227 A (TOSHIBA CORP), 29 January 1999 (1999-01-29) abstract	1-35
X	US 6 005 973 A (KORTGE CHRIS A ET AL) 21 December 1999 (1999-12-21) abstract; figures 1-8 column 3, paragraphs 2,3 column 4, paragraphs 2,3 column 5, paragraphs 2-4 -/--	1-35



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

20 October 2003

Date of mailing of the international search report

31/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Granger, B

## INTERNATIONAL SEARCH REPORT

Internatic Application No  
PCT/US 03/16848

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 185 333 B1 (MATSUBAYASHI KAZUHIRO ET AL) 6 February 2001 (2001-02-06) column 16, last paragraph column 17, line 44 -column 18, line 41; figures 33,34 -----	1-35

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No  
PCT/US 03/16848

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 11025227	A	29-01-1999	NONE	
US 6005973	A	21-12-1999	AT 206834 T	15-10-2001
			AU 669087 B2	23-05-1996
			AU 1288895 A	19-06-1995
			BR 9405791 A	12-12-1995
			CA 2153684 A1	08-06-1995
			CN 1117319 A ,B	21-02-1996
			DE 69428590 D1	15-11-2001
			DE 69428590 T2	27-06-2002
			DK 686291 T3	03-12-2001
			EP 0686291 A1	13-12-1995
			ES 2166393 T3	16-04-2002
			JP 8506444 T	09-07-1996
			SG 46656 A1	20-02-1998
			TW 481308 Y	21-03-2002
			WO 9515535 A1	08-06-1995
			ZA 9409146 A	21-07-1995
US 6185333	B1	06-02-2001	JP 6084018 A	25-03-1994
			JP 6096279 A	08-04-1994
			JP 3227219 B2	12-11-2001
			JP 6096284 A	08-04-1994
			JP 3417484 B2	16-06-2003
			JP 6096280 A	08-04-1994
			JP 3253136 B2	04-02-2002
			JP 6096281 A	08-04-1994
			JP 6096282 A	08-04-1994
			DE 69332555 D1	23-01-2003
			EP 0585944 A2	09-03-1994
			HK 1011781 A1	30-05-2003
			US 5699455 A	16-12-1997
			US 6396950 B1	28-05-2002