



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2003/0159411 A1**

Hansen et al.

(43) **Pub. Date: Aug. 28, 2003**

(54) **CYCLONIC DIRT SEPARATION MODULE**

(52) **U.S. Cl. 55/337**

(75) Inventors: **Samuel N. Hansen**, Jenison, MI (US);
Gary L. Smith, Belding, MI (US); **Eric R. Metzger**, Sand Lake, MI (US)

(57) **ABSTRACT**

Correspondence Address:
MCGARRY BAIR PC
171 MONROE AVENUE, N.W.
SUITE 600
GRAND RAPIDS, MI 49503 (US)

The invention relates to dirt separator module comprising a dirt-separation housing having an inlet and an outlet opening and defining a cyclonic airflow separator, and a suction source fluidly connected with the dirt-separation housing. A separator plate and a cylindrical wall of the dirt-separation housing form a toroidal cyclonic airflow chamber in the dirt-separator for aiding in the separation of dirt from a suction airstream developed by the suction source. The separator plate has an outer diameter smaller than the inner diameter of the cylindrical wall of the dirt-separation housing, creating a gap between the outer edge of the separator plate and the inner wall of the dirt tank. A further embodiment includes dual cyclonic separators fluidly connected through a filter assembly. A further embodiment includes a cyclonic separator in the form of a tangential helical ramp.

(73) Assignee: **BISSELL Homecare, Inc.**

(21) Appl. No.: **10/249,113**

(22) Filed: **Mar. 17, 2003**


Related U.S. Application Data

(63) Continuation-in-part of application No. 09/849,143, filed on May 4, 2001, now abandoned.

(60) Provisional application No. 60/269,044, filed on Feb. 15, 2001. Provisional application No. 60/201,933, filed on May 5, 2000.

Publication Classification

(51) **Int. Cl.⁷ B01D 50/00**

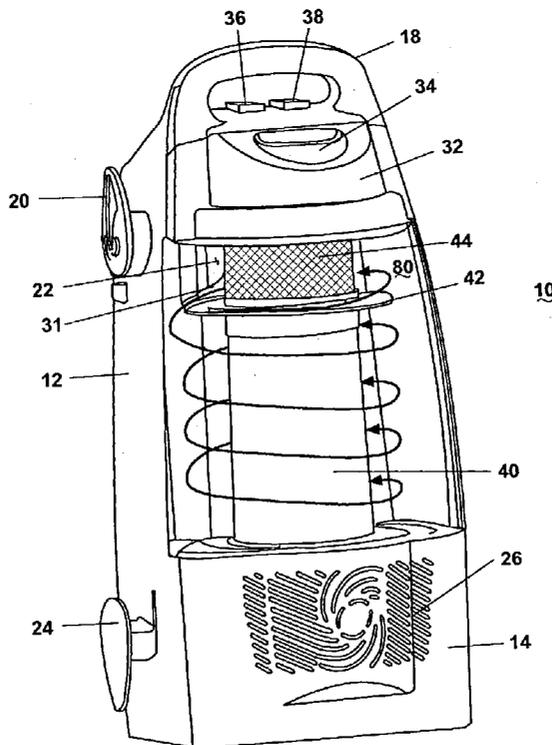

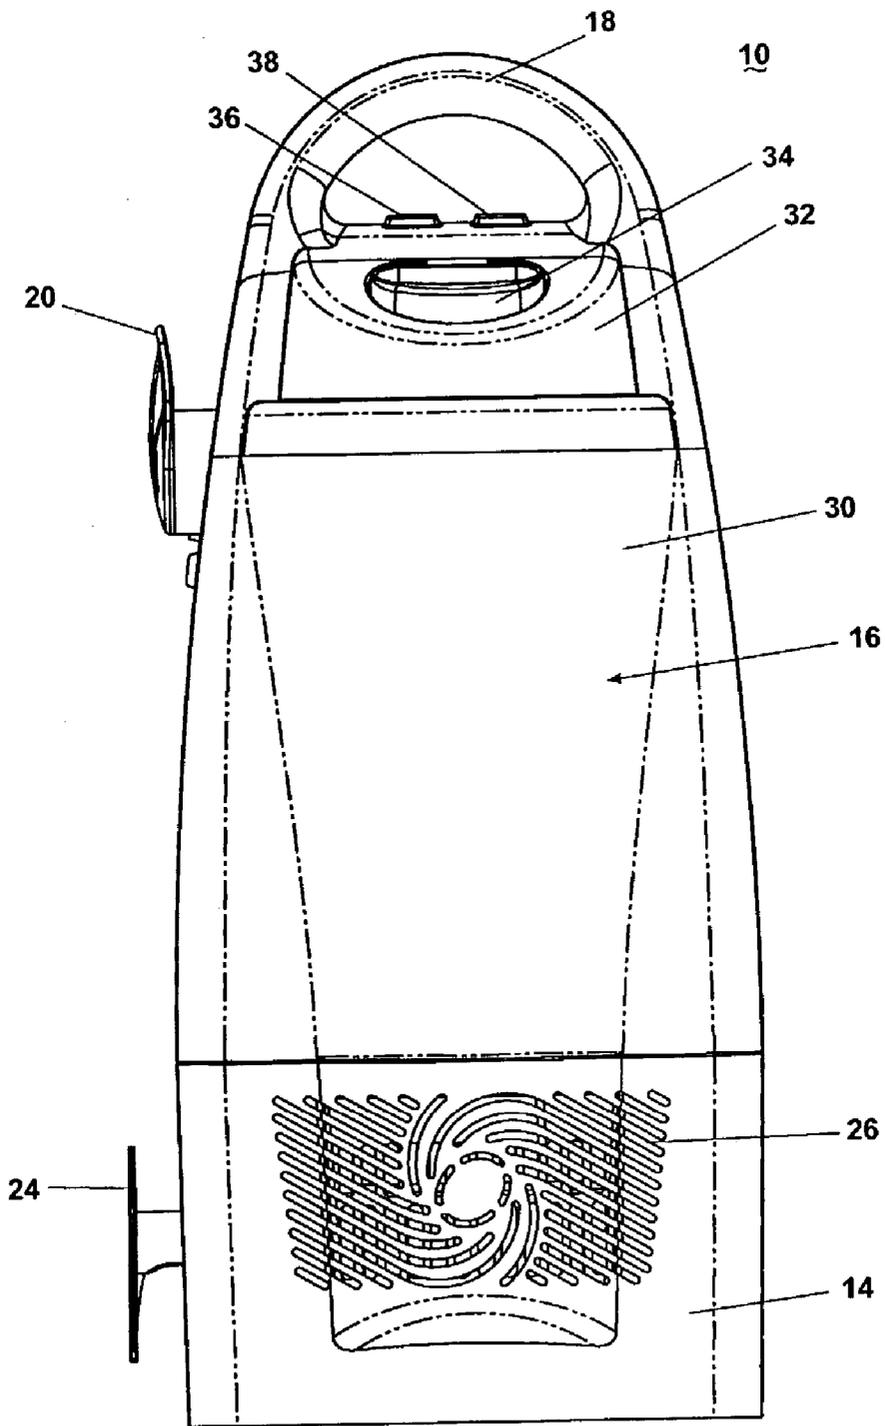


Fig. 1

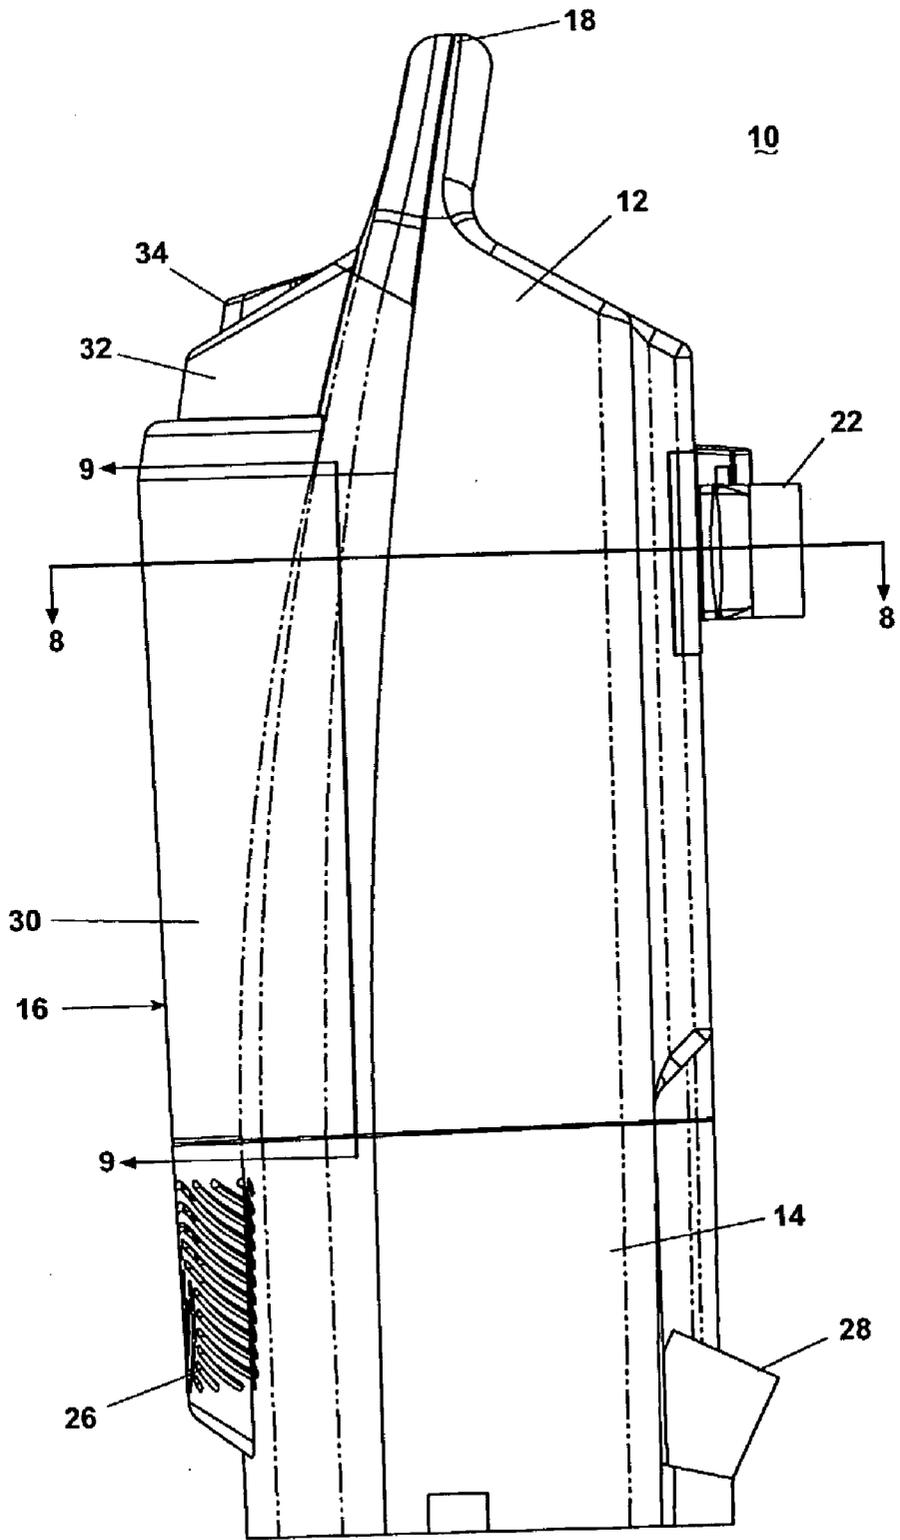


Fig. 2

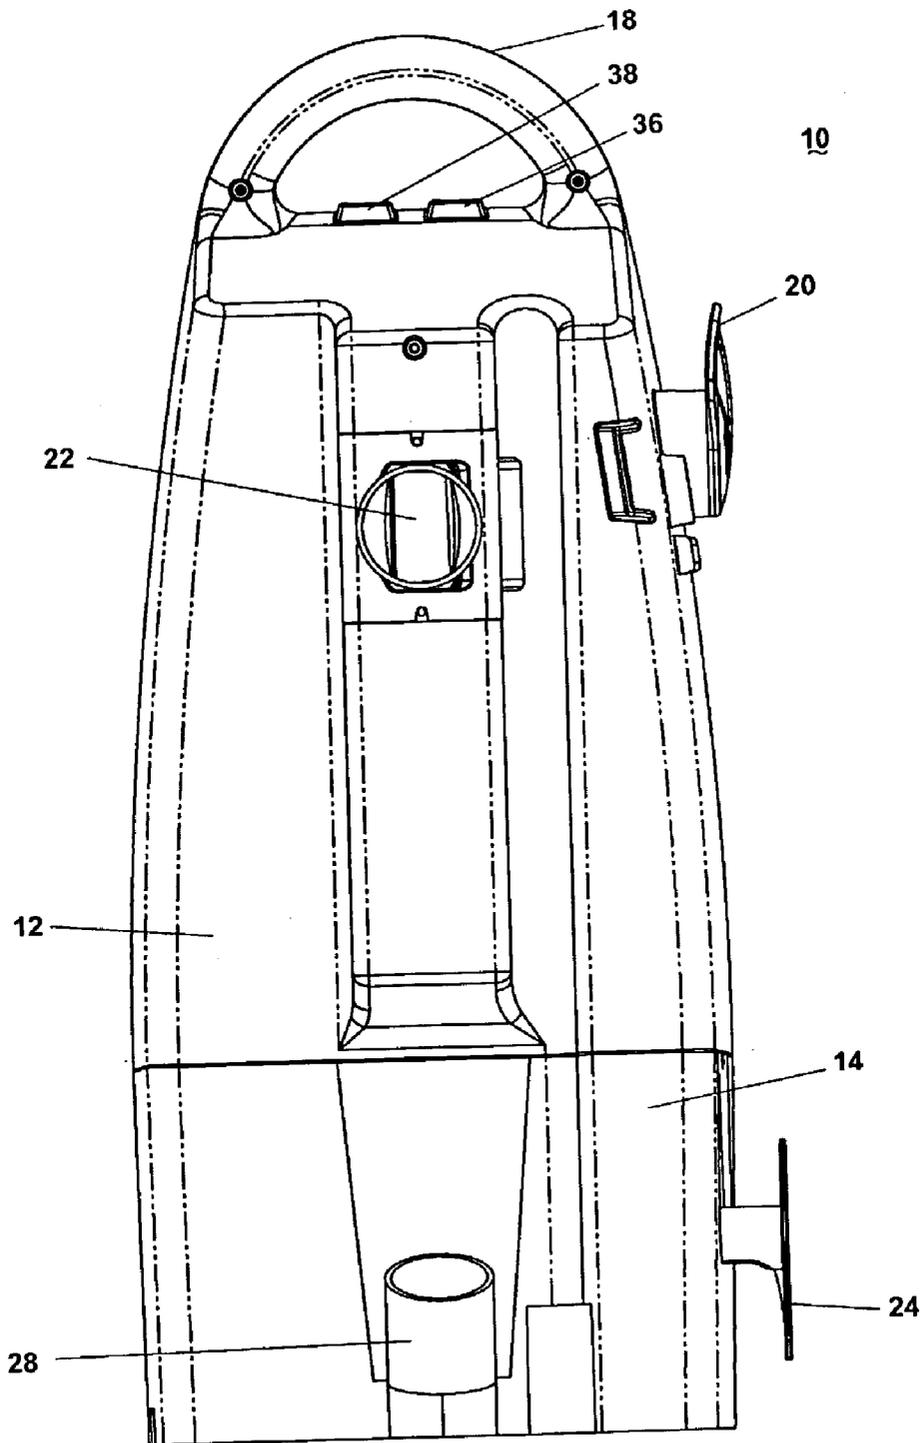


Fig. 3

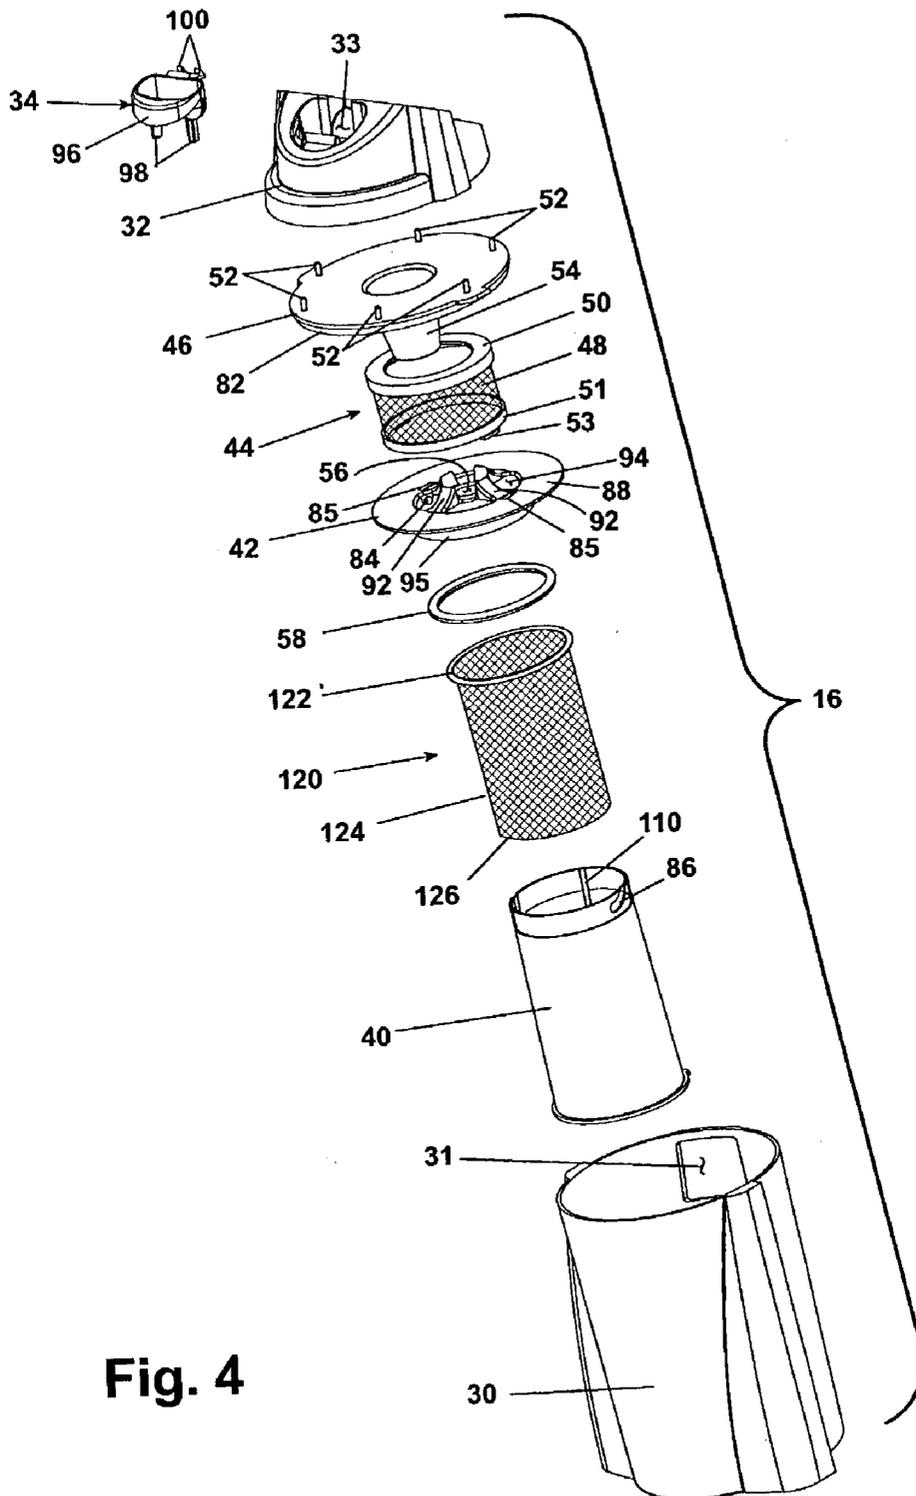


Fig. 4

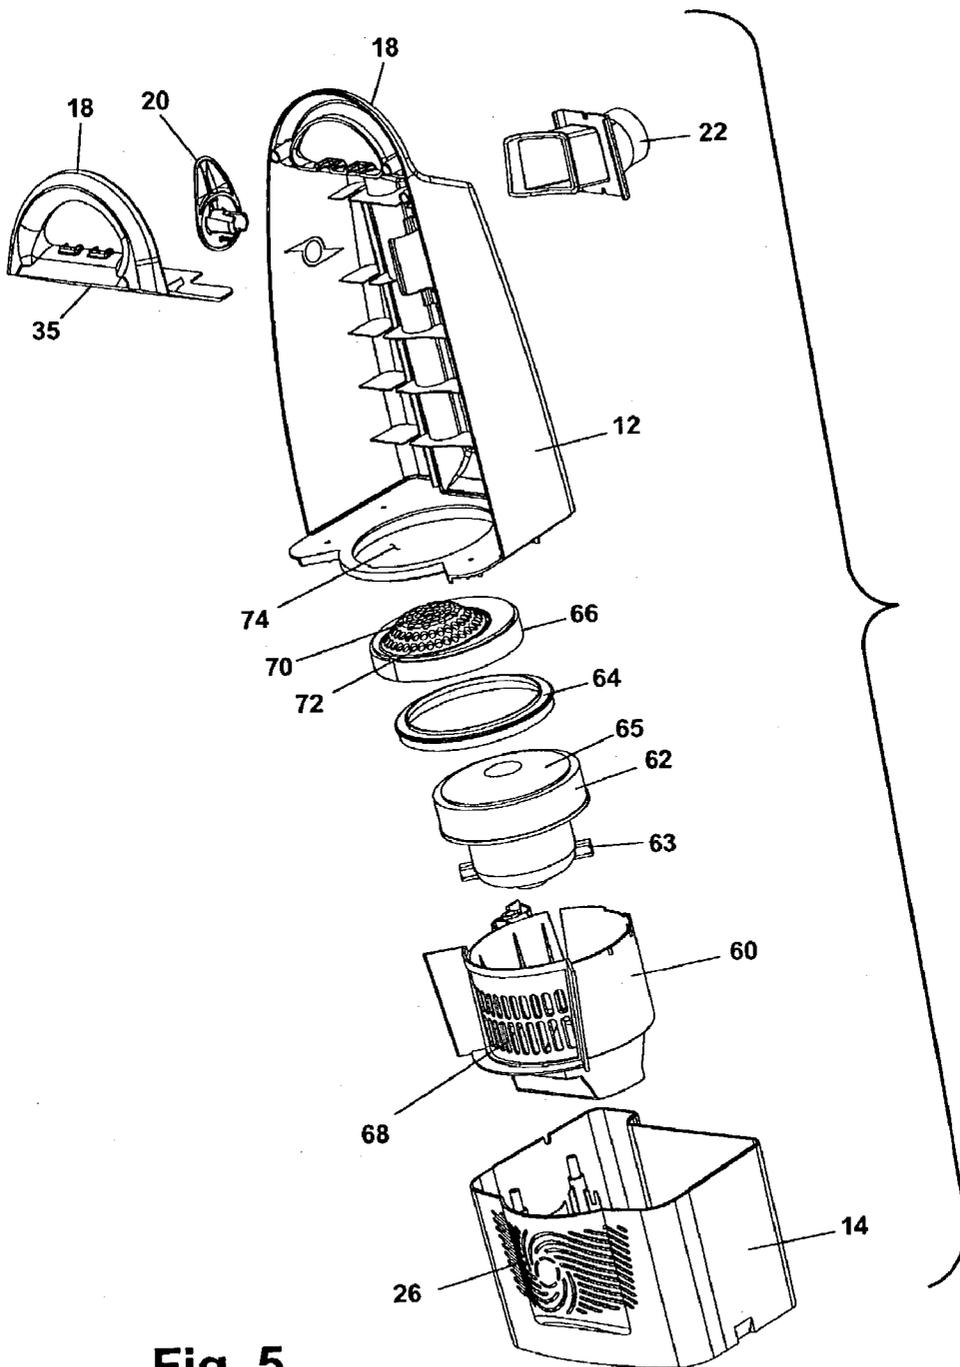


Fig. 5

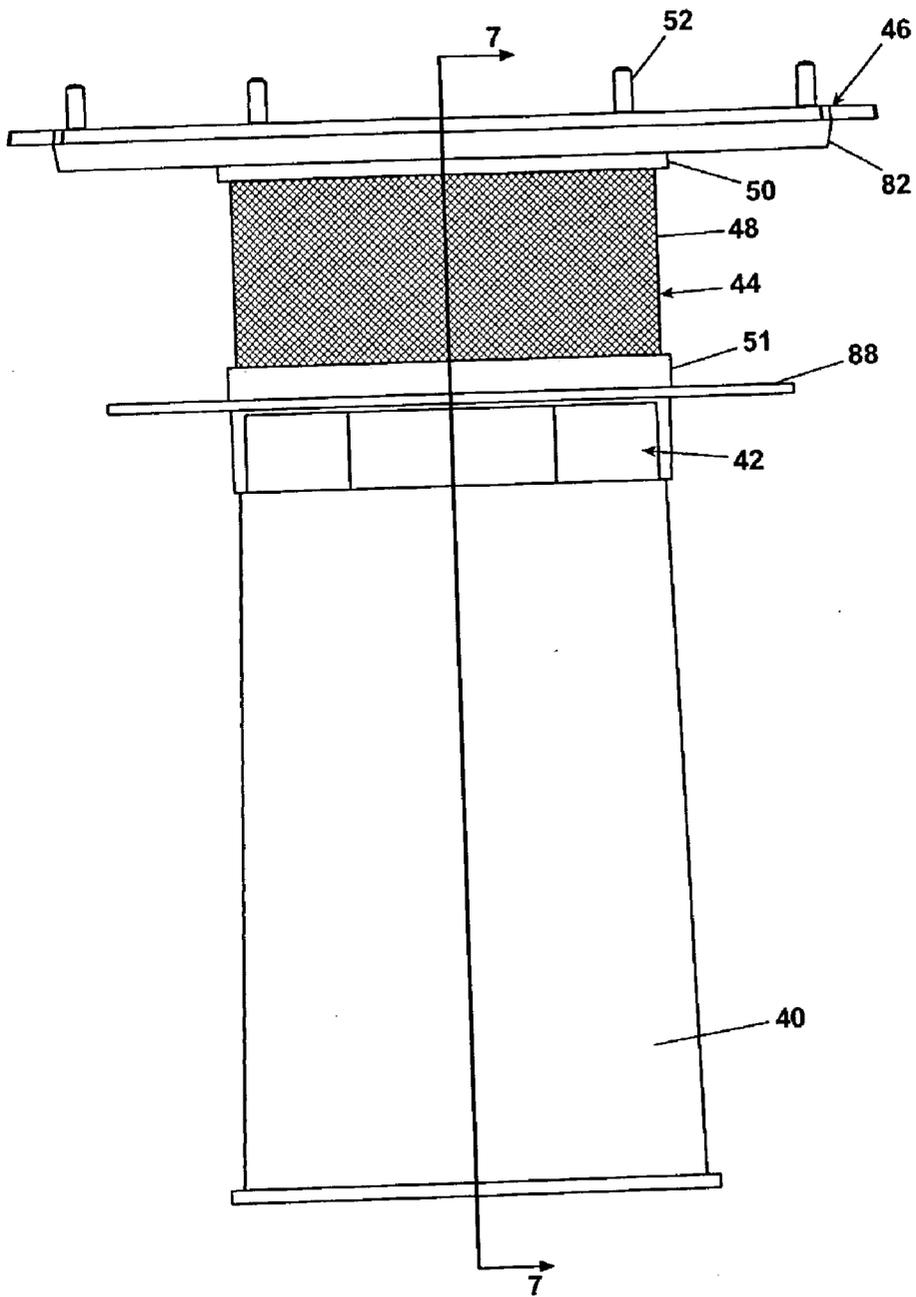


Fig. 6

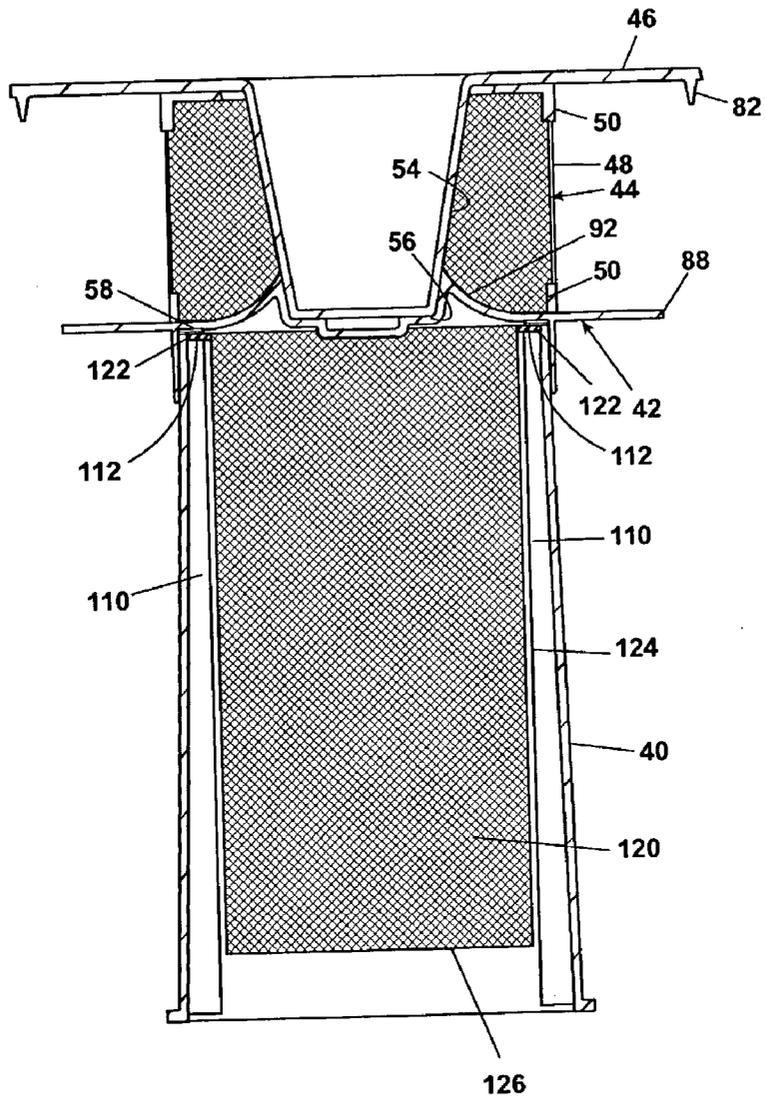


Fig. 7

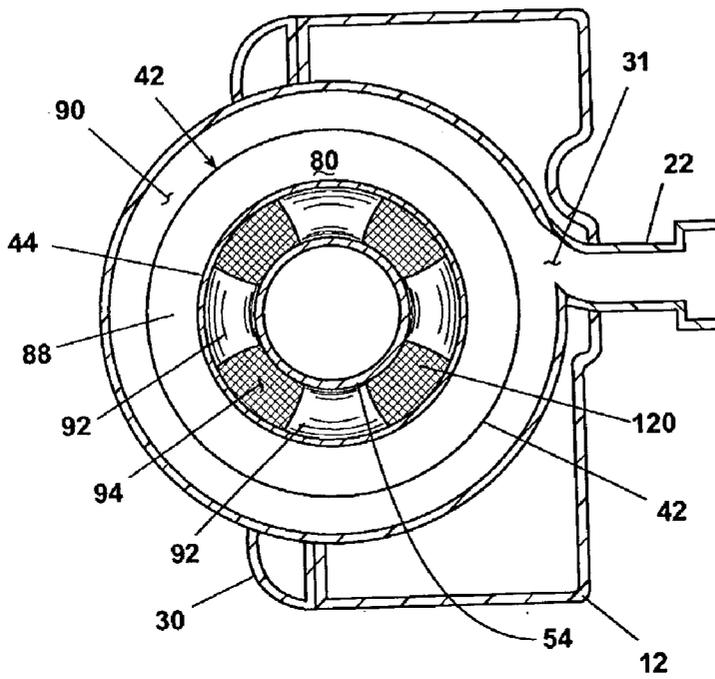


Fig. 8

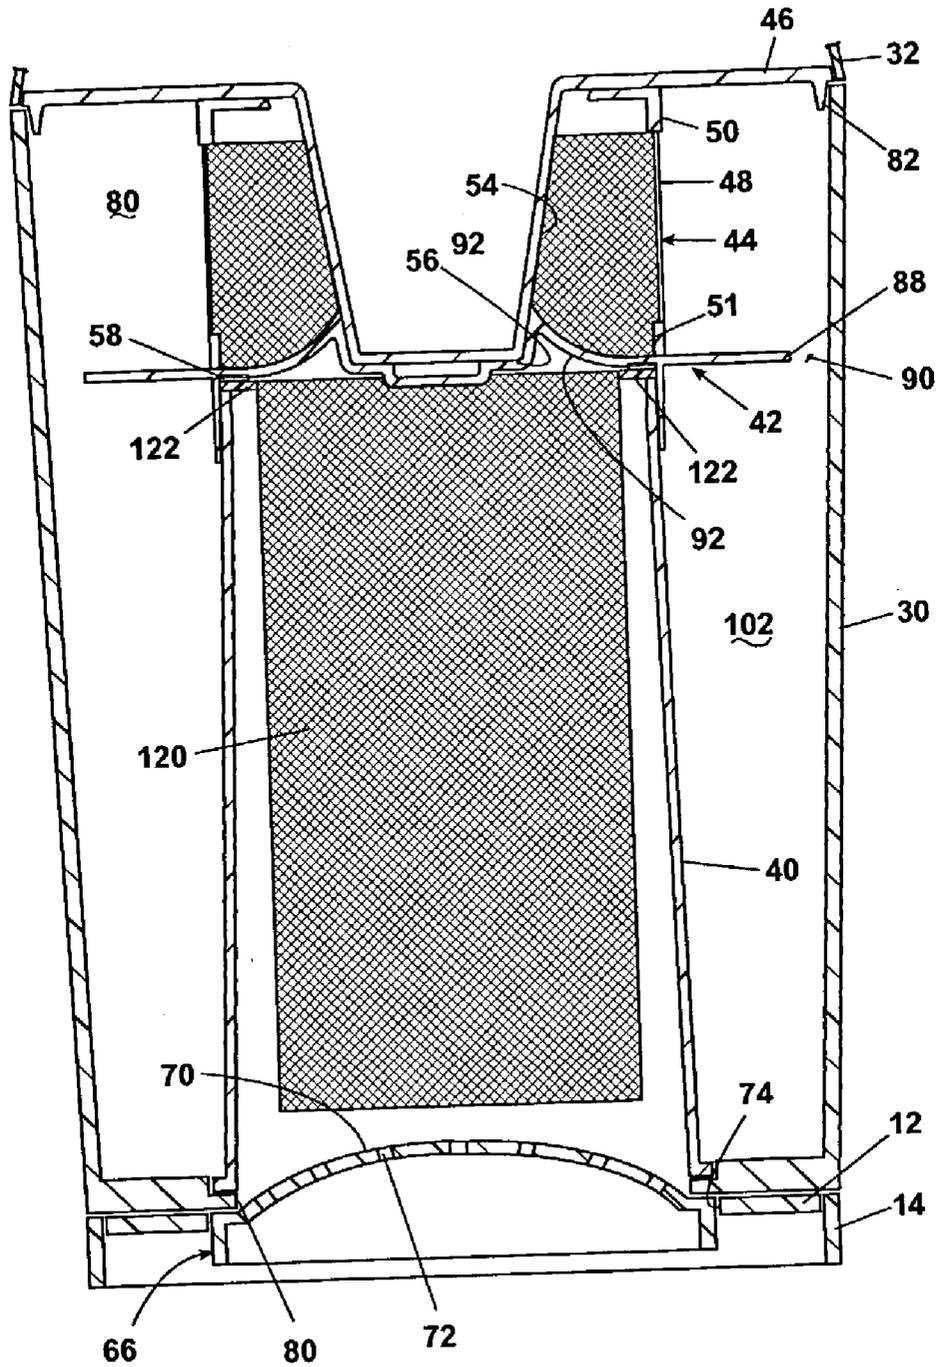


Fig. 9

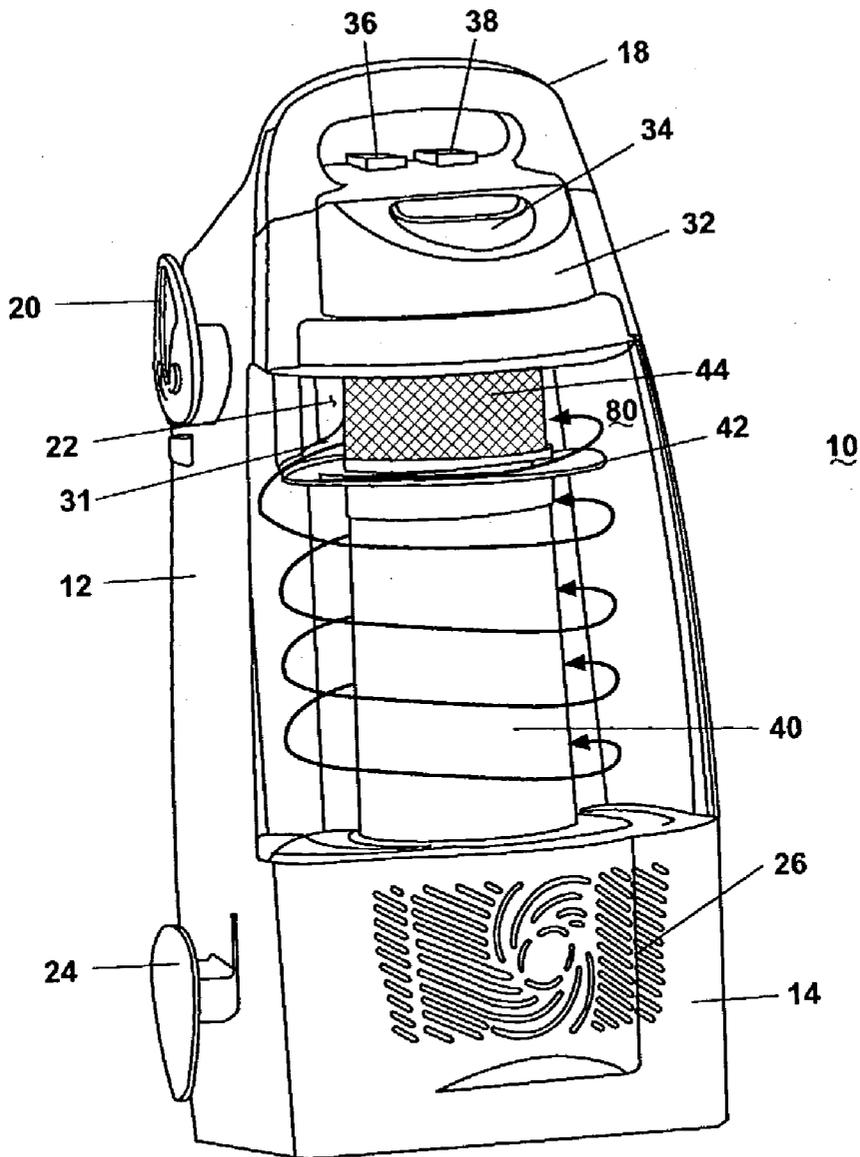


Fig. 10

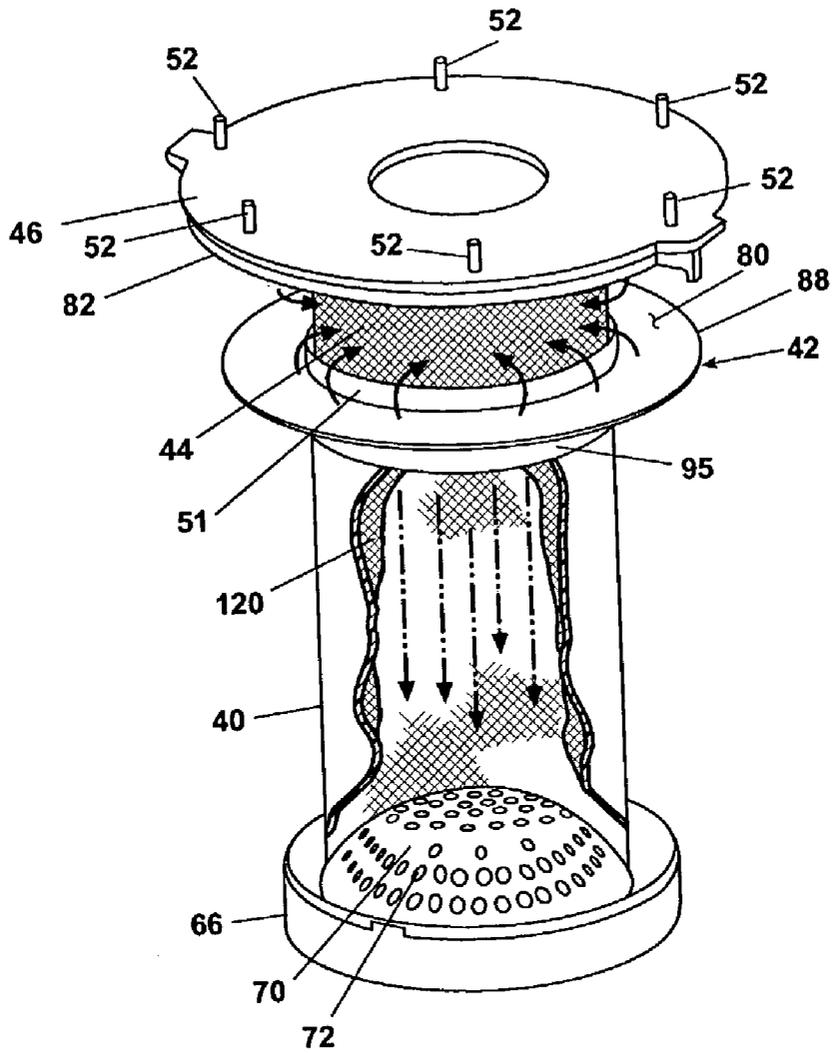


Fig. 11

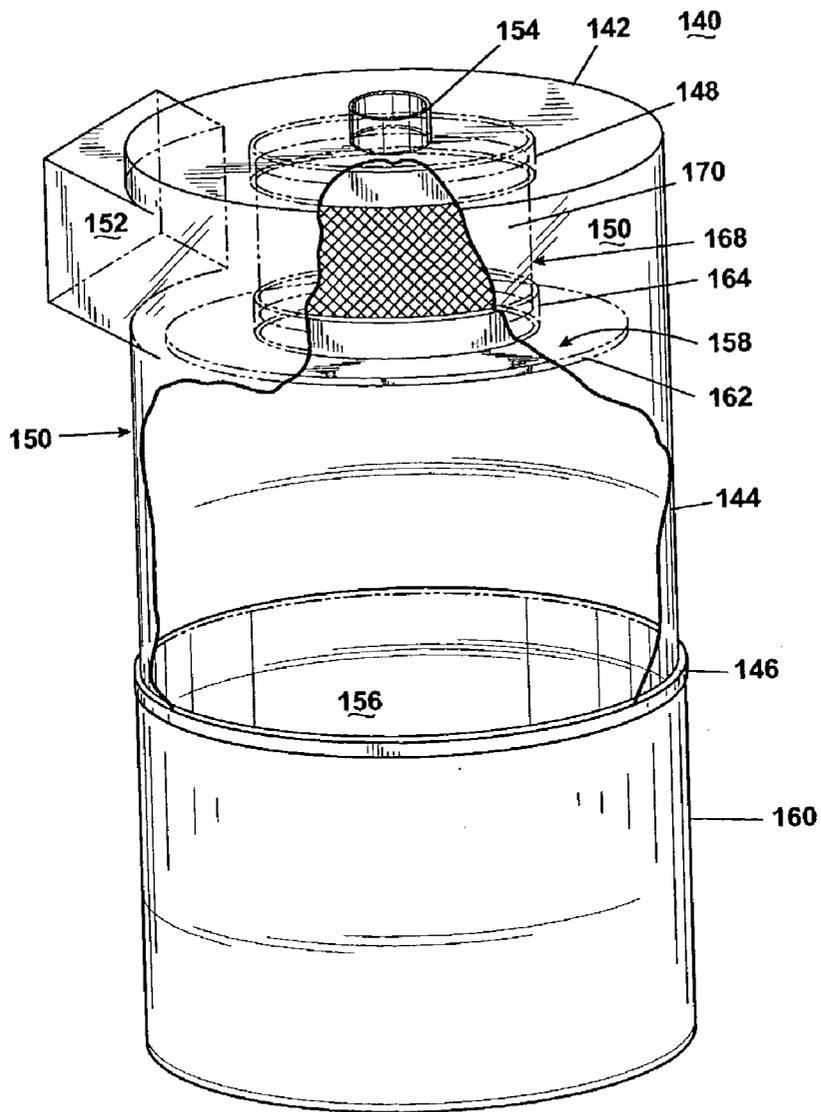


Fig. 12

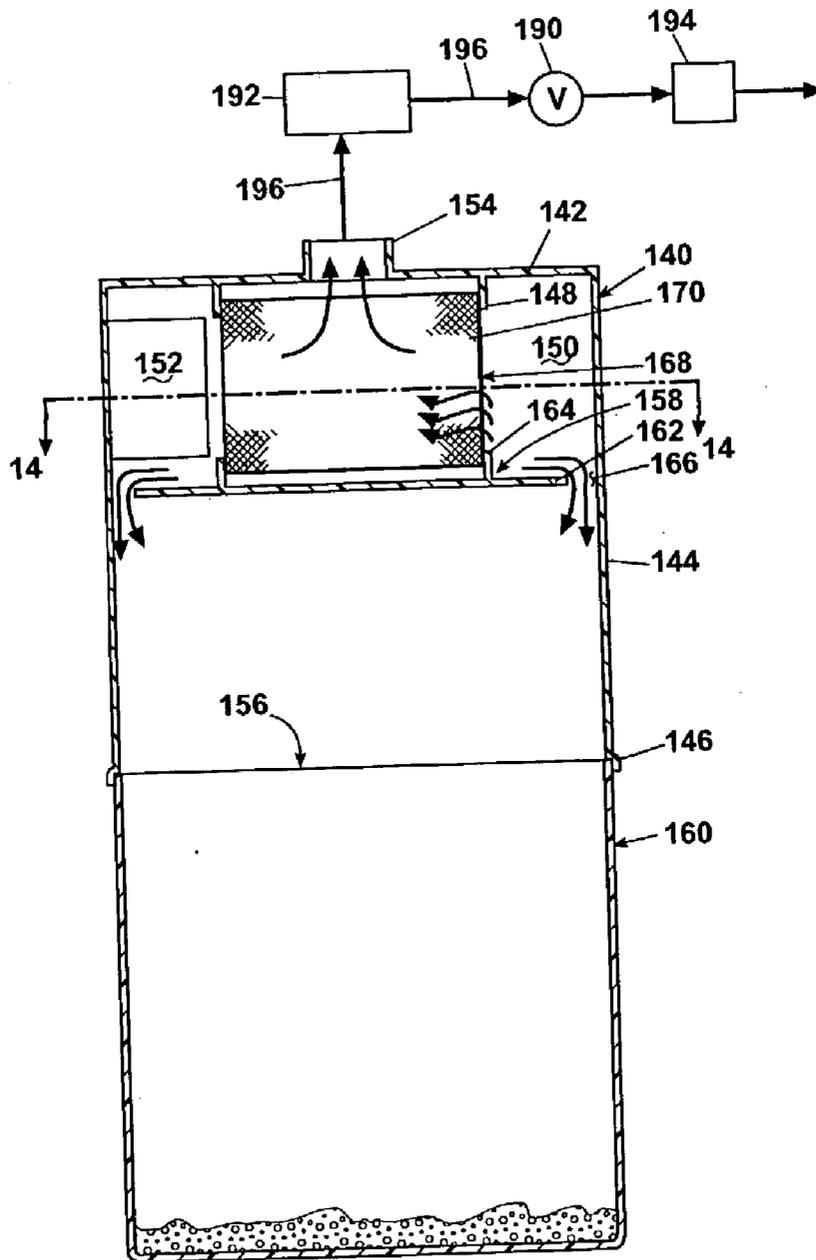


Fig. 13

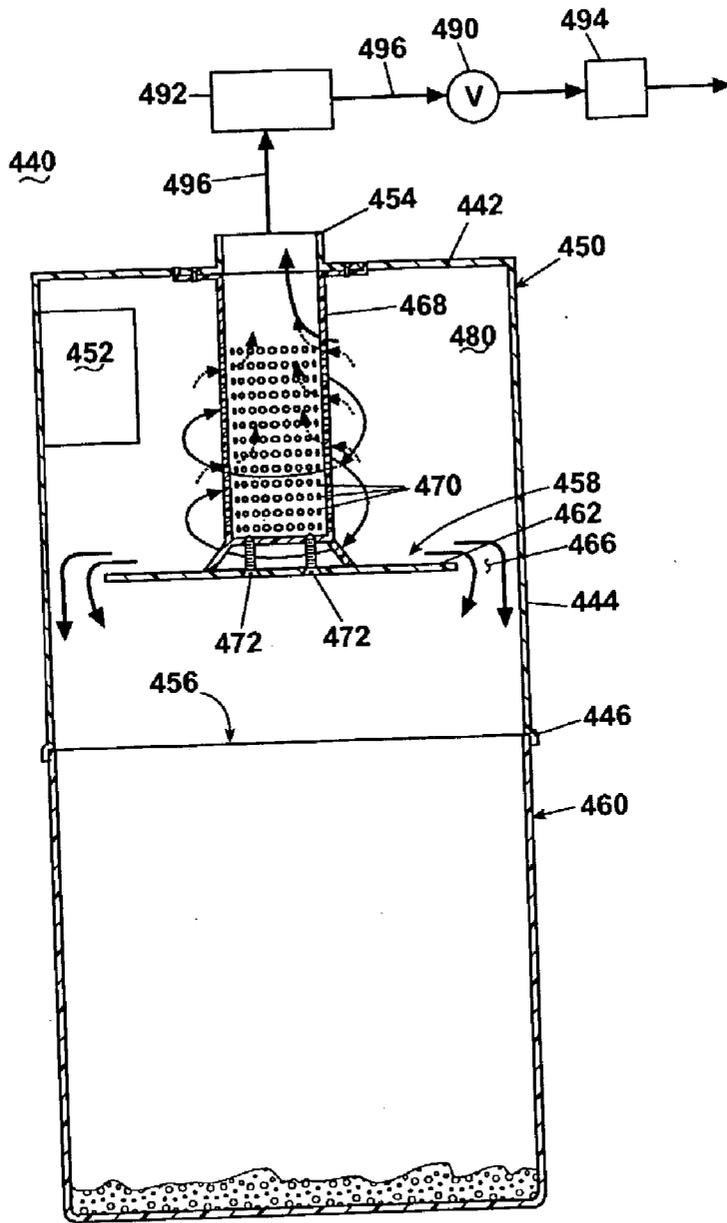


Fig. 13A

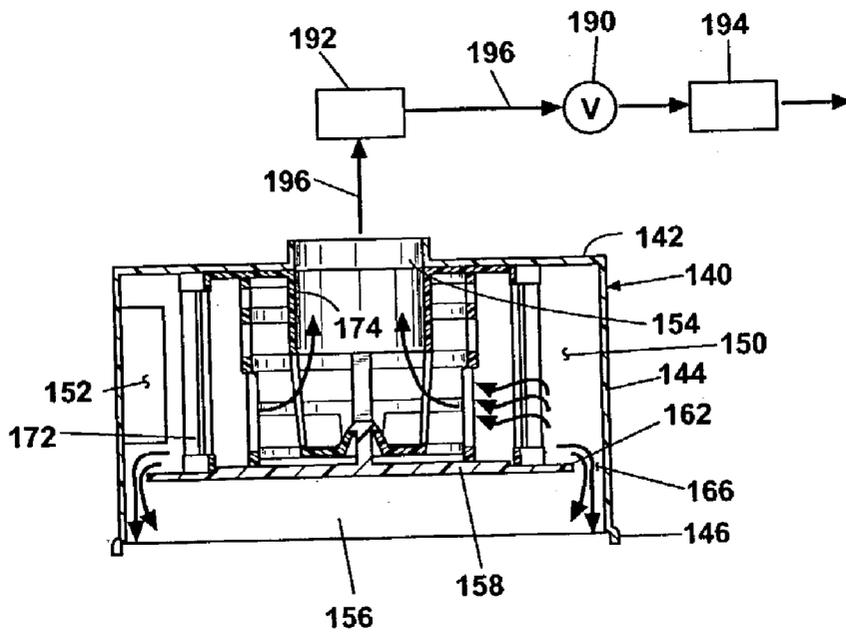


Fig. 13B

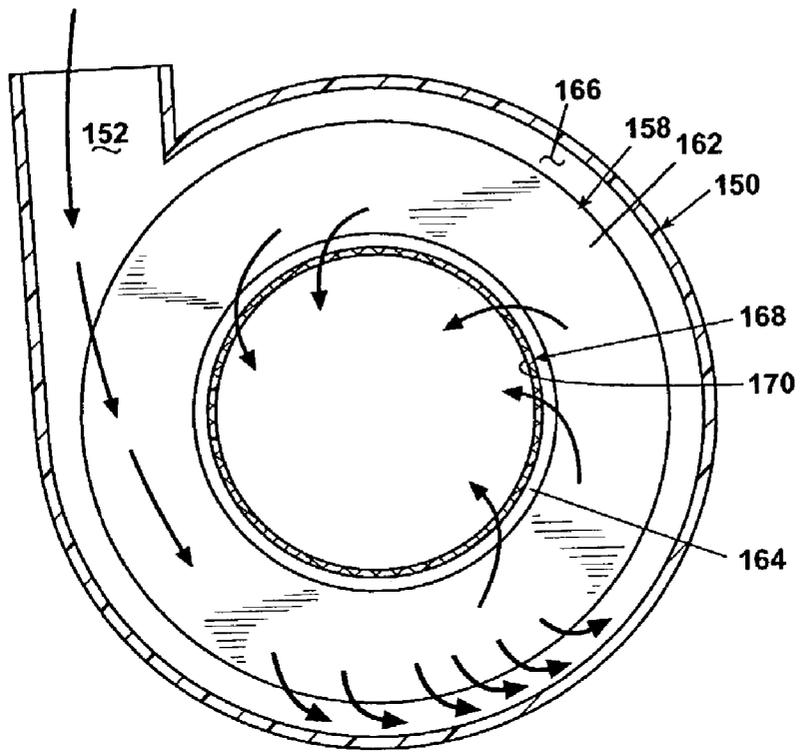


Fig. 14

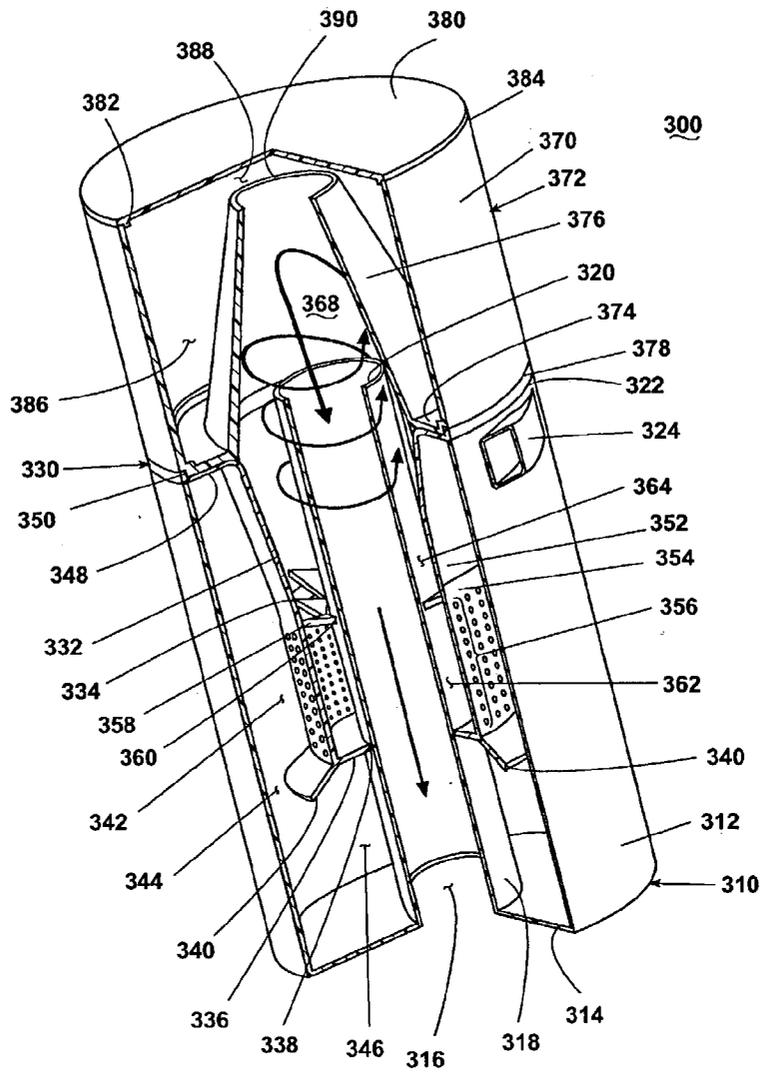
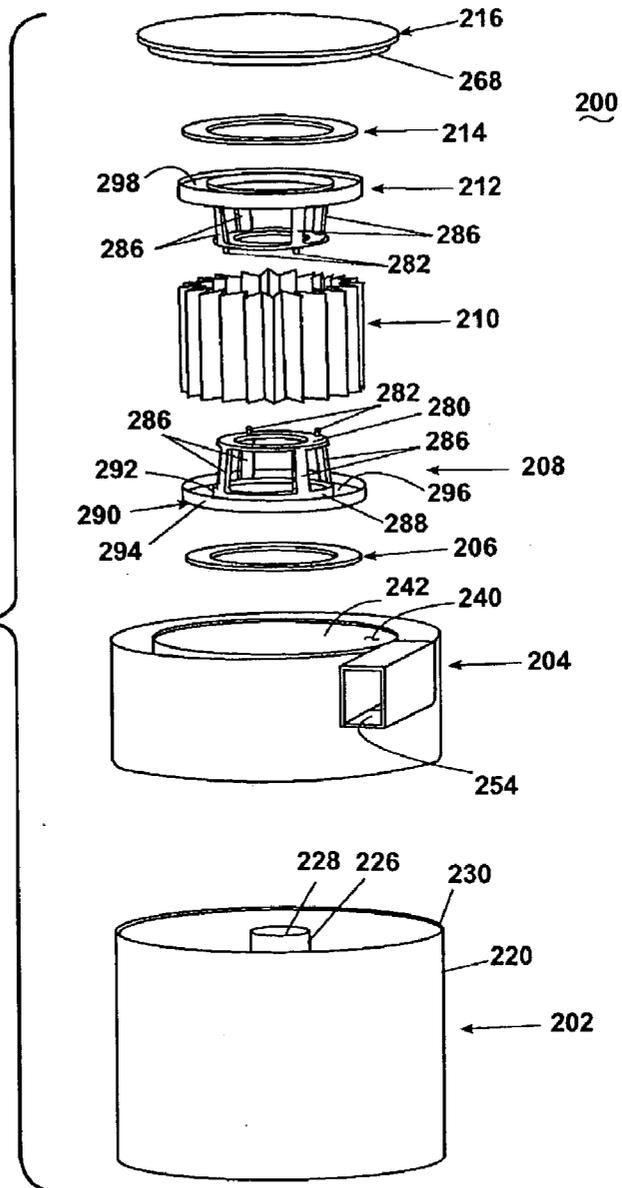


Fig. 15

Fig. 16



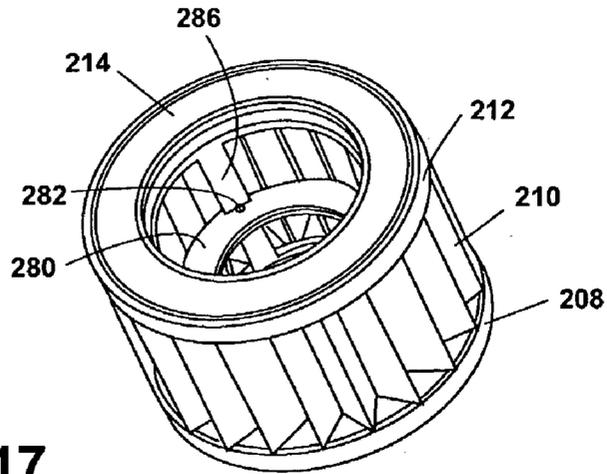


Fig. 17

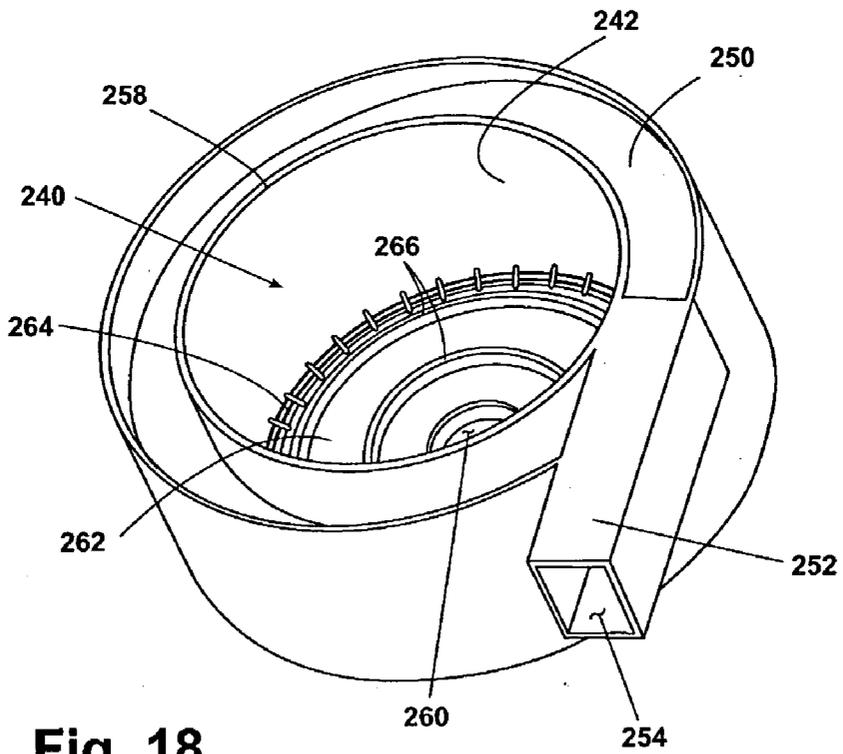


Fig. 18

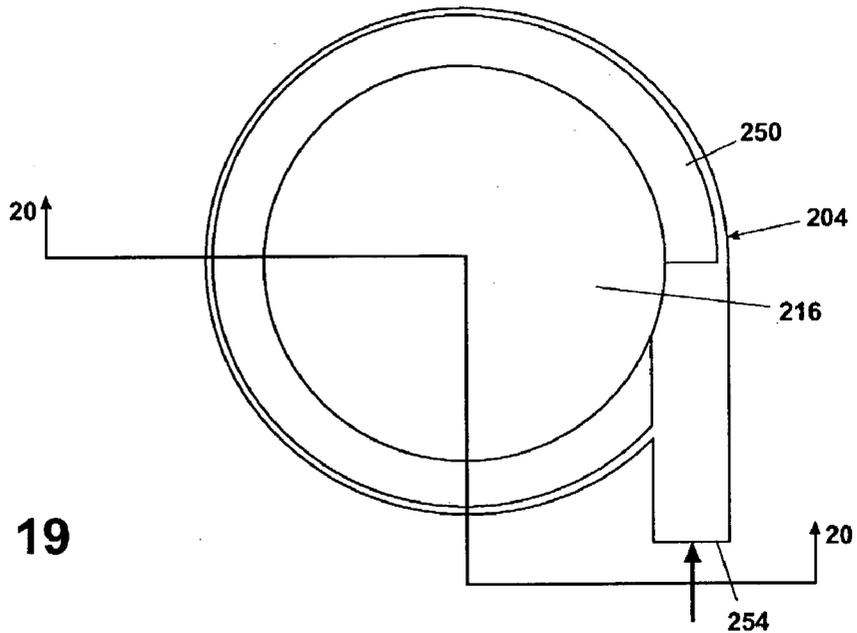


Fig. 19

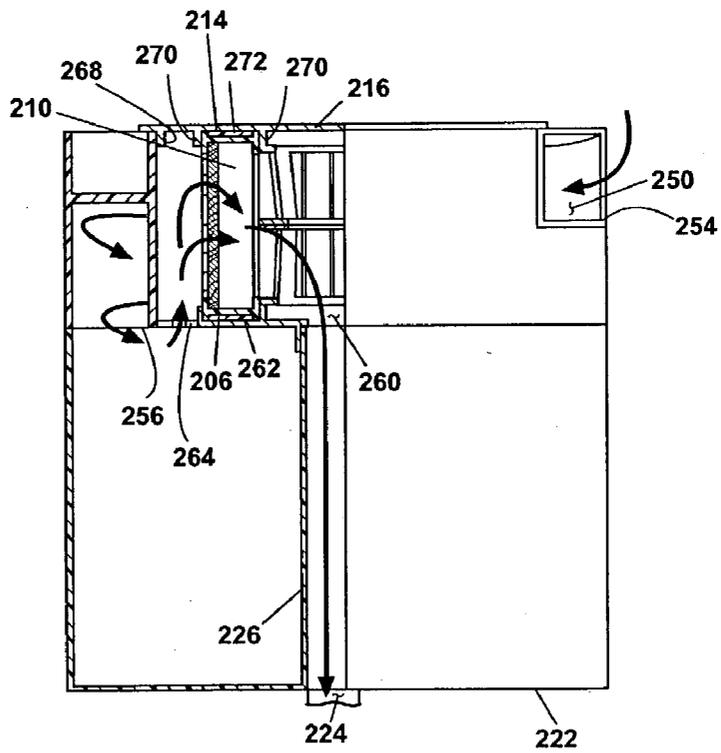


Fig. 20

CYCLONIC DIRT SEPARATION MODULE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation-in-part of Ser. No. 09/849,143, filed May 4, 2001, which claims the benefit of U.S. Provisional Application No. 60/201,933, filed May 5, 2000 and U.S. Provisional Application No. 60/269,044, filed Feb. 15, 2001, all of which are incorporated herein in their entirety.

BACKGROUND OF INVENTION

[0002] 1. Field of the Invention

[0003] The invention relates to suction cleaners, and in particular to a separator for a suction cleaner. In one of its aspects, the invention relates to a separator with a cyclonic airflow path to separate dirt and debris from air drawn into the cleaner. In another of its aspects, the invention relates to a separator that deposits the dirt and debris in a collection receptacle.

[0004] 2. Description of the Related Art

[0005] U.S. Pat. No. 4,172,710 to van der Molen discloses an upright vacuum cleaner with a wheeled base with a suction opening and a handle pivotally mounted to the base. A cyclone separator is mounted on the handle to remove dust and dirt from an airstream that is withdrawn through the suction opening in the base. The cyclone separator is formed by a cylindrical housing that has a tangential inlet in the cylindrical side wall and a central outlet at an upper portion of the housing. A motor driven suction source is mounted above the cyclone separator and is in communication with the central outlet of the cyclone separator to draw dust-laden air from the suction opening through the cyclone separator. A cylindrical screen filter is positioned within the cyclone separator between an outer cyclone chamber and the central outlet to screen entrained particles that have not been separated in the cyclone chamber from the air. A removable dirt cup below the cyclone separator collects the dust and dirt separated from the air.

[0006] Other upright vacuum cleaners with cyclonic separator mounted on an upright handle and with post cyclone separators mounted in cyclone separator housing are disclosed in the U.S. Pat. Nos. 6,563,622 to Dyson, 6,003,196 to Wright et al., 6,341,404 to Salo et al. and 6,026,540 to Wright et al.

[0007] U.S. Pat. No. 2,071,975 discloses a canister vacuum cleaner that has a wheeled base with a suction nozzle opening and a canister cyclone separator connected to the suction nozzle opening through a hose. The cyclone separator has a cyclone separation housing in which entrained dirt is separated from air and a dirt cup below the cyclone separation housing for collecting the thus separated dirt. The air is removed from the cyclone separation housing through a central tubular member that is formed by a series of baffles through which the air enters the tubular member. A disc is mounted to the bottom of the tubular member and acts as a baffle between the dirt cup and the cyclone separator.

[0008] U.S. Pat. No. 4,944,780, issued Jul. 31, 1990, to Usmani, discloses a central vacuum system having a cylin-

drical dirt tank with an interior cylindrical wall adjacent to a tangential inlet. Dirt-laden air drawn into the tangential inlet circulates about the interior of the cylindrical tank to the outside of the interior cylindrical wall. Entrained particulates are separated from the airstream and drop to the bottom of the cylindrical dirt tank. Exhaust air, which may carry smaller particulates, is drawn through a pleated cylindrical filter that is carried on a spindle inside the interior cylindrical wall. Waste air that passes through the filter is drawn through an exhaust opening and is exhausted from the central vacuum cleaner through an exhaust outlet.

[0009] U.S. Pat. No. 2,943,698, issued July 1968, to Bishop discloses a cylindrical dirt tank having a tangential air inlet, an interior frusto-conical shield, and a cylindrical filter element held in place by a frame comprising a cylindrical wire mesh or perforate screen. After dirt-laden air is introduced into the tank through the inlet, heavier dirt particles fall into a bottom portion of the dirt tank while waste air and any fine particles left in the waste air are exhausted through an air exhaust outlet. The filter element is interposed between the dirt tank and the air exhaust outlet to filter fine particles from the exhaust air.

SUMMARY OF INVENTION

[0010] According to the invention, a vacuum cleaner module comprises a module housing, a dirt-separation housing removably mounted in the module housing and defining a cyclonic airflow chamber for separating contaminants from a dirt-containing airstream and including an inlet opening for the cyclonic chamber adapted to be connected to a suction cleaning nozzle and an airstream outlet opening in an upper central portion of the dirt-separation housing and in communication with the inlet opening. An airstream suction source is mounted in the dirt-separation housing and is fluidly connected to the cyclonic chamber inlet opening, the cyclonic airflow chamber and the airstream outlet opening to establish and maintain a tangential flow of a dirt-containing airstream within the cyclone airflow chamber as the airstream flows between the cyclonic chamber inlet opening and the airstream outlet opening for separating dirt from the airstream in the cyclonic airflow chamber. A dirt-collecting chamber is mounted within the dirt-separation housing and beneath the cyclonic airflow chamber to collect dirt separated from the dirt-containing airstream in the cyclonic airflow chamber. A support element is mounted in an upper portion of the dirt separator housing and mounts a separator plate at a lower portion thereof above the dirt-collecting bin, and separating the cyclonic airflow chamber from the dirt-collecting chamber.

[0011] In one embodiment of the invention, the support element is cylindrical and has openings for passage of the dirt-separated airstream prior to exit of said airstream from said dirt-separation housing through the airstream outlet. A filter element can be positioned between the cyclonic airflow chamber and the support element. In one embodiment, the filter element is a fine mesh.

[0012] In a preferred embodiment, the separator plate extends radially from the support element toward a side wall of the housing. The separator plate forms a gap with the housing side wall for passage of dirt particles from the cyclone separation chamber to the dirt-collecting chamber. The side wall of the housing is cylindrical at the separator

plate and the gap between the separator plate and the housing side wall is annular. Thus, the separator plate is circular and the housing has a cylindrical wall adjacent the separator plate.

[0013] In a preferred embodiment of the invention, the relative cross-sectional areas of the separator plate with respect to the housing cross sectional area at the separator plate is generally in the range of 0.75 to 0.95. Preferably, the relative cross-sectional area of the separator plate with respect to the housing cross sectional area is in the range of 0.8 to 0.92. In a most preferred embodiment of the invention, the relative cross-sectional area of the separator plate with respect to the housing cross sectional area is about 9.

[0014] In another preferred embodiment, the cylindrical support element, the separator plate and the dirt-separation housing define a toroidal cyclonic airflow chamber that forms the cyclonic airflow chamber. In a one embodiment, a filter is positioned between the cyclonic airflow chamber and the airstream outlet opening. The filter can be a fine mesh.

[0015] In a preferred embodiment of the invention, a filter is positioned downstream of the airstream outlet opening and upstream of the suction source.

[0016] Preferably, the suction source is mounted beneath the dirt-separation housing. Typically, the suction source has an inlet downstream from the airstream opening to draw the dirt-containing airstream into the cyclonic airflow chamber.

[0017] In one embodiment of the invention, the dirt-separation housing also defines the dirt-collecting chamber. In another embodiment of the invention, a dirt cup defines the dirt-collecting chamber and the dirt cup is removably mounted to the dirt-separation housing and is also or alternately removably mounted to the module housing.

[0018] The vacuum cleaner module is adapted to be used with a suction nozzle that can be a part of a base that is movable along a floor surface or with a tool on the end of a hose for above floor cleaning.

[0019] Further according to the invention, a vacuum cleaner comprises a dirt separator housing defining a cyclonic airflow chamber for separating contaminants from a dirt-containing airstream includes a cyclonic chamber inlet and an airstream outlet in fluid communication with each other. An airstream suction source is fluidly connected to the cyclonic airflow chamber for transporting dirt-containing air from a source of a dirt-containing airstream to the cyclonic airflow chamber. The suction source is adapted to selectively establish and maintain the dirt-containing airstream from the source of the dirt-containing airstream to said cyclonic chamber inlet and for maintaining tangential flow of the dirt-containing airstream within the cyclone airflow chamber for separating dirt from the air stream in the cyclonic airflow chamber. A support element is positioned within said dirt-separation housing and mounts a separator plate that forms a toroidal chamber within the dirt-separation housing with a cylindrical side wall and upper wall of the dirt-separation housing. A dirt-collecting bin is positioned beneath the separator plate within the dirt-separation housing and forms a dirt-collecting chamber. In a preferred embodiment of the invention, the relative cross-sectional areas of the separator plate with respect to the housing cross sectional area at the separator plate is generally in the range

of 0.75 to 0.95. Preferably, the relative cross-sectional area of the separator plate with respect to the housing cross sectional area is in the range of 0.8 to 0.92. In a preferred embodiment of the invention, the relative cross-sectional area of the separator plate with respect to the housing cross sectional area is about 9.

[0020] In one embodiment of this invention, the airstream outlet is in a lower portion of the housing.

[0021] In a further embodiment, a separator plate is positioned between the first cyclonic airflow chamber and the first dirt-collecting bin. The relative cross-sectional area of the separator plate with respect to the housing is in the range of 0.75 to 0.95.

[0022] In a further embodiment according to the invention, the cyclonic airflow chamber is formed by a tangential helical ramp.

[0023] In a further embodiment, there is a direction change portal between the cyclonic airflow chamber and the airstream outlet opening in the dirt separation housing so that the airstream changes whereby the airstream changes direction before passing through the airstream outlet opening.

BRIEF DESCRIPTION OF DRAWINGS

[0024] In the drawings:

[0025] FIG. 1 is a front view of a suction cleaner housing with cyclonic dirt separation according to the invention.

[0026] FIG. 2 is a side view of the suction cleaner of FIG. 1.

[0027] FIG. 3 is a rear view of the suction cleaner of FIGS. 1-2.

[0028] FIG. 4 is an exploded perspective view of a dirt collection assembly of the suction cleaner of FIGS. 1-3.

[0029] FIG. 5 is an exploded perspective view of a module housing and a motor housing of the suction cleaner of FIGS. 1-3.

[0030] FIG. 6 is a front view of a cylindrical separator of the suction cleaner of FIGS.

[0031] FIG. 7 is a cross-sectional view through line 7-7 of FIG. 6.

[0032] FIG. 8 is a cross-sectional view taken through line 8-8 of FIG. 2.

[0033] FIG. 9 is a cross-sectional view taken through line 9-9 of FIG. 2.

[0034] FIG. 10 is a cut-away perspective view of the suction cleaner of FIGS. 1-9 showing air flow around the cylindrical separator in the dirt collection assembly.

[0035] FIG. 11 is a cut-away perspective view of the cylindrical separator of FIGS. 1-10 showing an internal axial air flow.

[0036] FIG. 12 is a cut-away perspective view of a further embodiment of a cyclonic separator for a suction cleaner according to the invention.

[0037] FIG. 13 is a front cross-sectional view of the cyclonic separator of FIG. 12.

[0038] FIG. 13A is a front cross-sectional view of a further embodiment of a cyclonic separator according to the invention.

[0039] FIG. 13B is a front cross-sectional view, like FIG. 13A of a further embodiment of a cyclonic separator according to the invention.

[0040] FIG. 14 is a cross-sectional view taken through line 14-14 of FIG. 13.

[0041] FIG. 15 is a cut-away perspective view of a further embodiment of a dirt collection assembly with cyclonic dirt separation according to the invention.

[0042] FIG. 16 is an exploded perspective view of another embodiment of a dirt collection assembly with cyclonic dirt separation according to the invention.

[0043] FIG. 17 is an enlarged perspective view of a filter assembly for the dirt collection assembly of FIG. 16.

[0044] FIG. 18 is an enlarged perspective view of a cyclonic separator of the dirt collection assembly of FIG. 16.

[0045] FIG. 19 is a plan view of the dirt collection assembly of FIG. 16.

[0046] FIG. 20 is a cross-sectional view of the dirt collection assembly taken through line 20-20 of FIG. 19.

DETAILED DESCRIPTION

[0047] With reference to FIGS. 1-3, a vacuum cleaner module 10 comprises a module housing 12, a motor housing 14, and a dirt collection assembly 16. The module housing 12 includes a two-piece handle 18, an upper cord wrap 20, and an air inlet 22 conduit. The module housing 12 further includes first and second switches 36, 38. The motor housing 14 includes a lower cord wrap 24, an exhaust air vent 26 and a floor suction conduit 28. The dirt collection assembly 16 comprises a dirt separation housing 30, a housing cap 32, and a tank latch 34. Each of the dirt collection assembly 16, module housing 12, and motor housing 14 are configured to be assembled to present a smooth, continuous appearance, and to be generally fluid-tight.

[0048] The dirt collection assembly 16, as shown in FIG. 4, includes the dirt-separation housing lower portion 30, the dirt separation housing upper portion 32 and the tank latch 34, and further includes a cylindrical separator 40, a secondary filter cup 120, a gasket 58, a separator plate 42, a cylindrical preliminary filter 44, and a top plate 46. Dirt-separation housing 30 includes an air inlet opening 31. Dirt separation housing upper portion 32 includes tank latch recess 33 for receiving tank latch 34. Tank latch 34 is an integral molding including a body portion 96, two generally downwardly depending leaf springs 98, and two rearwardly extending catches 100. Cylindrical separator 40 is a hollow cylinder and includes in its interior radially inwardly projecting ribs 110, and on its exterior twist-and-lock grooves 86. Secondary filter cup 120 includes an upper rim 122, cylindrical side wall 124, and bottom wall 126. Gasket 58 is annular and resilient for forming a compressive seal. Separator plate 42 is substantially annular, having an outer radial flange 88, and further including an inner portion having upwardly extending separator plate radial ribs 92 joined at a central hub and defining a central cavity 56, and separator

plate apertures 94 defined radially between radial ribs 92. Separator plate 42 further includes filter alignment slots 85 adjacent radial ribs 92. Separator plate 42 further includes a depending skirt 95, skirt 95 having inwardly projecting tabs 84 for receipt in twist-and-lock grooves 86. Preliminary filter 44 includes a filter element 48 in the form of a fine mesh screen, and upper and lower filter frames 50, 51. Lower filter frame 51 includes alignment tabs 53 for receipt in alignment slots 85 of separator plate 42. Top plate 46 includes upwardly projecting studs 52 and a downwardly projecting frusto-conical portion 54. Filter element 48 has been found to be effective with a fine mesh having openings as small as 40 microns.

[0049] Referring now to FIGS. 6-7, ribs 110 of separator 40 each having an upper end 112 slightly recessed from the upper end of separator 40. Separator 40 receives cup 120 so that ribs 110 support rim 122, suspending cup 120 within separator 40, rim 122 being substantially flush with the upper end of separator 40. Separator plate 42, with gasket 58, is then received on separator 40 in a twist-and-lock arrangement using tabs 84 and grooves 86, creating a sealing arrangement between plate 42 and separator 40, and holding cup 120 in place against ribs 110. Prior to placement of plate 42 on separator 40, preliminary filter 44 is aligned on separator plate 42 using tabs and slots 53, 85, coaxial with cylindrical separator 40. Support element 54 is configured to fill central cavity 56 formed in the separator plate 42 to sandwich preliminary filter 44 therebetween. Preliminary filter 44 is thereby sealingly received between the top plate 46 and the separator plate 42 when the support element 54 of the top plate 46 is received in the central cavity 56 of the separator plate 42. The pins 52 projecting from the top plate 46 are received in recesses (not shown) on the underside of the housing cap 32 for holding and aligning the top plate 46 to the housing cap 32.

[0050] Referring again to FIG. 4, and to FIG. 9, the dirt collection assembly 16 comprises dirt-separation housing 30 having a generally cylindrical interior, and having a central aperture 76 on the bottom thereof. The cylindrical separator 40 is coaxially received within the dirt-separation housing 30, so that the open end of the hollow cylindrical separator 40 is aligned with and sealingly engages the perimeter of the central aperture 76 of the dirt-separation housing 30. The cylindrical separator 40 is preferably affixed to tank 30 at central aperture 76, such as by welding. The assembly comprising the housing cap 32, top plate 46, preliminary filter 44, and separator plate 42 are received within the upper end of dirt-separation housing 30 as separator plate 42 is received on the cylindrical separator 40 in the twist-and-lock arrangement of tabs and grooves 84, 86. The perimeter of the top plate 46 includes a canted lip 82 configured to fit inside the upper edge of the tank 30 in a sealing fit. The top plate 46 is fixed within the housing cap 32, so that when the top plate is fit within the top of the dirt-separation housing 30, the exterior of the housing cap 32 aligns with the exterior of the dirt-separation housing 30 to provide a uniform flush surface. The separator plate 42 includes a radial flange 88 having a diameter less than the interior diameter of the dirt-separation housing 30, resulting in an annular gap 90 between the separator plate 42 and the side walls of the dirt-separation housing 30.

[0051] The motor housing 14 having exhaust air vent 26, shown in FIG. 5, further comprises a motor cage housing 60

having exhaust vents 68, a motor/impeller assembly 62, an impeller gasket 64 and a motor cover 66. The motor/impeller assembly 62 includes motor brushes 63, impeller intake 65, and motor electrical connections (not shown). Motor/impeller assembly 62 is closely received within motor cage housing 60, motor cage housing 60 further comprising integral ribs (not shown) that cooperate with the exterior of motor/impeller assembly 62 in a nesting relationship. Motor cover 66 includes a raised intake port 70 having apertures 72. Gasket 64 is configured to create a fluid seal between motor cover 66 and motor/impeller assembly 62 so that impeller intake 65 is in sealed fluid communication with intake port 70. Motor cage housing 60 and motor cover 66 are configured to enclose motor/impeller assembly 62 and gasket 64, providing sealed fluid communication between the motor cover 66 and exhaust vents 68, through motor/impeller assembly 62. Motor housing 14 is configured to mate with the bottom of the module housing 12 so that the motor cover 66 sealingly fills central aperture 74, and the bottom of the module housing 12 sealingly covers the motor housing 14. Assembly of the motor cage housing 60 within the motor housing 14, and further assembly of the motor housing 14 to the module housing 12, therefore creates a sealed fluid path between the interior of the module housing 12 at apertures 72 of the motor cover 66, to exhaust outlet 26 of motor housing 14, through motor/impeller assembly 62.

[0052] Referring now to FIGS. 8-11, the dirt collection assembly 16 can be assembled and inserted into the module housing 12 so that the cylindrical separator 40 within the tank 30 is aligned with and fluidly connected with the motor cover 66, and the inlet aperture 31 of the dirt-separation housing 30 is further fluidly connected with the air inlet 22, as particularly shown in FIGS. 8 and 10. Dirt collection assembly 16 is held in module housing 12 by tank latch 34 as will be further described below. The air inlet 22 is therefore fluidly connected to the exhaust air vent 26 of the motor housing 14 through the inlet opening 31 of the dirt-separation housing 30, the preliminary filter element 44, the separator plate 42, the hollow cylindrical separator 40, the apertures 72 of the raised portion 70 of the motor cover 66, the motor impeller assembly 62, and the exhaust vent 68 of the motor cage housing 60.

[0053] The user controls the suction cleaner by activating one of the switches 36, 38 to supply power to the motor impeller assembly 62. When the motor impeller assembly 62 is activated, a suction force is generated at the motor cover 66, causing a flow of air from the motor cover 66 through the motor impeller assembly 62, motor cage housing 60 and into the motor housing 14, and then to atmosphere through the exhaust air vent 26. A post-motor filter (not shown) is configured to fully occupy, and is inserted in, the space between exhaust vents 68 and exhaust air vent 26. When the motor cover 66 is sealingly and fluidly connected to the cylindrical separator 30, as in when the dirt collection assembly 16 is fully installed in the module housing 12, the motor/impeller assembly 62 is an airstream suction source that is fluidly connected to the cyclonic chamber inlet opening 22 through the cyclonic airflow chamber 80, filter 44, filter 120 and outlet openings 72 to establish and maintain a tangential flow of dirt-containing airstream within the cyclone airflow chamber 80 as the airstream flows between the cyclonic chamber inlet opening 31 and the airstream outlet opening 72 for separating dirt from the

airstream in the cyclonic chamber 80. A suction hose or nozzle of known construction is generally attached to the air inlet 22 for use in cleaning a surface.

[0054] As air is drawn into the air inlet 22, the air inlet 22 imparts a tangential component to the inlet air, as shown in FIG. 10, as it enters the dirt-separation housing 30 through the aperture 31. The air enters the dirt-separation housing 30 in a toroidal section of the dirt tank formed between top plate 46 and separator plate 42, and between the preliminary filter 44 and the interior tank wall. As the air flows in a tangential direction about the dirt-separation housing 30, heavier particles of dirt and debris are propelled outwardly by centrifugal force and fall under the force of gravity through the gap 90 formed between the radial flange 88 of the separator plate 42 and the dirt-separation housing 30 into a dirt collecting chamber 102 in the lower portion of the dirt-separation housing 30. It has been found that separator plate 42 acts as a separator between two air velocity zones, one existing in the toroidal cyclonic airflow chamber 80 having a relatively high rotational air velocity, and a second zone in the dirt collecting chamber 102 separated from the toroidal cyclonic airflow chamber 80, below separator plate 42, having a much lower rotational air velocity. The high rotational air velocity in the toroidal cyclonic airflow chamber 80 forces dirt particles contained in the airstream to the outside of the chamber where they will be drawn through the gap 90 to the outside of flange 88. As the airstream flows into the zone beneath the separator plate 42 and the air velocity decreases, the dirt particles will fall out of the airstream and collect and the dirt-separation housing 30. It has been found that narrowing the gap 90, in the sense of having a high ratio of the surface area of the plate 42 to the overall cross-sectional area of the housing, is beneficial to maintaining the two air velocity zones. This must be balanced with maintaining a gap 90 large enough to enable passage of larger dirt particles such as hair, carpet fuzz, etc. A relative plate surface area in the range of 0.75 to 0.95 with respect to the housing cross-sectional area is effective in defining the two air velocity zones while enabling the passage of large dirt particles, with the preferred ratio of surface areas being 0.8 to 0.92, or optimally 0.9.

[0055] The air flow circulates tangentially about the interior of the tank 30 until it is drawn inwardly toward the preliminary filter element 44, as shown in FIG. 11. As the air flow passes through the preliminary filter element 44, the filter element 44 prevents larger dirt particles and debris, that did not fall to the lower portion of the dirt-separation housing 30, from passing into the interior of filter element 44 and then into the interior of separator 40 and filter cup 120. The air is then drawn downwardly between separator plate radials 92 through separator plate apertures 94 (see FIG. 8), through filter cup 120 which traps additional finer particles, and passes axially through the hollow interior of the cylindrical separator 40, then through apertures 72 and the motor housing 14 to atmosphere through the post motor filter (not shown) and the exhaust air vent 26.

[0056] Dirt and debris, when collected in the dirt-separation housing 30, can be discarded by removing the dirt collection assembly 16 from the module housing 12. Dirt collection assembly 16 is retained in module housing 12, as stated above, by tank latch 34 on housing cap 32. Leaf springs 98 bias latch 34 upwardly by pressing against the bottom of recess 33, forcing the catches 100 underneath a lip

35 of the handle 18, thereby retaining the housing cap 32 against the handle 18. Latch 34 is released by depressing the latch body 96 against the biasing force of the leaf springs 98, thereby releasing the catches 100 from the lip 35. The dirt collection assembly 16 can then be tilted away from the housing portion 12. With the dirt collection assembly 16 removed from the module housing 12, the assembly comprising housing cap 32, top plate 46, preliminary filter 44 and separator plate 42, can be removed from dirt-separation housing 30 and cylindrical separator 40 as a unit by counter-clockwise rotation of the twist-and-lock arrangement of tabs and grooves 84, 86. The upper portion of the dirt-separation housing 30 and the filter cup 120 are thus open so that they can be emptied by a user. Filter cup 120 can further be removed from separator 40 for cleaning, and top plate 46 can be further separated from the separator plate 42 for cleaning or replacement of the preliminary filter assembly 44. Upon reassembly as described above, dirt collection assembly 16 is replaced in module housing 12 by inserting the lower portion of the assembly 16 into the housing portion 12 and tilting it inwardly until catches 100 resiliently slide past lip 35 to bias upwardly and engage lip 35 and hold assembly 16 in place in module housing 12.

[0057] Referring to FIG. 12, a further embodiment of a cyclonic dirt separator 140 according to the invention comprises a cylindrical cyclone chamber 150 having an upper wall 142 and a sidewall 144, the sidewall 144 terminating in a lower offset lip 146. An annular collar 148 depends from upper wall 142, the collar 148 being centered in the cylindrical chamber 150. An exhaust outlet 154 in the upper wall 142 and within the annular collar 148 is fluidly connected with a suction source (see FIG. 14). Sidewall 144 further includes a tangential air inlet 152 aligned proximate the upper wall 142 for generating a tangential airflow in the chamber 150 parallel to the upper wall 142.

[0058] The cyclonic dirt separator 140 further comprises a primary filter element 168. In a preferred embodiment, the primary filter element 168 comprises a cylindrical fine mesh screen 170 retained by the collar 148 that depends from upper wall 142 of the chamber 150. Cyclonic dirt separator 140 further comprises a separator plate 158 in the form of a solid disc having an upstanding annular collar 164. In the preferred embodiment, the upstanding annular collar 164 is aligned with the depending collar 148 of the upper wall 142 so that the cylindrical screen 170 is retained at the ends thereof by each of the collars 148, 164. In this manner, separator plate 158 is suspended from upper wall 142, forming a toroidal cyclonic airflow chamber 150 between the cylindrical screen 170 and the sidewall 144, and between the upper wall 142 and the separator plate 158, respectively. In the preferred embodiment, air inlet 152 is vertically aligned between upper wall 142 and separator plate 158 such that the tangential airflow generated from tangential air inlet 152 is directed into the toroidal cyclonic airflow chamber 150.

[0059] With further reference to FIGS. 13-14, the tangential airflow, containing particulate matter, passes through tangential air inlet 152 and into toroidal cyclonic airflow chamber 150 to travel around the cylindrical screen 170. As the air travels about the toroidal cyclonic airflow chamber 150, heavier dirt particles are forced toward sidewall 144. These particles will fall under the force of gravity through a gap 166 defined between an edge 162 of separator plate 158

and the sidewall 144. Referring particularly to FIG. 13, dirt particles falling through the gap 166 drop through the open end 156 of chamber 150 and are collected in the dirt cup 160. The upper end of dirt cup 160 is received in a nesting relationship in lower offset lip 146 of the sidewall 144 to seal the cyclone chamber 150 to the dirt cup 160.

[0060] As the inlet air traverses through toroidal cyclonic airflow chamber 150, casting dirt particles toward sidewall 144, the inlet air will be drawn through cylindrical screen 170, through exhaust outlet 154, exhaust/suction conduit 196, through a secondary (pre-motor) filter 192 to the suction source 190. The secondary filter 192 removes additional particulate matter from the exhaust airstreams prior to the airstreams being drawn through the suction source 190. A post-motor filter 194 can also be provided downstream of the suction source 190 to remove additional fine particulate matter from the exhaust airstream before it is released to the atmosphere.

[0061] Dirt cup 160 is removably connected to chamber 150. Accumulated dirt can be discarded by axially displacing dirt cup 160 from cyclone chamber 150 so that it disengages from offset lip 146. Dirt cup 160 can then be removed from chamber 150 to discard accumulated dirt.

[0062] A further embodiment of a cyclonic separator 440 is shown in FIG. 13A. the cyclonic separator 440 comprises a cylindrical cyclone chamber 450 having an upper wall 442 and a sidewall 444, the sidewall 444 terminating in a lower offset lip 446. A substantially cylindrical filter assembly 468 depends from upper wall 442, being centered in the cylindrical chamber 450. An exhaust outlet 454 in the upper wall 442 and within the filter assembly 468 is fluidly connected with a suction source 490. Sidewall 444 further includes a tangential air inlet 452 aligned proximate the upper wall 442 for generating a tangential airflow in the chamber 450 parallel to the upper wall 442.

[0063] In a preferred embodiment, the filter assembly 468 comprises a plurality of apertures 470 passing through the wall of the assembly 468 and fluidly connecting air inlet 452 with exhaust outlet 454. Cyclonic dirt separator 440 further comprises a separator plate 458 in the form of a solid disc. Separator plate 458 is secured by fasteners 472 to a lower end of cylindrical filter assembly 468, parallel to upper wall 442, forming a toroidal cyclonic airflow chamber 480 between the cylindrical filter assembly 468 and the sidewall 444, and between the upper wall 442 and the separator plate 458, respectively. In the preferred embodiment, air inlet 452 is vertically aligned between upper wall 442 and separator plate 458 such that the tangential airflow generated from tangential air inlet 452 is directed into the toroidal cyclonic airflow chamber 480.

[0064] As in the previous embodiment, the tangential airflow, containing particulate matter, passes through tangential air inlet 452 and into toroidal cyclonic airflow chamber 480 to travel around the cylindrical filter assembly 468. As the air travels about the toroidal cyclonic airflow chamber 480, heavier dirt particles are forced toward sidewall 444. These particles will fall under the force of gravity through a gap 466 defined between an edge 462 of separator plate 458 and the sidewall 444. Dirt particles falling through the gap 466 drop through the open end 456 of chamber 450 and are collected in the dirt cup 460. The upper end of dirt

cup **460** is received in a nesting relationship in lower offset lip **446** of the sidewall **444** to seal the cyclone chamber **450** to the dirt cup **460**.

[**0065**] As the inlet air traverses through toroidal cyclonic airflow chamber **480**, casting dirt particles toward sidewall **444**, the inlet air will be drawn through the apertures **470** in cylindrical filter assembly **468**, through exhaust outlet **454**, exhaust/suction conduit **496**, through a secondary (pre-motor) filter **492** to the suction source **490**. The secondary filter **492** removes additional particulate matter from the exhaust airstreams prior to the airstreams being drawn through the suction source **490**. A post-motor filter **494** can also be provided downstream of the suction source **490** to remove additional fine particulate matter from the exhaust airstream before it is released to the atmosphere.

[**0066**] Dirt cup **460** is removably connected to chamber **450**. Accumulated dirt can be discarded by axially displacing dirt cup **460** from cyclone chamber **450** so that it disengages from offset lip **446**. Dirt cup **460** can then be removed from chamber **450** to discard accumulated dirt.

[**0067**] Referring now to **FIG. 13B**, where like numerals have been used to designate like parts, a dirt separator **140** has a tangential inlet opening **152** in an upper portion of the cylindrical wall **144** and a central outlet opening **154** extending through the upper wall **142** thereof. An annular array of louvers **172** is mounted centrally within the dirt separator **140** and defines a cyclone separation chamber **150** with the cylindrical wall **144** of the dirt separator **140**. A cylindrical wall **174** extends downwardly from the upper wall **142** from the central outlet opening **154** to define an outlet passage within the cylindrical space of the louvers **172**. A cylindrical separator plate **158** is removably mounted to the annular wall **174** beneath the louvers **172** and separates the dirt separator **140** from the dirt collector **160** (**FIG. 13**).

[**0068**] A further embodiment of a cyclonic separator **300** is depicted in **FIG. 15**. The cyclonic separator **300** comprises a dirt bin **310** having a cylindrical configuration with an exterior wall **312**, a bottom wall **314** having a central opening **316** integral with a hollow cylindrical shaft **318** extending from bottom wall **314**. Shaft **318** includes an upper end **320** and extends coaxially within bin **310** so that upper end **320** extends above an upper end **322** of exterior wall **312** of dirt bin **310**. Dirt bin **310** further comprises a tangential inlet opening **324** passing through the exterior wall **312** of the dirt bin **310**, located proximate the upper end **322** of the exterior wall **312** of the dirt bin **310**.

[**0069**] The cyclonic separator **300** further comprises a cyclonic insert **330** having a substantially hollow cylindrical body **332**, cylindrical body **332** shown as having a neck portion **334** in a central area thereof, so that the diameter of the cylindrical body **332** is slightly narrower at neck portion **334**. Cylindrical body **332** is further contemplated as being uniform in diameter, i.e. eliminating neck portion **334**. Cyclonic insert **330** further comprises an annular bottom portion **336**.

[**0070**] Annular bottom portion **336** includes a central opening **338** configured to closely conform to the exterior of the central shaft **318** of the dirt bin **310**. Bottom portion **336** is connected to the exterior wall of the cylindrical portion **332** of the cyclonic insert **330**, and further includes a separator flange **340**. Separator flange **340** extends downwardly at an obtuse angle beyond the exterior wall of the cylindrical body **332**.

[**0071**] The cylindrical body **332** of the cyclonic insert **330** has a diameter less than the diameter of the cylindrical dirt bin **310**, so that when the cyclonic insert **330** is inserted into the dirt bin **310**, a toroidal portion **342** is formed therebetween. The separator flange **340** does not extend to cylindrical wall **312**, leaving a gap **344** between the separator flange **340** and the interior of the cylindrical wall **312** of the dirt bin **310**.

[**0072**] The interior of the dirt bin **310** is thus divided into two toroidal portions **342**, **346**, the first toroidal portion **342** being between the cyclonic insert **330** and the wall **312** of the dirt bin **310**, and the second toroidal portion **346** formed between the central shaft **318** and the cylindrical wall **312** of the dirt bin **310**, beneath the separator flange **340**.

[**0073**] The cyclonic insert **330** further comprises an upper annular flange portion **348** integrally formed with the cylindrical body **332** of the cyclonic insert **330**, the flange portion **348** having an outer diameter equivalent to the outer diameter of the dirt bin **310** and configured to be received in an engaging and sealing manner on the upper edge **322** of the exterior wall **312** of the dirt bin **310**.

[**0074**] The cylindrical body **332** of the cyclonic insert **330** further comprises two wall portions, an impervious upper wall portion **352** and a lower wall portion **354** having a plurality of perforations **356** passing therethrough. Perforations **356** are contemplated as being of uniform size and spacing, or of being arranged in a non-uniform pattern of varying apertures, as required to develop the most advantageous airflow pattern.

[**0075**] The cyclonic insert **330** further includes a plurality of canted vanes **358** arranged in a ring about the interior of the cyclonic insert **330** at the necked portion **334** of the cylindrical body **332**. The vanes **358** include a central opening **360** configured to closely receive the central shaft **318** of the dirt bin **310**.

[**0076**] The necked portion **334**, and the vanes **358**, substantially divide the volume between the cyclonic insert **330** and the central shaft **318** of the dirt bin **310** into two toroidal portions **362**, **364**. The first toroidal portion **362** is bounded on its interior by the central shaft **318** of the dirt bin **310**, and on its exterior by the perforated section **354** of the cylindrical portion of the dirt bin **310**. The second toroidal portion **364** is bounded on its interior by the central shaft **318** of the dirt bin **310** and on its exterior by the solid portion **352** of the cylindrical portion of the cyclonic insert **330**. The second toroidal portion **364** is bounded at its lower end by the vanes **358** and at its upper end by a frusto-conical chamber **368** defined by a frusto-conical wall **376**.

[**0077**] The cyclonic separator **300** further comprises a secondary cyclone chamber **370**, the chamber **370** comprising an outer cylindrical wall **372**, a lower annular wall **374** and frusto-conical wall **376**. The bottom wall **374** of the chamber **370** has an annular perimeter **378** for abutting the perimeter edge **350** of the cyclone insert **330** to present a flush appearance and to resist removal of the chamber **370** from the insert **330**.

[**0078**] The chamber **370** further comprises a chamber cap **380**, being a disk having a depending rim **382** for receipt in an upper portion **384** of the cylindrical chamber **370** in a sealing manner. The exterior wall **372**, lower wall **374** and frusto-conical wall **376** of the chamber **370** are integrally

formed, forming a substantially toroidal receptacle **386**. The frusto-conical wall **376** is shorter than the exterior walls **372** of the chamber **370** resulting in a gap **388** between a top edge **390** of the hollow frusto-conical wall **376** and the lid **380** of the chamber **370**.

[**0079**] Prior to assembly, therefore, the cyclonic separator **300** comprises a cylindrical dirt bin **310** having a concentric cylindrical shaft **314** passing from an aperture **316** and a flat bottom **314** to above the upper edge **322** of the dirt bin **310**, forming a single toroidal cyclonic airflow chamber therebetween. Inserting the cyclonic insert **330** in a sealing engagement with the upper edge **322** of the dirt bin **310** divides the interior of the dirt bin **310** into two toroidal portions **342**, **346** to the outside of the insert **330**. The toroidal portions **342**, **346** are separated by the separator flange **340** of the cyclonic insert **330**, except for a gap **344** between separator flange **340** and wall **312**.

[**0080**] The interior of the insert **330** is divided into toroidal sections **362**, **364** inside the cylindrical body **332** of the insert **330**. The toroidal sections **362**, **364** are defined by the vanes **358**. The central shaft **318** still projects above the top **322** of the bin **310** and the upper flange **348** of the cyclonic insert **330**.

[**0081**] Attaching the secondary cyclone chamber **370** and its lid **380** places the upper end **320** of the central shaft **318** within the hollow frusto-conical wall **376** of the secondary cyclone chamber **370**. The cyclonic separator **300** is now sealed from the atmosphere except for the tangential inlet **324** of the dirt bin **310** and the central outlet **316** at the base **314** of the dirt bin **310**. The tangential inlet **324** and outlet **316** are fluidly connected through the dirt bin **310**, perforations **356** of the cyclonic insert **330**, through the toroidal sections **362**, **364** within the cyclonic insert **330** and through the upper end **320** of the central shaft **318**.

[**0082**] The cyclonic separator, when used in a suction cleaner, will have a vacuum source fluidly connected to the outlet opening **316**, thereby forming a vacuum within the cyclonic separator **300** and at the tangential inlet **324** to the dirt bin **310**. Inlet **324** will be fluidly connected to a surface cleaning apparatus. Dirt-laden air will be drawn through the inlet **324** into the first toroidal section **342**, the air flow having a tangential component due to the orientation of inlet **324**. As the dirt-laden air is circulated about the perimeter of the dirt bin **310**, the dirt will be driven toward the outer wall **312** of dirt bin **310** and tend to fall towards the bottom wall **314** to the outside of the separator flange **340**.

[**0083**] As the air circulates about dirt bin **310**, the air will be drawn inwardly toward the perforations **356** in the lower portion **354** of the cylindrical portion **332** of the cyclonic insert **330**. Heavier particles of dirt will fall to the bottom of the dirt bin. The flange **340** acts to discourage dirt particles from being recirculated in the air flow adjacent the perforations **356**.

[**0084**] The air passing through the perforations **356** continues to carry finer particulates that were not heavy enough to be deposited in the bottom of the dirt bin **310**. The perforations **356** substantially pass perpendicularly through the surface **354** of the cyclonic insert **330** to further encourage deflection of dirt particles from the perforations and thereby removing them from the airflow.

[**0085**] As the air flow passes through the perforations **356**, it begins traveling essentially along the outside of the central

shaft **318**. It is been found that this air flow still maintains some rotational velocity. In the embodiment shown in **FIG. 15**, the airflow will strike vanes **358**. Vanes **358** will increase the rotational velocity component to the air flow. The air flow in the upper toroidal portion **364** will therefore have a tangential component to encourage additional cyclonic action in the toroidal section **364**.

[**0086**] As the air flow travels to the frusto-conical chamber **368**, the rotational velocity of the air flow will increase, driving dirt particles toward the frusto-conical wall **376** of the secondary cyclone chamber **370**. In addition, the axial velocity components will push the dirt particles to the top opening **390**. The tangential component will then direct the dirt particles to the outer secondary cyclonic chamber **370**, through the gap **388**. With very little airflow in the outer chamber of the secondary cyclonic chamber **370**, the velocity of the dirt particles drops dramatically and the dirt particles fall to the bottom **386** of the secondary cyclonic chamber **370**.

[**0087**] The remaining airflow, and those particles not having sufficient centripetal energy to be driven to the outside of the frusto-conical wall **376**, will be drawn through the top end **320** of the central shaft **316**, to be drawn to the vacuum source fluidly connected to the outlet opening **316**. A fine particulate filter (not shown) is inserted in the exhaust airstream to remove those fine particulates not extracted by the cyclonic separator.

[**0088**] An additional embodiment of a cyclonic separator **200** for a suction cleaner is shown in **FIGS. 16-20**. Cyclonic separator **200** comprises a dirt bin **202**, a cyclonic housing **204**, first and second filter frames **208**, **212**, first and second filter seals **206**, **214**, filter medium **210**, and filter chamber lid **216**.

[**0089**] The dirt bin **202** is cylindrical in configuration, having an outer wall **220**, a bottom wall **222** having a central opening **224**, and a central cylindrical shaft **226** encompassing the aperture **224**, the cylindrical shaft **226** being concentric with the outer wall **220** of the dirt bin **202**. The central shaft **226** has an upper end **228** substantially even with an upper end **230** of the dirt bin outer wall **220**. The dirt bin thereby comprises a toroidal receptacle encompassed by the outer wall **220** and the central shaft **226**, and by the dirt bin lower surface **222** and the upper edges **228**, **230** of the central shaft **226** and outer wall **220**.

[**0090**] The cyclone housing **204** is cylindrical, having an exterior diameter equal to the diameter of the dirt bin **202**. The cyclone housing **204** comprises a central cylindrical filter chamber **240** having an outer wall **242**, the diameter of the cylindrical filter chamber **240** being smaller than the exterior diameter of the cyclone housing **204**, but concentric therewith. The annular region defined between the outer wall **242** of the filter chamber **240** and the outer wall of the cyclone housing **204** comprises a spiral channel **250**. Channel **250** begins at an upper portion **252** of the cyclone housing **204** with an inlet opening **254**. The channel **250** then follows the perimeter of the cyclone housing in a downward spiral fashion to a channel outlet **256** on a lower portion of the cyclone housing **204**.

[**0091**] The upper portion of the filter chamber **240** comprises a filter chamber opening **258**. A lower portion of the filter chamber **240** comprises a central opening **260**, an

annular filter seat 262 surrounding the central opening 260 on the lower portion of the filter chamber 240, and an annular perforated inlet section 264. The annular filter seat 262 is bounded on its interior and exterior edges by a raised rim 266, each raised rim being annular and perpendicular to the base of the filter chamber 240.

[0092] The filter chamber lid 216 is a flat disc having a diameter slightly greater than the diameter of the cylindrical filter chamber 240, and having an annular depending rim 268 inset from the edge of lid 216 and adapted to be closely received within the opening 258 of filter chamber 240. Filter chamber lid 216 further comprises two additional depending annular rims 270 each having a diameter corresponding to one of the rims 266 surrounding the annular filter seat 262 in the lower portion of the filter chamber 240. The rims 270 bound an annular filter seat 272, the annular filter seat 272 being centered on the underside of the circular filter chamber lid 216 for alignment with the filter seat 262.

[0093] The first and second filter frames 208, 212 are identical in construction. The filter frames 208, 212 comprise a flat annular mating surface 280 including a pair of pin projections 282 and a pair of pin receiving openings 284 evenly spaced about the perimeter of the mating surface 280 so that the pins 282 of the first filter frame can be received in the openings 284 of the second filter frame, and vice versa, so that the mating surfaces 280 of the first and second filter frames 208, 212 can abut in a flush manner.

[0094] Referring to the first filter frame 208 for the purpose of describing the construction of the filter frames 208, 212, the first filter frame 208 further comprises a number of ribs 286 depending from the mating surface 280 of the filter frame 208 in a slightly splayed manner, being substantially perpendicular to the plane of the mating surface 280 but canted slightly away from this center line of the filter frame 208. The ribs 286 terminate in an annular base 290. Based 290 comprises an inner annular rim 288 and an annular ring 292 with a raised outer rim 294. The raised outer rim 294, the ring 292 and the rim 288 form a shallow annular cavity 296 for receiving a lower portion of the filter medium 210. Each of the filter frames 208, 212 further comprises an annular recess 298 on a face opposite the mating surface 280, the recess 298 configured to receive annular filter seal 206, 214.

[0095] The filter medium 210 is a hollow cylindrical arrangement of a pleated filter paper, the hollow cylinder having a diameter and wall thickness substantially corresponding to the width of the annular ring 292 of the filter frame 208. The filter medium 210 has a height substantially equal to the distance between the annular rings 292 of the first and second filter frames 208, 212 when the frames 208, 212 are assembled with their respective mating surfaces 280 in abutment.

[0096] The cyclone separator 200 is assembled by placing the cyclone housing 204 in a sealing engagement with the upper end 230 of the dirt bin 202. The outer wall of the cyclone housing 204 aligns with the outer wall 220 of the dirt bin 202, and the upper end 228 of the central shaft 226 sealing engages the central opening 260 of the cyclone housing 204.

[0097] The filter frame is assembled by placing a first filter seal 206 in the annular recess 298 of the first filter frame 208,

placing the hollow cylindrical filter medium 210 over the first filter frame 208 so that the lower portion of the filter medium 210 is received in the annular recess 296 of the first filter frame 208, then inserting the second filter frame 212 into the filter medium 210 until the mating surface 280 of the second filter frame 212 abuts the mating surface 280 of the first filter frame 208 in a flush manner. The upper portion of the filter medium 210 is thus received in the annular recess 296 of the second filter frame 212. The second filter seal is then placed in the annular recess 298 of the second filter frame 212.

[0098] The filter assembly is then placed into the cyclone housing 204 so that the annular base of the first filter frame 208 is received in the annular filter seat 262 of the cyclone housing 204. The filter chamber lid 216 can then be placed over the filter chamber opening 258 so that the depending rim 268 resides immediately inside the filter chamber wall 242, and the annular base of the second filter frame 212 can be received in the annular filter seat 272 of the filter chamber lid 216 between the rims 270.

[0099] The assembled cyclonic separator is now fluidly sealed from the atmosphere except for the inlet opening 254 of the spiral channel 250, and the outlet opening 224 at the base of the dirt bin 202. The inlet opening 254 and outlet opening 224 are fluidly connected through the spiral channel 250 into the interior of the dirt bin 202 and then through the annular inlet section 264 into the filter chamber 240. Any fluid flow must then pass through the filter medium 210 to reach the central opening 260 at the base of the filter chamber 240, from whence it travels through the central shaft 226 to the outlet opening 224.

[0100] In a suction cleaner, the suction source is applied to the outlet opening 224, thereby drawing a vacuum throughout the fluid path just described and the inlet opening 254 is then directed by known structures to a surface or object to be cleaned, thereby drawing dirt laden air into the cyclonic separator. The tangential flow through the spiral channel 250 will reduce the velocity in the particles in the air, causing them to fall under gravity into the toroidal dirt chamber of the dirt bin 202. The air flow is further subjected to a severe change in direction as it must flow upwardly through the annular inlet section 264 of the filter chamber 240 before it can pass through the filter medium 210 to the exhaust outlet 224.

[0101] While the invention has been specifically described in connection with certain specific embodiments thereof, it is to be understood that this is by way of illustration and not of limitation. Reasonable variation and modification are possible within the forgoing disclosure and drawings without departing from the spirit of the invention which is defined in the appended claims.

1. A vacuum cleaner module comprising:

a module housing;

a dirt separation housing removably mounted in the module housing and defining a cyclonic airflow chamber for separating contaminants from a dirt-containing airstream, the housing further comprising an inlet opening for the cyclonic chamber adapted to be connected to a suction cleaning nozzle and an airstream outlet

- opening in an upper central portion of the dirt separation housing and in communication with the inlet opening;
- an airstream suction source mounted in the module housing and fluidly connected to the cyclonic chamber inlet opening, the cyclonic airflow chamber and the airstream outlet opening to establish and maintain a tangential flow of a dirt-containing airstream within the cyclone airflow chamber as the airstream flows between the cyclonic chamber inlet opening and the airstream outlet opening for separating dirt from the air stream in the cyclonic airflow chamber;
- a support element mounted in an upper portion of said dirt separator housing;
- a dirt-collecting chamber within the module housing and beneath the cyclonic airflow chamber to collect dirt separated from the dirt-containing airstream in the cyclonic airflow chamber; and
- a separator plate mounted to a lower portion of the support element above the dirt-collecting bin, and separating the cyclonic airflow chamber from the dirt collecting chamber.
2. A vacuum cleaner according to claim 1 wherein the support element is cylindrical and has openings for passage of the dirt-separated airstream prior exit of said airstream from said dirt separation housing through the airstream outlet.
 3. A vacuum cleaner according to claim 2 and further comprising a filter element between the cyclonic airflow chamber and the support element.
 4. A vacuum cleaner according to claim 3 wherein the filter element is a fine mesh.
 5. A vacuum cleaner according to claim 1 wherein the separator plate extends radially from the support element toward the housing.
 6. A vacuum cleaner according to claim 5 wherein the separator plate forms a gap with the housing for passage of dirt particles from the cyclone separation chamber to the dirt-collecting chamber.
 7. A vacuum cleaner according to claim 6 wherein the gap between the separator plate and the housing is annular.
 8. A vacuum cleaner according to claim 7 wherein the separator plate is circular and the housing has a cylindrical wall adjacent the separator plate.
 9. A vacuum cleaner according to claim 5 wherein the separator plate is circular and the housing has a cylindrical wall adjacent the separator plate.
 10. A vacuum cleaner according to claim 2 wherein the cylindrical support element, the separator plate and the dirt separation housing define a toroidal chamber that forms the cyclonic airflow chamber.
 11. A vacuum cleaner according to claim 10 and further comprising a filter positioned between the cyclonic airflow chamber and the airstream outlet opening.
 12. A vacuum cleaner according to claim 11 wherein the filter comprises a fine mesh.
 13. A vacuum cleaner according to claim 1 and further comprising a filter positioned downstream of the airstream outlet opening.
 14. A vacuum cleaner according to claim 1 wherein the suction source is mounted beneath the dirt separation housing.
 15. A vacuum cleaner according to claim 14 wherein the suction source has an inlet downstream from the airstream opening to draw the dirt-containing airstream into the cyclonic airflow chamber.
 16. A vacuum cleaner according to claim 1 wherein the dirt separation housing also defines the dirt-collecting chamber.
 17. A vacuum cleaner according to claim 1 and further comprising a dirt cup that defines the dirt collecting chamber and the dirt cup is removably mounted to the dirt separation housing.
 18. A vacuum cleaner according to claim 17 wherein the dirt cup is also removably mounted to the module housing.
 19. A vacuum cleaner according to claim 1 and further comprising a dirt cup that defines the dirt collecting chamber and the dirt cup is removably mounted to the module housing.
 20. A vacuum cleaner according to claim 1 wherein the cyclonic airflow chamber is formed in part by a tangential helical ramp.
 21. A vacuum cleaner according to claim 20 and further comprising a direction change portal between the cyclonic airflow chamber and the airstream outlet opening in the dirt separation housing so that the airstream changes whereby the airstream changes direction before passing through the airstream outlet opening.
 22. A vacuum cleaner comprising;
 - a dirt separator housing defining a cyclonic airflow chamber for separating contaminants from a dirt-containing airstream, said dirt separator housing further comprising a cyclonic chamber inlet and an airstream outlet in fluid communication with each other;
 - an airstream suction source fluidly connected to the cyclonic airflow chamber for transporting dirt-containing air from a source of a dirt-containing airstream to the cyclonic airflow chamber, said suction source selectively establishing and maintaining the dirt-containing airstream from said source of a dirt-containing airstream to said cyclonic chamber inlet and for maintaining tangential flow of the dirt-containing airstream within the cyclone airflow chamber for separating dirt from the air stream in the cyclonic airflow chamber;
 - a support element positioned within said dirt separation housing and mounting a separator plate that forms a toroidal chamber within the dirt separation housing with a cylindrical side wall and upper wall of the dirt separation housing;
 - a dirt-collecting bin beneath the separator plate within the dirt separation housing and forming a dirt collecting chamber; and
 - wherein the relative cross-sectional areas of the separator plate with respect to the housing cross sectional area at the separator plate is in the range of 0.75 to 0.95.
 23. A vacuum cleaner according to claim 22 wherein the airstream outlet is in a lower portion of the housing.
 24. A vacuum cleaner according to claim 22 wherein the relative cross-sectional area of the separator plate with respect to the housing cross sectional area is in the range of 0.8 to 0.92.
 25. A vacuum cleaner according to claim 22 wherein the relative cross-sectional area of the separator plate with respect to the housing cross sectional area is about 9.

* * * * *