




- (51) **International Patent Classification:**
H04N 5/225 (2006.01) *G03B 17/17* (2006.01)
G02B 27/10 (2006.01)
- (21) **International Application Number:**
PCT/US2012/053973
- (22) **International Filing Date:**
6 September 2012 (06.09.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/229,363 9 September 2011 (09.09.2011) US
- (71) **Applicant (for all designated States except US):** **APPLE INC.** [US/US]; 1 Infinite Loop, Cupertino, CA 95014 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **WEBSTER, Steven** [GB/US]; 1 Infinite Loop, M/S 35-2MP, Cupertino, CA 95014 (US). **CHAN, Ning, Y.** [US/US]; 1 Infinite Loop, M/S 35-2MP, Cupertino, CA 95014 (US).
- (74) **Agents:** **VINCENT, Lester, J.** et al.; Blakely, Sokoloff, Taylor & Zafman LLP, 1279 Oakmead Parkway, Sunnyvale, CA 94085-4040 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** DIGITAL CAMERA WITH LIGHT SPLITTER

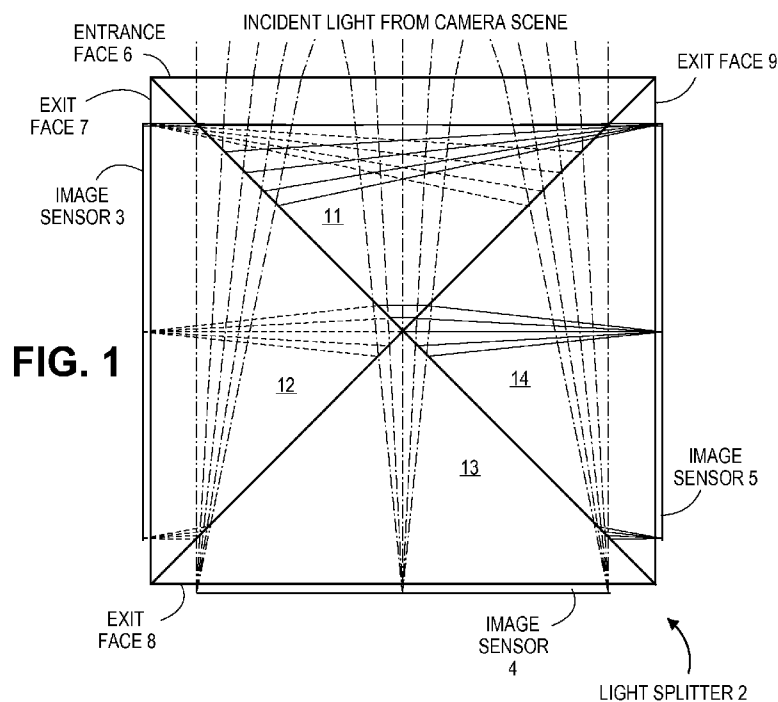

(57) **Abstract:** A digital camera component is described that has a light splitter cube having an entrance face to receive incident light from a camera scene. The cube splits the incident light into first, second, and third color components that emerge from the cube through a first face, a second face, and a third face of the cube, respectively. First, second, and third image sensors are provided, each being positioned to receive a respective one of the color components that emerge from the first, second, and third faces of the cube. Other embodiments are also described and claimed.



Published:

— *with international search report (Art. 21(3))*

DIGITAL CAMERA WITH LIGHT SPLITTER

[0001] An embodiment of the invention relates to a digital camera component having a light splitter cube that splits incident light from a camera scene into three color components, and three image sensors each being positioned to receive a respective one of the color components. Other embodiments are also described and claimed.

BACKGROUND

[0002] Personal consumer electronic devices that have a small profile such as smart phones and tablet computers have a very limited z-height or thickness (distance in the direction of the z-axis), in which to fit an integrated digital camera module. This is in contrast to the relatively deep housing of a dedicated handheld camcorder or high-end digital SLR camera. The small profile, however, presents a problem in view of the continuing trend to deliver digital pictures that have increasing resolution using larger color pixel sensor arrays. Despite improvements in pixel density, the overall area of the pixel array increases substantially for higher resolution sensors, *e.g.* 5 megapixels and greater. This may not be a large issue if the pixel array can be oriented within the device housing to lie within the x-y plane, *i.e.* perpendicular to the z-axis. However, in that configuration the limited z-height of the device housing places a constraint on the length of the optical subsystem, *e.g.* an autofocus lens, a zoom lens, which in turn limits camera performance.

SUMMARY

[0003] An embodiment of the invention is a digital camera component that has a light splitter cube having an entrance face to receive incident light from a camera scene. The cube splits the incident light into three color components that emerge from the cube through respective faces of the cube. Three image sensors are also provided, where each sensor is positioned to receive a respective one of the color components that emerge from the respective face of the cube. The image sensors may be clear pixel array sensors that have no color filter array or color separation capabilities, making them relatively inexpensive yet more accurate (due to no color interpolation or demosaicing required). In such a color splitting architecture, the amount of light

incident on each pixel is about three times greater than in a conventional Bayer-pattern color filter array (CFA) sensor. Also, the color splitting cube may essentially avoid the color-crosstalk that is typical of traditional Bayer-pattern CFA sensors.

[0004] The cube may be built using four, essentially identically dimensioned transparent polyhedrons. In one embodiment, each of the polyhedrons has a right isosceles triangular base, a right isosceles triangular top, and three faces joining corresponding sides of the triangular base and top. The three faces are a hypotenuse face, a left leg face, and a right leg face. The hypotenuse face of the first polyhedron is the entrance face of the light splitter cube. The right leg face of the first polyhedron adjoins the left leg face of the second polyhedron at a first dichroic interface. The first dichroic interface reflects the third color component in the first polyhedron, and transmits the first and second color components into the second polyhedron. The left leg face of the first polyhedron adjoins the right leg face of the fourth polyhedron at a second dichroic interface. The second interface reflects the first color component in the first polyhedron, and transmits the second and third color components into the fourth polyhedron.

[0005] The light splitter cube may be combined with a deflector that is positioned to reflect the incident light from the camera scene, and an optical lens system, such as a zoom lens, an autofocus lens, or a fixed focus lens, that is positioned in the path of the deflected incident light between the deflector and the entrance face of the light splitter cube. The deflector may be oriented to deflect the incident light by about 90 degrees. This arrangement allows a z-height of the combination deflector, optical lens system, light splitter cube and image sensors as a whole to be in the range of 3mm – 9mm. In addition, the x-length of that combination may be in the range of 18mm – 32mm. Such an arrangement yields a particularly compact digital camera module that may have not only optical zoom but also relatively high resolution (due to not requiring demosaicing or color interpolation). Furthermore, the arrangement enables a greater x-length, so that the incident angles of the light rays on any anti-reflection coating or infrared filter, used in the zoom lens or other optical lens system between the deflector and the entrance face of the cube, are reduced. This may lead to

several benefits, including reduced color shading and reduced stray light, ghosts, and flares.

[0006] A folding mirror can be used as the deflector. The folding mirror may be one that can be tilted and tipped (or rolled) by a powered actuator under automatic control, as part of an optical image stabilization (OIS) mechanism. Such an OIS mechanism may be used instead of a conventional one that requires a moveable sensor or a moveable lens.

[0007] The color splitting cube architecture may also be used in polarization imaging, advantageously without “throwing away” 50% of the incident light, as would be the case in a conventional polarization imaging technique. Use the color splitting cube may also be advantageous in polarization sum and difference imaging in order to improve contrast and enhance visibility of targets in scattering media and assist in improved detection and feature extraction of targets in scattering media (*e.g.*, imaging through clouds, fog, smog, and rain).

[0008] Yet another application of the color splitting cube may be in combined visible and infrared imaging. The cube may be designed so that one of its exit faces produces one or more visible color components of the incident light from the camera scene while suppressing the infrared component, while another one of its exit faces suppresses visible color components but does not suppress the infrared component.

[0009] The above summary does not include an exhaustive list of every aspect of the present invention. It is contemplated that the invention includes all systems and methods that can be practiced from all suitable combinations of the various aspects summarized above, as well as those disclosed in the Detailed Description below and particularly pointed out in the claims filed with the application. Such combinations have particular advantages not specifically recited in the above summary.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The embodiments of the invention are illustrated by way of example and not by way of limitation in the figures of the accompanying drawings in which like references indicate similar elements. It should be noted that references to “an” or “one” embodiment of the invention in this disclosure are not necessarily to the same embodiment, and they mean at least one.

- [0011] **Fig. 1** is a top view through a cross-section of a light splitter, in accordance with an embodiment of the invention.
- [0012] **Fig. 2** is a 3-D perspective view of a polyhedron.
- [0013] **Fig. 3** is a 3-D perspective view of the light splitter.
- [0014] **Fig. 4** shows example graphs of transmission and reflection vs. wavelength, describing characteristics of two dichroic interfaces within the light splitter.
- [0015] **Fig. 5** shows the combination of a light splitter, zoom lens and deflector within a camera module.
- [0016] **Fig. 6** depicts operation of a zoom lens that has been combined with the light splitter.
- [0017] **Fig. 7** is an elevation view through a cross-section of a light splitter and image sensor combination.
- [0018] **Fig. 8** is a 3-D perspective view of a portable wireless communications device in which a camera module is integrated.

DETAILED DESCRIPTION

- [0019] Several embodiments of the invention with reference to the appended drawings are now explained. Whenever the shapes, relative positions and other aspects of the parts described in the embodiments are not clearly defined, the scope of the invention is not limited only to the parts shown, which are meant merely for the purpose of illustration. Also, while numerous details are set forth, it is understood that some embodiments of the invention may be practiced without these details. In other instances, well-known circuits, structures, and techniques have not been shown in detail so as not to obscure the understanding of this description.
- [0020] **Fig. 1** is a top view through a cross-section of a light splitter 2, in accordance with an embodiment of the invention. The light splitter 2 may be externally dimensioned and shaped so as to define essentially a cube, as shown. **Fig. 1** shows a top view of the cube looking down into the structure, showing how incident light from a camera scene (not shown) is received through an entrance face 6 of the cube. As depicted by three different line shadings, the light splitter 2 acts to split the incident light into first, second and third color components that emerge from the cube through

respective exit faces 7, 8, 9. Any reference to “colors” or “color components” here is understood as referring to light within a wavelength band, all of which may be in the visible spectrum, or some of which may overlap with ultraviolet or infrared bands. For instance, a common list of colors identifies six main bands, namely red, orange, yellow, green, blue, and violet.

[0021] The light splitter 2 is made essentially of identically sized or dimensioned first, second, third and fourth transparent polyhedrons 11, 12, 13, 14. Each of the polyhedrons may be made of a solid piece of light transparent material such as glass or polycarbonate. As also seen in the 3-D perspective view of **Fig. 2**, each of the polyhedrons 11-14 has a right isosceles base, a right isosceles top, and three faces joining corresponding sides of the triangular base and top. The three faces of the polyhedron are a hypotenuse face 16, a left leg face 17, and a right leg face 18. These dimensions yield a cube when the polyhedrons have been joined as shown in **Fig. 3**. As seen in **Fig. 1**, the hypotenuse face 16 of the first polyhedron 11 is the entrance face 6 of the light splitter 2.

[0022] The light splitting function of the lighter splitter 2 is achieved as follows. Referring now to **Fig. 1** and to the first polyhedron 11, the right leg face of this polyhedron adjoins the left leg face 17 of the second polyhedron 12, at a first dichroic interface. The mixture of light wavelengths arriving at a given sensor can be controlled by appropriately designing the filtering function of the various dichroic interfaces of the light splitter 2. A dichroic interface may be formed by coating the adjoining faces of the first polyhedron 11 and the second polyhedron 12 with an optical coating consisting of one or more layers of optical material. The dichroic interface reflects one color while passing other colors, similar to a dichroic mirror or dichroic reflector, and a dichroic filter. The adjoining faces of the polyhedrons may be optically bonded to each other with no air gap, using an optical coating selected to produce desired light reflection and transmission characteristics. **Fig. 4** depicts an example graph of reflection and transmission characteristics vs. wavelength for the first dichroic interface, and one for a second dichroic interface. The second dichroic interface is formed when adjoining the first polyhedron 11 and, in particular, its left leg face 16, with the fourth polyhedron 14 (and, in particular, its right leg face 18).

[0023] In the example of **Fig. 4**, the first dichroic interface is designed to reflect red while passing (transmitting) blue and green. In contrast, the second dichroic interface is designed to reflect blue, and pass green and red. This is achieved by appropriately forming the optical coating at each interface. The graph for the first interface indicates maximum reflection within the red spectrum (at about 0.65 microns), but minimal reflection of green (at about 0.525 microns) and blue (at about 0.475 microns). The transmission characteristics of the first dichroic interface are such that there is full transmission of green and blue, but minimal transmission of red. It should be noted that the reflection and transmission characteristics shown in the graphs of **Fig. 4** are ideal, rather than practical. Thus, in practice, the degree of reflection of a color component at a given interface may not be the same as at another interface.

[0024] Regarding the second dichroic interface, the optical coating there has been selected so as to result in full transmission of red and green (or wavelengths above 0.5 microns) while at the same time minimal transmission of blue (below 0.475 microns). In addition, the reflection characteristics are such that blue is fully reflected, while red and green (or wavelengths above 0.5 microns) are minimally reflected. This combination reflection and transmission of the first and second dichroic interfaces results in essentially only the red component (see **Fig. 1**, solid rays) emerging from the hypotenuse face 16 of the fourth polyhedron 14, and, at the same time, essentially only the blue component (see **Fig. 1**, dashed ---- rays) emerging from the hypotenuse face 16 of the second polyhedron 12. This allows the pixel sensor array that is part of the image sensor 3 to produce the image data for the blue channel, while the pixel sensor array of the third image sensor 5 produces the red channel.

[0025] To obtain the needed green channel (thereby completing the additive primary color model of red, green and blue) the dichroic interfaces between polyhedrons 12 and 13, and polyhedrons 14 and 13, have been designed to, referring now to **Fig. 4**, pass only the green color component into the polyhedron 13. Accordingly, the pixel sensor array of the image sensor 4 will produce the green color channel. In this manner, no demosaicing of color pixel data is needed, and also there is no need for separate color channel processing at the pixel level. This enables the use of

relatively low cost, clear pixel sensor arrays for each of the different color channels, while being able to maximize the pixel sensor array resolution.

[0026] The dichroic interfaces may alternatively be designed to achieve a desired mix of any two or more colors passing to a cube exit face (and then to the respective sensor). This may be a desired mix of two primary colors, as desired for the designed system performance. A mix of two or more colors could be achieved by varying the percentage of optical energy transmitted by an interface, at different wavelengths of light. It may thus be desirable to transition the reflection and transmission characteristics smoothly through the optical wavelengths of light, at a given dichroic interface. For instance, it may be desirable to add some portion of the red component of light from the scene to emerge from the exit face that is otherwise associated with the green sensor (green color channel), while some green may be added to emerge from the exit face that is otherwise associated with the red sensor (red color channel). A purpose of such an approach would be to provide more color information to each sensor so that in the subsequent digital image processing operations of color reproduction, more accurate and continuous color detection and image representation could be achieved.

[0027] Turning now to **Fig. 5**, a combination of the light splitter 2, a zoom lens 21, and a deflector 20 within a camera module housing is shown. The camera module housing (not shown) may be a plastic, or metal, or composite material frame in which the elements depicted in **Fig. 5** are installed in the relative positions and alignment shown, so as to form a single unit or assembly. The assembly has a z-height defined as shown, and an x-length defined as shown. The deflector 20 is positioned to deflect incident light of several colors (*e.g.*, red, blue and green) from the camera scene towards the light splitter 2. The deflector 20 may be an angled mirror or other optical element that can perform a similar function. The entrance face of the light splitter 2 is oriented perpendicular to the center longitudinal optical axis as shown, to receive the deflected incident light, through the zoom lens 21. In another embodiment the deflector may not be needed such that the optical path may be straight; in that case, light from the camera scene could enter the camera module from the edge or side of the end-user device (rather than from its face as shown in the example of **Fig. 8**). The zoom lens 21 has one or more moveable lens elements whose position along the optical axis can be

automatically controlled by a motorized actuator (not shown) to achieve variable magnification (and thus variable angle of view or field of view, FOV). The zooms lens may be a true zoom lens that can also maintain focus when its magnification or focal length is changed. These are also referred to as parfocal lenses. Alternatively, the zoom lens may be a varifocal lens, which has one or more moveable lens elements that achieve variable magnification, but for which an additional mechanism is needed to bring the image back into focus after a change in magnification.

[0028] Still referring to **Fig. 5**, this embodiment of the camera module also contains a plano-concave lens 22 whose planar side faces the camera scene as shown, and is positioned to bring the light from the camera scene to the deflector 20 as shown. In addition, a convex-concave lens 23 is positioned between the deflector 20 and the zoom lens 21, where the convex side of the lens 23 faces the deflector 20, as shown. Other suitable lens elements, as alternatives to the plano-concave lens 22 and the convex-concave lens 23, are possible. These may be designed as part of the overall optical subsystem of the camera module, in conjunction with the zoom lens 21, and the allowed z-height and x-length.

[0029] **Fig. 6** depicts operation of the zoom lens 21 using ray tracing, at three different angles of view that can be achieved. Note how, in this case, the deflector 20 is oriented so as to deflect the incident light from the camera scene by about 90 degrees, towards the zoom lens along the center optical axis. This arrangement of the camera module allows the previously defined z-height of the entire combination (see **Fig. 5**) to be in the range of 3mm – 9mm. Simulation of such an optical system has shown that, where the light splitter 2 is a cube of 3.5mm x 3.5mm x 3.5mm, the x-length of the combination (as defined in **Fig. 5**) may be in the range 18mm – 32mm, while at the same time being able to achieve 22° – 66° angle of view. This is a particularly compact arrangement that is suitable for being integrated within portable wireless communications devices such as tablet computers and smart phones (*e.g.*, see **Fig. 8** for an example smart phone) in which the outer housing of the communications device has a z-height or thickness within the range of 6mm – 13mm. Of course, the camera module depicted in **Fig. 5** may also be fitted into larger products such as laptop computers and desktop computers.

[0030] Turning now to **Fig. 7**, an elevation view through a cross-section of an exit face of the light splitter 2 is shown. This depicts an example of how the image sensor may be attached to the exit face. The image sensor includes an image sensor die in which an array of photocells are covered with micro lenses, without requiring any color filters or color separation circuitry. The micro lenses are preferred in order to minimize optical cross-talk, however it is feasible to achieve acceptable performance without the micro lenses. The image sensor die is electrically connected to a printed circuit carrier, in this example a flex circuit that is located behind the sensor as shown, via solder balls. Other ways of electrically connecting to the circuit carrier are possible, *e.g.* wire bonds. The sensor is protected by a transparent cover plate, *e.g.* a glass or polycarbonate plate; the plate is located in front of the sensor so as to leave an air gap between the cover plate and the micro lenses. It is preferred that this transparent cover plate be bonded to the sensor die for optimal planarity, however it may be possible with appropriate methods to achieve the required planarity by bonding the glass to the printed circuit carrier. The circuit carrier carries electrical image signals from the sensor die to image data storage and/or an image processor (not shown). Note that the combination of the printed circuit carrier and the attached protective cover plate, as a single unit or assembly, may be manufactured separately from the light splitter 2, and then the exposed face of the protective cover plate may be optically bonded to the exit face of the light splitter 2.

[0031] The cover plate over the sensor die could be bonded to the light splitter cube to create a sensor-cube sub-assembly. Maintaining planarity for the cover plate to the sensor plane is an important for the sensor assembly. One way to bond a sensor assembly to the cube is by a UV curable optical adhesive, which would be applied to the exposed face of the cover plate. The cover plate or the cube can be moved relative to each other, and be brought together and pressure applied to them in order to create a thin adhesive bondline between the two parts. Once in contact with each other, the relative position of the sensor and the cube can be adjusted by sliding one part relative to the other part, to achieve the required alignment. The alignment can be determined by simultaneously reading out the sensor signals while providing a target optical image input (in the camera scene) to the cube for this alignment purpose. While manipulating

the parts, the correct alignment may be achieved as revealed by processing the read sensor signals; at that point, the manipulation stops and the parts are locked in place by the application of UV light, which will cross-link and cure the UV adhesive.

[0032] Referring now to **Fig. 8**, a 3-D perspective view of a portable wireless communications device in which a camera module in accordance with an embodiment of the invention is integrated. The device in this case may be a smart phone or a tablet computer, which is a handheld device in the sense of being intended for use while held in a single hand of the user. Of course, the camera module may alternatively be integrated in other types of portable wireless devices, such as laptop or notebook computers, and it may also be integrated within non-portable devices such as desktop personal computers, television monitors, or any other electronic device that has a particularly short profile in the z-axis (z-height). In the case of the smart phone or tablet computer, the device has an outer housing in which is integrated a cellular network wireless communications circuit that enables the device to function as a mobile telephony terminal or end station. Also integrated inside the housing as depicted in **Fig. 8** is a digital camera, part of which is the camera module depicted in **Fig. 5** and described above in detail. As suggested above, the portable wireless communications device may have an outer housing whose z-height is in the range of 6mm – 13 mm, thereby being particularly fitting to receive therein a camera module that has a z-height within the range of 3mm – 9mm.

[0033] While certain embodiments have been described and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative of and not restrictive on the broad invention, and that the invention is not limited to the specific constructions and arrangements shown and described, since various other modifications may occur to those of ordinary skill in the art. For example, although the figures show a light splitter that yields the primary additive colors of red, green and blue, the light splitter may alternatively be designed to split the incident light into a different set of color components (*e.g.*, cyan, yellow, green, magenta, CYGM, and red, green, blue, emerald, RGBE). Also, while **Fig. 5** depicts an embodiment of the invention where the optical lens system is a zoom lens 21, the camera module containing the light splitter cube may alternatively have a different

optical lens system such as a smaller Auto Focus lens or even a smaller fixed focus lens. The description is thus to be regarded as illustrative instead of limiting.

CLAIMS

What is claimed is:

1. A digital camera component comprising:
a light splitter cube having an entrance face to receive incident light from a camera scene, the cube to split the incident light into first, second, and third color components that emerge from the cube through a first face, a second face, and a third face of the cube, respectively; and
first, second and third image sensors, each being positioned to receive a respective one of the color components that emerge from the first, second and third faces of the cube.
2. The digital camera component of claim 1 wherein the light splitter cube comprises essentially identically sized first, second, third and fourth transparent polyhedrons, each of the polyhedrons having a right isosceles triangular base, a right isosceles triangular top, and three faces joining corresponding sides of the triangular base and top, wherein the three faces are a hypotenuse face, a left leg face, and a right leg face.
3. The digital camera component of claim 2 wherein the hypotenuse face of the first polyhedron is the entrance face of the light splitter cube,
the right leg face of the first polyhedron adjoins the left leg face of the second polyhedron at a first dichroic interface, wherein the first interface reflects the third color component in the first polyhedron and transmits the first and second color components into the second polyhedron, and
the left leg face of the first polyhedron adjoins the right leg face of the fourth polyhedron at a second dichroic interface, wherein the second interface reflects the first color component in the first polyhedron and transmits the second and third color components into the fourth polyhedron.
4. The digital camera component of claim 1 further comprising:
a deflector positioned to deflect the incident light from the camera scene; and

an optical lens system positioned in a path of the deflected incident light between the deflector and the entrance face of the light splitter cube.

5. The digital camera component of claim 4 wherein the deflector is oriented to deflect the incident light by about ninety degrees.
6. The digital camera component of claim 4 wherein a z-height of the deflector, optical lens system, light splitter cube and image sensors is in the range 3mm-9mm.
7. The digital camera component of claim 6 wherein x-length of the deflector, optical lens system, light splitter cube and image sensors is in the range 18mm-32mm.
8. The digital camera component of claim 4 wherein the optical lens system is a zoom lens.
9. The digital camera component of claim 4 wherein the optical lens system is an auto focus lens.
10. The digital camera component of claim 4 wherein the optical lens system is a fixed focus lens.
11. The digital camera component of claim 4 wherein the deflector comprises a folding mirror that is coupled to be tilted or rolled by a powered actuator under automatic control, as part of an optical image stabilization (OIS) mechanism.
12. The digital camera component of claim 4 wherein each of the image sensors is a) a clear image sensor having an array of photocells covered with micro lenses but no color filters, b) electrically connected to a printed circuit carrier located behind the sensor, and c) protected by a transparent cover plate that is located in front of the sensor and that leaves an air gap between the cover plate and the micro lenses.
13. A digital camera module comprising:
 - a camera module housing having integrated therein
 - a deflector positioned to deflect incident light from a camera scene,
 - a light splitter having an entrance face to receive the deflected incident light, the light splitter to split the incident light into first, second and third color

components, the light splitter being formed of essentially identical first, second, third and fourth transparent polyhedrons, each of the polyhedrons having a right isosceles triangular base, a right isosceles triangular top, and three faces joining corresponding sides of the triangular base and top, wherein the three faces are a hypotenuse face, a left leg face, and a right leg face, wherein the hypotenuse face of the first polyhedron is the entrance face of the light splitter, the right leg face of the first polyhedron adjoins the left leg face of the second polyhedron at a first dichroic interface, wherein the first interface reflects the third color component in the first polyhedron and transmits the first and second color components into the second polyhedron, and the left leg face of the first polyhedron adjoins the right leg face of the fourth polyhedron at a second dichroic interface, wherein the second interface reflects the first color component in the first polyhedron and transmits the second and third color components into the fourth polyhedron, the splitter further having a first exit face, a second exit face, and a third exit face,

first, second and third image sensors, each being positioned to face the first, second and third exit faces, and

an optical lens system positioned in a path of the incident light between the deflector and the entrance face of the light splitter.

14. The digital camera module of claim 13 wherein the deflector is oriented to deflect the incident light by about ninety degrees.

15. The digital camera module of claim 14 wherein z-height of the deflector, optical lens system, light splitter and image sensors is in the range 3mm-9mm.



16. The digital camera module of claim 14 wherein x-length of the deflector, optical lens system, light splitter and image sensors is in the range 18mm-32mm.

17. The digital camera module of claim 14 further comprising:

a plano-concave lens whose planar side faces the camera scene and is positioned to bring the light from the camera scene to the deflector; and

a convex-concave lens whose convex side faces the deflector and is positioned between the deflector and the optical lens system.

18. A portable wireless communications device comprising:
an outer housing;
cellular network wireless communications circuitry integrated inside the outer housing; and
a digital camera integrated inside the housing, the digital camera having a deflector positioned to deflect light from a camera scene by about ninety degrees, a light splitter having an entrance face to receive the deflected light, the light splitter to split the incident light into first, second, and third color components that emerge through a first exit face, a second exit face, and a third exit face, respectively, and first, second and third image sensors, each being positioned to face the first, second and third exit faces, and an optical lens system positioned in a path of the light between the deflector and the entrance face of the light splitter.
19. The portable wireless communications device of claim 18 wherein the outer housing has a z-height of 6mm - 13mm.
20. The portable wireless communications device of claim 18 further comprising:
a plano-concave lens whose planar side faces the camera scene and is positioned to bring the light from the camera scene to the deflector; and
a convex-concave lens whose convex side faces the deflector and is positioned between the deflector and the optical lens system.
21. The portable wireless communications device of claim 18 wherein the first, second and third color components are additive primary color components.
22. The portable wireless communications device of claim 21 wherein the first, second, and third color components are blue, green, and red components.

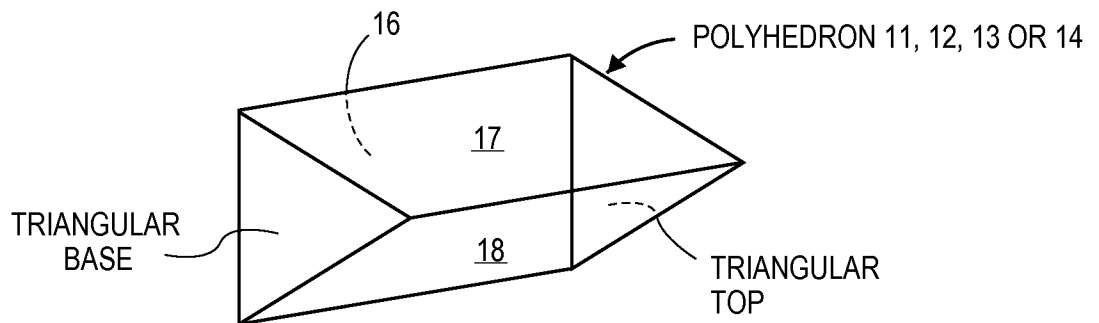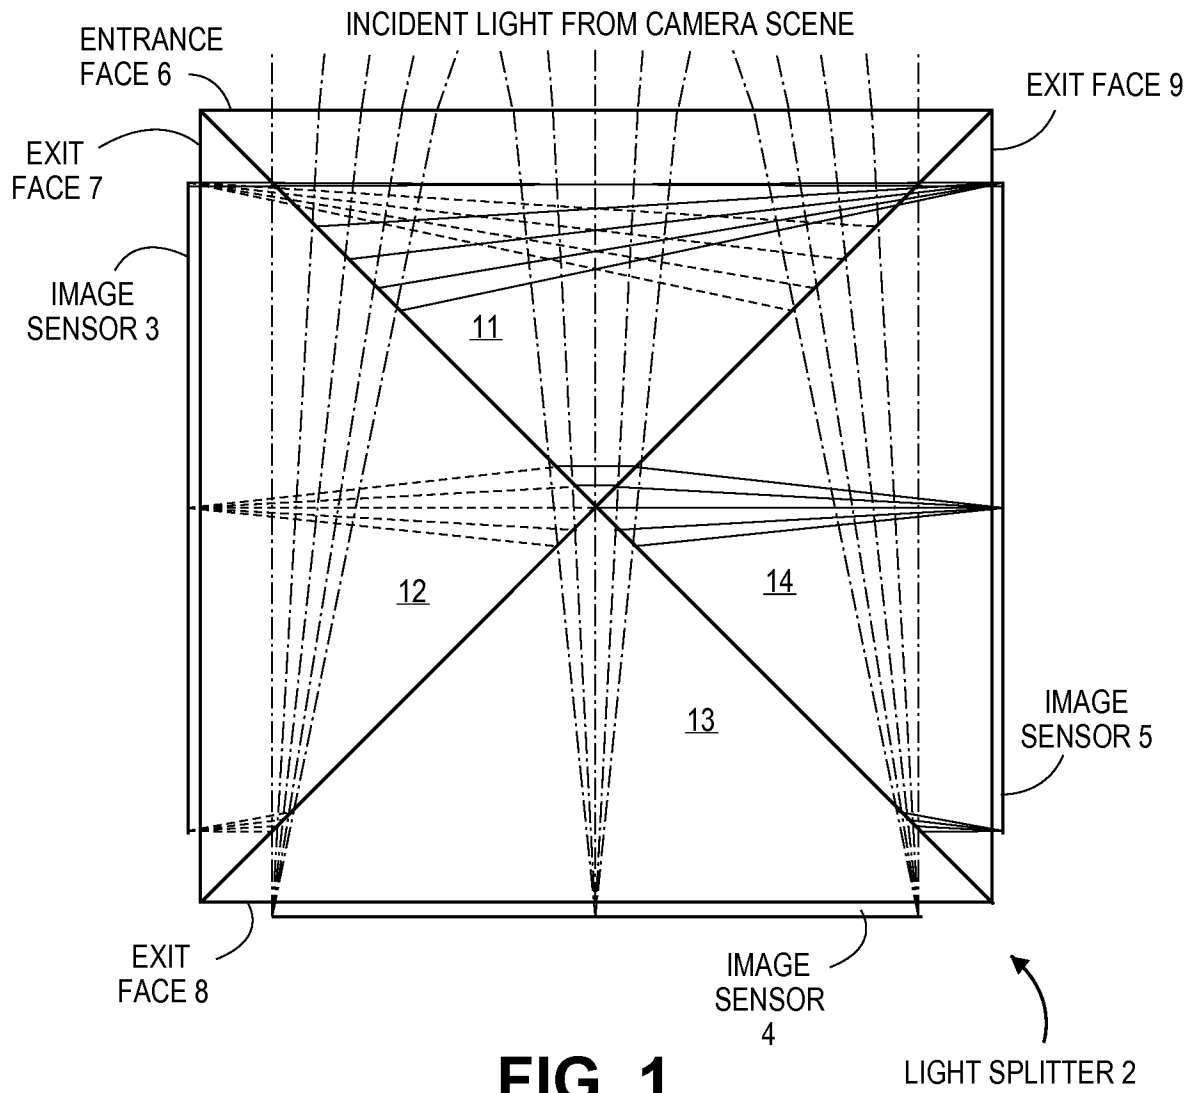

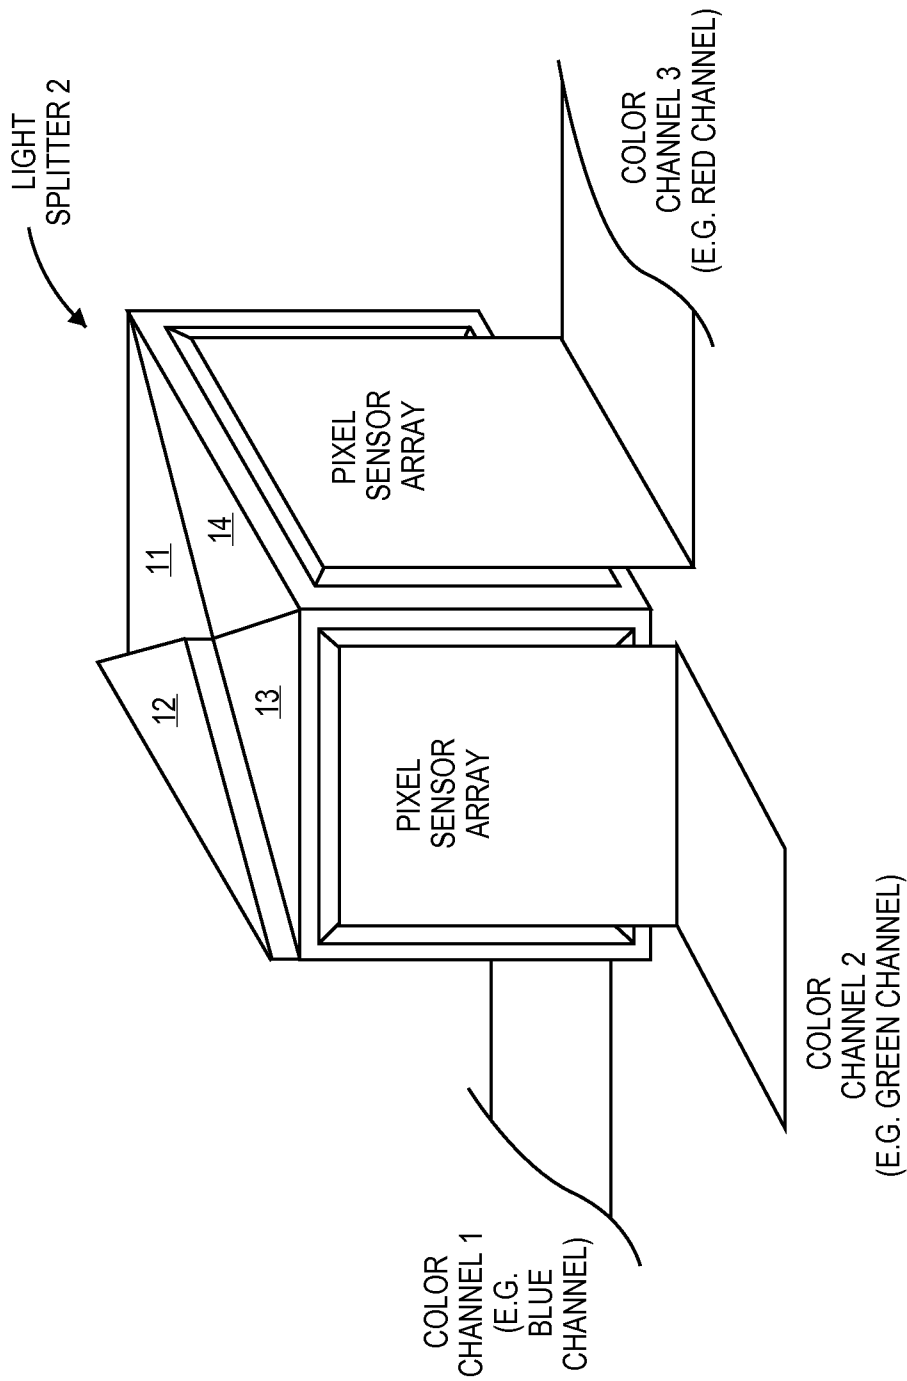


FIG. 3

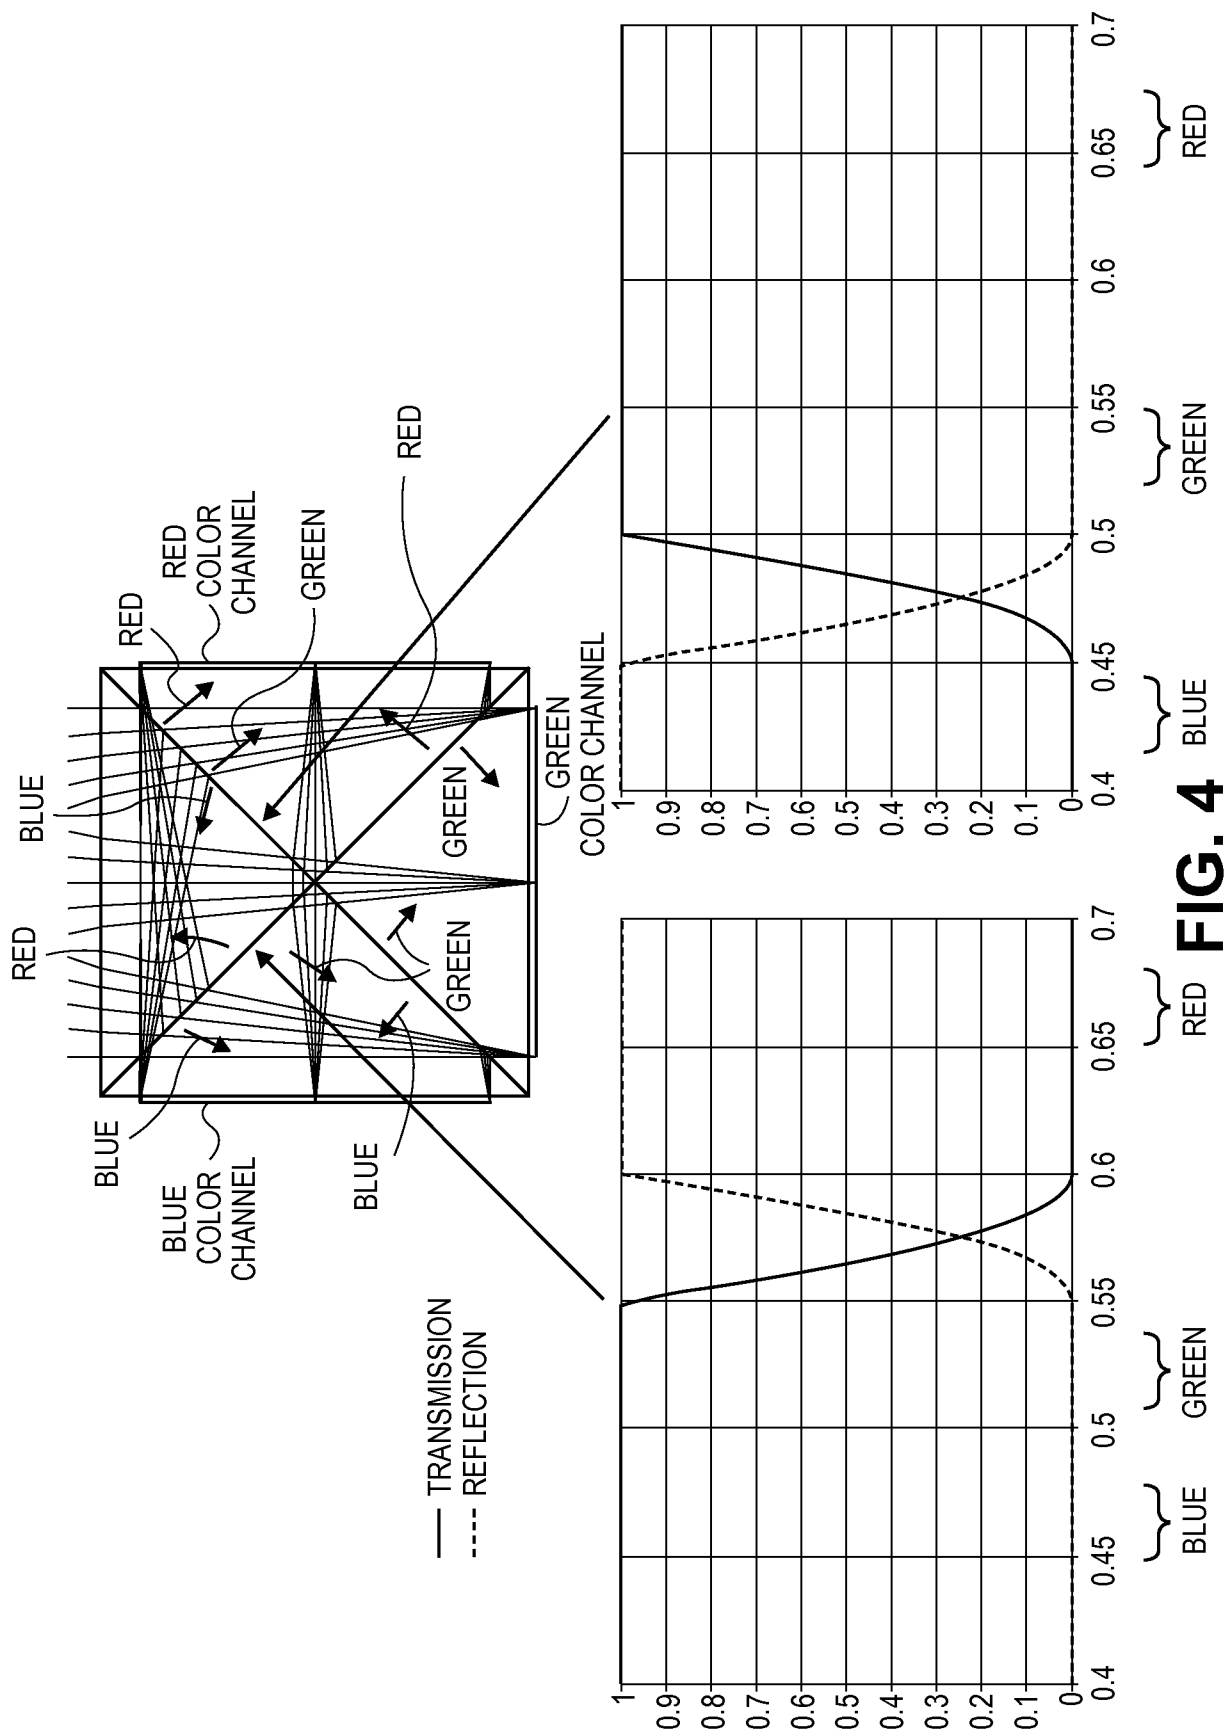
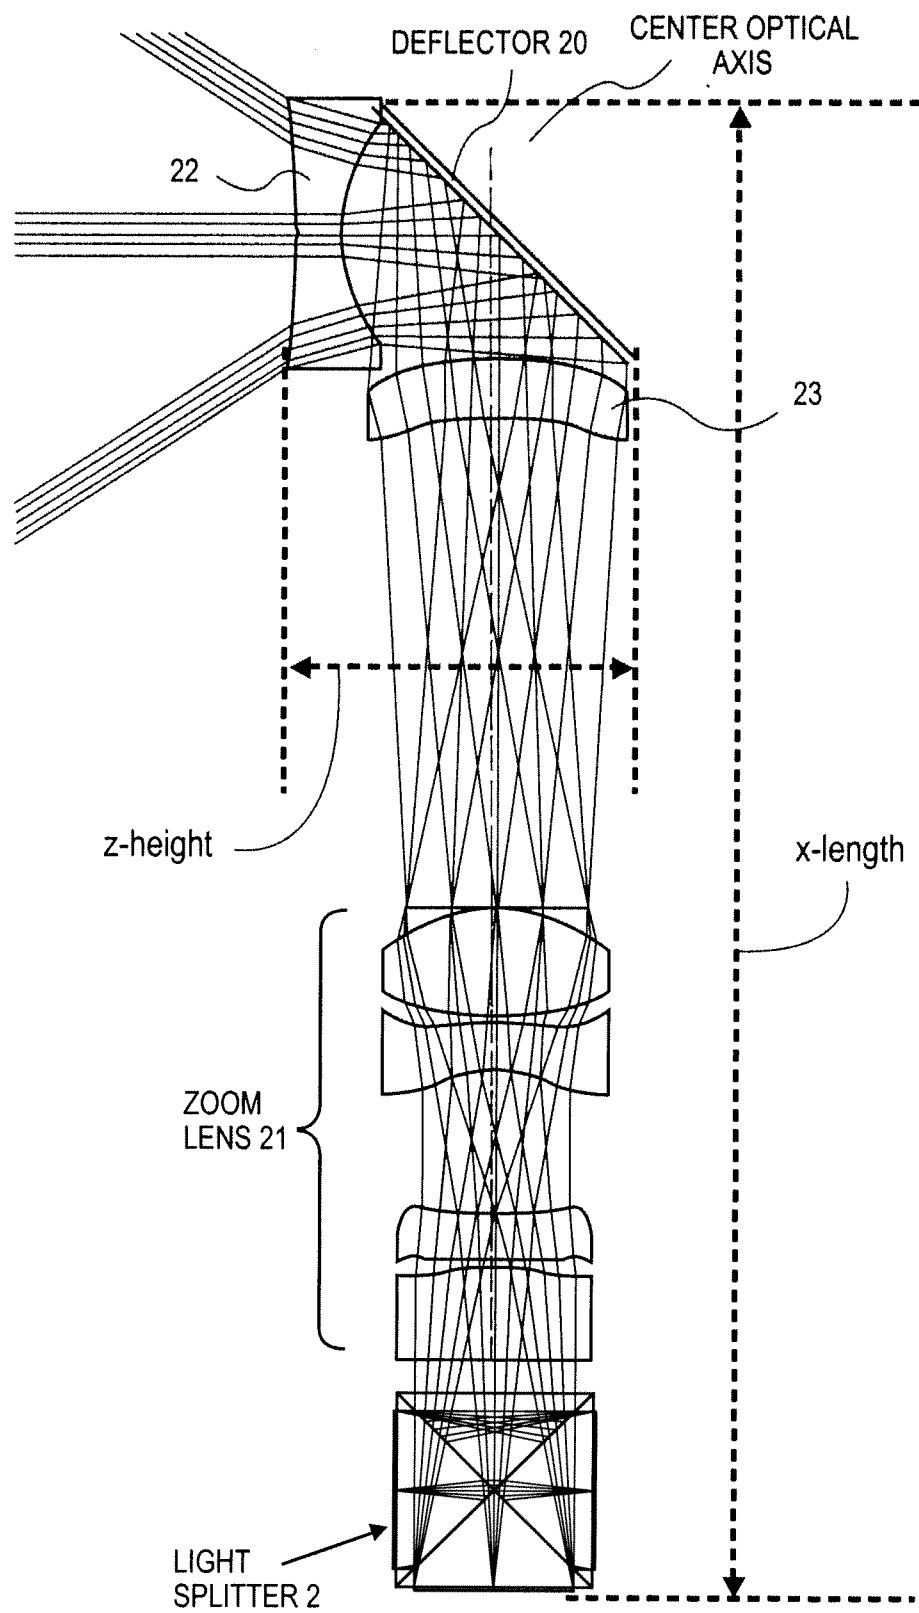


FIG. 4

**FIG. 5**

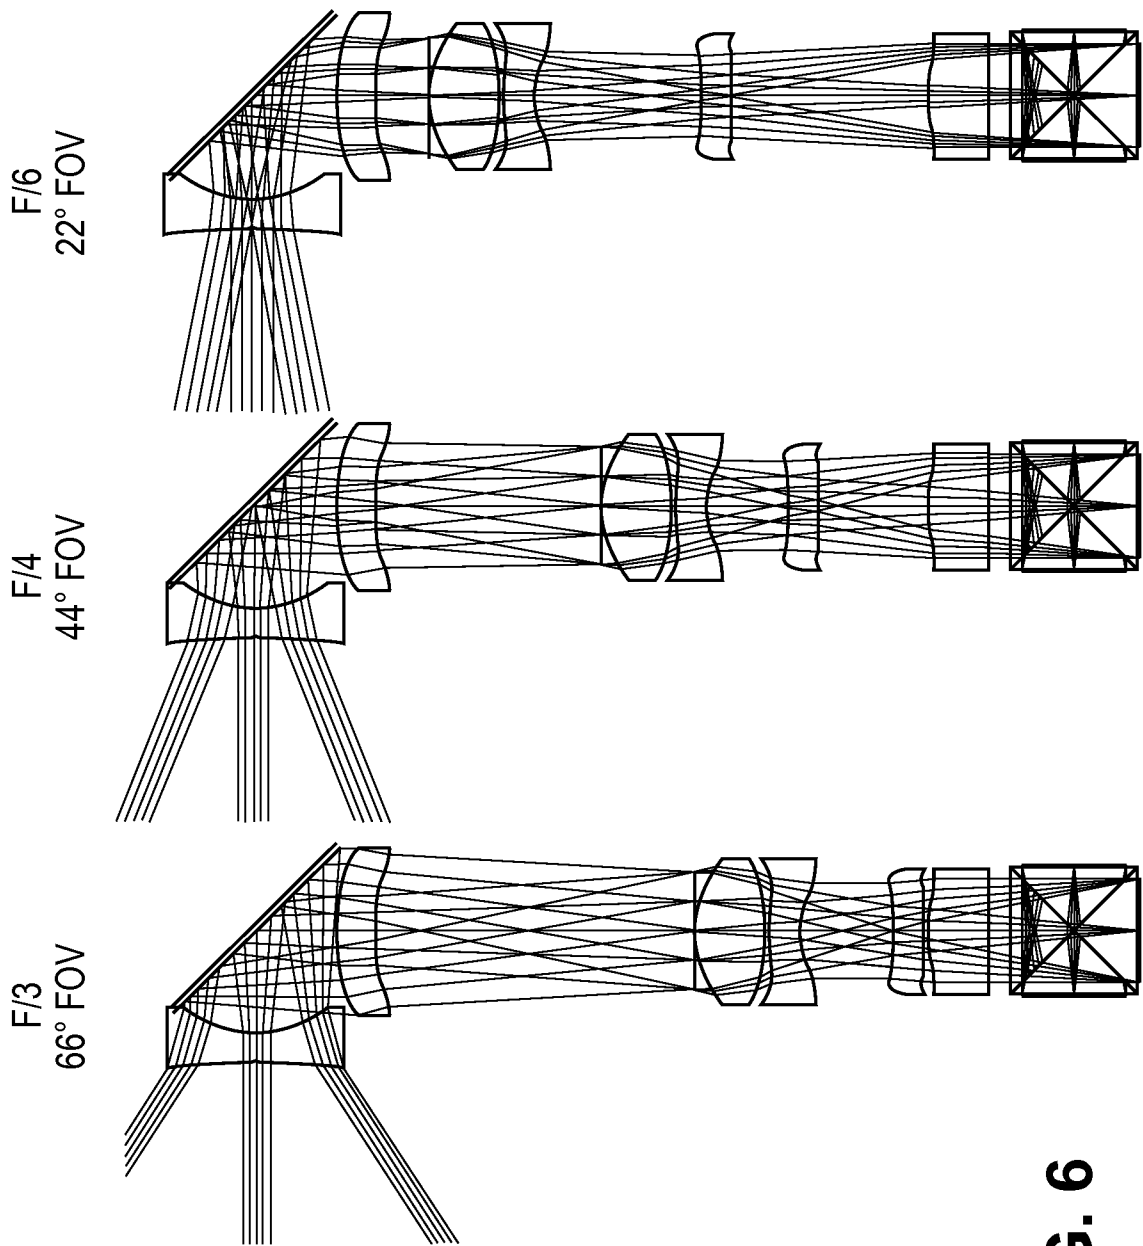
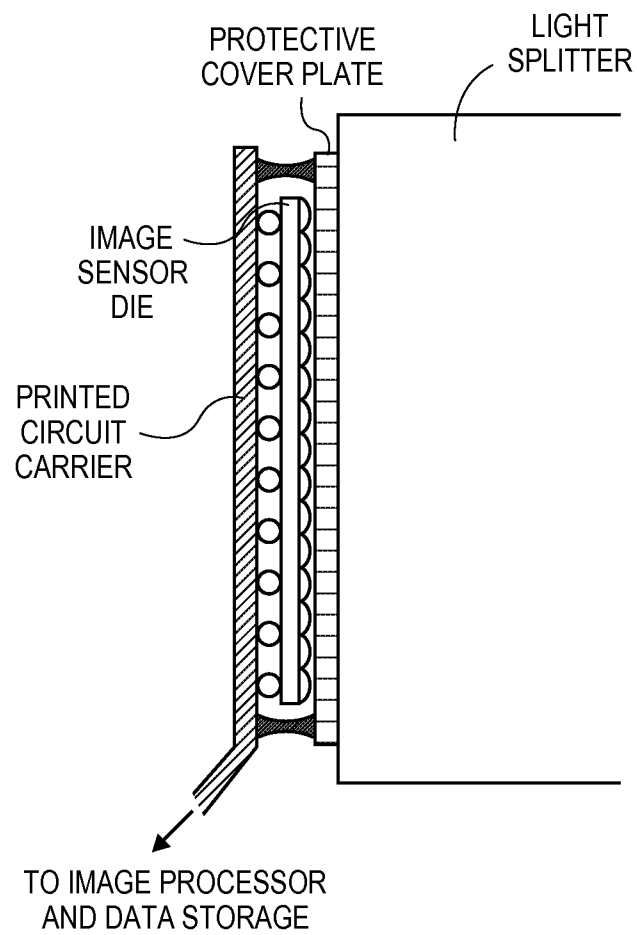
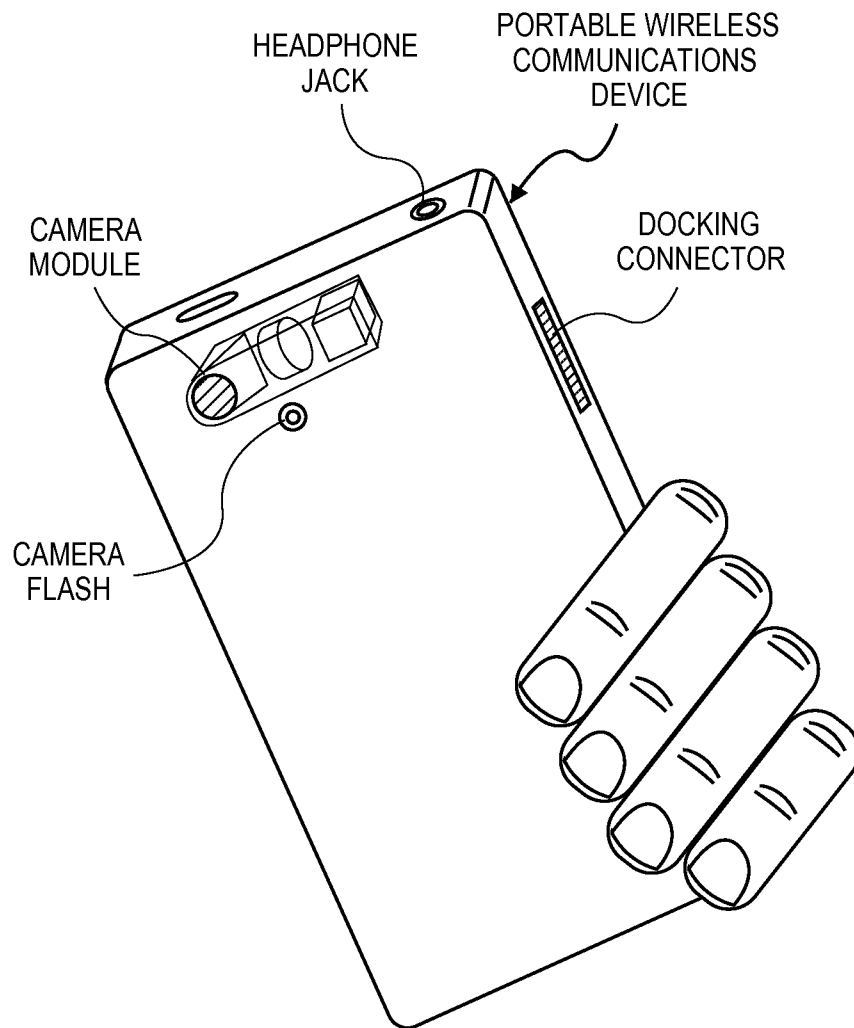


FIG. 6

**FIG. 7**

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/053973

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04N5/225 G02B27/10 G03B17/17
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N G02B G03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005/057659 A1 (HASEGAWA TAKAMI [JP]) 17 March 2005 (2005-03-17) paragraphs [0038], [0039]; figures 1,2 -----	1-17
Y	EP 0 359 461 A2 (SEIKO EPSON CORP [JP]) 21 March 1990 (1990-03-21) column 3, line 20 - column 4, line 35; figures 1,2 -----	1-17
Y	US 2006/177208 A1 (ITO YOSHIHIRO [JP] ET AL) 10 August 2006 (2006-08-10) abstract; figures 1,3 paragraphs [0018], [0021], [0030], [0031], [0039]; claims 1,5; figures 1,3 -----	18-22
X	EP 1 339 238 A2 (EASTMAN KODAK CO [US]) 27 August 2003 (2003-08-27)	1
Y	paragraph [0027]; figure 5 -----	18-22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 December 2012

Date of mailing of the international search report

19/12/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Oelsner, Martin

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/053973

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005057659	A1	17-03-2005	NONE

EP 0359461	A2	21-03-1990	DE 68928858 D1 07-01-1999
			DE 68928858 T2 22-04-1999
			EP 0359461 A2 21-03-1990
			HK 1015179 A1 14-07-2000
			JP 2074903 A 14-03-1990
			US 5098183 A 24-03-1992

US 2006177208	A1	10-08-2006	JP 2006217467 A 17-08-2006
			US 2006177208 A1 10-08-2006

EP 1339238	A2	27-08-2003	CN 1441603 A 10-09-2003
			EP 1339238 A2 27-08-2003
			JP 2003274424 A 26-09-2003
			US 2003160881 A1 28-08-2003
