

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 December 2003 (11.12.2003)


PCT

(10) International Publication Number
WO 03/101901 A1

- (51) International Patent Classification⁷: C03B 37/08
 - (21) International Application Number: PCT/US03/14620
 - (22) International Filing Date: 12 May 2003 (12.05.2003)
 - (25) Filing Language: English
 - (26) Publication Language: English
 - (30) Priority Data:
10/160,774 31 May 2002 (31.05.2002) US
 - (71) Applicant (for all designated States except US): OWENS CORNING [US/US]; One Owens Corning Parkway, Toledo, OH 43659 (US).
 - (72) Inventors; and
 - (75) Inventors/Applicants (for US only): SULLIVAN, Timothy, A. [US/US]; 82 Stonington Circle, Newark, OH 43055 (US). BEMIS, Byron, L. [US/US]; 10538 Blue Jay Road, Newark, OH 43055 (US).
 - (74) Agents: BARNES, Stephen, W. et al.; OWENS CORNING Science & Technology Center, 2790 Columbus Road, Building 54-1, Granville, OH 43023-1200 (US).
 - (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
 - (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: FIBER FORMING BUSHING ASSEMBLY HAVING FLANGE SUPPORT

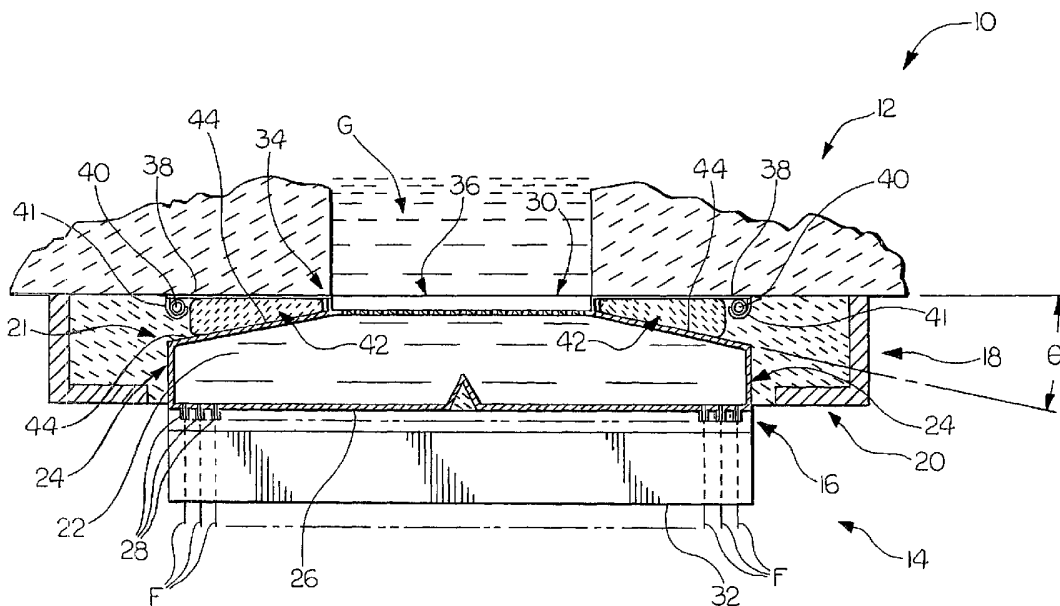

(57) Abstract: A fiber forming bushing assembly (14) comprises a bushing (16) and a support (42). The bushing includes a bushing body (21) and a flange (34). The bushing body is defined at least in part by a throat (30) and a side wall (24) beneath the throat. The side wall has an upper portion (44). The flange extends from the throat. The support (42) is positioned between the flange (34) and an upper portion of the side wall (24). The support (42) is formed of a ceramic material.



WO 03/101901 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

FIBER FORMING BUSHING ASSEMBLY
HAVING FLANGE SUPPORT

BACKGROUND OF THE INVENTION

5 This invention relates in general to fiber forming bushing assemblies and more particularly to a fiber forming bushing assembly having a flange support.

 Fiber forming bushing assemblies are well known in the prior art. An example of a prior art bushing assembly is illustrated in Fig. 1. The bushing assembly shown comprises a bushing 16, a frame 18 about the bushing 16, and a refractory material 20 between the
10 bushing 16 and the frame 18. A throat 30 is provided at the top of the bushing 16. A flange 34 is provided about the throat 30. A cooling coil 40 is attached to the flange 34. The bushing 16 has a body 21 that is defined in a lateral direction by opposing end plates 22 and in a longitudinal direction by elongate side walls 24. The end plates 22 extend downward in a generally vertical direction. Upper portions 38 of the side walls 24 are
15 slanted or angled outward and beneath the flange 34 while lower portions of the side walls 24 extend downward in a generally vertical direction.

 In a fiber forming operation, the bushing assembly is secured beneath a bushing block 12 at a forming position by clamping the frame 18 to a forehearth steel (not shown). The flange 34 is adapted to engage an underside of the bushing block 12. Molten glass G
20 flows from the bushing block 12 into the throat 30 of the bushing 16. The molten glass G exits the bushing 16 (for example, as glass fibers F) through tip plates 26 provided at the bottom of the bushing 16.

 Ideally, the flange 34 extends perpendicularly from the throat 30 and parallel relative to the underside of the bushing block 12. An upper surface of the flange 34 is
25 adapted to engage the underside of the bushing block 12 so as to provide a seal between the flange 34 and the bushing block 12 to prevent molten glass G from escaping or leaking between the flange 34 and the bushing block 12. In some instances, a small amount of molten glass G may leak between the flange 34 and the bushing block 12. However, the temperature of this small amount of glass G drops significantly as it passes between the
30 flange 34 and the bushing block 12 and approaches the cooling coil 40 (that is, heat for the molten glass G dissipates into the cooling coil 40). Molten glass G that reaches the edge

of the flange 34 is solidified due to the effect of the cooling coil 40. The solidified glass forms a seal to prevent the molten glass G from flowing any further.

Various size bushings are required, depending on the production requirements (for example, the number of fibers F being formed). The bushing 16 shown has two tip plates 5 26 and, consequently, is a wider bushing. That is to say, the bushing 16 has greater dimension from front to back or a lateral direction of the bushing 16 (from left to right, or vice versa, when viewing Fig. 1). The upper portion 44 of each side wall 24 of this bushing 16 is at a tighter angle relative to the flange 34 than a narrower bushing. Therefore, very little clearance is provided between the flange 34 and the cooling coil 40 10 and the upper portion 44 of each side wall 24. Consequently, it is more difficult to ensure continuous backfill of refractory material 20 in the area or cavity defined between the flange 34 and the cooling coil 40 and the upper portion 44 of each side wall 24. A more continuous backfill can be achieved by raising the moisture content of the refractory material 20. However, an increased moisture level of the refractory material 20 has an 15 adverse affect on the strength and integrity of the refractory material 20. Such refractory material tends to crack and separate from the bushing 16 and frame 18, resulting in premature failure of the bushing 16.

A discontinuous backfill results in the presence of voids V in the refractory material 20. The voids V weaken the support provided by the refractory material 20. 20 Downward forces from the molten glass G against the bushing screen, clamping pressure, and gravitational force cause plastic and/or creep deformation of the flange 34 and the upper portion 44 of each side 24. This causes the flange 34 to separate or pull away from the bushing block 12, as illustrated in Fig. 1 of the prior art. When the flange 34 separates from the bushing block 12, more molten glass G can penetrate between the flange 34 and 25 the bushing block 12. As the amount of molten glass G penetrating between the flange 34 and the bushing block 12 increases, the molten glass G does not cool sufficiently by the time it reaches the edge of the flange 34. Consequently, the molten glass G between the flange 34 and the bushing block 12 is at a heightened temperature. The cooling coil 40 is not designed to cool molten glass G at the heightened temperature. Consequently, the 30 molten glass G leaks beyond the edge of the flange 34 and the cooling coil 40 and results in a premature failure of the bushing 16.

What is needed is a support that provides greater subjacent support for the peripheral flange in a longitudinal direction of the bushing to prevent the flange from sagging and thus prevent molten glass from leaking between the flange and the bushing block, thereby eliminating premature failures and prolonging the life of the bushing.

5

SUMMARY OF THE INVENTION

The present invention is directed toward a fiber forming bushing assembly comprising a bushing and a support. The bushing includes a bushing body and a flange. The bushing body is defined at least in part by a throat and a side wall beneath the throat.
10 The side wall has an upper portion. The flange extends from the throat. The support is positioned between the flange and an upper portion of the side wall. The support is formed of a ceramic material.

The present invention is also directed toward a fiber forming bushing assembly having a bushing body defined at least in part by a throat, opposing end plates extending in
15 a lateral direction, and elongated side walls extending in a longitudinal direction. The end plates and side walls are beneath the throat. Each side wall has an upper portion. The flange extends from the throat. The flange comprises a lateral portion and an elongate portion. A support is positioned between each of the elongate portions of the flange and the upper portion of a corresponding one of the side walls. Each support is formed of a
20 ceramic material.

Various objects and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the preferred embodiment, when read in light of the accompanying drawings.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side elevational view of a prior art bushing.

Fig. 2 is a side elevational view of a bushing according to a preferred embodiment of the invention.

Fig. 3 is a front elevational view of the bushing shown in Fig. 2.

30 Fig. 4 is an enlarged perspective view of the flange support according to a preferred embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, there is illustrated in Fig. 2 a fiber forming position 10 comprising a bushing block 12 and a bushing assembly 14. The bushing assembly 14 basically comprises a bushing 16, a frame 18 about the bushing 16, and a refractory material 20 (for example, a castable refractory material) between the frame 18 and the bushing 16. The frame 18 is secured beneath the bushing block 12 by clamping the frame 18 to a forehearth steel (not shown). Molten glass G is supplied to the bushing 16 through the bushing block 12. The molten glass G passes through the bushing 16 and exits the bushing 16 in the form of fibers F (for example, glass fibers).

10 The bushing 16 is basically comprised of an electrically conductive bushing body 21 and an electrically conductive screen located within the bushing body 21. In a preferred embodiment of the invention, the bushing body 21 is in the form of a metal box having an elongate, substantially rectangular shape. The bushing body 21 is defined in part by opposing end plates 22 and elongate side walls 24 extending between the end plates 22. 15 The bottom of the bushing body 21 is defined by a tip plate 26 having a plurality of orifices (not shown) formed therein, preferably including tubular members 28, as described in commonly-assigned U.S. Patent No. 4,161,646, which is incorporated herein by reference. The tip plate 26 extends in a side to side or longitudinal direction between the end plates 22 and a front to rear or lateral direction between the side walls 24. An opening 20 is provided at the top of the bushing body 21 for receiving the molten glass G from the bushing block 12. The opening is defined by a throat 30.

A pair of opposing electrical terminals or ears 32 is attached to the opposing end plates 22. The ears 32 are adapted to be connected to a source of current (not shown). Current is adapted to flow through the ears 32 and further into and through the bushing 25 body 21 to resistance heat the bushing body 21 and thereby maintain the glass G under the desired thermal condition.

A flange 34 extends from the throat 30 at the top of the bushing body 21. The flange 34 includes a lateral portion 36 that extends in the lateral direction adjacent each of the end plates 22 and an elongate portion 38 that extends in the longitudinal direction 30 adjacent each of the elongate side walls 24. The flange 34 engages an underside of the bushing block 12 to form a seal between the bushing block 12 and the flange 34 to prevent

molten glass G from escaping or leaking from between the bushing block 12 and the flange 34.

To further reduce the risk that molten glass G will escape from between the bushing block 12 and the flange 34, a cooling coil 40 is attached to the flange 34 (for example, with metal tabs 41 that are welded to the flange 34). In a preferred embodiment of the invention, the cooling coil 40 is a continuous cooling coil that is attached to an outer peripheral edge of the flange 34.

In accordance with the present invention, a support 42 is positioned beneath the flange 34 in an area or cavity defined between each elongate portion 38 of the flange 34 and an upper portion 44 of each side wall 24. The support 42 is positioned juxtaposed the throat 30 of the bushing body 21 and beneath the flange 34 to provide lateral support for the throat 30 and subjacent support for the flange 34.

The upper portion 44 of each side wall 24 is disposed at an acute angle θ relative to the corresponding elongate portion 38 of the flange 34. The measure of the angle θ depends at least in part upon the width W of the bushing body 21. That is to say, the measure of the angle θ is inversely proportional to the width W of the bushing body 21, assuming a constant bushing height and throat width.

The support 42 is shaped and dimensioned to fit between each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24. Consequently, the support 42 is preferably wedge-shaped. In a preferred embodiment of the invention, the support 42 has a shape complementary to that of the cavity provided between each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24. Moreover, the support 42 is dimensioned to fit closely relative to each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24. The support 42 preferably fits flush against each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24 or up to within 0.0625 inch (1.5875 millimeters) of each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24.

The shape of the support 42 depends at least in part upon the shape of the cavity defined between each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24. The shape of this cavity depends upon shape of the bushing body 21. For example, the throat 30 is preferably substantially vertical. The flange 34 is preferably at about a right angle relative to the throat 30. The upper portion 44 of each side wall 24 is

vertically spaced from the flange 34 by the vertical dimension of the throat 30. The upper portion 44 of each side wall 24 is oriented at an acute angle θ relative to the flange 34. As stated above, the measure of the angle θ is inversely proportional to the width of the bushing 16. If the cooling coil 40 is mounted to the underside of the flange 34, then the shape of the support 42 can further depend at least in part upon the space provided between the throat 30 and the cooling coil 40.

An example of a support 42 according to a preferred embodiment of the invention is illustrated in Fig. 4. The support 42 shown has a cross-section that is polygonal in shape. It has an upper surface 46 and an inner surface 48 which preferably extends downward from the upper surface 46 at about a right angle relative to the upper surface 46. An outer surface 50 of the support 42 preferably extends downward from the upper surface 46 and at about a right angle relative to the upper surface 46 and substantially parallel to the inner surface 48. A lower surface 52 of the support 42 extends between the inner and outer surfaces 48, 50. The lower surface 52 extends at an obtuse angle relative to the inner surface 48 and an acute angle relative to the outer surface 50. The upper surface 46 is adapted to engage the underside of the flange 34. The inner surface 48 is adapted to engage the throat 30. The lower surface 52 is adapted to engage the upper portion 44 of the side wall 24. The length of the support 42 depends at least in part upon the longitudinal dimension of the bushing 16. The width or lateral dimension of the upper surface 46 depends at least in part upon the width or lateral dimension of the flange 34 and the distance between the throat 30 and the cooling coil 40. The vertical dimension of the inner surface 48 depends upon the vertical dimension of the throat 30. The dimensions of the outer surface 50 and the lower surface 52 depend at least in part upon the dimension of the upper portion 44 of the side wall 24, which is largely dependent upon its angle θ .

It should be clearly understood by one of ordinary skill in the art of the invention that the shape of the support 42 can vary and that the present invention is not intended to be limited to the shape shown and described. For example, the outer surface 50 of the support 42 may extend at an acute or obtuse angle relative to the upper surface 46. The support 42 can have rounded corners, as shown, or relatively sharp corners (not shown). Moreover, the ends 54, 56 of the support 42 can be squared off, as shown, or, although not shown, rounded, similar to the rounded corners. It should also be understood that the outer surface 50 can have a relief (not shown) for receiving the cooling coil 40.

The support 42 is preferably formed from a non-deteriorating material that has a resistance to high temperature and a high tensile strength. The material is preferably resistant to high temperatures, for example, in a range of about 2,100 to 2,900 degrees Fahrenheit. The modulus of rupture (MOR) of the support 42 preferably exceeds that of the refractory material 20. The MOR of the refractory material 20 is in the range of about 200 to 1000 pounds per square inch (PSI) (140 to 703 kilopascals). A support 42 according to a preferred embodiment of the invention would have a MOR of several thousand PSI.

In the most preferred embodiment of the invention, the support 42 is extruded from a ceramic material, such as mullite, zircon, alumina, or an equivalent thereto. Such materials have tensile strengths capable of withstanding stress endured by the elongate portion 38 of the flange 34 over its entire span and maintaining rigidity during the service life of the bushing 16.

It should be appreciated by one of ordinary skill in the art of the invention that the support 42 may be formed from a high temperature-high strength material other than a ceramic material. Moreover, the support 42 may be formed from a composite material, such as a ceramic matrix with a high temperature-high strength fiber reinforcement.

In the preferred embodiment of the invention, the cooling coil 40 is mounted to an underside of the flange 32 so that a support 42 is held in place between each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24 by the cooling coil 40. In this way, the cooling coil 40 holds a support 42 between each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24 while the refractory material 20 is cast and permitted to set up. It should be clearly understood that, after the refractory material 20 sets up, the refractory material 20 holds the support 42 in place.

The support 42 provides a continuous rigid structural support for the upper end of the bushing 16 and, more particularly, the throat 30 and each elongate portion 38 of the flange 34. The support 42 fits tightly in the clearance provided between each elongate portion 38 of the flange 34 and the upper portion 44 of each side wall 24. The support 42 maintains the rigidity and shape of the throat 30 and the flange 34 during the operation of the bushing 16 and thus reinforces the throat 30 and prevents each elongate portion 38 of the flange 34 from collapsing during the service life of the bushing 16. Consequently, a proper seal is maintained between the underside of the bushing block 12 and each elongate

portion 38 of the flange 34, thus minimizing the gap between the underside of the bushing block 12 and each elongate portion 38 of the flange 34. This, in turn, reduces the risk of glass leaking between the bushing block 12 and each elongate portion 38 of the flange 32. Any leakage that does occur will be solidified by the cooling coil 40.

5 In accordance with the provisions of the patent statutes, the principle and mode of operation of this invention have been explained and illustrated in its preferred embodiment. However, it must be understood that this invention may be practiced otherwise than as specifically explained and illustrated without departing from its spirit or scope.

10

WHAT IS CLAIMED IS:

1. A fiber forming bushing assembly (14), comprising:
a bushing (16) having a bushing body (21) and a flange (34), the bushing body being defined at least in part by a throat (30) and a side wall (24) beneath the throat, the side wall having an upper portion (44), the flange extending from the throat; and
5 a support (42) positioned between the flange and the upper portion of the side wall, the support being formed of a ceramic material.
2. A fiber forming bushing assembly according to claim 1, wherein the flange and the upper portion of the side wall extend at an acute angle relative to one another and
10 the support is wedge-shaped.
3. A fiber forming bushing assembly according to claim 1, wherein the support fits within about 0.0625 inch (1.5875 millimeters) of the flange and upper portion of the side wall.
4. A fiber forming bushing assembly according to claim 1, wherein the flange
15 includes an elongate portion (38), the support being positioned between the elongate portion of the flange and the upper portion of the side wall.
5. A fiber forming bushing assembly according to claim 1, further comprising a cooling coil (40) attached to the flange, the support further being positioned between the throat and the cooling coil.
- 20 6. A fiber forming bushing assembly according to claim 1, further comprising a frame (18) about the bushing and refractory material (20) between the frame and the bushing.
7. A fiber forming bushing assembly according to claim 6, wherein the refractory material is castable.
- 25 8. A fiber forming bushing assembly (14), comprising:
a bushing (16) having a bushing body (21) and a flange (34), the bushing body being defined at least in part by a throat (30), opposing end plates (22) extending in a lateral direction, and elongated side walls (24) extending in a longitudinal direction, the end plates and side walls being beneath the throat, each side wall having an upper portion
30 (44), the flange extending from the throat, the flange comprising a lateral portion (36) and an elongate portion (38); and

a support (42) positioned between each of the elongate portions of the flange and the upper portion of a corresponding one of the side walls, each of the supports being formed of a ceramic material.

5 9. A fiber forming bushing assembly according to claim 8, wherein each of the elongate portions of the flange and the upper portion of the corresponding one of the side walls extend at an acute angle relative to one another.

10 10. A fiber forming bushing assembly according to claim 8, wherein each of the supports fits within about 0.0625 inch (1.5875 millimeters) of the elongate portions of the flange and upper portion of the corresponding one of the side walls.

11. A fiber forming bushing assembly according to claim 8, further comprising a cooling coil (40) mounted to the flange, the support further being positioned between the throat and the cooling coil.

12. A fiber forming bushing assembly according to claim 8, further comprising a frame (18) about the bushing and refractory material (20) between the frame and the bushing.

13. A fiber forming bushing assembly according to claim 12, wherein the refractory material is castable.

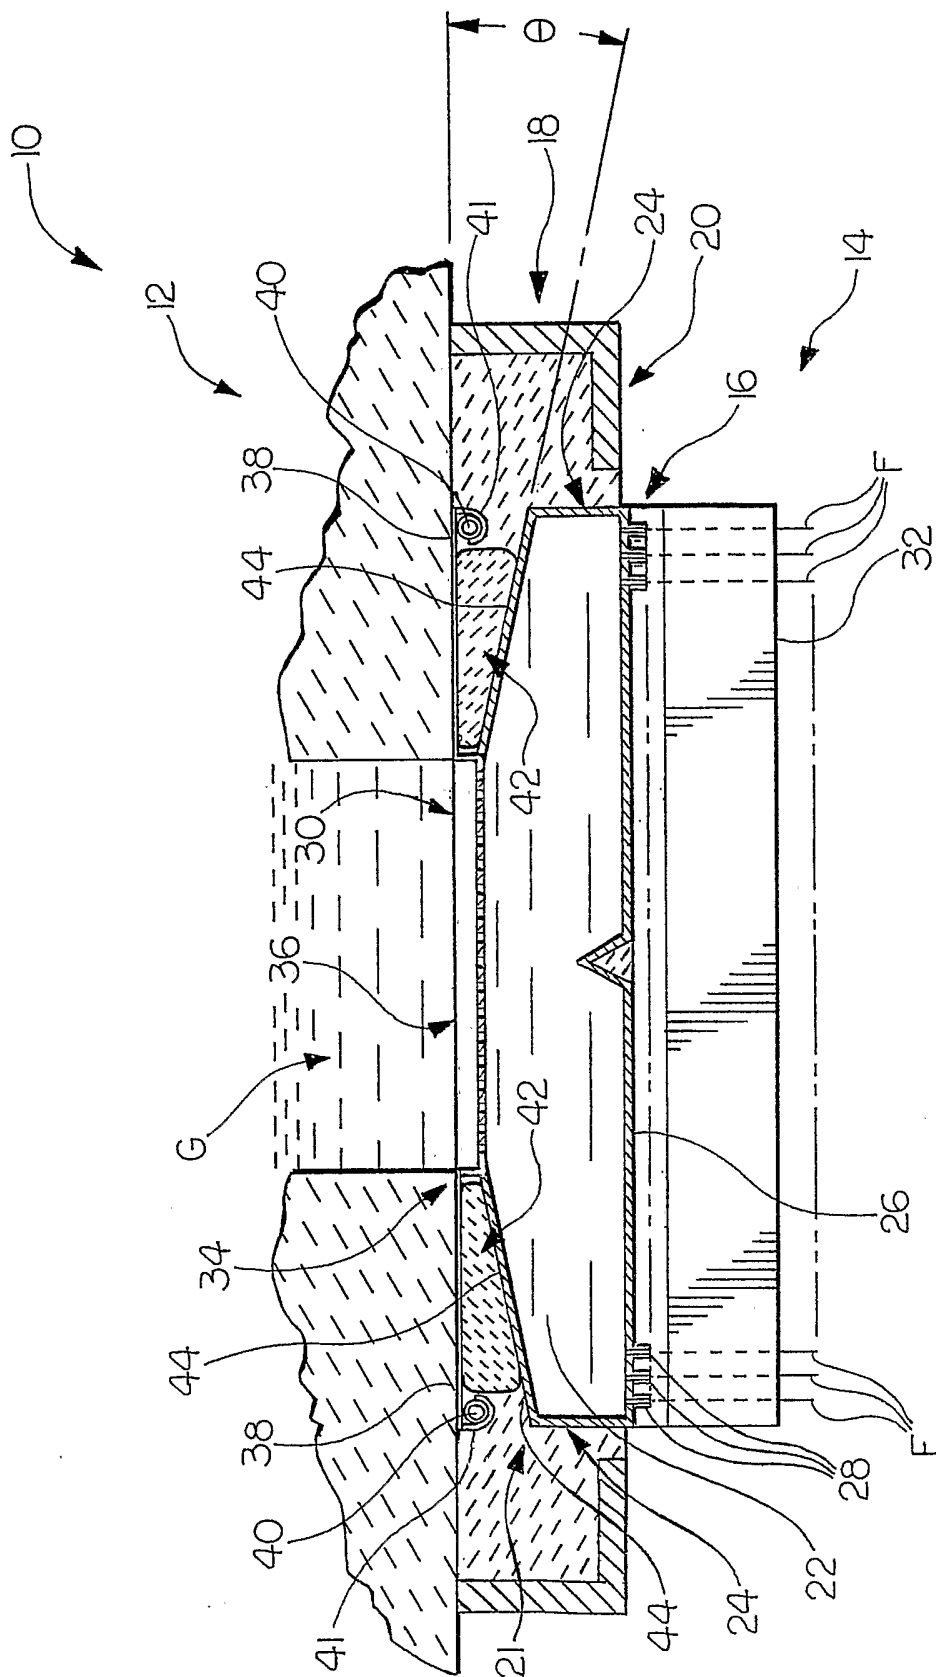


FIG. 2

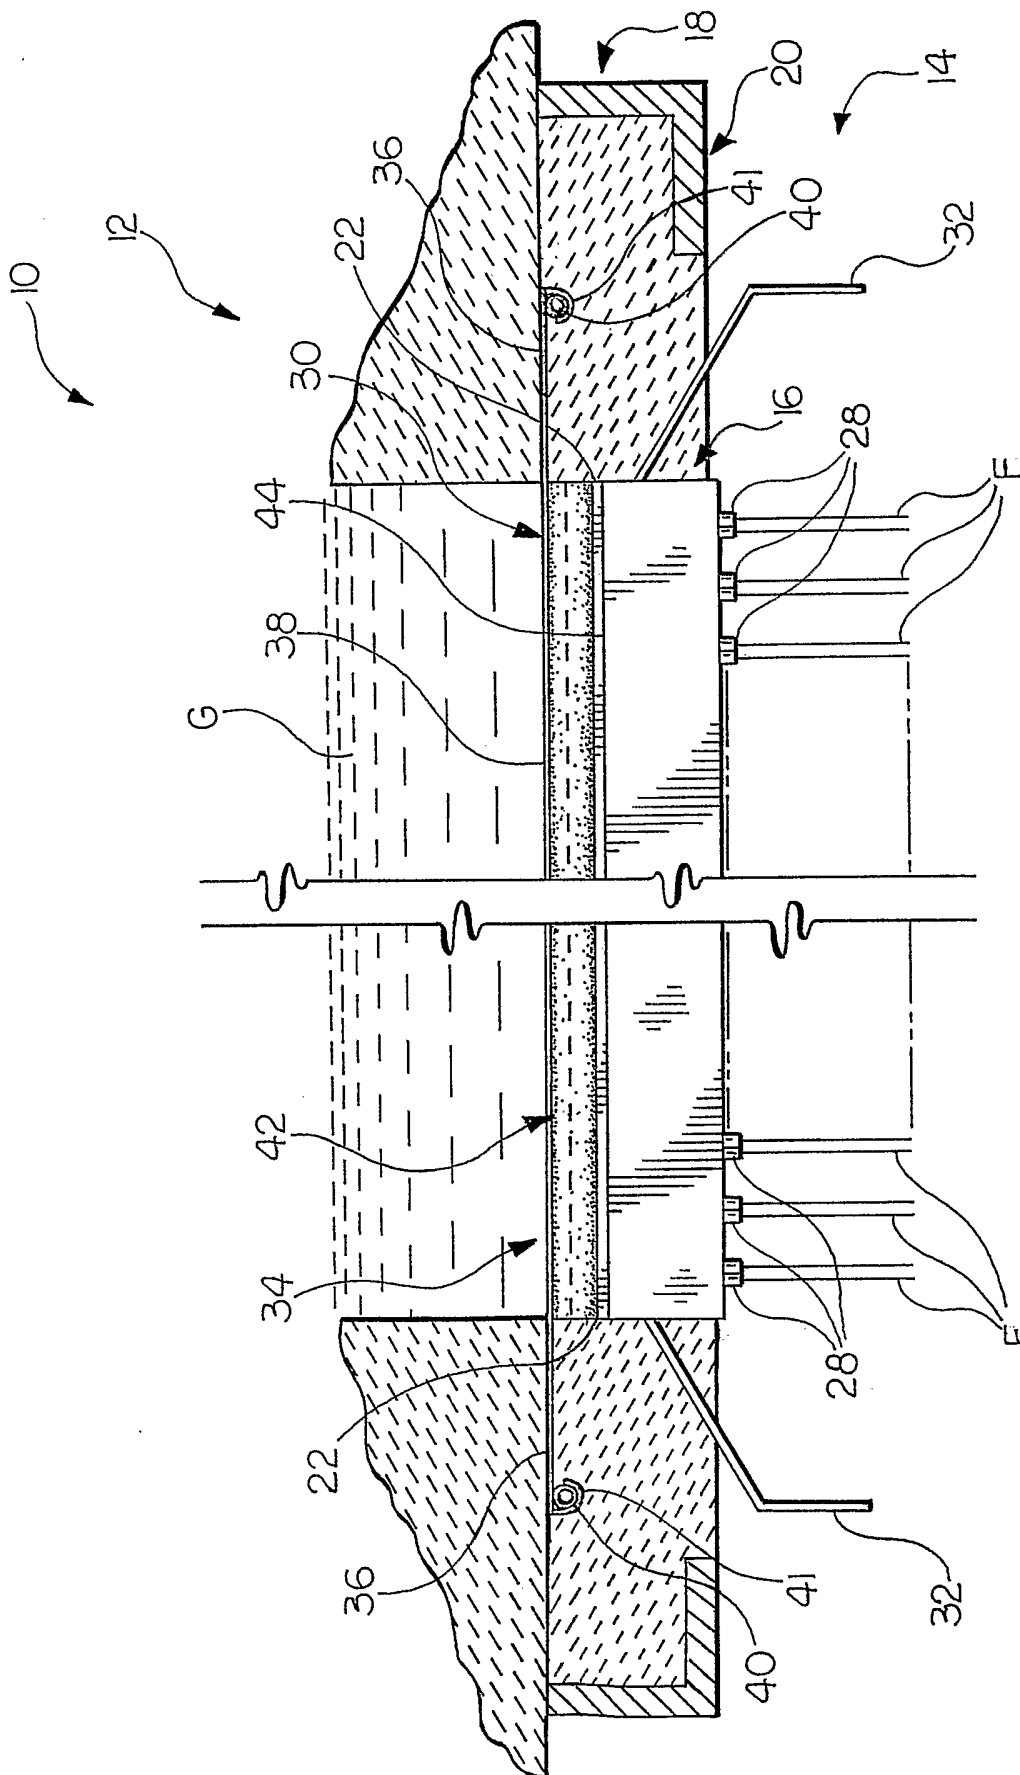


FIG. 3

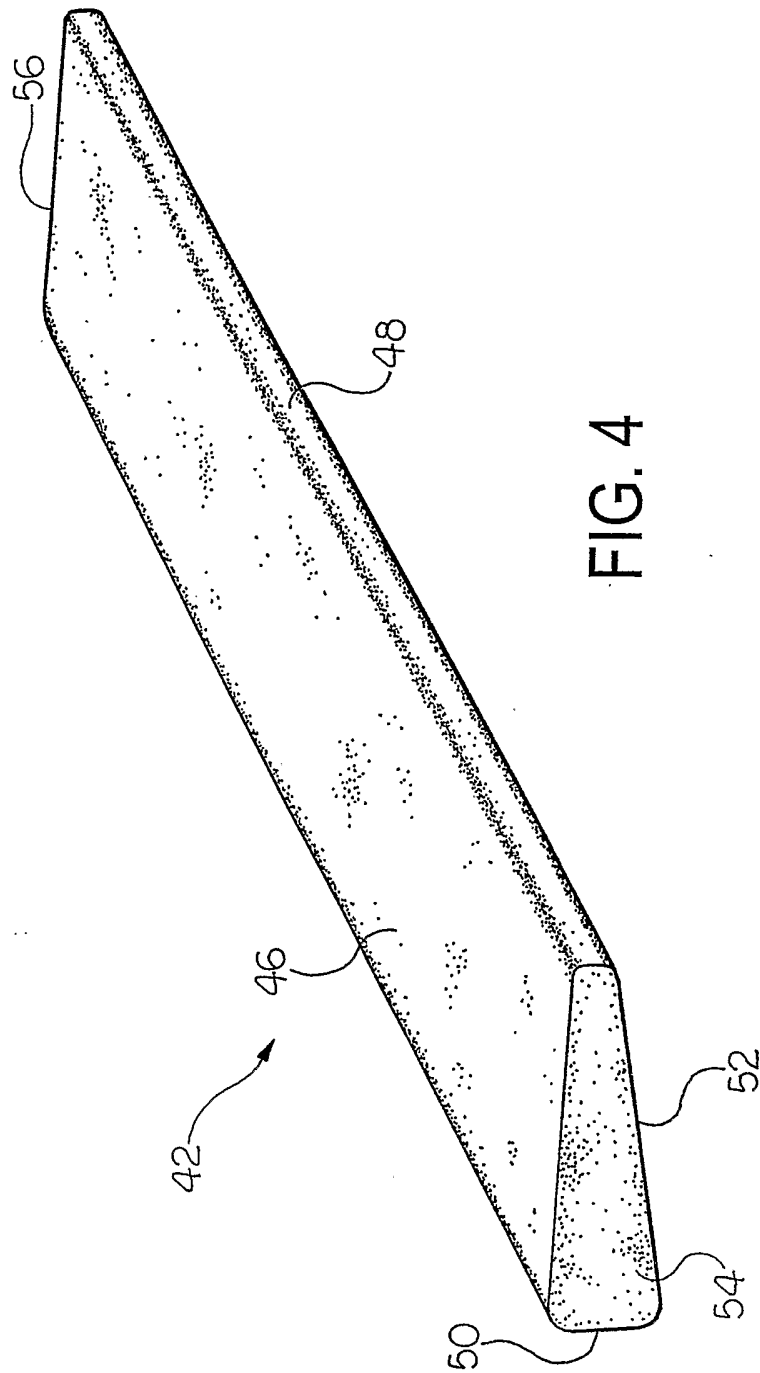


FIG. 4

INTERNATIONAL SEARCH REPORT

PCT/US 03/14620

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C03B37/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 193 225 A (JOHNS MANVILLE INTERNAT INC) 3 April 2002 (2002-04-03) figure 2 ---	1-13
X	US 4 351 656 A (JENSEN THOMAS H) 28 September 1982 (1982-09-28) figure 2 ---	1-13
X	US 3 982 915 A (COGGIN JR CHARLES H) 28 September 1976 (1976-09-28) figure 3 ---	1-13
X	US 5 948 135 A (GRUNDY REED H ET AL) 7 September 1999 (1999-09-07) figure 1 --- -/--	1-13

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

9 September 2003

Date of mailing of the international search report

17/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marrec, P

INTERNATIONAL SEARCH REPORT

PCT/US 03/14620

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 146 373 A (SULLIVAN TIMOTHY A ET AL) 27 March 1979 (1979-03-27) the whole document -----	1

INTERNATIONAL SEARCH REPORT

PCT/US 03/14620

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1193225	A	03-04-2002	US 6453702 B1	24-09-2002
			CA 2358075 A1	29-03-2002
			EP 1193225 A2	03-04-2002
			JP 2002220250 A	09-08-2002
US 4351656	A	28-09-1982	NONE	
US 3982915	A	28-09-1976	AU 499888 B1	03-05-1979
			AU 1688476 A	23-02-1978
			BE 845226 A1	16-12-1976
			BR 7604549 A	31-01-1978
			CA 1081956 A1	22-07-1980
			CA 1086059 A2	23-09-1980
			DE 2636998 A1	27-10-1977
			FR 2334637 A1	08-07-1977
			GB 1546204 A	23-05-1979
			IN 144770 A1	01-07-1978
			JP 1002306 C	19-06-1980
			JP 52074028 A	21-06-1977
			JP 54038219 B	20-11-1979
			LU 76114 A1	08-06-1977
			NL 7608882 A ,B,	10-06-1977
			NZ 181759 A	31-08-1979
			SE 419437 B	03-08-1981
			SE 7608701 A	09-06-1977
			SU 948287 A3	30-07-1982
			TR 19328 A	28-11-1978
			US 4032314 A	28-06-1977
ZA 7604415 A	27-07-1977			
US 5948135	A	07-09-1999	AU 3792799 A	29-11-1999
			WO 9958460 A1	18-11-1999
US 4146373	A	27-03-1979	BR 7808283 A	14-08-1979
			JP 54093124 A	24-07-1979