



(51) International Patent Classification:

C07C 7/00 (2006.01) C07C 7/10 (2006.01)
C07C 7/04 (2006.01)

(21) International Application Number:

PCT/IB2013/000406

(22) International Filing Date:

18 March 2013 (18.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

709/MUM/2012 16 March 2012 (16.03.2012) IN

(71) Applicant: **BHARAT PETROLEUM CORPORATION LIMITED** [IN/IN]; Bharat Bhavan, 4 & 6 Currimbhoy Road, Ballard Estate, Mumbai 400 001 (IN).

(72) Inventors: **RAI, Pragya**; Bharat Petroleum Corporation Limited Corporate R&D Center, Plot No. 2A, Udyog Kendra, Surajpur, Greater Noida 201 306 (IN). **NEHAMI-AH, Jose**; Bharat Petroleum Corporation Limited Corporate R&D Center, Plot No. 2A, Udyog Kendra, Surajpur, Greater Noida 201 306 (IN). **THOTA, Chiranjeevi**; Bharat Petroleum Corporation Limited Corporate R&D Center, Plot No. 2A, Udyog Kendra, Surajpur, Greater Noida 201 306 (IN). **GOKAK, Dattatraya Tammannashastry**; Bharat Petroleum Corporation Limited Corporate R&D Center, Plot No. 2A, Udyog Kendra, Surajpur, Greater Noida 201 306 (IN). **VISWANATHAN, Poyyamani Swaminathan**; Bharat Petroleum Corporation Limited Corporate R&D Center, Plot No. 2A, Udyog Kendra, Surajpur, Greater Noida 201 306 (IN). **SHUKLA, Shashikant**; Bharat Petroleum Corporation Limited-Refinery, Mahul, Chembur, Mumbai 400 074 (IN). **KUNDU, Buddhadeb**; Bharat Petroleum Corporation Limited-Refinery, Mahul, Chembur, Mumbai 400 074 (IN). **GOEL, Satish Kumar**; Bharat Pet-

roleum Corporation Limited-Refinery, Mahul, Chembur, Mumbai 400 074 (IN).

(74) Agents: **RAE, Konpal** et al.; Lakshmikumaran & Sridharan, B-6/10, Safdarjung Enclave, New Delhi 110 029 (IN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: PROCESS FOR OBTAINING FOOD GRADE HEXANE

(57) Abstract: The present invention relates to a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63 °C to 69°C and having 3%-15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.



TECHNICAL FIELD

The present invention relates to a process for obtaining food grade hexane from naphtha range hydrocarbon feed.

5 The food grade hexane obtained by the process has less than 100 ppm wt/wt of aromatic compounds.

BACKGROUND

10 The naphtha from petroleum industry contains varying amount of its constituent's viz. paraffins, naphthenes, aromatics and olefins in different proportion. Naphtha is used for different purposes depending on their boiling range and composition. They are mainly used in production of hydrogen, olefin, aromatics like Benzene, Toluene and Xylene, and as solvent in commercial and food industries. Narrow cut naphtha in the range of 63°C to 69°C with aromatics, mainly benzene, less than 650 ppm by weight known as food grade hexane is widely used in food industry. This low aromatic requirement of hexane is because of its application in the extraction of edible oil. Thus it is necessary to separate aromatics from the non aromatics phase to the extent possible.

15 The naphtha cut contains aromatics in the range of 3-15% and boiling point range from 50°C to 140°C depending on the petroleum crude and source of naphtha. Several processes such as catalytic hydrogenation, adsorptive dearomatisation, catalytic distillation and solvent extraction have been currently followed in industry for reduction of benzene in naphtha for the production of food grade hexane.

20 The catalytic hydrogenation involves the hydrogenation of benzene in liquid phase with the help of suspended solid. U.S. patent 3,505,421 describes a process of hydrogenating benzene in liquid phase by means of molecular hydrogen in the presence of suspended solid catalyst. U.S. patent 5,254,763 also describes a process for selective hydrogenation of benzene using water soluble organo-metallic hydrogenation catalyst. This hydrogenation process involves hydrogen at elevated temperature and pressure. The hydrogenation process also involves the removal of sulfur before the reaction, which makes this process more expensive.

The adsorptive dearomatisation was achieved using activated carbon, alumina, and zeolite materials. U.S. patent 3,963,934 claims the separation of aromatics from process streams

by use of a molecular sieve. Other U.S. patent 2,728,800; 2,847,485; and 2,856,444 describes the use of silica gel for adsorbing aromatics from a process stream, followed by desorption by use of a liquid hydrocarbon. U.S. patent 5,294,334 describes the process for selectively removing benzene from gasoline boiling range process streams using aluminosilicate zeolite material.

5 The catalytic distillation for benzene removal is another method/technology. U.S. patent 7,501,549 claims the reduction in benzene from gasoline can be achieved by feeding a gasoline fraction with an alcohol and ether to a catalytic distillation column with one reaction zone containing an alkylation catalyst. Then the C6 hydrocarbons are separated from C7+ hydrocarbons.

10 The catalytic hydrogenation is another method for benzene removal where benzene reduction, olefin saturation and sulfur reduction occurs simultaneously. U.S. patent 6,153,805 discloses the catalytic hydrogenation of benzene to produce cyclo-hexane in the presence of metal catalyst. US Patent Application 2002/24395 discloses the production of food grade hexane by hydrogenation, using Ni supported alumina catalyst.

15 U.S. patent 4,428,829 reports the production of food grade hexane by separating aromatics and non-aromatics from heavy hydrocarbon stream by extraction process. The Indian patent applications 1224/DEL/1994 & 788/DEL/1994 discloses the separation of the aromatics and non-aromatics from naphtha and kerosene range fraction by extraction. The raffinate phase is water washed to remove the solvent carryover. The U.S. patent application 2001/82750 discloses
20 the process for removal of aromatics from petroleum streams like naphtha, kerosene and gasoil through extraction by using solvents like NMP, Sulfolane and glycol. In all the above said process, solvent is recovered by distillation.

 U.S. patent 3,551,327 discloses a process for recovery of aromatics from vapour to liquid phase i.e by extractive distillation, further it also focuses on raffinate water wash and recovery of
25 sulfolane from water. US patent application 2001/82750 discloses a process for extraction of aromatics from petroleum fraction like heavy naphtha, kerosene and gas oil. U.S. patent 3,942,765, 4,314,974 discloses a process for the removal of metal ions from aqueous solution by using solvent in different type of static mixer and then whole process is confined to static mixer alone.

The processes for producing food grade hexane containing less than 100 ppm benzene is hydrogenation (U.S. patent application 2002/24395) and adsorption (U.S. patent 4,567,315). Refineries producing food grade hexane by solvent extraction process need to put up separate unit to employ these processes which is cost intensive.

5 Specifications for food grade hexane with respect to benzene content are becoming stringent day by day. Refineries producing food grade hexane by solvent extraction process need to switch to alternative processes like catalytic hydrogenation and adsorption which calls for additional capital investment. Thus there is a need for a cost effective process for obtaining a food grade hexane having less than 100 ppm of aromatic compound.

10 SUMMARY

The present invention relates to a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%-15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current
15 solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

The present invention also relates to a process for obtaining food grade hexane,
20 comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%-15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to
25 obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

These and other features, aspects, and advantages of the present subject matter will
30 become better understood with reference to the following description and appended claims. This

summary is provided to introduce a selection of concepts in a simplified form. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

BRIEF DESCRIPTION OF DRAWINGS

5 The above and other features, aspects, and advantages of the subject matter will become better understood with regard to the following description, appended claims, and accompanying drawings where:

Figure 1 is a schematic illustration of the process for obtaining food grade hexane containing less than 100 ppm aromatic compounds.

10 **Figure 2** is a schematic illustration of the process for obtaining food grade hexane containing 150 - 400 ppm aromatic compounds.

Figure 3 shows a static mixer which can be used for efficient cross mixing in the process of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

15 The present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first
20 raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

 An embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a the hydrocarbon feed having a boiling point in the range of
25 50°C to 90°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using

sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a naphtha range petroleum stock, having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of benzene; extracting the hydrocarbon fraction to remove benzene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of benzene.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of toluene; extracting the hydrocarbon fraction to remove toluene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of toluene.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of mixture of benzene and toluene; extracting the hydrocarbon fraction to remove mixture of benzene and toluene by counter current solvent extraction using sulfolane

as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of mixture of benzene and toluene.

5 Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using an extractor and sulfolane as a solvent to
10 obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

 Further an embodiment of the present invention provides a process for obtaining food
15 grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using a rotating disc column extractor and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-
20 current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

 Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C
25 to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using a packed column extractor and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate
30 phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon
5 fraction by counter current solvent extraction using a sieve tray column extractor and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon
10 fraction by counter current solvent extraction using a pulsed column extractor and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Another embodiment of the present invention provides a process for obtaining food grade
20 hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using a Karr reciprocating column extractor and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current
25 solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range
30 of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon

fraction by counter current solvent extraction by counter currently mixing the sulfolane and the hydrocarbon fraction in a weight ratio in the range of 2 to 10 to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using a static mixer, and sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using a corrugated plate static mixer and sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using a multilayer static mixer and sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate

phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Still, another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using an open design with helical static mixer and sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using an open design with blades static mixer and sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction which is carried out by co-currently mixing the sulfolane and the first raffinate phase in a weight ratio in the range of 2 to 10 to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C

to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction which is carried out at a temperature in the range of 50°C to 110°C using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction which is carried out at a temperature in the range of 50°C to 110°C using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

The present invention further relates to a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

An embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating the hydrocarbon feed having a boiling point in the range of 50°C to 90°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate

phase;; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a naphtha range petroleum stock to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of benzene; extracting the hydrocarbon fraction to remove benzene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of benzene; and recycling a part of the food grade hexane containing less than 100 ppm of benzene for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of toluene; extracting the hydrocarbon fraction to remove toluene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent

to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of toluene; and recycling a part of the food grade hexane containing less than 100 ppm of toluene for the counter current solvent extraction.

Further, an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of mixture of benzene and toluene; extracting the hydrocarbon fraction to remove the mixture of benzene and toluene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of mixture of benzene and toluene; and recycling a part of the food grade hexane containing less than 100 ppm of mixture of benzene and toluene for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using an extractor, and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using rotating disc column and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second

raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using packed column and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using Sieve tray column and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using pulsed column and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic

compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using Karr reciprocating column and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction which is carried out by counter currently mixing the sulfolane and the hydrocarbon fraction in a weight ratio in the range of 2 to 10 to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using a static mixer, and sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of

aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction by using a corrugated plate static mixer and sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction by using a multilayer static mixer and sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction by using a open design with helical static mixer and sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing

less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction by using a open design with blades static mixer and sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction which is carried out by co-currently mixing the sulfolane and the first raffinate phase in a weight ratio in the range of 2 to 10 to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction which is carried out at a temperature in the range of 50°C to 110°C using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing

less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction is carried out at a temperature in the range of 50°C to 110°C using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

The present invention further provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3% -15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

An embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50° C to 90° C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50° C to 90° C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content;

extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a naphtha range petroleum stock to obtain a mercaptan free naphtha range petroleum stock by converting mercaptan content of the naphtha range petroleum stock into disulfide; fractionating the mercaptan free naphtha range petroleum stock to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of benzene; extracting the hydrocarbon fraction to remove benzene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of benzene; and recycling a part of the food grade hexane containing less than 100 ppm of benzene for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of toluene; extracting the hydrocarbon fraction to remove toluene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of toluene; and recycling a part of the food grade hexane containing less than 100 ppm of toluene for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of mixture of benzene and toluene; extracting the hydrocarbon fraction to remove the mixture of benzene and toluene by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of the mixture of benzene and toluene; and recycling a part of the food grade hexane containing less than 100 ppm of the mixture of benzene and toluene for the counter current solvent extraction.

Still another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content;

extracting the hydrocarbon fraction by counter current solvent extraction using an extractor, and sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase to obtain a second raffinate phase by co-current solvent extraction using sulfolane as a solvent; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction which is carried out by counter currently mixing the sulfolane and the hydrocarbon fraction in a weight ratio in the range of 2 to 10 to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

The extractor used in the process of the present invention for counter current solvent extraction is usually selected from, but not limited to the group consisting of rotating disc column, packed column, Sieve tray column, pulsed column, and Karr reciprocating column.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using a static mixer, using sulfolane as a solvent to obtain a second raffinate phase;

washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

The static mixer used in the process of the present invention for co-current solvent
5 extraction is usually selected from, but not limited to the group consisting of corrugated plate static mixer, multilayer static mixer, open design with helical static mixer and open design with blades static mixer.

Further an embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of
10 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a
15 solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction which is carried out by co-currently mixing the sulfolane and the first raffinate phase in a weight ratio in the range of 2 to 10 to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of
20 aromatic compounds for the counter current solvent extraction.

Another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a
25 boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction is carried out at a temperature in the range of 50°C to 110°C using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a
30 solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm aromatic compounds; and recycling a

part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

Yet another embodiment of the present invention provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction is carried out at a temperature in the range of 50°C to 110°C using sulfolane as a solvent to obtain a second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

The present invention further provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3% to 15% wt/wt of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

The present invention further provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in

the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3% to 15% wt/wt of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain a first raffinate phase; extracting the first raffinate phase by co current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm aromatic compounds for the counter current solvent extraction.

The present invention also provides a process for obtaining food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%- 15% (wt/wt) of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase; extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

The present invention further provides a process for obtaining a food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 90°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 90°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3% to 15% wt/wt of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain a first raffinate phase; extracting the first raffinate phase by co current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain second raffinate phase; and washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

The present invention also provides a process for obtaining a food grade hexane, comprising: treating a hydrocarbon feed having a boiling point in the range of 50°C to 90°C to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide; fractionating the mercaptan free hydrocarbon feed having a boiling point in the range of 50°C to 90°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3% to 15% wt/wt of aromatic compounds content; extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain a first raffinate phase; extracting the first raffinate phase by co current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain second raffinate phase; washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds; and recycling a part of the food grade hexane containing less than 100 ppm aromatic compounds for the counter current solvent extraction.

The recycling of a food grade hexane having less than 100 ppm of aromatic compounds increases the effective solvent to feed ratio.

In the present invention the use of static mixer before raffinate wash column enhances the separation of aromatics.

The present invention provides a process for obtaining food grade hexane by extraction of aromatic compounds from naphtha range petroleum feed stock using solvent like NMP, sulfolane, and glycol.

The present invention provides a process for obtaining food grade hexane having less than 100 ppm of aromatic compounds where the solvent used for counter current solvent extraction and co-current solvent extraction is same.

The present invention provides a process for obtaining food grade hexane having less than 100 ppm of aromatic compounds where the counter current solvent extraction is carried out in multi stage sieve tray column and the co-current solvent extraction is carried out in static mixer, preferably corrugated plate type static mixer.

The static mixer used in the present invention contains minimum four numbers of mixing elements. A static mixer with efficient cross mixing is employed in a suitable position to increase the extraction of aromatics from first raffinate phase.

The static mixer used in the present invention is preferably, corrugated plate type static mixer having at least four mixing elements in number. The use of corrugated plate type static mixer enhances the separation of aromatics specifically benzene from first raffinate phase.

The process of the present invention is a cost effective process, since the refineries using
5 sulfolane as solvent for producing food grade hexane can easily shift to the process of the present invention, without incurring any substantial cost. The process of the present invention is a cost effective process because it does not involve expensive apparatus as well as expensive reagents.

The term hydrocarbon fraction as used in the present invention contains a food grade
10 hexane fraction and other contaminants. In general art, the 'hydrocarbon fraction having boiling point in the range of 63 to 69°C and having 3- 15% (wt/wt) of aromatic compounds content' and food grade hexane having boiling point in the range of 63 to 69°C and having 3- 15% (wt/wt) of aromatic compounds content are used interchangeable.

The schematic presentation of the process of the present invention is show in figure 1. In this scheme the hydrocarbon feed having boiling point in the range of 50 to 140°C is first
15 processed to remove mercaptans in column A and thereafter fractionated in columns B and C to get a hydrocarbon fraction having boiling point in the range of 63 to 69°C and having 3- 15% (wt/wt) of aromatic compounds content. The hydrocarbon fraction is routed to extractor where it is contacted counter currently with lean sulfolane solvent. The first extract phase, thus obtained is distilled in a distillation column under vacuum to recover the extract hydrocarbons while the
20 solvent is recirculated back to the extractor. The first raffinate phase is contacted co-currently with sulfolane in a static mixer and separated in second raffinate phase and second extract phase. The second raffinate phase from the static mixer is water washed in a raffinate wash column to get finished product. In the most preferred embodiment the raffinate phase is partially recycled back to the extractor.

25 The solvent to feed ratio may range from 2 to 10 by weight and preferably between 2.5 and 5.5 by weight. The temperature in the contacting zone may range from 50°C to 110°C, preferably in the range of 70°C to 100°C.

The hydrocarbon feed is introduced through line 1 to the column A to convert mercaptans to disulfides. Thereafter the mercaptan free hydrocarbon feed is introduced to splitter B followed
30 by splitter C through line 2 where it is fractionated in 63°C to 69°C cut. 63°C to 69°C cut which is known as hydrocarbon fraction is sent to extractor D through line 5 and lean solvent is

introduced to column D via line 21 where the two streams meet counter currently. The extractor is a multistage sieve tray column. The first raffinate and first extract phase, thus produced, are separately withdrawn through lines 10 and 11 respectively. First raffinate phase which leaves the extractor D is sent to static mixer E via line 10. Lean solvent is introduced to static mixer E via line 9 where two streams meet co currently. The mixture is sent to a separating vessel F via line 12 where second raffinate phase and second extract phase are separately withdrawn through lines 13 and 14 respectively. Second raffinate phase from separating vessel F is sent to raffinate wash column G via line 13. Water is sent to column G via line 15 where it meets raffinate phase counter currently. The wash water containing sulfolane is recycled to solvent recovery column H via line 17. The water washed raffinate is partially recycled back to the extractor through line 8 and remaining is forwarded through line 16 as a food grade hexane containing less than 100 ppm of aromatic compounds.

The extract phase obtained from the extractor D and separating vessel F is introduced via lines 11 and 14 respectively in the solvent recovery column H where solvent free extract is forwarded to a separation vessel I via line 18. From the vessel I water layer is removed via line 15 and the hydrocarbon feed is partly recycled to the solvent recovery column H via line 19 and partly removed via line 20. The regenerated selective solvent obtained as bottom product from column H is sent to extractor D and static mixer E via lines 21 and 9 respectively.

Under the conditions employed in the process of the invention the aromatic compounds left in the second raffinate from static mixer is less than 100ppm. Thus, the food grade hexane (63-69°C) obtained by the process of the present invention contains less than 100ppm benzene.

Figure 2 shows a process of obtaining food grade hexane in which the two stage solvent extraction is carried out before the fractionation of the hydrocarbon feed. The process shown in figure 2 is similar to the process of the present invention except the position of solvent extraction. In the process shown in figure 2, is as follows:

Hydrocarbon feed boiling in the range of 50 to 140°C is introduced through line 2 into extractor A and lean solvent is introduced to extractor A via line 1 where the two streams meet counter currently. The extractor is a multistage sieve tray column. The first raffinate and first extract phase, thus produced, are separately withdrawn through lines 3 and 4 respectively. First raffinate phase which leaves the extractor A is sent to static mixer B via line 3. Lean solvent is introduced to static mixer B via line 21 where two streams meet co currently. The mixture is sent

to a separating vessel C via line 5 where second extract and second raffinate phases are separately withdrawn through lines 6 and 7 respectively. Second raffinate phase from separating vessel C is water washed in raffinate wash column D. The water washed second raffinate is sent to column E via line 9 where mercaptans are converted to disulfides and then enters the column F via line 10 where it gets fractionated to 63^{-0}C and 63^{+0}C . 63^{-0}C is forwarded through line 12 and 63^{+0}C fraction is sent to column G via line 11 where it gets fractionated to 63 to 69°C cut which is forwarded through line 13 as food grade hexane and 69^{+0}C which is forwarded through line 14. Water is sent to column D via line 20 where it meets raffinate phase counter currently. The wash water containing sulfolane is recycled to solvent recovery column H via line 8.

The extract phase obtained from the extractor A and separating vessel C is forwarded through lines 4 and 6 respectively and jointly introduced via lines 15 in the solvent recovery column H where solvent free extract is forwarded to a separation vessel I via line 16. From the vessel water layer is removed via line 20 and the hydrocarbon layer is partly recycled to the solvent recovery column H via line 17 and partly removed via line 18. The regenerated selective solvent obtained as bottom product from column H forwarded via line 19 and sent to extractor A and static mixer B via lines 1 and 21 respectively.

Under the conditions employed in the process of the invention the aromatic compounds left in the second raffinate from static mixer is less than 100ppm. Due to azeotrope formation aromatic compound content gets enriched in food grade hexane (63-69 $^{\circ}\text{C}$) fraction obtained from fractionator G. Thus aromatic content in food grade hexane obtained by this process is in the range of 150 to 400 ppm, which is not desired.

The comparative study of the two processes disclosed in figure 1 and figure 2 shows that the mere two stage solvent extraction will not give the food grade hexane having aromatic content less than 100 ppm. The particular position of two stage solvent extraction, i.e. after the fractionation of the hydrocarbon feed, is important to obtain the desired product.

EXAMPLES

The following examples are given by way of illustration of the present invention and should not be construed to limit the scope of present disclosure. It is to be understood that both the

foregoing general description and the following detailed description are exemplary and explanatory only and are intended to provide further explanation of the claimed subject matter.

Example 1

The process used in this example is as per the schematic representation of figure 1. The hydrocarbon feed (50-90°C) containing about 15 wt. % of total aromatics is fed to column A via line 1 at a rate of 300 tons per day where mercaptans are converted to disulfides using Kero Merox process, as disclosed in United States Patent 4,088,569. Thereafter the mercaptan free hydrocarbon feed is fed to fractionator B via line 2 where it splits into two fractions of 63⁻ °C and 63⁺ °C boiling range. The overhead product is forwarded via line 3 and the bottom stream is fed to splitter C via line 4 where it is fractionated into two fractions of 63-69°C boiling range and above 69°C. The bottom product is forwarded via line 6 and the overhead product (hydrocarbon fraction) containing about 7 wt. % aromatics is fed into the bottom of sieve tray solvent extractor D at a rate of 150 tons per day where it is contacted counter currently with the solvent stream of sulfolane flowing in from the top of the extraction column at a rate of 1140 tons per day at 90°C through line 21. The resulting first raffinate phase is withdrawn from the top of the column at a rate of 120 tons per day via line 10. The first raffinate phase is sent to static mixer E via line 10 where it is contacted co currently with sulfolane at a flow rate of 480 tons per day coming through line 9. The mixture is sent to settler F via line 12 where it gets separated in second raffinate phase and second extract phase. The second raffinate phase from the static mixer containing less than 100 ppm benzene is sent to raffinate wash column (RWC) G via line 13, where it comes in contact with water flowing in from the top via line 15. The RWC operates at 45°C. The water washed raffinate phase is withdrawn from the top of column G via line 16 and recycled to the extractor D via line 8 to meet the minimum throughput of 300 tons per day to the extraction column D. Once the column is stabilized 50 wt. % of the raffinate phase from RWC containing aromatics in traces is recycled and rest is forwarded as food grade hexane with less than 100ppm aromatics via line 16. The feed entering to the extraction column contains about 3.5 wt. % aromatics. Thus the food grade hexane produced by this process invention contains less than 100 ppm aromatics especially benzene. The wash water containing solvent from the bottom of the column G is sent to solvent recovery column H via line 17. The extract phase from the

bottom of the extractor D and from the bottom of the settler F is sent to solvent recovery column H via lines 11 and 14 respectively for solvent recovery.

The process produces food grade hexane (FGH) containing less than 100 ppm aromatic compounds.

5 Example 2

The process employed in this example is as per figure 2. The hydrocarbon feed (50-90°C) containing about 15 wt. % of total aromatics is fed to a sieve tray extractor A via line 2 at a rate of 300 tons per day where it is contacted counter currently with the solvent stream of sulfolane flowing in from the top of the extractor at a rate of 1350 tons per day at 93°C temperature via line 1. The resulting first raffinate phase is withdrawn from the top of the column at a rate of 171 tons per day via line 3 and the first extract phase is withdrawn from the bottom at a rate of 1479 tons per day via line 4. The first raffinate phase is sent to static mixer B via line 3 where it is contacted co currently with sulfolane at a flow rate of 650 tons per day coming through line 21. The mixture is sent to settler C via line 5 where it gets separated in second raffinate phase and second extract phases. The second raffinate phase from the static mixer containing less than 100 ppm benzene is sent to raffinate wash column (RWC) D via line 7 at a rate of 136 tons per day, where it comes in contact with water flowing in from the top via line 20. The RWC operates at 45°C. The water washed raffinate phase is withdrawn from the top of column D via line 9 at a rate of 130 tons per day. The washed raffinate is sent to column E to convert mercaptans into disulfides via line 9 and thereafter sent to fractionator F via line 10 where it is fractionated in 63°C and 63+ °C cuts. 63°C cut is forwarded through line 12 and 63+ °C cut is sent to splitter G through line 11 where it is again fractionated to 63-69°C and 69+ °C fractions. 63-69°C fraction is forwarded through line 13 as food grade hexane containing 200 ppm benzene at a rate of 80 tons per day. The wash water containing solvent from the bottom of the column D is sent to solvent recovery column H via line 8. The extract phase from the bottom of the extractor A and from the bottom of the settler C is sent to solvent recovery column H jointly through line 15 for solvent recovery.

The food grade hexane (FGH) produced in this process scheme contains aromatics specially benzene around 200ppm.

Example 3

The process used in this example is as per the schematic representation of figure 2 . The hydrocarbon feed (50-90⁰C) containing about 15 wt. % of total aromatics is fed to a sieve tray extractor A via line 2 at a rate of 282 tons per day where it is contacted counter currently with the solvent stream of sulfolane flowing in from the top of the extractor at a rate of 913 tons per day at 93 ⁰C temperature via line 1. The resulting first raffinate phase is withdrawn from the top of the column at a rate of 201 tons per day via line 3 and the first extract phase is withdrawn from the bottom at a rate of 994 tons per day via line 4. The first raffinate phase is sent to raffinate wash column D bypassing static mixer B. The water washed raffinate phase is withdrawn from the top of column D via line 9 at a rate of 190 tons per day. The washed raffinate is sent to column E to convert mercaptans into disulfides via line 9 and thereafter sent to fractionator F via line 10 where it is fractionated in 63⁻ ⁰C and 63⁺ ⁰C cuts. 63⁻ ⁰C cut is forwarded through line 12 and 63⁺ ⁰C cut is sent to splitter G through line 11 where it is again fractionated to 63-69 ⁰C and 69⁺ ⁰C fractions. 63-69 ⁰C fractions are forwarded through line 13 as food grade hexane containing 350 ppm benzene at a rate of 131 tons per day.

Example 4

The process used in this example is as per the schematic representation of figure 1 . The hydrocarbon feed (50-90 ⁰C) containing about 15 wt. % of total aromatics is fed to column A via line 1 at a rate of 250 tons per day where mercaptans are converted to disulfides using Kero Merox process. Thereafter mercaptan free hydrocarbon feed is fed to fractionator B via line 2 where it splits into two fractions of 63⁻ ⁰C and 63⁺ ⁰C boiling range. The overhead product is forwarded via line 3 and the bottom stream is fed to splitter C via line 4 where it is fractionated into two fractions of 63-69 ⁰C boiling range and above 69 ⁰C. The bottom product is forwarded via line 6 and the overhead product (hydrocarbon fraction) containing about 11 wt. % aromatics is fed into the bottom of sieve tray solvent extractor D at a rate of 150 tons per day where it is mixed with 167 tons of recycle phase containing traces of benzene from raffinate wash column (RWC) through line 8 and contacted counter currently with the solvent stream of sulfolane flowing in from the top of the extraction column at a rate of 1231 tons per day at 90 ⁰C through line 21. The resulting raffinate phase is withdrawn from the top of the column at a rate of 272 tons per day via line 10 and sent to raffinate wash column G bypassing static mixer E to remove

dissolved sulfolane. Water washed raffinate is collected through line 16 which is partly recycled to column D through line 8 and rest is collected as food grade hexane containing 170 ppm benzene.

5 This example shows that if the co-current solvent extraction is not carried out in the process at the desired stage the food grade hexane obtained will contain aromatic content more than 100 ppm which is not desired.

This shows that the process of Example 1 is the desired process as compared to the process of example 2, 3 and 4.

10 Although the subject matter has been described in considerable detail with reference to certain preferred embodiments thereof, other embodiments are possible. As such, the spirit and scope of the appended claims should not be limited to the description of the preferred embodiment contained therein.

We Claim:

1. A process for obtaining food grade hexane, comprising:

fractionating a hydrocarbon feed having a boiling point in the range of 50°C to 140°C to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3%-15% (wt/wt) of aromatic compounds content;

extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent to obtain a first raffinate phase;

extracting the first raffinate phase by co-current solvent extraction using sulfolane as a solvent to obtain a second raffinate phase; and

washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

2. The process as claimed in claim 1, further comprising; recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

3. The process as claimed in claim 1, wherein the hydrocarbon feed is treated to obtain a mercaptan free hydrocarbon feed by converting mercaptan content of the hydrocarbon feed into disulfide.

4. The process as claimed in claim 1, wherein the hydrocarbon feed has a boiling point in the range of 50° C to 90° C.

5. The process as claimed in claim 1, wherein the hydrocarbon feed is a naphtha range petroleum stock.

6. The process as claimed in claim 1, wherein the aromatic compounds is selected from the group consisting of benzene and toluene or mixtures thereof.

7. The process as claimed in claim 1, wherein the counter current solvent extraction is by using an extractor.

8. The process as claimed in claim 7, wherein the extractor is selected from the group consisting of rotating disc column, packed column, Sieve tray column, pulsed column, and Karr reciprocating column.

9. The process as claimed in claim 1, wherein the counter current solvent extraction is carried out by counter currently mixing the sulfolane and the hydrocarbon fraction in a weight ratio in the range of 2 to 10.
10. The process as claimed in claim 1, wherein the co-current solvent extraction is by using a static mixer.
11. The process as claimed in claim 10, wherein the static mixer is selected from the group consisting of corrugated plate static mixer, multilayer static mixer, open design with helical static mixer and open design with blades static mixer.
12. The process as claimed in claim 1, wherein the co-current solvent extraction is carried out by co-currently mixing the sulfolane and the first raffinate phase in a weight ratio in the range of 2 to 10.
13. The process as claimed in claim 1, wherein the counter current solvent extraction and the co-current solvent extraction is carried out at a temperature in the range of 50°C to 110°C.
14. A process for obtaining food grade hexane, comprising:
- treating a hydrocarbon feed having a boiling point in the range of 50°C to 90°C to obtain a mercaptan free hydrocarbon feed by converting mercaptans content of the hydrocarbon feed into disulfides;
- fractionating the mercaptan free hydrocarbon feed to obtain a hydrocarbon fraction having boiling point in the range of 63°C to 69°C and having 3% to 15% wt/wt of aromatic compounds content;
- extracting the hydrocarbon fraction by counter current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain a first raffinate phase ;
- extracting the first raffinate phase by co current solvent extraction using sulfolane as a solvent at a temperature in the range of 50°C to 110°C to obtain a second raffinate phase; and
- washing the second raffinate phase with water to obtain a food grade hexane containing less than 100 ppm of aromatic compounds.

15. The process as claimed in claim 14 further comprising:

recycling a part of the food grade hexane containing less than 100 ppm of aromatic compounds for the counter current solvent extraction.

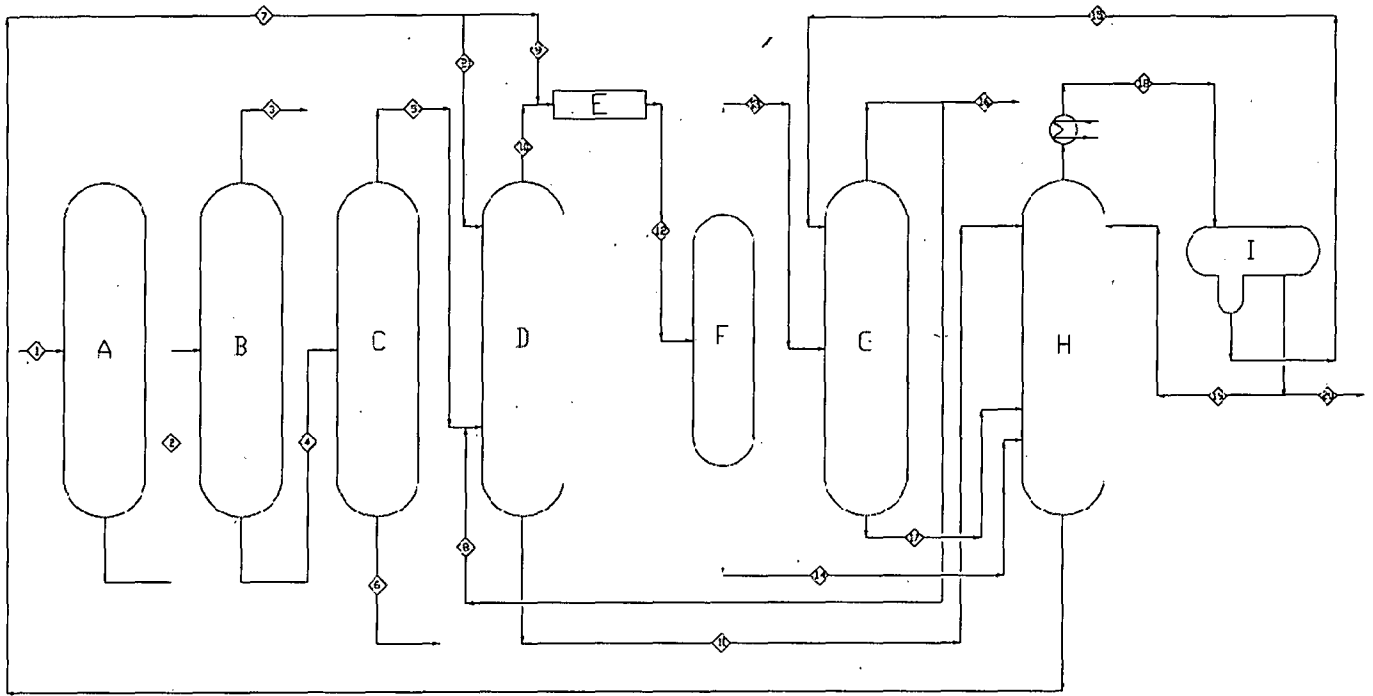


FIGURE 1

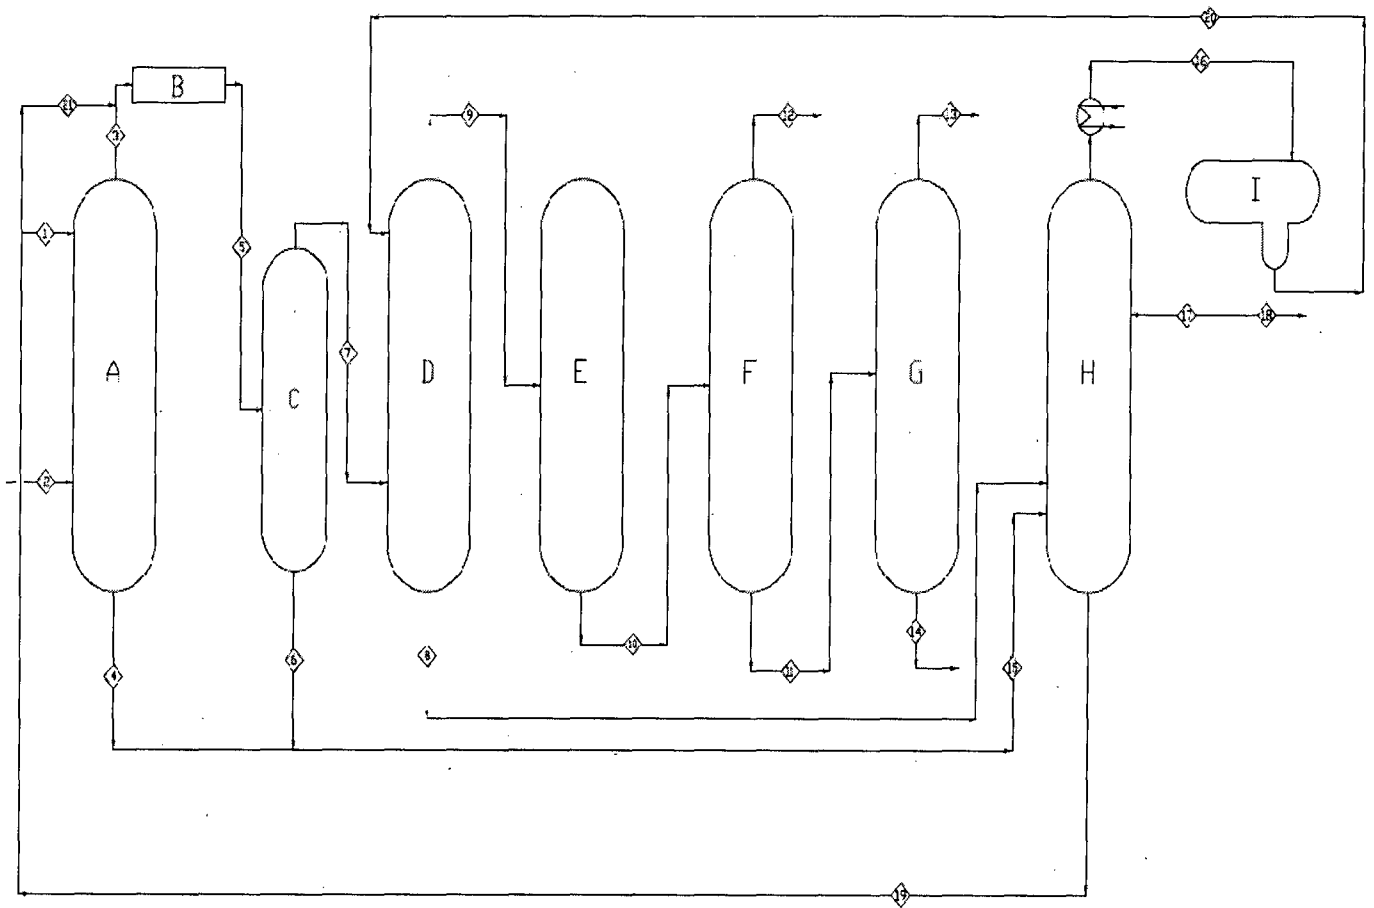


FIGURE 2

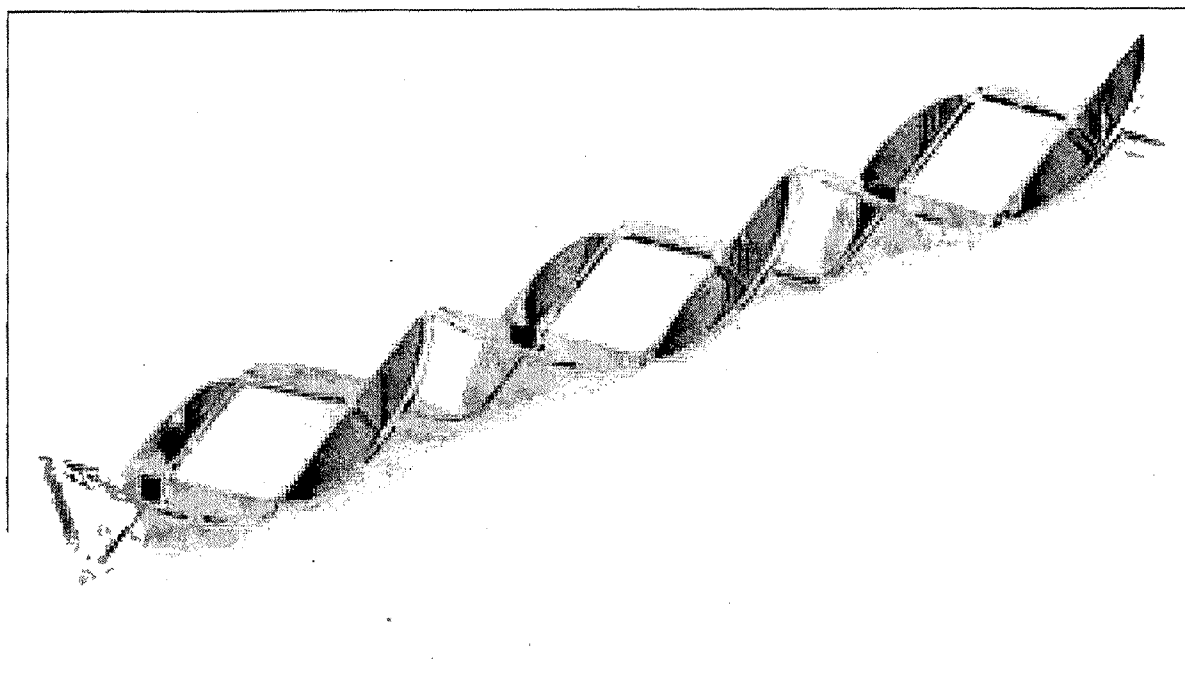


FIGURE 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/000406

A. CLASSIFICATION OF SUBJECT MATTER
INV. C07C7/00 C07C7/04 C07C7/10
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 008 004 A (MAIER WILLIAM H [US] ET AL) 16 April 1991 (1991-04-16) claim 10 -----	1-15
A	GB 704 781 A (STANDARD OIL DEV CO) 3 March 1954 (1954-03-03) claim 1 -----	1-15
A	EP 0 050 381 A1 (SHELL INT RESEARCH [NL]) 28 April 1982 (1982-04-28) example -----	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 August 2013

Date of mailing of the international search report

21/08/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

O'Sullivan, Paul

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2013/000406

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5008004	A	16-04-1991	NONE	

GB 704781	A	03-03-1954	BE 509744 A	07-08-2013
			FR 1054976 A	15-02-1954
			GB 704781 A	03-03-1954

EP 0050381	A1	28-04-1982	AU 543480 B2	18-04-1985
			AU 7631681 A	22-04-1982
			CA 1169012 A1	12-06-1984
			DE 3165088 D1	30-08-1984
			EP 0050381 A1	28-04-1982
			JP H0257595 B2	05-12-1990
			JP S5794090 A	11-06-1982
			MY 8500924 A	31-12-1985
			SG 68384 G	14-06-1985
			SU 1122217 A3	30-10-1984
			US 4428829 A	31-01-1984
			ZA 8107093 A	29-09-1982
