

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Connector

(51)⁶ International Patent Classification(s)
F16B 2/10 (2006.01) 7/04
F16B 7/04 (2006.01) 20060101ALI2005122
F16L 37/08 (2006.01) OBMJP F16L
F16L 37/138 37/08
(2006.01) 20060101ALI2005122
F16B 2/10 OBMJP F16L
20060101AFI2005122 37/138
OBMJP **F16B** 20060101ALI2005100
8BMEP

(21) Application No: 2004200324

(22) Application Date: 2004 .01 .29

(30) Priority Data

(31) Number	(32) Date	(33) Country
10/358000	2003 .02 .04	US

(43) Publication Date : 2004 .08 .19

(43) Publication Journal Date : 2004 .08 .19

(71) Applicant(s)
Flow-Rite Controls, Ltd.

(72) Inventor(s)
Campau, Daniel N.

(74) Agent/Attorney
Spruson & Ferguson, Level 35 St Martins Tower 31 Market Street, Sydney, NSW, 2000

(56) Related Art
US 6257626
US 6443496
US 6283443

CONNECTOR

Abstract

The present invention is directed to a connector (10), comprising a first connector segment (12) having a laterally extending flange, and a second connector segment (16) having a body (21) and a pair of opposed retainers (22) adapted to releaseably maintain the first and second connector segments (12, 16) in mated relationship. Each of the retainers has a lever (23) spaced laterally from the second connector segment body, the lever being joined to the second connector segment body at a base end (24) and having a latch (30) at a free end (26). The lever (23) is also joined to the second connector segment (16) body by a fulcrum wall (28) positioned intermediate the ends of the lever (23), an outwardly facing cam surface (34) is provided on the lever (23) between the fulcrum wall (28) and the base end (24). A slide ring (35) is disposed over the second connector segment (16) retainers, the slide ring (35) being movable from a first position adjacent the latch (30) of each retainer (22) to a second position of engagement with the cam surface of each retainer (22). The latch (30) of each retainer (22) is engageable with the flange of the first connector segment (12) to prevent uncoupling of the first and second connector segments (12, 16).

The latches (30) of each retainer (22) are locked in engagement with the first connector segment flange when the slide ring (35) is in the first position, and the latches (30) of each retainer are disengaged from the first connector segment flange to thereby permit uncoupling of the connector segments when the slide ring (35) is in the second position.

FIG. 1


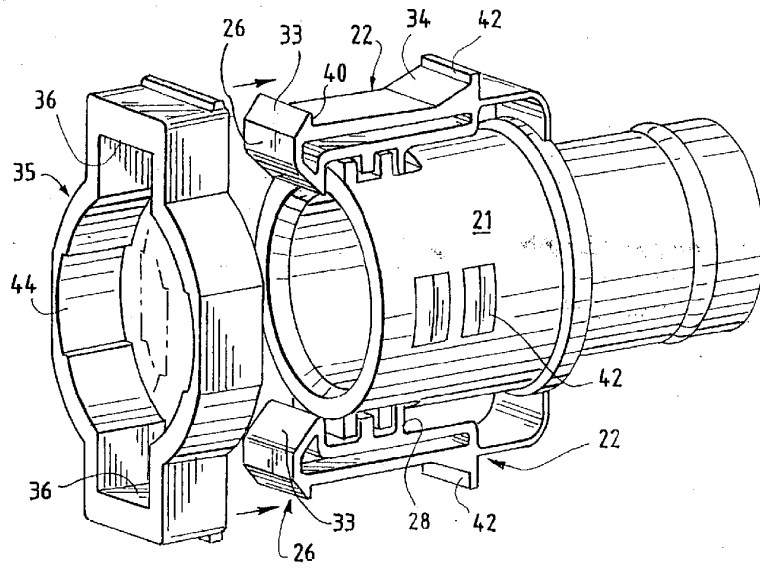


FIG. 2

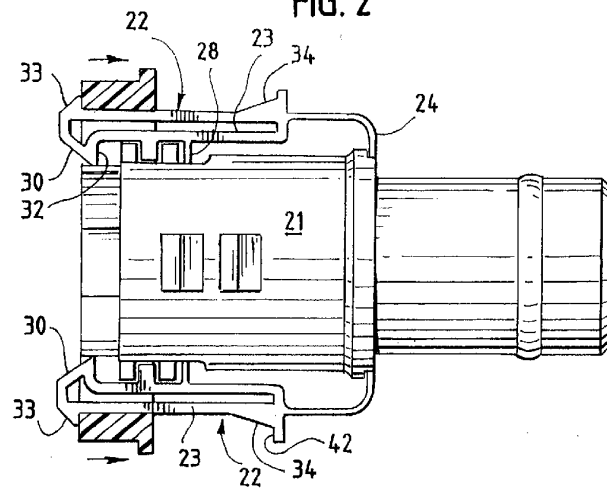

S&F Ref: 664423

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

Name and Address of Applicant :	Flow-Rite Controls, Ltd. 3412 Lousma Drive, S.E. Grand Rapids Michigan 49548 United States of America
---------------------------------------	--

Actual Inventor(s):	Daniel N. Campau
------------------------	------------------

Address for Service:	Spruson & Ferguson St Martins Tower Level 35 31 Market Street Sydney NSW 2000 (CCN 3710000177)
-------------------------	--

Invention Title:	Connector
------------------	-----------

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

5845c

CONNECTOR

BACKGROUND OF THE INVENTION

The present invention is directed to "quick coupling" connectors and, more particularly, to improvements in the quick coupling connector disclosed in United States Patent No. 6,257,626.

5 The connector described in United States Patent No. 6,257,626 has many advantageous features and has proved useful in the marine fluid handling field. Such a connector must be manually manipulated to effect connection and disconnections. One disadvantage of the aforementioned connector, however, is that at
10 least two separate manual operations are required to effectively lock or unlock the connector. That is, both the lock ring and the retainers must be manipulated separately to couple or decouple the connector. It would be desirable, therefore, to retain the advantages of this style connector while simplifying and
15 facilitating its use.

SUMMARY OF THE INVENTION

The present invention is directed to a connector, comprising a first connector segment having a laterally extending flange, and a second connector segment having a body and a pair of opposed
20 retainers adapted to releaseably maintain the first and second connector segments in mated relationship. Each of the retainers has a lever spaced laterally from the second connector segment body, the lever being joined to the second connector segment body

at a base end and having a latch at a free end. The lever is also joined to the second connector segment body by a fulcrum wall positioned intermediate the ends of the lever an outwardly facing cam surface is provided on the lever between the fulcrum wall and the base end. A slide ring is disposed over the second connector segment retainers, the slide ring being moveable from a first position adjacent the latch of each retainer to a second position of engagement with the cam surface of each retainer. The latch of each retainer is engageable with the flange of the first connector segment to prevent uncoupling of the first and second connector segments.

The latches of each retainer are locked in engagement with the first connector segment flange when the slide ring is in the first position, and the latches of each retainer are disengaged from the first connector segment flange to thereby permit uncoupling of the connector segments when the slide ring is in the second position.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features which are characteristic of the present invention are set forth in the appended claims. However, the invention's preferred embodiments, together with further objects and attendant advantages, will be best understood by reference to the following detailed description taken in connection with the accompanying drawings in which:

FIGURE 1 is an exploded perspective view of one connector component or segment as used in accordance with a preferred embodiment of the invention;

FIGURE 2 is a side view of the component illustrated in FIGURE 1, in partial cross-section, and showing the manner of assembling the parts of the connector segment;

FIGURE 3 is a side view, again in partial cross-section, showing the two connector components or segments as they are engaged;

FIGURE 4 is a perspective view of the two connector segments in fully mated and locked engagement;

FIGURE 5 is a cross-sectional view taken along line 5-5 of FIGURE 4; and

FIGURES 6 and 7 are perspective views of another embodiment of the present invention, showing the two connector segments in decoupled and fully coupled relationships.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference to FIGURES 1-5, one preferred embodiment of the present invention is illustrated as connector 10. In this embodiment, the connector is utilized in a fluid handling system with a first connector segment 12 terminating a first fluid flow passageway 14, and a second connector segment 16 terminating a second fluid flow passageway 18. The first connector segment 12 includes a laterally or radially extending flange 20. The second connector segment 16 includes a body portion 21 and a pair of diametrically opposed retainers 22 spaced slightly from body 21.

Each retainer 22 includes a lever 23 which extends from base end 24 to a free end 26, and is joined to the segment body 21 by a fulcrum wall or living hinge 28 at a position intermediate its ends. The free end 26 of the lever 23 is configured as a latch 30 with a lip 32 and a forward cam surface 33. Finally, each retainer 22 is provided with an outwardly facing cam surface 34 positioned along the length of the lever 23 at a point in between the fulcrum wall 28 and the base end 24.

In accordance with the preferred embodiments, connector 10 is also provided with a slide ring 35 which is positioned around the second connector segment 16 and over the two retainers 22. The slide ring 35 includes opposed channels 36 which have a size and configuration to slidingly cooperate with each of the retainer levers 23.

The slide ring 35 is assembled to the second connector segment 16 simply by pushing it over the free ends 26 of levers 23. As the ring engages the forward cam surfaces 33, the retainer levers will flex inward until the ring clears the latch shoulder 40. Once properly positioned around the second connector segment 16 and over the retainers 22, slide ring 35 can be easily moved between a first position, shown in FIGURE 4, adjacent the latch shoulder 40 and a second position, shown in FIGURE 3, adjacent cam shoulder 42. In the first position, the slide ring 35 prevents any laterally outward movement of latches 30, thereby locking the latches in engagement with flange 20. In the second position, the slide ring 35 engages the cam surfaces 34, thereby depressing each retainer lever 23 and moving the latches 30 outwardly away from flange 20. The slide ring 35 is held in the second position by engagement of bosses or risers 42 with the slide ring side walls 44.

In operation, the two connector segments 12 and 16 are joined by insertion of the first segment 12 into mating relation with the second segment 16. Once fully mated, a continuing force on slide ring 35 will move it off bosses 42 and to the first position shown in FIGURE 3. To decouple the connector, the slide ring is simply moved to the second position where it will abut cam shoulder 42, and a continuing force applied to the ring will result in full disengagement of the two connector segments. Thus, the connector 10 may be either coupled or decoupled in a single manual manipulation.

FIGURES 6 and 7 illustrate another embodiment of the invention where the connector 50 comprises two connector segments 52 and 54 employed to terminate straps or bands 46. Thus, the connector is ideally suited for use as a buckle on back packs, duffle bags, car
5 seats and the like.

It will be appreciated by those skilled in the art that various changes and modifications can be made to the illustrated embodiments without departing from the spirit of the present invention. All such modifications and changes are intended to be
10 covered by the appended claims.

The claims defining the invention are as follows:

1. A connector, comprising:

a first connector segment having a laterally extending flange;

5 a second connector segment having a body and a pair of opposed retainers adapted to releaseably maintain the first and second connector segments in mated relationship;

each of said retainers comprising a lever spaced laterally from the second connector segment body, the lever being joined to the second connector segment body at a base end and having a latch
10 at a free end, the lever also being joined to the second connector segment body by a fulcrum wall positioned intermediate the ends of the lever, and the lever having an outwardly facing cam surface located between the fulcrum wall and the base end;

a slide ring disposed over the second connector segment
15 retainers, the slide ring being moveable from a first position adjacent the latch of each retainer to a second position of engagement with the cam surface of each retainer;

the latch of each retainer being engageable with the flange of the first connector segment to prevent uncoupling of the first and
20 second connector segments; and

the latches of each retainer being locked in engagement with the first connector segment flange when the slide ring is in the first position, and the latches of each retainer being disengaged from the first connector segment flange to thereby permit

2004200324 05 Oct 2007

uncoupling of the first and second connector segments when the slide ring is in the second position.

2. The connector of claim 1 wherein each retainer includes a latch shoulder and a cam surface shoulder, the two shoulders acting to limit the movement of the slide ring.

3. The connector of claim 1 wherein the first connector segment is a plug which terminates a first fluid passageway, and the second connector segment is a socket which terminates a second fluid passageway.

4. The connector of claim 1 wherein each retainer includes a forward cam surface at its free end which engages the slide ring thereby moving the latches laterally inward to facilitate assembly of the slide ring onto the second connector segment.

Dated 16 January, 2004

Flow-Rite Controls, Ltd.

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

1/3

FIG. 1

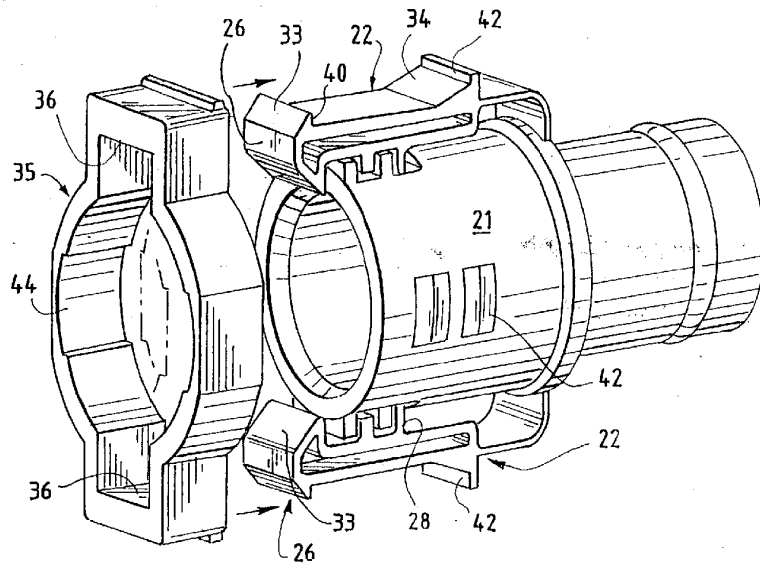


FIG. 2

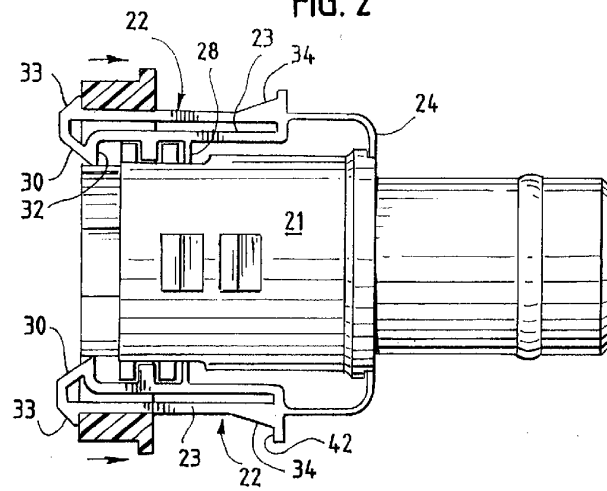


FIG. 5

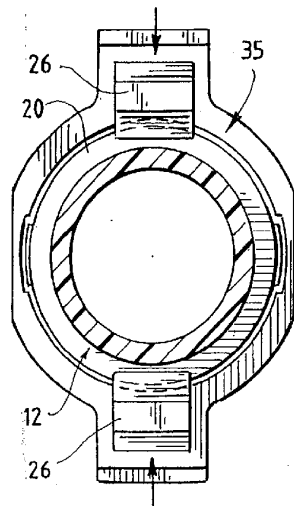


FIG. 3

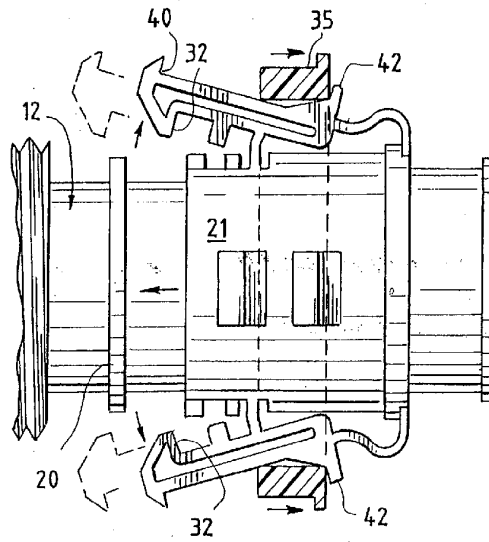


FIG. 4

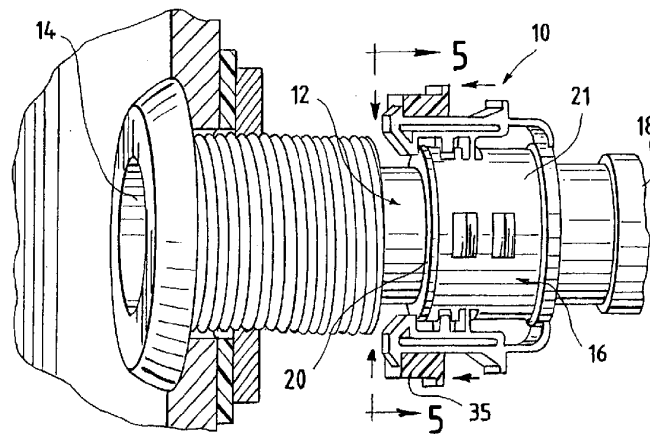


FIG. 6

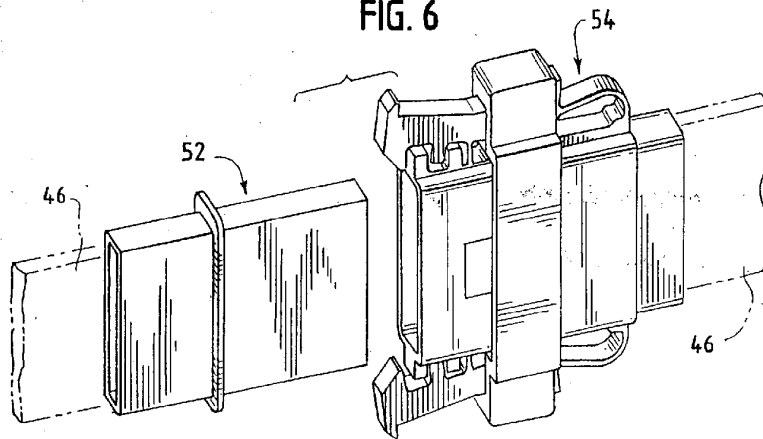


FIG. 7

