



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2542949 A1 2005/05/12

(21) 2 542 949

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2004/10/20
(87) Date publication PCT/PCT Publication Date: 2005/05/12
(85) Entrée phase nationale/National Entry: 2006/04/19
(86) N° demande PCT/PCT Application No.: US 2004/034837
(87) N° publication PCT/PCT Publication No.: 2005/042609
(30) Priorité/Priority: 2003/10/22 (US10/690,953)


(51) Cl.Int./Int.Cl. C08G 18/10 (2006.01),
C08G 18/28 (2006.01), C08G 18/48 (2006.01),
C09D 175/04 (2006.01), C09J 175/04 (2006.01)

(71) Demandeurs/Applicants:
BAYER MATERIALSCIENCE LLC, US;
BAYER AKTIENGESELLSCHAFT, DE

(72) Inventeurs/Inventors:
ROESLER, RICHARD R., US;
CRAWFORD, DEREK L., US;
FRISCH, KURT C., US;
DANIELMEIER, KARSTEN, DE;
PETHIYAGODA, DINESH, US;
RUTTMANN, GERHARD, DE

(74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : PROCEDE DE PREPARATION D'URETHANNES POLYETHERS DOTES DE GROUPES SILANE,
DURCISSABLES A L'HUMIDITE, ET LEUR UTILISATION COMME AGENTS D'ETANCHEITE, ADHESIFS ET
AGENTS DE REVETEMENT
(54) Title: PROCESS FOR PREPARING MOISTURE-CURABLE, POLYETHER URETHANES WITH REACTIVE SILANE
GROUPS AND THEIR USE AS SEALANTS, ADHESIVES AND COATINGS

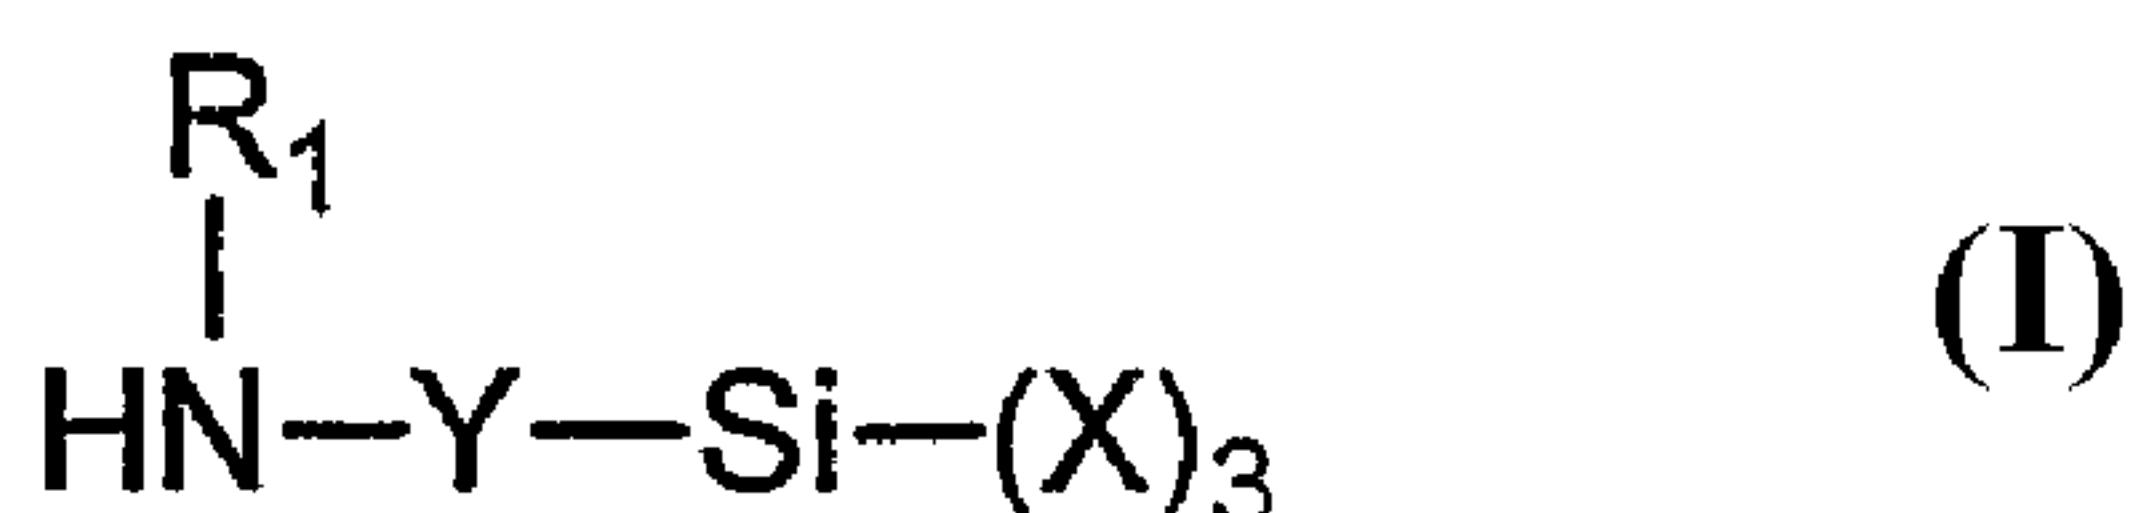

(57) Abrégé/Abstract:

Preparation of moisture-curable, alkoxy silane-functional polyether urethanes by reacting at an NCO:OH equivalent ratio of 1.5:1 to 2.5:1 a) a hydroxyl component containing i) 20 to 100 wt. %, of a polyether diol and other polyether segments, where the polyether segments have Mn of at least 3000 and degree of unsaturation of less than 0.04 meq/g, where the sum of Mn of polyether segments per molecule averages 6000 to 20,000, and ii) 0 to 80 wt. % of a polyether monool and other polyether segments having Mn of 1000 to 15,000, with b) an isocyanate component containing i) 20 to 100 wt. % of a diisocyanate, and ii) 0 to 80 wt. % of a mono isocyanate, forming an isocyanate-containing reaction product reacted at an equivalent ratio of 0.8:1 to 1.11:11 with C) a compound containing an isocyanate-reactive group and reactive silane groups where at least 10 mole % is a compound of formula: (I).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/042609 A1

(51) International Patent Classification⁷: C08G 18/10,
18/28, 18/48, C09J 175/04, C09D 175/04

Gerhard [DE/DE]; Witzheldener Strasse 25, D-51399 Burscheid (DE).

(21) International Application Number:
PCT/US2004/034837

(74) Agents: GIL, Joseph, C. et al.; Bayer MaterialScience LLC, 100 Bayer Road, Pittsburgh, PA 15205-9741 (US).

(22) International Filing Date: 20 October 2004 (20.10.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

Published:

— with international search report

(30) Priority Data:
10/690,953 22 October 2003 (22.10.2003) US

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.


(71) Applicants (for all designated States except US): BAYER MATERIALSCIENCE LLC [US/US]; 100 Bayer Road, Pittsburgh, PA 15205-9741 (US). BAYER AKTIENSELLSCHAFT [DE/DE]; D-51368 Leverkusen (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ROESLER, Richard, R. [US/US]; 863 Hillcrest Circle, Wexford, PA 15090-7583 (US). CRAWFORD, Derek, L. [US/US]; 678 Gamble Road, Oakdale, PA 15071 (US). FRISCH, Kurt, C. [US/US]; 1750 Scarlett Drive, Upper St. Clair, PA 15241 (US). DANIELMEIER, Karsten [DE/DE]; Talsperrenstr. 5, D-42659 Solingen-Burg (DE). PETHIYAGODA, Dinesh [LK/US]; 1514 Chestnut Ridge Drive, Pittsburgh, PA 15205 (US). RUTTMANN,



(54) Title: PROCESS FOR PREPARING MOISTURE-CURABLE, POLYETHER URETHANES WITH REACTIVE SILANE GROUPS AND THEIR USE AS SEALANTS, ADHESIVES AND COATINGS

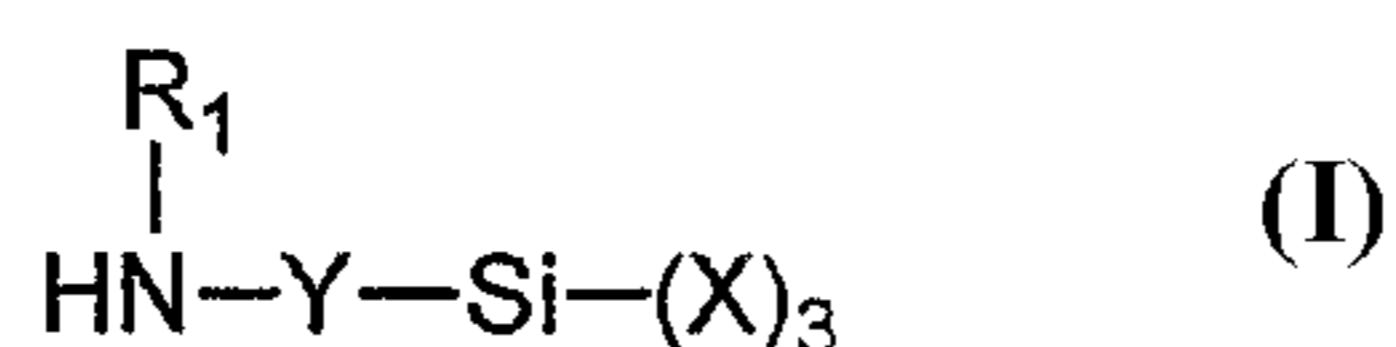

WO 2005/042609 A1

(57) Abstract: Preparation of moisture-curable, alkoxysilane-functional polyether urethanes by reacting at an NCO:OH equivalent ratio of 1.5:1 to 2.5:1 a) a hydroxyl component containing i) 20 to 100 wt.%, of a polyether diol and other polyether segments, where the polyether segments have Mn of at least 3000 and degree of unsaturation of less than 0.04 meq/g, where the sum of Mn of polyether segments per molecule averages 6000 to 20,000, and ii) 0 to 80 wt.% of a polyether monool and other polyether segments having Mn of 1000 to 15,000, with b) an isocyanate component containing i) 20 to 100 wt.% of a diisocyanate, and ii) 0 to 80 wt.% of a monoisocyanate, forming an isocyanate-containing reaction product reacted at an equivalent ratio of 0.8:1 to 1.11:11 with C) a compound containing an isocyanate-reactive group and reactive silane groups where at least 10 mole % is a compound of formula: (I).

PROCESS FOR PREPARING MOISTURE-CURABLE, POLYETHER URETHANES WITH REACTIVE SILANE GROUPS AND THEIR USE AS SEALANTS, ADHESIVES AND COATINGS

CROSS REFERENCE TO RELATED PATENT APPLICATION

This application is a Continuation-In-Part of U.S. Ser. No. 10/160,479, filed May 31, 2002.

5

FIELD OF THE INVENTION

The present invention relates to a process for preparing moisture-curable urethanes containing reactive silane groups from polyether polyols having a low degree of unsaturation and to the use of these polyurethanes as sealants, adhesives and coatings.

10

BACKGROUND OF THE INVENTION

Polyether urethanes containing reactive silane groups, also referred to as silane-terminated polyurethanes (STPs), and their use as sealants and adhesives are known and described, e.g., in U.S. Patents 5,554,709; 4,857,623; 5,227,434 and 6,197,912; and WO 02/06367. The silane-terminated polyurethanes may be prepared by various methods. In one method the silane-terminated polyurethanes are prepared by reacting diisocyanates with polyether polyols to form isocyanate-terminated prepolymers, which are then reacted with aminosilanes to form the silane-terminated polyurethanes. The sealants may also be prepared by reacting unsaturated monoools with diisocyanates to form intermediates containing unsaturated end groups and then converting these unsaturated groups to alkoxy silane groups by hydrosilylation. In another method the sealants are prepared in one step by the reaction of polyether diols with isocyanatosilanes

25 To be useful as sealants the silane-terminated polyurethanes should have a number average molecular weight of 6000 to 20,000. One

method of obtaining this molecular weight is to use polyether diols prepared by the KOH process and having a molecular weight of 2000 to 5 prepare the isocyanate-terminated prepolymers. The presence of urethane groups causes the products to have a high viscosity. To achieve suitable application viscosities, the high viscosity is reduced by the addition of higher amounts of plasticizer and lesser amounts of fillers, resulting in more expensive sealant products.

Another method of obtaining high molecular weight sealants is by 10 using high molecular weight polyether diols having a low degree of unsaturation and prepared using special catalysts as described in EP-A 0,546,310, EP-A 0,372,561 and DE-A 19,908,562. When these polyether diols are used, the resulting sealants have excellent tensile strength, but the sealants are too brittle for many applications because the elongation is too low and the 100% modulus is too high.

15 The preparation of sealants from mixtures of polyfunctional and monofunctional silane-terminated polyurethanes is known and disclosed in U.S. Patents 5,554,709 and 4,857,623 and WO 02/06367. However, these references do not disclose the use of polyether polyols having a low degree of unsaturation and aspartate-functional silanes to prepare the 20 sealants.

The preparation of silane-terminated polyether urethanes from aspartate-functional silanes is disclosed in U.S. Patent 5,364,955 and WO 98/18843. In both of these references the polyethers used to 25 prepare polyether urethanes do not have a low degree of unsaturation. In addition, mixtures of polyfunctional and monofunctional silane-terminated polyurethanes are not disclosed. Finally, in the latter reference the polyethers must contain 15 to 40% by weight of ethylene oxide units.

WO 00/26271 discloses the preparation of silane-terminated polyether urethanes from polyether polyols having a low degree of 30 unsaturation and aspartate-functional silanes. The products are prepared

by reacting diisocyanates with high molecular weight polyether diols to form NCO prepolymers, which are then capped with aspartate-functional silanes to form silane-terminated polyether urethanes. This application does not disclose mixtures of disilane-terminated polyether urethanes with 5 polyether urethanes containing one reactive silane group.

U.S. Patent 6,265,517 describes a similar process for preparing silane-terminated polyether urethanes from polyether polyols having a low degree of unsaturation and aspartate-functional silanes. The patent requires the starting polyol to have a monool content of less than 10 31 mole%, and teaches that a relatively high monool content is highly undesirable because monools react with isocyanates thereby reducing crosslinking and curing of the prepolymer. The patent also requires the aspartate silanes to be prepared from dialkyl maleates in which the alkyl groups each contain more than four carbon atoms.

15 EP 0,372,561 discloses polyether urethanes containing reactive silane groups and prepared from polyether polyols having a low degree of unsaturation. In addition, polyether urethanes containing one reactive silane group are disclosed. This application fails to disclose the use of aspartate-functional silanes to incorporate the reactive silane groups.

20 The deficiencies of the preceding sealants was overcome in copending applications, Ser. Nos. 10/160,479, 10/174,039, 10/173,919, and 10/160,364, which describe moisture-curable, alkoxy silane-functional polyether urethanes containing both polyether urethanes having two or more reactive silane groups and polyether urethanes having one reactive 25 silane group. The moisture-curable polyether urethanes are suitable for use as sealants, adhesives and coatings which possess high tensile strengths and elongations and have a reduced 100% modulus when compared with existing products

30 In the copending applications the polyether urethane component containing two or more reactive silane groups are prepared from high

molecular weight polyether polyols having a low degree of unsaturation. In addition, at least a portion of the reactive silane groups present in at least one of the two components are incorporated by the use of silanes containing secondary amino groups. Finally, the polyether urethane 5 components described in the copending applications are prepared separately and subsequently blended to form the moisture-curable polyether urethanes according to the invention.

One of the disadvantages of these moisture-curable polyether urethanes is that even though the blended product has a low viscosity, the 10 polyether urethane component containing two or more reactive silane groups has a high viscosity and is more difficult to prepare than a lower viscosity product.

Accordingly, it is an object of the present invention to provide moisture-curable polyether urethanes that can be prepared at lower 15 production viscosities and still retain all of the valuable properties of the polyether urethanes disclosed in the copending applications, i.e., the products are suitable for use as sealants, adhesives and coatings which possess high tensile strengths and elongations and have a reduced 100% modulus.

20 This object may be achieved with process of the present invention in which the moisture-curable polyether urethanes containing a mixture of polyether urethane component having two or more reactive silane groups and a polyether urethane component having one reactive silane group are prepared simultaneously instead of being prepared separately and mixed.

25 It is surprising that the polyether urethanes obtained according to the process of present invention possess the same properties as the products obtained in accordance with the copending applications because a greater variety of by-products are obtained according to the present invention and it could not be predicted that the presence of these by-

products would not affect the valuable properties of the moisture-curable polyurethanes.

SUMMARY OF THE INVENTION

The present invention relates to a process for preparing a moisture-curable, alkoxy silane-functional polyether urethane by reacting at an NCO:OH equivalent ratio of 1.5:1 to 2.5:1

5 a) a hydroxyl component containing

10 i) 20 to 100% by weight, based on the weight of component a), of a polyether containing two hydroxyl groups and one or more polyether segments, wherein the polyether segments have a number average molecular weight of at least 3000 and a degree of unsaturation of less than 0.04 milliequivalents/g, provided that the sum of the number average molecular weights of all of the polyether segments 15 per molecule averages 6000 to 20,000, and

ii) 0 to 80% by weight, based on the weight of component a), of a polyether containing one hydroxyl group and one or more polyether segments having a number average molecular weight of 1000 to 15,000, with

20 b) an isocyanate component containing


i) 20 to 100% by weight, based on the weight of component b), of a compound containing two isocyanate groups, and

ii) 0 to 80% by weight, based on the weight of component b), of a compound containing one isocyanate group,

25 to form an isocyanate-containing reaction product and subsequently reacting this reaction product at an equivalent ratio of isocyanate groups to isocyanate-reactive groups of 0.8:1 to 1.1:1 with

c) a compound containing an isocyanate-reactive group and one more reactive silane groups in which at least 10 mole % of component c)

30 is a compound corresponding to the formula

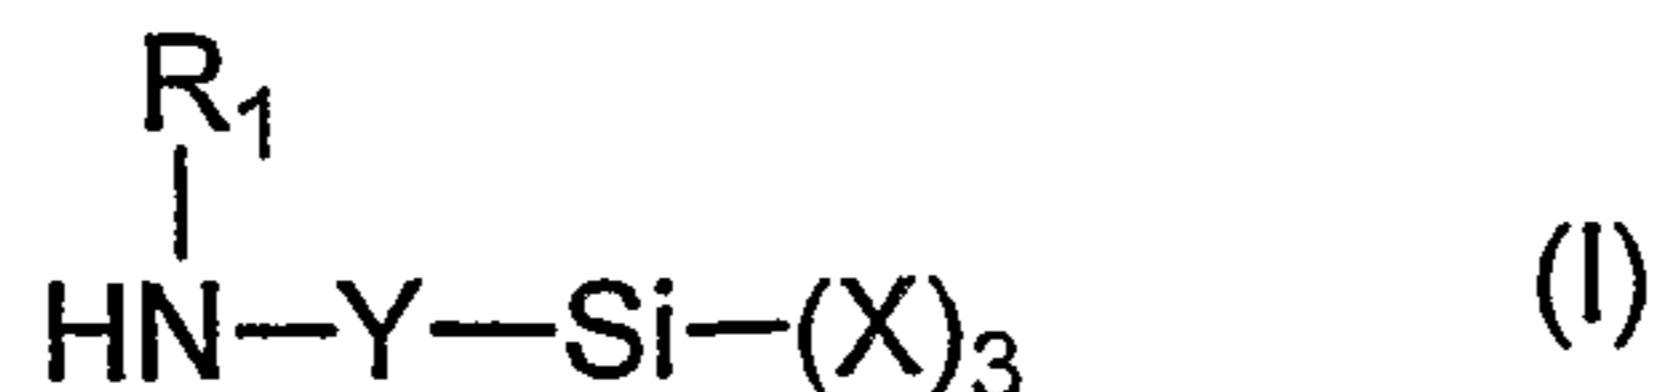

5 wherein

X represents identical or different organic groups which are inert to isocyanate groups below 100°C, provided that at least two of these groups are alkoxy or acyloxy groups,

10 Y represents a linear or branched alkylene group containing 1 to 8 carbon atoms and

R₁ represents an organic group which is inert to isocyanate groups at a temperature of 100°C or a group corresponding to formula II

15 —Y—Si—(X)₃ (II)

to form a moisture-curable, alkoxy silane-functional polyether urethane, provided that total percentages of a-ii) and b-ii) add up to at least 10.

DETAILED DESCRIPTION OF THE INVENTION

20 In accordance with the present invention the term "reactive silane group" means a silane group containing at least two alkoxy or acyloxy groups as defined by substituent "X". A silane group containing two or three alkoxy and/or acyloxy groups is considered to be one reactive silane group. Also, a urethane is a compound containing one or more urethane and/or urea groups. These compounds preferably contain one or more urethane groups and may optionally contain urea groups. More preferably, these compounds contain both urethane and urea groups.

25 The isocyanate-containing reaction products used for preparing the moisture-curable polyether urethanes may be prepared by several methods. For example, they may be prepared by reacting a mixture of 30 polyether diol a-i) and polyether monool a-ii) with an excess of

diisocyanate b-i), to form an isocyanate-containing reaction product containing NCO prepolymers and monoisocyanates formed by the reaction of one mole of a diisocyanate with one mole of a polyether monool. In this embodiment polyether monool a-ii) is present in an 5 amount of at least 10% by weight, based on the weight of component a).

In another embodiment the isocyanate-containing reaction products are prepared by reacting polyether diol a-i) with an excess of diisocyanate b-i) and monoisocyanate b-ii) to form an isocyanate-containing reaction product containing NCO prepolymers and monoisocyanates formed by the 10 reaction of one mole of a monoisocyanate with one mole of a polyether diol. In this embodiment monoisocyanate b-ii) is present in an amount of at least 10% by weight, based on the weight of component b).

It is also possible to use a combination of the preceding processes in which both polyether monools a-ii) and monoisocyanates b-ii) are 15 present.

The isocyanate-containing reaction products are prepared by reacting the isocyanate component with the polyether component at an NCO:OH equivalent ratio of a 1.5:1 to 2.5:1, preferably 1.8:1 to 2.2:1 and more preferably 1.9:1 to 2.1:1 and most preferably 2:1. It is especially 20 preferred to react one mole of the isocyanate component for each equivalent of hydroxyl groups.

When preparing the isocyanate-containing reaction product from diisocyanate b-i), polyether diol a-i) and polyether monool a-ii) at an NCO:OH equivalent ratio of 2:1, the reaction mixture contains the 2/1 25 adduct of the diisocyanate and diol; minor amounts of higher molecular weight oligomers, such as the 3/2 adduct; a monoisocyanate, which is the 1/1 adduct of the monool and diisocyanate; non-functional polymers, which are formed by the reaction of two molecules of the monool with one molecule of the diisocyanate; various products containing both diols and

monoools; and a minor amount of unreacted diisocyanate, which can be removed, e.g., by distillation, or which can remain in the reaction mixture.

To form the moisture-curable polyether urethanes according to the invention the isocyanate-containing reaction products are reacted with compounds c) containing reactive silane groups at equivalent ratio of isocyanate groups to isocyanate-reactive groups of 0.8:1 to 1.1:1, preferably 0.9:1 to 1.05:1 and more preferably about 1:1.

The moisture-curable polyether urethanes may also be prepared by reacting an excess of diisocyanates b) with aminosilanes c) to form a monoisocyanate and then reacting the resulting monoisocyanate with a mixture of polyethers a-i) and a-ii) to form the polyether urethanes.

The moisture-curable, polyether urethanes obtained according to the process of the present invention contain polyether urethanes A), which contain two or more, preferably two, reactive silane groups, and polyether urethanes B), which contain one reactive silane group. Also present are polymers C), which are the reaction products of unreacted isocyanates b) with aminosilanes c). Polymers C) are preferably present in an amount of less than 5% by weight.

The reaction mixture also contains non-functional polymers D), which are formed by the reaction of two molecules of the monool with one molecule of the diisocyanate, two molecules of the monoisocyanate with one molecule of the diol, or one molecule of the monool with one molecule of a monoisocyanate. Non-functional polymers D) are generally present in an amount of less than 30% by weight.

In accordance with the present invention it is also possible to adjust the NCO:OH equivalent ratio to form additional amounts of non-functional polymers D) are formed from the reactants as previously described. These polymers remain in the reaction mixture and function as plasticizers during the subsequent use of the moisture-curable, polyether urethanes according to the invention.

Suitable polyethers for use as component a-i) include polyethers containing two hydroxyl groups and optionally up to 20% by weight, based on the weight of component a-i), of polyethers containing more than 2 hydroxyl groups. In an embodiment of the invention, the polyethers

5 contain one or more, in some cases one, polyether segment. The polyether segments have a number average molecular weight of at least 3000, in some cases at least 6000 and in other cases at least 8000. Also, the number average molecular weight of the poly ether segment can be up to 20,000, in some cases up to 15,000 and in other cases up to 12,000.

10 The number average molecular weight of the polyether segments can vary and range between any of the values recited above. As a non-limiting example, when the polyether segments have a number average molecular weight of 3000, then two or more of these segments must be present to provide that the number average molecular weights of all of the polyether

15 segments per molecule averages between 6000 to 20,000.

The polyethers have a maximum total degree of unsaturation of less than 0.04 milliequivalents/g (meq/g) in some cases less than 0.02 meq/g, in other cases less than 0.01 meq/g and in some situations 0.007 meq/g or less. The amount of unsaturation will vary depending on

20 the method used to prepare the polyether as well as the molecular weight of the polyerther. Such polyether diols are known and can be produced by, as a non-limiting example, the propoxylation of suitable starter molecules. As another non-limiting example, minor amounts (up to 20% by weight, based on the weight of the polyol) of ethylene oxide can be used.

25 If ethylene oxide is used, it can be used as the initiator for or to cap polypropylene oxide groups. Non-limiting examples of suitable starter molecules include diols such as ethylene glycol, propylene glycol, 1,3-butanediol, 1,4-butanediol, 1,6 hexanediol and 2-ethylhexanediol-1,3. Also suitable are polyethylene glycols and polypropylene glycols.

Suitable methods for preparing polyether polyols are known and are described, for example, in EP-A 283 148; US-A 3,278,457; US-A 3,42,256; US-A 3,829,505; US-A 4,472,560; US-A 3,278,458; US-A 3,427,334; US-A 3,941,849; US-A 4,721,818; US-A 3,278,459; 5 US-A 3,427,335 and US-A 4,355,188. They are preferably prepared using double metal cyanides as catalysts.

In addition to the polyether polyols, minor amounts (up to 20% by weight, based on the weight of the polyol) of low molecular weight dihydric and trihydric alcohols having a molecular weight 32 to 500 can also be 10 used. Suitable examples include ethylene glycol, 1,3-butandiol, 1,4-butandiol, 1,6-hexandiol, glycerine or trimethylolpropane. However, the use of low molecular weight alcohols is less preferred.

Polyethers a-i) are present in a amount of up to 100% by weight. When polyether monools a-ii) are used as the sole monofunctional 15 component, polyethers a-i) are present in a minimum amount of 20% by weight, preferably 30% by weight and more preferably 40% by weight, and a maximum amount of 90% by weight, preferably 80% by weight and more preferably 70% by weight. The preceding percentages are based on the total weight of polyethers a).

20 Suitable polyether monools a-ii) are polyether monools having a number average molecular weight of 1000 to 15,000, preferably 3000 to 12,000 and more preferably 6000 to 12,000. The polyether monools are prepared by the alkoxylation of monofunctional starting compounds with alkylene oxides, preferably ethylene oxide, propylene oxide or butylene 25 oxide, more preferably propylene oxide. If ethylene oxide is used, it is used in an amount of up to 40% by weight, based on the weight of the polyether. The polyethers are preferably prepared either by the KOH process or by mixed metal cyanide catalysis. The latter process results in products with low a degree of unsaturation.

Preferably, the polyethers have a maximum total degree of unsaturation of less than 0.04 milliequivalents/g (meq/g) in some cases less than 0.02 meq/g, in other cases less than 0.01 meq/g and in some situations 0.007 meq/g or less. The amount of unsaturation will vary

5 depending on the method used to prepare the polyether as well as the molecular weight of the polyether. These polyether monools are known and can be produced by the methods set forth previously for preparing the polyether polyols, as a non-limiting example by the propoxylation of suitable starter molecules. In another non-limiting example, minor amounts

10 (up to 20% by weight, based on the weight of the polyol) of ethylene oxide can also be used. As with the polyethers a-i), if ethylene oxide is used, it can be used as the initiator for or to cap the polypropylene oxide groups.

Examples of suitable starter molecules include aliphatic, cycloaliphatic and araliphatic alcohols, phenol and substituted phenols,

15 such as methanol, ethanol, the isomeric propanols, butanols, pentanols and hexanols, cyclohexanol and higher molecular weight compounds such as nonylphenol, 2-ethylhexanol and a mixture of C₁₂ to C₁₅, linear, primary alcohols (Neodol 25, available from Shell). Also suitable are unsaturated alcohols such as allyl alcohol; and hydroxy functional esters such as

20 hydroxyethyl acetate and hydroxyethyl acrylate. Preferred are the higher molecular weight monohydroxy compounds, especially nonyl phenol and mixtures of C₁₂ to C₁₅, linear, primary alcohols.

When polyethers a-ii) are present as the sole monofunctional component, they are preferably present in a minimum amount of 10% by

25 weight, more preferably 20% by weight and most preferably 30% by weight, and a maximum amount of 80% by weight, preferably 70% by weight and more preferably 60% by weight. The preceding percentages are based on the total weight polyethers a).

Suitable isocyanates b-i) include the known monomeric organic

30 diisocyanates represented by the formula, R(NCO)₂, in which R represents

an organic group obtained by removing the isocyanate groups from an organic diisocyanate having a molecular weight of 112 to 1,000, preferably 140 to 400. Preferred diisocyanates are those represented by the above formula in which R represents a divalent aliphatic hydrocarbon group 5 having from 4 to 18 carbon atoms, a divalent cycloaliphatic hydrocarbon group having from 5 to 15 carbon atoms, a divalent araliphatic hydrocarbon group having from 7 to 15 carbon atoms or a divalent aromatic hydrocarbon group having 6 to 15 carbon atoms.

Examples of suitable organic diisocyanates include 1,4-tetra-10 methylene diisocyanate, 1,6-hexamethylene diisocyanate, 2,2,4-trimethyl-1,6-hexamethylene diisocyanate, 1,12-dodecamethylene diisocyanate, cyclohexane-1,3- and -1,4-diisocyanate, 1-isocyanato-2-isocyanatomethyl cyclopentane, 1-isocyanato-3-isocyanatomethyl-3,5,5-trimethyl-cyclohexane (isophorone diisocyanate or IPDI), bis-(4-isocyanato-15 cyclohexyl)-methane, 1,3- and 1,4-bis-(isocyanatomethyl)-cyclohexane, bis-(4-isocyanatocyclo-hexyl)-methane, 2,4'-diisocyanato-dicyclohexyl methane, bis-(4-isocyanato-3-methyl-cyclohexyl)-methane, $\alpha,\alpha,\alpha',\alpha'$ -tetramethyl-1,3- and/or -1,4-xylylene diisocyanate, 1-isocyanato-1-methyl-4(3)-isocyanatomethyl cyclohexane, 2,4- and/or 2,6-hexahydro-toluylene 20 diisocyanate, 1,3- and/or 1,4-phenylene diisocyanate, 2,4- and/or 2,6-toluylene diisocyanate, 2,4- and/or 4,4'-diphenylmethane diisocyanate and 1,5-diisocyanato naphthalene and mixtures thereof.

Monomeric polyisocyanates containing 3 or more isocyanate groups such as 4-isocyanatomethyl-1,8-octamethylene diisocyanate and 25 aromatic polyisocyanates such as 4,4',4"-triphenylmethane triisocyanate and polyphenyl polymethylene polyisocyanates obtained by phosgenating aniline/formaldehyde condensates may also be used in an amount of up to 20% by weight, based on the weight of isocyanates b). Also suitable, although less preferred, are polyisocyanate adducts prepared from the 30 preceding monomeric polyisocyanates and containing isocyanurate,

uretdione, biuret, urethane, allophanate, iminooxadiazine dione, carbodiimide and/or oxadiazinetrione groups.

Preferred diisocyanates include bis-(4-isocyanatocyclohexyl)-methane, 1,6-hexamethylene diisocyanate, isophorone diisocyanate, $\alpha,\alpha,\alpha',\alpha'$ -tetramethyl-1,3- and/or -1,4-xylylene diisocyanate, 2,4- and/or 2,6-toluylene diisocyanate, and 2,4- and/or 4,4'-diphenylmethane diisocyanate. Especially preferred are isophorone diisocyanate, 2,4-toluylene diisocyanate and mixtures of 2,4- and 2,6-toluylene diisocyanate.


Diisocyanates b-i) are present in a amount of up to 100% by weight. When monoisocyanates b-ii) are used as the sole monofunctional component, diisocyanates b-i) are present in a minimum amount of 20% by weight, preferably 30% by weight and more preferably 40% by weight, and a maximum amount of 90% by weight, preferably 80% by weight and more preferably 70% by weight. The preceding percentages are based on the total weight of isocyanates b).

Suitable isocyanates b-ii) include those corresponding to the formula R(NCO), wherein R is defined as previously set forth with regard to the organic diisocyanates. Suitable monoisocyanates include those corresponding to the diisocyanates previously set forth. Examples include butyl isocyanate, hexyl isocyanate, octyl isocyanate, 2-ethylhexyl isocyanate, stearyl isocyanate, cyclohexyl isocyanate, phenyl isocyanate and benzyl isocyanate.

When monoisocyanates b-ii) are present as the sole monofunctional component, they are preferably present in a minimum amount of 10% by weight, more preferably 20% by weight and most

preferably 30% by weight, and a maximum amount of 80% by weight, preferably 70% by weight and more preferably 60% by weight. The preceding percentages are based on the total weight isocyanates b).

Suitable compounds c) containing reactive silane groups are those
5 corresponding to formula I

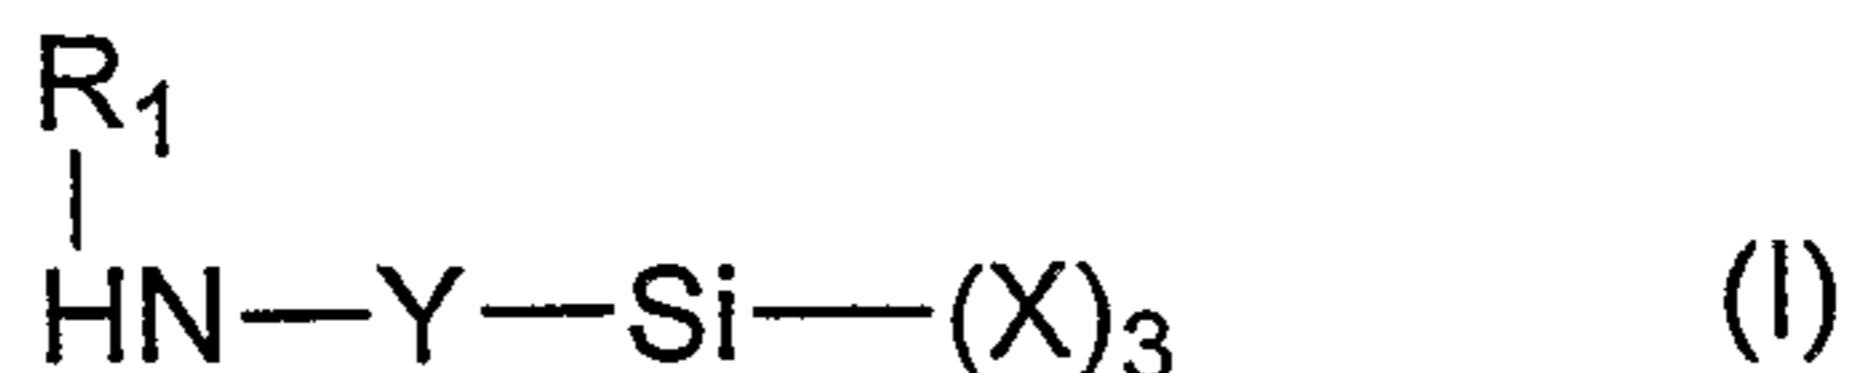


wherein

10 X represents identical or different organic groups which are inert to isocyanate groups below 100°C, provided that at least two of these groups are alkoxy or acyloxy groups, preferably alkyl or alkoxy groups having 1 to 4 carbon atoms and more preferably alkoxy groups,

15 Y represents a linear or branched alkylene group containing 1 to 8 carbon atoms, preferably a linear group containing 2 to 4 carbon atoms or a branched group containing 5 to 6 carbon atoms, more preferably a linear group containing 3 carbon atoms and

R₁ represents an organic group which is inert to isocyanate groups at 20 a temperature of 100°C or less, provided that R₁ is not a succinate group, preferably an alkyl, cycloalkyl or aromatic group having 1 to 12 carbon atoms and more preferably an alkyl, cycloalkyl or aromatic group having 1 to 8 carbon atoms, or R₁ represents a group corresponding to formula II

25

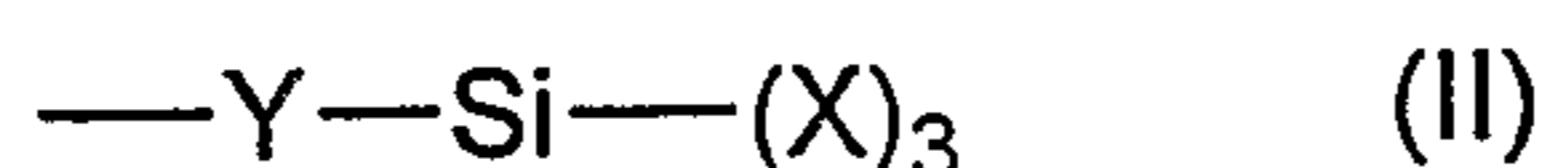


Especially preferred are compounds in which X represents methoxy, ethoxy groups or propoxy groups, more preferably methoxy or ethoxy groups, and Y is a linear group containing 3 carbon atoms.

Examples of suitable aminoalkyl alkoxy silanes and aminoalkyl

5 acyloxy silanes of formula I, which contain secondary amino groups, include N-phenylaminopropyl-trimethoxysilane (available as A-9669 from OSI Corporation), bis-(γ -trimethoxysilylpropyl)amine (available as A-1170 from OSI Corporation), N-cyclohexylaminopropyl-triethoxysilane, N-methylaminopropyl-trimethoxysilane, N-butylaminopropyl-

10 trimethoxysilane, N-butylaminopropyl-triacyloxy silane, 3-(N-ethyl)amino-2-methylpropyl-trimethoxysilane, 4-(N-ethyl)amino-3,3-dimethylbutyl-trimethoxysilane and the corresponding alkyl diethoxy, alkyl dimethoxy and alkyl diacyloxy silanes, such as 3-(N-ethyl)amino-2-methylpropyl-methyldimethoxysilane.

15 A special group of compounds containing alkoxy silane groups, which correspond to formula I and are especially preferred for use as compounds c), are those containing aspartate groups and corresponding to formula III

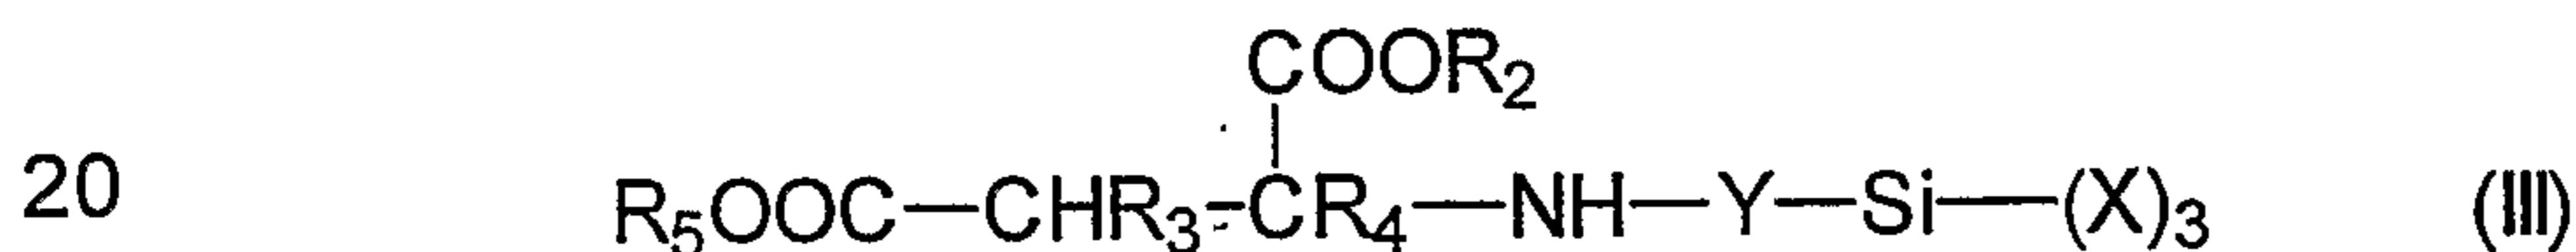

wherein

X and Y are as previously defined,


R₂ and R₅ are identical or different and represent organic groups which

25 are inert to isocyanate groups at a temperature of 100°C or less, preferably alkyl groups having 1 to 9 carbon atoms, more preferably alkyl groups having 1 to 4 carbon atoms, such as methyl, ethyl or butyl groups and

R_3 and R_4 are identical or different and represent hydrogen or organic groups which are inert towards isocyanate groups at a temperature of 100°C or less, preferably hydrogen.

The compounds of formula III are prepared by reacting

5 aminosilanes corresponding to formula IV

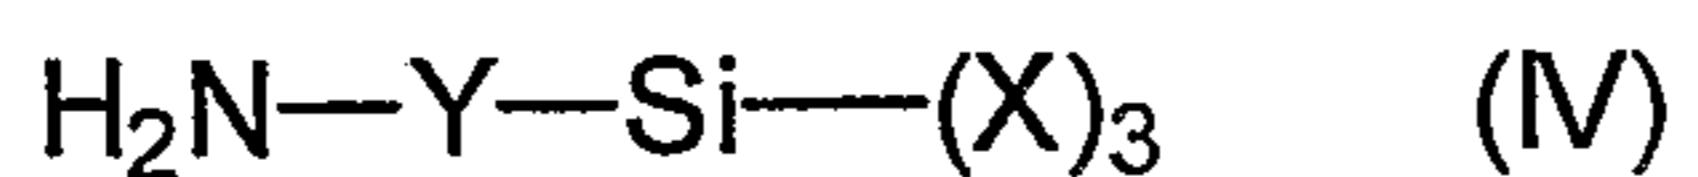

with maleic or fumaric acid esters corresponding to formula V



Examples of suitable aminoalkyl alkoxy silanes and aminoalkyl acyloxy silanes corresponding to formula IV include 3-aminopropyl-triacyloxy silane, 3-aminopropyl-methyldimethoxy silane; 6-aminohexyl-tributoxy silane; 3-aminopropyl-trimethoxy silane; 3-aminopropyl-triethoxy silane; 3-aminopropyl-methyldiethoxy silane; 5-aminopentyl-trimethoxy silane; 5-aminopentyl-triethoxy silane; 4-amino-3,3-dimethylbutyl-trimethoxy silane; and 3-aminopropyl-triisopropoxysilane. 3-amino-propyl-trimethoxy silane and 3-aminopropyl-triethoxy silane are particularly preferred.

Examples of optionally substituted maleic or fumaric acid esters suitable for preparing the aspartate silanes include the dimethyl, diethyl, dibutyl (e.g., di-n-butyl), diamyl, di-2-ethylhexyl esters and mixed esters based on mixture of these and/or other alkyl groups of maleic acid and fumaric acid; and the corresponding maleic and fumaric acid esters substituted by methyl in the 2- and/or 3-position. The dimethyl, diethyl and dibutyl esters of maleic acid are preferred, while the diethyl esters are especially preferred.

The reaction of primary amines with maleic or fumaric acid esters to form the aspartate silanes of formula III is known and described, e.g., in U.S. Patent 5,364,955, which is herein incorporated by reference.

The compounds corresponding to formula I are preferably used as 5 component c). To obtain the benefits of the present invention, they should be present in an amount of at least 10% by weight, preferably at least 30% by weight, more preferably at least 50% by weight and most preferably at least 80% by weight. In addition to the compounds of formula I, which are required according to the present invention, component c) may also 10 contain aminosilanes that do not correspond to formula I, such as the primary aminosilanes corresponding to formula IV.

The compositions obtained by the process of the present invention may be cured in the presence of water or moisture to prepare coatings, adhesives or sealants. The compositions cure by "silane poly- 15 condensation" from the hydrolysis of alkoxy silane groups to form Si-OH groups and their subsequent reaction with either Si-OH or Si-OR groups to form siloxane groups (Si-O-Si).

Suitable acidic or basic catalysts may be used to promote the curing reaction. Examples include acids such as paratoluene sulfonic 20 acid; metallic salts such as dibutyl tin dilaurate; tertiary amines such as triethylamine or triethylene diamine; and mixtures of these catalysts. The previously disclosed, low molecular weight, basic aminoalkyl trialkoxysilanes, also accelerate hardening of the compounds according to the invention.

25 The one-component compositions generally may be either solvent-free or contain up to 70%, preferably up to 60% organic solvents, based on the weight of the one-component composition, depending upon the particular application. Suitable organic solvents include those which are known from either from polyurethane chemistry or from coatings 30 chemistry.

The compositions may also contain known additives, such as leveling agents, wetting agents, flow control agents, antiskinning agents, antifoaming agents, fillers (such as chalk, lime, flour, precipitated and/or pyrogenic silica, aluminum silicates and high-boiling waxes), viscosity regulators, plasticizers, pigments, dyes, UV absorbers and stabilizers against thermal and oxidative degradation.

The one-component compositions may be used with any desired substrates, such as wood, plastics, leather, paper, textiles, glass, ceramics, plaster, masonry, metals and concrete. They may be applied by standard methods, such as spraying, spreading, flooding, casting, dipping, rolling and extrusion.

The one-component compositions may be cured at ambient temperature or at elevated temperatures. Preferably, the moisture-curable compositions are cured at ambient temperatures.

The invention is further illustrated but is not intended to be limited by the following examples in which all parts and percentages are by weight unless otherwise specified.

EXAMPLES

Preparation of Silane Functional Aspartate 1

An aspartate resin was prepared according to U.S. Patent 4,364,955. To a 5 liter flask fitted with agitator, thermocouple, nitrogen inlet and addition funnel with condenser were added 1483g (8.27 equivalents) of 3-amino-propyl-trimethoxysilane (Silquest A-1110, available from OSI Corporation). The addition funnel was used to admit 1423.2g (8.27 equivalents) of diethyl maleate over a two hour period. The temperature of the reactor was maintained at 25°C during the addition. The reactor was maintained at 25°C for an additional five hours at which time the product was poured into glass containers and sealed under a

blanket of nitrogen. After one week the unsaturation number was 0.6 indicating the reaction was ~99% complete.

Polyether diol 1

5 A polyoxypropylene diol (Acclaim 12200 (unsaturation = 0.007 meq/g), available from Bayer Corporation) having a functionality of 2 and an equivalent weight of 5783.

Polyether monool 2

10 Nonylphenol (183 g, 0.89 eq) was charged to a stainless-steel reactor. Zinc hexacyanocobaltate-tert-butyl alcohol complex (0.143 g, prepared as described in U.S. Patent No. 5,482,908) was added and the mixture was heated with stirring under vacuum at 130°C for one hour to remove traces of water from the nonylphenol starter. Propylene oxide (6407 g, 145.6 eq) was introduced into the reactor over 6 hours. After the 15 epoxide addition was completed, the mixture was heated to 130°C until no further pressure decrease occurred. The product was vacuum stripped and then drained from the reactor. The resulting polyether had an OH number of 8.5, an equivalent weight of 6612 and a functionality of 1.

20 Example 1 - Preparation Silane Terminated Polyurethane (STP) 1 in situ from a 74:26 diol:monool mixture

25 A 2 liter round bottom flask was fitted with agitator, nitrogen inlet, condenser, heater and addition funnel. Into the flask were charged 36.2 g (0.33 eq) of isophorone diisocyanate, 733.9g (0.13 eq) of polyether diol 1, 264.5 g (0.04 eq) of polyether monool 2 and 0.23 g of dibutyltin dilaurate. The reaction was heated to 60°C for 8 hours until the NCO content was 0.57% (theoretical = 0.66%). 59.7g (0.16 eq) of silane functional aspartate 1 were added and the flask was heated at 60°C for an additional 1 hour 30 until no NCO remained as determined by an IR spectrum. 5.5 g of vinyl

trimethoxysilane were added as moisture scavenger. The resulting product had a viscosity of 34,700 mPa.s at 25°C.

Example 2 - Preparation Silane Terminated Polyurethane (STP) 2 in situ

5 from a 60:40 diol:monool mixture

A 2 liter round bottom flask was fitted with agitator, nitrogen inlet, condenser, heater and addition funnel. Into the flask were charged 35.33 g (0.32 eq) of isophorone diisocyanate, 602.3g (0.10 eq) of polyether diol 1, 400.5 g (0.06 eq) of polyether monool 2 and 0.22 g of dibutyltin dilaurate. The reaction was heated to 60°C for 8 hours until the NCO content was 0.61% (theoretical = 0.64%). 51.6g (0.16 eq) of silane functional aspartate 1 were added and the flask was heated at 60°C for an additional 1 hour until no NCO remained as determined by an IR spectrum. 5.5 g of vinyl trimethoxysilane were added as moisture scavenger. The resulting product had a viscosity of 31,500 mPa.s at 25°C.

Example 3 - Preparation Silane Terminated Polyurethane (STP) 3 in situ

from a 50:50 diol:monool mixture

20

Example 2 was repeated with the exception that 34.55 g (0.31 eq) of isophorone diisocyanate, 502.0 g (0.087 eq) of polyether diol 1, 502.2 g (0.069 eq) of polyether monool 2 and 56.9 g (0.16 eq) of silane functional aspartate 1 were used. The resulting product had a viscosity of 39,000 mPa.s at 25°C.

Example 4 - Preparation Silane Terminated Polyurethane (STP) 4 in situ

from a 40:60 diol:monool mixture

Example 2 was repeated with the exception that 95.1 g (0.43 eq) of isophorone diisocyanate, 1134 g (0.20 eq) of polyether diol 1, 1700.4 g (0.233 eq) of polyether monool 2 and 160.2 g (0.43 eq) of silane functional aspartate 1 were used. The resulting product had a viscosity of 27,700
5 mPa.s at 25°C.

Example 5 (Comp) - Preparation of Silane Terminated Polyurethane (STP) 5

A 5 liter round bottom flask was fitted with agitator, nitrogen inlet, condenser, heater and addition funnel. Into the flask were charged 139.3
10 g (1.26 eq) of isophorone diisocyanate, 3643.3 g (0.63 eq) of polyether diol 1 and 0.8 g of dibutyltin dilaurate. The reaction was heated to 60°C for 3 hours until the NCO content was 0.72% (theoretical = 0.70%). 229.8g (0.63 eq) of silane functional aspartate 1 were added and the flask was heated at 60°C for an additional 1 hour until no NCO remained as
15 determined by an IR spectrum. 20 g of vinyl trimethoxysilane were added as moisture scavenger. The resulting product had a viscosity of 73,000 mPa.s at 25°C.

Example 6 (Comp) - Preparation of Silane Terminated Polyurethane (STP) 6

20 A 5 liter round bottom flask was fitted with agitator, nitrogen inlet, condenser, heater and addition funnel. Into the flask were charged 150.9 g (1.14 eq) of isophorone diisocyanate, 3664.1 g (0.57 eq) of polyether monool 2 and 0.6 g dibutyltin dilaurate. The reaction was heated to 60°C for 3 hours until the NCO content was 0.65% (theoretical = 0.63%). 202.2g
25 (0.57 eq) of silane functional aspartate 1 were added and the flask was heated at 60°C for an additional 1 hour until no NCO remained as determined by an IR spectrum. 20 g of vinyl trimethoxysilane were added

as moisture scavenger. The resulting product had a viscosity of 16,100 mPa.s at 25°C.

Formulation of Silane Sealants

5 The STP's prepared in situ were formulated into sealants using the following typical formulation and procedure. Comparison STP's 5 and 6 were formulated at a 70:30 ratio.

Procedure

10 The following is the standard sealant formulation and procedure used to formulate all of the STP's for testing. Values given for each formula component are percent by weight of the total formula weight. A high-speed centrifugal mixer was used to mix the formulation components in the steps given below. Each mixing period was one minute in length at a speed of 2200 rpm.

15

Step 1:

To a clean dry mixing container were charged the following:

STP (blend)	37.5
Plasticizer	17.5
20 Adhesion Promoter	0.8
Catalyst	0.1
Desiccant	0.5

The ingredients were mixed for one minute in length at a speed of 2200 rpm.

25

Step 2:

A portion of the filler was added to the mixing container.

Filler 23.6

The ingredients were mixed for one minute at a speed of 2200 rpm.

Step 3:

The remaining filler was added to the mixing container.

Filler 20.0

5 The ingredients were mixed for one minute in length at a speed of
2200 rpm.

Step 4:

10 The side of the mix container was scraped and the ingredients were
mixed for one additional minute at a speed of 2200 rpm to
incorporate all of the filler into the mixture.

Step 5:

15 The resulting product was degassed at 50°C and under full vacuum
(>28 mm Hg) for one hour. The material was used immediately.
Exxon Jayflex DIDP was used as the plasticizer. An aminosilane
(Silquest A-1120, available from OSI Corporation) was used as the
adhesion promoter. A vinyltrimethoxysilane (Silquest A-171, available from
OSI Corporation) was used as the desiccant. The filler used was Specialty
Minerals Ultra P Flex precipitated calcium carbonate (mean particle size of
20 0.07 microns). The catalyst used was dibutyltin dilaurate.

Cure and Testing of Silane Sealants

25 The sealant formulations were cast onto 0.25 inch thick
polyethylene sheets and cured at standard conditions of 20°C, 50%
relative humidity for at least two weeks before testing. Tensile strength,
percent elongation and 100% modulus were determined according to
ASTM D-412. The results are set forth in the following table.

Examples 1-95: Properties for the sealants

Example	In situ STP	Diol STP	Monool STP	Diol/Monool Ratio	Ultimate Tensile Strength (psi)	Modulus @ 100% Elongation (psi)	Elongation (%)
7	1	—	—	70:30	305	151	359
8	2	—	—	60:40	248	119	339
9	3	—	—	50:50	235	92	358
10	4	—	—	40:60	198	76	356
11 (Comp)		5 (Comp)	6 (Comp)	70:30	381	165	392

The preceding examples demonstrate that the sealant properties for the products prepared by the insitu process according to the invention

5 are comparable to the properties obtained by separately preparing and blending the silane-terminated polyurethanes used in the sealant compositions, even though the products according to the invention contain by-products that are not present in the comparison sealant.


Although the invention had been described in detail in the foregoing
10 for the purpose of illustration, it was to be understood that such detail was solely for that purpose and that variations can be made therein by those skilled in the art without departing from the spirit and scope of the invention except as it may be limited by the claims.

WHAT IS CLAIMED IS:

1. The present invention relates to a process for preparing a moisture-curable, alkoxy silane-functional polyether urethane by reacting at an NCO:OH equivalent ratio of 1.5:1 to 2.5:1
 - 5 a) a hydroxyl component containing
 - i) 20 to 100% by weight, based on the weight of component a), of a polyether containing two hydroxyl groups and one or more polyether segments, wherein the polyether segments have a number average molecular weight of at least 3000 and a degree of unsaturation of less than 0.04 milliequivalents/g, provided that the sum of the number average molecular weights of all of the polyether segments per molecule averages 6000 to 20,000, and
 - ii) 0 to 80% by weight, based on the weight of component a), of a polyether containing one hydroxyl group and one or more polyether segments having a number average molecular weight of 1000 to 15,000, with
 - b) an isocyanate component containing
 - i) 20 to 100% by weight, based on the weight of component b), of a compound containing two isocyanate groups, and
 - ii) 0 to 80% by weight, based on the weight of component b), of a compound containing one isocyanate group,

20 to form an isocyanate-containing reaction product and subsequently reacting this reaction product at an equivalent ratio of isocyanate groups to isocyanate-reactive groups of 0.8:1 to 1.1:1 with

25 c) compounds containing an isocyanate-reactive group and one or more reactive silane groups selected from
 - i) compounds corresponding to formula I

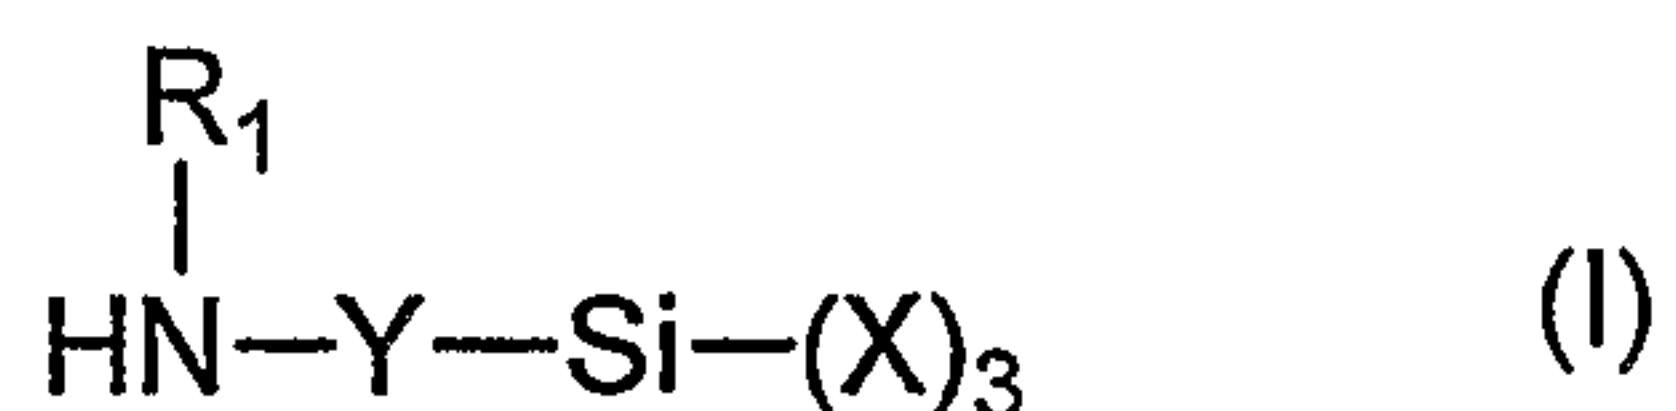

wherein

X represents identical or different organic groups which are inert to isocyanate groups below 100°C, provided that at least two of these groups are alkoxy or acyloxy groups,

5 Y represents a linear or branched alkylene group containing 1 to 8 carbon atoms and

R₁ represents an organic group selected from alkyl, cycloalkyl or aromatic groups having from 1 to 12 carbon atoms and a group corresponding to formula II

10



ii) the reaction product of aminosilanes corresponding to formula IV

15



with maleic or fumaric acid esters corresponding to formula V



20

wherein X and Y are as defined above,
 R₂ and R₅ are identical or different and represent alkyl groups having 1 to 4 carbon atoms, and
 R₃ and R₄ are identical or different and represent hydrogen or
 25 organic groups which are inert towards isocyanate groups at a temperature of 100°C or less,

to form a moisture-curable, alkoxy silane-functional polyether urethane, provided that total percentages of a-ii) and b-ii) add up to at least 10.

2. The process of Claim 1 wherein


X represents identical or different alkoxy groups having 1 to 4 carbon atoms,

5 Y represents a linear radical containing 2 to 4 carbon atoms or a branched radical containing 5 to 6 carbon atoms and

R₁ represents ethyl.

3. The polyether urethane of Claim 1 wherein at least

10 10 mole % of component c) is a compound corresponding to the formula

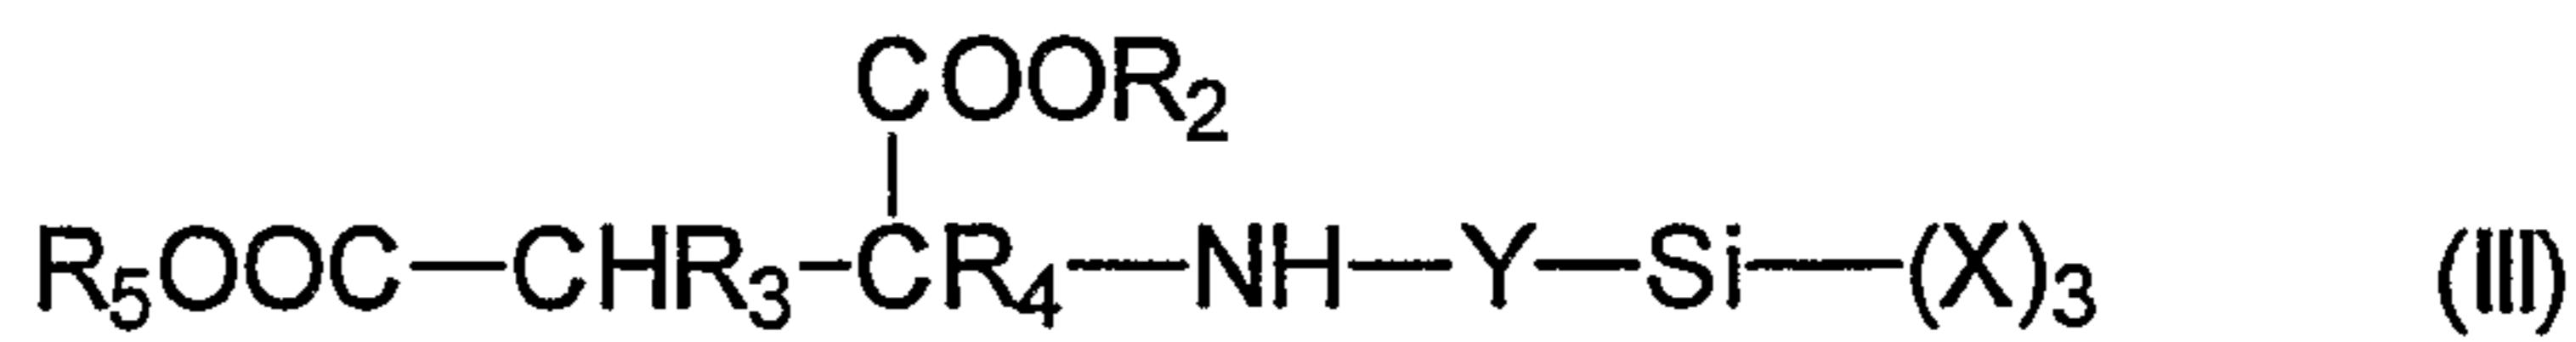

wherein

X represents identical or different alkoxy groups having 1 to 4 carbon atoms,

15 Y represents a linear radical containing 2 to 4 carbon atoms or a branched radical containing 5 to 6 carbon atoms and

R₂ and R₅ are identical or different and represent alkyl groups having 1 to 4 carbon atoms and

20 R₃ and R₄ represent hydrogen.

4. The process of Claim 1 wherein component a-i) is present in

an amount of 20 to 90% by weight, based on the weight of component a);

and component a-ii) is present in an amount of 10 to 80% by weight,

25 based on the weight of component a).

5. The process of Claim 2 wherein component a-i) is present in

an amount of 20 to 90% by weight, based on the weight of component a);

and component a-ii) is present in an amount of 10 to 80% by weight,

30 based on the weight of component a).

6. The process of Claim 3 wherein component a-i) is present in an amount of 20 to 90% by weight, based on the weight of component a); and component a-ii) is present in an amount of 10 to 80% by weight, based on the weight of component a).

5

7. The process of Claim 1 wherein component b-i) is present in an amount of 20 to 90% by weight, based on the weight of component b); and component b-ii) is present in an amount of 10 to 80% by weight, based on the weight of component b).

10

8. The process of Claim 2 wherein component b-i) is present in an amount of 20 to 90% by weight, based on the weight of component b); and component b-ii) is present in an amount of 10 to 80% by weight, based on the weight of component b).

15

9. The process of Claim 3 wherein component b-i) is present in an amount of 20 to 90% by weight, based on the weight of component b); and component b-ii) is present in an amount of 10 to 80% by weight, based on the weight of component b).

20

10. The process of Claim 1 wherein component a-i) is present in an amount of 30 to 80% by weight, based on the weight of component a); component a-ii) is present in an amount of 20 to 70% by weight, based on the weight of component a); and at least 80 mole % of component c) is a compound corresponding to the formula I.

25

11. The process of Claim 2 wherein component a-i) is present in an amount of 30 to 80% by weight, based on the weight of component a); component a-ii) is present in an amount of 20 to 70% by weight, based on

the weight of component a); and at least 80 mole % of component c) is a compound corresponding to the formula I.

12. The process of Claim 3 wherein component a-i) is present in
5 an amount of 30 to 80% by weight, based on the weight of component a);
component a-ii) is present in an amount of 20 to 70% by weight, based on
the weight of component a); and at least 80 mole % of component c) is a
compound corresponding to the formula III.

10 13. The process of Claim 1 wherein component b-i) is present in
an amount of 30 to 80% by weight, based on the weight of component b);
component b-ii) is present in an amount of 20 to 70% by weight, based on
the weight of component b); and at least 80 mole % of component c) is a
compound corresponding to the formula I.

15

14. The process of Claim 2 wherein component b-i) is present in
an amount of 30 to 80% by weight, based on the weight of component b);
component b-ii) is present in an amount of 20 to 70% by weight, based on
the weight of component b); and at least 80 mole % of component c) is a
20 compound corresponding to the formula I.

15. The process of Claim 3 wherein component b-i) is present in
an amount of 30 to 80% by weight, based on the weight of component b);
component b-ii) is present in an amount of 20 to 70% by weight, based on
25 the weight of component b); and at least 80 mole % of component c) is a
compound corresponding to the formula III.

16. The process of Claim 1 wherein the polyether segments of
component a-i) have a number average molecular weight of at least 6000
and the polyether segments of component a-ii) have a number average
30 molecular weight of 3000 to 12,000.

- 30 -

17. The process of Claim 2 wherein the polyether segments of component a-i) have a number average molecular weight of at least 6000 and the polyether segments of component a-ii) have a number average molecular weight of 3000 to 12,000.

5

18. The process of Claim 3 wherein the polyether segments of component a-i) have a number average molecular weight of at least 6000 and the polyether segments of component a-ii) have a number average molecular weight of 3000 to 12,000.

10

19. The process of Claim 4 wherein the polyether segments of component a-i) have a number average molecular weight of at least 6000 and the polyether segments of component a-ii) have a number average molecular weight of 3000 to 12,000.

15

20. The process of Claim 10 wherein the polyether segments of component a-i) have a number average molecular weight of at least 6000 and the polyether segments of component a-ii) have a number average molecular weight of 3000 to 12,000.

20

R_1

(I)

