

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/088140 A1

- (51) International Patent Classification⁷: **G06K 19/077**, H01L 23/485
- (74) Agent: **WEBER, Helmut**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/IB03/01356
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 3 April 2003 (03.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02100383.5 16 April 2002 (16.04.2002) EP
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicants (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). **W.C. HERAEUS GMBH & CO. KG** [DE/DE]; Heraeusstrasse 12-14, 63450 Hanau (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **MOLL, Rainer** [AT/AT]; c/o Prof . Holstlaan 6, NL-5656 AA Eindhoven (NL). **RABE, Michael** [AT/DE]; c/o Prof . Holstlaan 6, NL-5656 AA Eindhoven (NL).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MODULE FOR A DATA CARRIER WITH IMPROVED BUMP COUNTERPARTS

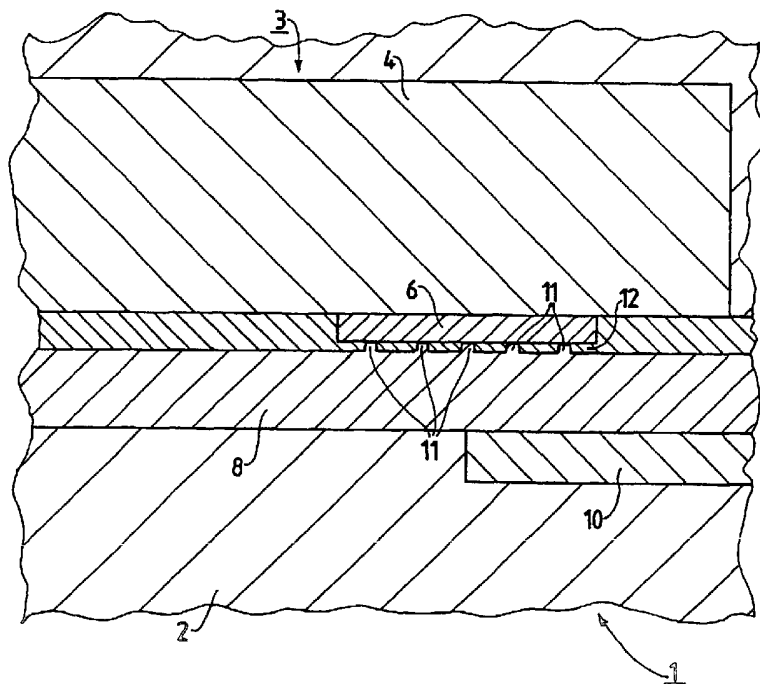

(57) Abstract: In a data carrier (1), or a module (3) for such a data carrier (1), the module (3) has an integrated component (4) with at least two projecting connection contacts (5, 6) and, for each connection contact (5, 6), a connecting part (7, 8) which is electrically conductively connected thereto, the connecting parts (7, 8) consisting of metal, being constructed so as to be plate-shaped, and including remnants (11) of raised portions which have been formed by mechanical deformation of the connecting parts (7, 8).

Module for a data carrier with improved bump counterparts

The invention relates to a module for a data carrier, which module includes an integrated component with at least two connection contacts and, for each connection contact, a connecting part which is electrically conductively connected to the relevant connection contact, the connection contacts being constructed so as to project from the integrated component and the connecting parts consisting of metal and being constructed so as to be plate-shaped.

The invention also relates to a data carrier provided with a module which includes an integrated component with at least two connection contacts and, for each connection contact, a connecting part which is electrically conductively connected to the relevant connection contact, the connection contacts being constructed so as to project from the integrated component and the connecting parts consisting of metal and being constructed so as to be plate-shaped.

Various versions of a data carrier of the kind set forth in the second paragraph and of a module of the kind set forth in the first paragraph are at present being marketed by Applicant and hence are known. The integrated component in the known versions has two connection contacts in the form of so-called bumps which are provided on so-called pads of the integrated component by means of a galvanic method. Such galvanically produced bumps have an essentially plane boundary surface with slightly raised edge zones, the two boundary surfaces of the two connection contacts nominally being situated in one plane in the known versions. Because of the fact that the boundary surfaces of the connection contact nominally are situated in one plane, for the manufacture of the known versions it is necessary to perform and maintain a very exact adjustment of the parallelism of the integrated component with its connection contacts, bounded by the plane boundary surfaces and the plate-shaped connecting parts, so that this parallelism must meet very severe requirements so as to ensure a reliable and perfect electrically conductive connection between each connection contact and the relevant connecting part. In order to meet such severe requirements, a large amount of work must be spent on the manufacture of a known module or a known data carrier, thus

increasing the cost of the manufactured products while still involving, despite the major effort made, a significant degree of uncertainty as regards the realization of a perfect electrically conductive connection between the connection terminals and the connecting parts.

5

It is an object of the invention to avoid the described problems and to realize an improved module and an improved data carrier in a simple manner while using simple means.

10

In order to achieve this object, a module is provided with the features in accordance with the invention in such a manner that a module in accordance with the invention can be characterized as follows:

15

A module for a data carrier, which module includes an integrated component with at least two connection contacts and, for each connection contact, a connecting part which is electrically conductively connected to the relevant connection contact, the connection contacts being constructed so as to project from the integrated component and the connecting parts consisting of metal and being constructed so as to be plate-shaped, the connecting parts comprising remnants of raised portions which have been formed by mechanical deformation of the connecting parts, which remnants project from the connecting parts in the direction of the connection contacts.

20

In order to solve the above object, steps are taken for a data carrier in accordance with the invention such that a data carrier in accordance with the invention can be characterized as follows:

25

A data carrier with a module, which module includes an integrated component with at least two connection contacts and, for each connection contact, a connecting part which is electrically conductively connected to the relevant connection contact, the connection contacts being constructed so as to project from the integrated component and the connecting parts consisting of metal and being constructed so as to be plate-shaped, the connecting parts comprising remnants of raised portions which have been formed by mechanical deformation of the connecting parts, which remnants project from the connecting parts in the direction of the connection contacts.

30

By taking the steps in accordance with the invention it is simply achieved that, while making a small additional effort only, the electrically conductive connection between each connection contact of the integrated component and the connecting part electrically

connected to the connection contact is realized by means of the remnants of raised portions, the remnants of raised portions ensuring with absolute certainty, because they are small in respect of surface, and hence in respect of contact, in comparison with the surface dimensions of the connection contacts and the connecting parts, that at least one remnant of this kind provides a raised portion for a perfect electrical connection between a connection contact and the associated connecting part. The ensured electrically conductive connection of a connection contact to an associated connecting part by means of at least one remnant of a raised portion is also based inter alia on the fact that, because the raised portions are so small, they can be deformed to a given extent; in practice this ensures that always a comparatively large number of such remnants of raised portions form an electrically conductive connection between a connection contact and an associated connecting part, the deformability of the raised portions offering the desired result while imposing only comparatively minor requirements as regards the parallelism of the integrated component with its connection contacts and the plate-shaped connecting parts.

In embodiments in accordance with the invention the remnants of raised portions may originate from raised portions which have been realized, for example, by means of an etching method. However, it has been found to be particularly advantageous when the remnants of raised portions originate from raised portions which have been formed by means of stamping. This is advantageous with a view to achieving an as simple and economical realization as possible of the raised portions. This is also advantageous because such stamping can be performed simultaneously with a stamping operation carried out to form the connecting parts.

In embodiments in accordance with the invention the remnants of raised portions may have a height of between 0.2 μm and 20 μm . However, it has been found that it is particularly advantageous when the remnants of raised portions have a height of between 1.0 μm and 10 μm . Tests have demonstrated that such a construction is particularly advantageous.

The remnants of raised portions in the transitional zone to the connecting parts in embodiments of the invention may have a lateral length of between 1.0 μm and 100 μm . However, it has been found that it is particularly advantageous when the remnants of raised portions have a lateral length of between 10 μm and 50 μm in the transitional zone to the connecting parts. Tests have again demonstrated that this is particularly advantageous for practical applications. The remnants of raised portions may have a triangular or rectangular

or square shape, but also a circular shape in a cross-section taken parallel to the plate-shaped connecting parts.

For the solutions in accordance with the invention it has been found that it is very advantageous to provide a filler material, enclosing the connection contacts and the remnants of raised portions, between the integrated component and the connecting parts. In this respect it has been found that it is very advantageous when the filler material is formed by a foil which consists of a synthetic material and can be softened at least once by heating. Such embodiments in accordance with the invention offer the advantage that the remnants of raised portions and additionally also the portions of the connecting parts which are electrically conductively connected to the connection contacts are protected against environmental effects.

The above aspects and further aspects of the invention will become apparent from and elucidated on the basis of the embodiment described hereinafter.

15

The invention will be described in detail hereinafter with reference to an embodiment as shown in the drawing, however, without the invention being limited thereto.

Fig. 1 is a sectional view of a part of an embodiment of a data carrier in accordance with the invention with an embodiment of the module in accordance with the invention.

Fig. 2 shows a detail of the data carrier of Fig. 1 at a scale which is about five times larger.

The Figs. 1 and 2 show the part of a data carrier 1 which is essential in the present context. The data carrier 1 is arranged for the wireless communication with a communication station which is suitable for this purpose and is constructed as a so-called chip card in the present case. However, other configurations such as so-called labels or tags are also feasible.

The data carrier 1 includes an envelope body 2 which has been manufactured during a lamination process. The envelope body 2, however, may also have been formed by means of an injection molding process. The envelope body 2 accommodates a module 3 for the data carrier 1. The module 3 comprises an integrated component 4 with a first connection contact 5 and a second connection contact 6. Each of the two connection contacts 5 and 6 is

formed by a so-called bump which is made of gold and has been formed galvanically. For each connection contact 5 and 6 the module 3 also comprises a connecting part which is electrically conductively connected to the relevant connection contact 5, 6, that is, a first connecting part 7 and a second connecting part 8. The two connecting parts 7 and 8 form part of a so-called metal lead frame which has been known since long. Each of the two connecting parts 7 and 8 is connected to a coil terminal, the first connecting part 7 being electrically conductively connected to a first coil terminal 9 while the second connecting part 8 is electrically conductively connected to a second coil terminal 10. The two coil terminals 9 and 10 form part of a transmission coil of the data carrier 1 whereby wireless communication can be carried out. Fig. 1 shows only the two coil terminals 9 and 10 of this transmission coil and Fig. 2 shows only the coil terminal 10. Instead of comprising coil terminals 9 and 10, the data carrier 1 may also comprise two connection surfaces of capacitively operative transmission means.

As can be seen in the Figs. 1 and 2, the two connection contacts 5 and 6 are constructed so as to project from the integrated component 4. In respect of the two connecting parts 7 and 8 it may be stated that they are made of metal and are constructed so as to be plate-shaped as is customary in the case of a metal lead frame.

The data carrier 1 and the module 3 shown in the Figs. 1 and 2 are advantageously constructed in such a manner that, as is shown in Fig. 2, the two connecting parts 7 and 8 include remnants 11 of raised portions which have been formed by mechanical deformation of the connecting parts 7 and 8 prior to the manufacture of the module 3 or the data carrier 1. Said remnants 11 of raised portions project from the connecting parts 7 and 8 in the direction of the associated connection contacts 5 and 6. In the data carrier and the module 3 shown in the Figs. 1 and 2, the remnants 11 originate from raised portions formed by stamping, that is, raised portions formed by means of a stamping tool.

As regards the dimensions of the data carrier 1 and the module 3 and the constituents thereof it is to be noted that the data carrier 1 has a nominal thickness or height H of 800 μm . The integrated component 4 has a nominal height of 180 μm ; however, it may also have a smaller height of, for example, 150 μm and less. The two connection contacts 5 and 6 have a measurable height of approximately 20 μm relative to the integrated component 4. The two connecting parts 7 and 8 have a height of approximately 60 μm ; however, they may also have a height in the range of from 60 μm to 80 μm . The coil terminals 9 and 10 have a height of approximately 30 μm ; however, they may also have a height in the range of from 25 μm to 40 μm . The remnants 11 of raised portions have a height of approximately

5 μm ; however, they may also have a height of between 1.0 μm and 10 μm or also 20 μm .

The remnants 11 of raised portions have a square cross-section in a cross-sectional view taken transversely of the height direction, the remnants 11 of raised portions having a lateral length of approximately 20 μm in the transitional zone to the connecting parts 7 and 8.

5 However, they may also have a lateral length of between 10 μm and 50 μm or also 100 μm . As can be seen in Fig. 2, the remnants 11 of raised portions are shaped so as to be tapered in a direction pointing away from the connecting parts 7 and 8.

In the data carrier 1 and the module 3 in accordance with the Figs. 1 and 2 a filler material 12 is provided between the integrated component 4 and the connecting parts 7 and 8; this filler material encloses the connection contacts 5 and 6 and the remnants 11 of raised portions; in the present case said filler material is formed by a foil which consists of a synthetic material and can be softened at least once by heating. The connection contacts 5 and 6 and the remnants 11 of raised portions, being electrically conductively connected to the connection contacts 5 and 6, and the connecting parts 7 and 8 are protected against
15 environmental effects by the filler material in the form of the foil.

The remnants 11 of raised portions are formed by the deformation of raised portions originally formed during the manufacture of the data carrier 1 or the module 3. The remnants 11, however, may also be formed by raised portions which have not been deformed and are still in their original condition; this is the case if no deformation of the originally
20 formed raised portions has taken place during the manufacture of the data carrier 1 or the module 3.

The remnants 11 ensure that, even when the elements of the module which have been brought into operative contact, that is, the integrated component 4 with its two connection contacts 5 and 6 and the plate-shaped connecting parts 7 and 8, are not exactly in
25 parallel, a perfect, electrically conductive connection is formed nevertheless between the remnants 11, and hence the connecting parts 7 and 8, on the one side and the connection terminals 5 and 6 of the integrated component 4 on the other side.

CLAIMS:

1. A module (3) for a data carrier (1), which module (3) includes an integrated component (4) with at least two connection contacts (5, 6) and, for each connection contact (5, 6), a connecting part (7, 8) which is electrically conductively connected to the relevant connection contact (5, 6), the connection contacts (5, 6) being constructed so as to project
5 from the integrated component (4) and the connecting parts (7, 8) consisting of metal and being constructed so as to be plate-shaped, the connecting parts (7, 8) comprising remnants (11) of raised portions which have been formed by mechanical deformation of the connecting parts (7, 8), which remnants (11) project from the connecting parts (7, 8) in the direction of the connection contacts (5, 6).
10
2. A module (3) as claimed in claim 1, in which the remnants (11) of raised portions originate from raised portions formed by stamping.
3. A module (3) as claimed in claim 1, in which the remnants (11) of raised
15 portions have a height of between 1.0 μm and 10 μm .
4. A module (3) as claimed in claim 1, in which the remnants (11) of raised portions have a lateral length of between 10 μm and 50 μm in the transitional zone to the connecting parts (7, 8).
20
5. A module (3) as claimed in claim 1, in which a filler material (12) which encloses the connection contacts (5, 6) and the remnants (11) of raised portions is provided between the integrated component (4) and the connecting parts (7, 8).
- 25 6. A module (3) as claimed in claim 5, in which the filler material (12) is formed by a foil which consists of a synthetic material and can be softened at least once by heating.
7. A data carrier (1) provided with a module (3) which includes an integrated component (4) with at least two connection contacts (5, 6) and, for each connection contact

(5, 6), a connecting part (7, 8) which is electrically conductively connected to the relevant connection contact (5, 6), the connection contacts (5, 6) being constructed so as to project from the integrated component (4) and the connecting parts (7, 8) consisting of metal and being constructed so as to be plate-shaped, the connecting parts (7, 8) comprising remnants
5 (11) of raised portions which have been formed by mechanical deformation of the connecting parts (7, 8), which remnants (11) project from the connecting parts (7, 8) in the direction of the connection contacts (5, 6).

8. A data carrier (1) as claimed in claim 7, in which the remnants (11) of raised
10 portions originate from raised portions formed by stamping.



9. A data carrier (1) as claimed in claim 7, in which the remnants (11) of raised portions have a height of between 1.0 μm and 10 μm .

15 10. A data carrier (1) as claimed in claim 7, in which the remnants (11) of raised portions have a lateral length of between 10 μm and 50 μm in the transitional zone to the connecting parts (7, 8).

11. A data carrier (1) as claimed in claim 7, in which a filler material (12) which
20 encloses the connection contacts (5, 6) and the remnants (11) of raised portions is provided between the integrated component (4) and the connecting parts (7, 8).

12. A data carrier (1) as claimed in claim 11, in which the filler material (12) is
25 formed by a foil which consists of a synthetic material and can be softened at least once by heating.

1/1

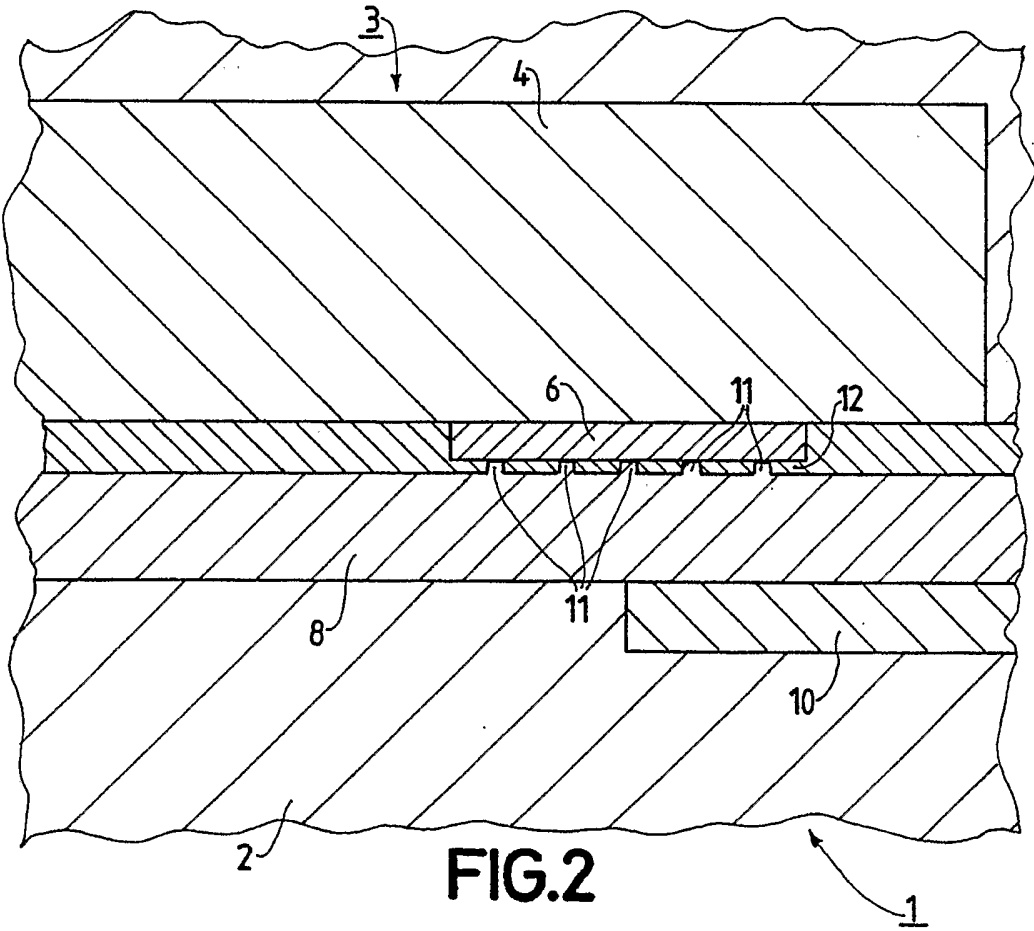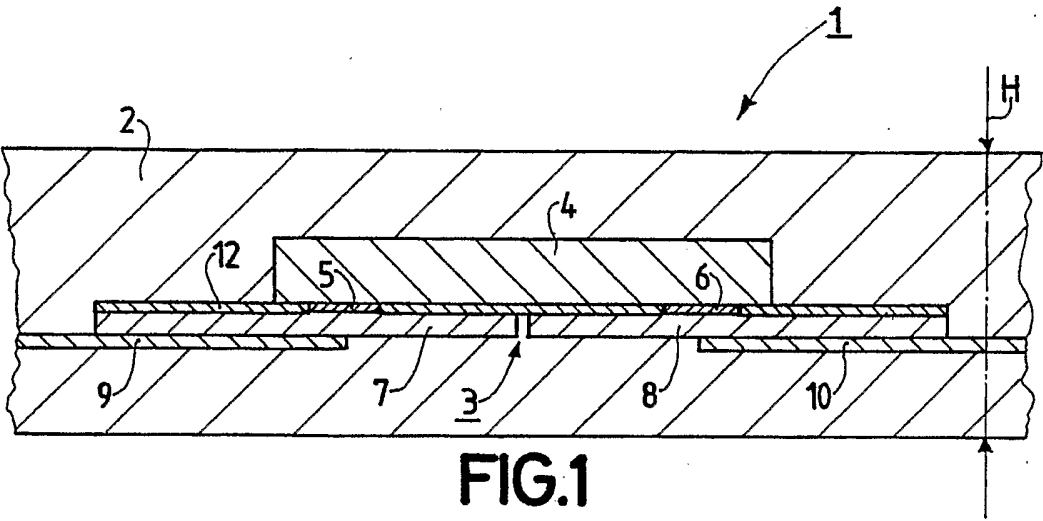

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/01356

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K19/077 H01L23/485

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 297 562 B1 (TILLY LARS) 2 October 2001 (2001-10-02) column 6, line 27 -column 7, line 10; figures 2,6-9	1,7
X	DE 198 31 565 C (MUEHLBAUER AG) 28 October 1999 (1999-10-28) column 6, line 40 -column 7, line 14; figures 3,4	1,7
X	US 6 365 967 B1 (HEMBREE DAVID ET AL) 2 April 2002 (2002-04-02) column 3, line 63 -column 4, line 15; figures 1,3	1,7
A	US 5 483 741 A (WOOD ALAN G ET AL) 16 January 1996 (1996-01-16) figures 5,15	1,7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

14 July 2003

Date of mailing of the international search report

25/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schauler, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 03/01356

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6297562	B1	02-10-2001	AU 1270601 A 24-04-2001
			CN 1391703 T 15-01-2003
			WO 0122491 A1 29-03-2001
			EP 1214742 A1 19-06-2002
			JP 2003510815 T 18-03-2003
DE 19831565	C	28-10-1999	DE 19831565 C1 28-10-1999
US 6365967	B1	02-04-2002	NONE
US 5483741	A	16-01-1996	US 5523697 A 04-06-1996
			US 5326428 A 05-07-1994
			AT 238606 T 15-05-2003
			AU 4232396 A 31-05-1996
			DE 69530509 D1 28-05-2003
			EP 0792518 A1 03-09-1997
			JP 3195359 B2 06-08-2001
			JP 10506196 T 16-06-1998
			WO 9614660 A1 17-05-1996
			US 2001050574 A1 13-12-2001
			US 5592736 A 14-01-1997
			US 2002067183 A1 06-06-2002
			US 2002093361 A1 18-07-2002
			US 2003006798 A1 09-01-2003
			US 6380754 B1 30-04-2002
			US 2002140450 A1 03-10-2002
			US 2001050570 A1 13-12-2001
			US 2001015655 A1 23-08-2001
			US 2001030550 A1 18-10-2001
			US 6127195 A 03-10-2000
			US 6124721 A 26-09-2000
			JP 2840544 B2 24-12-1998
			JP 7086346 A 31-03-1995
			US 5419807 A 30-05-1995