

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 January 2007 (04.01.2007)

PCT

(10) International Publication Number  
**WO 2007/002923 A1**

(51) International Patent Classification:  
**H01P 3/00** (2006.01)

(74) Agents: **BUCKLEY, Patrick** et al.; BUCKLEY,  
MASCHOFF & TALWALKAR, LLC, Five Elm Street,  
New Canaan, Connecticut 06840 (US).

(21) International Application Number:  
PCT/US2006/025776

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 29 June 2006 (29.06.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/170,426 29 June 2005 (29.06.2005) US

(71) Applicant (*for all designated States except US*): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, California 95052 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **SUAREZ-GARNER, Ricardo** [US/US]; 2200 Mission College Blvd., Santa Clara, California 95052 (US). **HALL, Stephen** [US/US]; 5329 Ne Corral Ct, Hillsboro, Oregon 97124 (US). **HORINE, Bryce** [US/US]; 5329 Ne Corral Ct, Beaverton, Oregon 97006 (US). **MOONSHIRAM, Anusha** [US/US]; 1492 Ne Alex Way #313, Hillsboro, Oregon 97124 (US).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: WAVEGUIDE CABLE

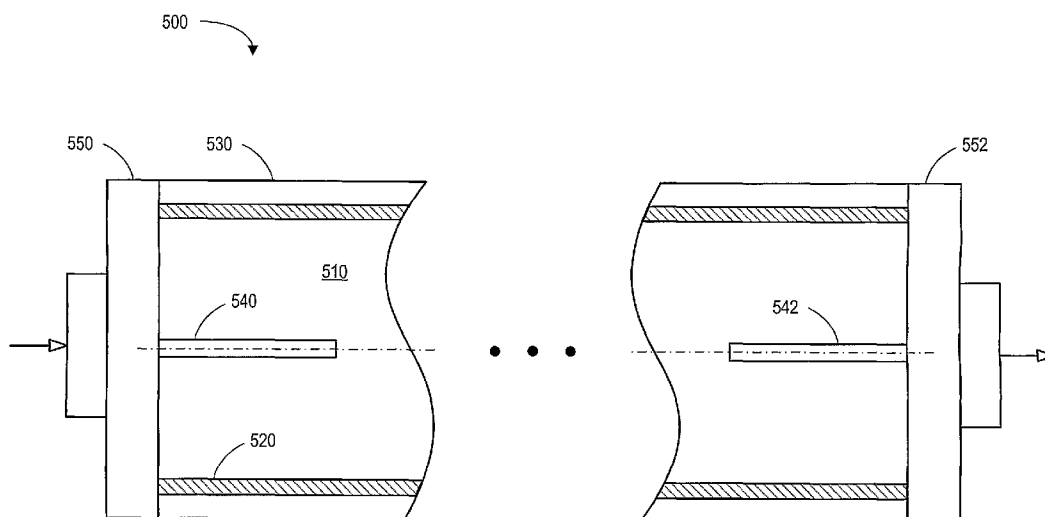

(57) Abstract: According to some embodiments, a waveguide cable includes a dielectric core and a conducting layer surrounding the dielectric core. A first antenna may be provided at a first end of the waveguide cable to receive a digital signal and to propagate an electromagnetic wave through the dielectric core. A second antenna may be provided at a second end of the waveguide cable, opposite the first end, to receive the electromagnetic wave from the dielectric core and to provide the digital signal.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## WAVEGUIDE CABLE

### BACKGROUND

Computers and other electronic devices may exchange digital information through a cable. For example, a Personal Computer (PC) might transmit data to another PC or to a peripheral (*e.g.*, a printer) through a coaxial or Category 5 (Cat5) cable. Moreover, the rate at which computers and other electronic devices are able to transmit and/or receive digital information is increasing. As a result, it may be desirable to provide a cable that can transfer information at relatively high data rates, such as 30 Gigahertz (GHz) or higher.

### 10 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a system according to some embodiments.

FIG. 2 is a chart illustrating insertion loss as a function of frequency.

FIG. 3 is cross-sectional view of a waveguide cable according to some embodiments.

15 FIG. 4 is an antenna for a waveguide cable according to some embodiments.

FIG. 5 is a side cross-sectional view of a waveguide cable according to some embodiments.

FIG. 6 illustrates energy propagation through a waveguide cable according to some embodiments.

20 FIG. 7 is a chart illustrating insertion loss as a function of frequency according to some embodiments.

FIG. 8 is a flow diagram of a method according to some embodiments.

FIG. 9 is a cross-sectional view of a waveguide cable according to another embodiment.

### 25 DETAILED DESCRIPTION

Computers and other electronic devices may exchange digital information through a cable. For example, FIG. 1 is a block diagram of a system 100 in which a first computing device 110 and a second computing device 120 exchange information via a cable 150. The computing devices 110, 120 might be associated with, for example, a PC, a mobile computer, a server, a computer peripheral (*e.g.*, a printer or display monitor), a storage device (*e.g.*, an external hard disk drive or memory unit), a display device (*e.g.*, a digital television, digital video recorder, or set-top box), or a game device.

The cable 150 might comprise, for example, a coaxial, Unshielded Twisted-Pair (UTP), Shielded Twisted-Pair cabling (STP), or Cat5 cable adapted to electrically propagate digital information.

As the rate at which digital information is being transmitted increases, energy losses associated with the cable 150 may also increase. For example, FIG. 2 is a chart illustrating insertion loss for a typical electrical cable as a function of frequency. An x-axis represents the frequency at which digital information is transmitted in Hertz (Hz) (with movement along the x-axis to the right representing an increase in the rate), and a y-axis represents the associated insertion loss in decibels (dB) (with movement along the y-axis upwards representing an decrease in the loss, and therefore an increase in the strength of the signal). As can be seen by plot 210, increasing the rate at which digital information is transmitted will cause the insertion loss to increase (and therefore the signal strength will decrease). Moreover, the frequency response of a typical cable might cause significant Inter-Symbol Interference (ISI) at relatively high frequencies.

As a result, the rate at which digital information can be transmitted through a typical electrical cable may be limited. Consider, for example, a ten foot electrical cable. In this case, signal losses may make it impractical to transmit digital signals at 30 GHz or higher.

To avoid such a limitation, the cable 150 may be formed as a fiber optic cable adapted to optically transmit digital information. Such an approach, however, may require a laser or other device to convert an electrical signal at the first computing device 110 (and a light detecting device at the second computing device 120 to convert the light information back into electrical signals). These types of non-silicon components can be expensive, difficult to design, and relatively sensitive to system noise.

According to some embodiments, the cable 150 coupling the first computing device 110 and the second computing device 120 is formed as a waveguide cable adapted to transmit digital information in the form of electromagnetic waves. For example, FIG. 3 is cross-sectional view of a waveguide cable 300 according to some embodiments. The waveguide cable 300 includes a dielectric core 310, such as a low loss dielectric core 310 that extends the length of the cable 300. The dielectric core 310 might be formed of, for example, TEFLON® brand polytetrafluoroethylene (available from DuPont), polyurethane, air, or another appropriate material. According to some embodiments, the dielectric core 310 may have a substantially circular cross-section.

According to some embodiments, a conducting layer 320 surrounds the dielectric core 310 (*e.g.*, and may also extend along the length of the cable 300). The conducting layer might comprise, for example, a copper wire braid. An insulating layer 330 may surround the conducting layer 320 according to some embodiments (*e.g.*, a sheath of rubber or plastic may extend along the length of the cable 300). Note that materials used for the dielectric core 310, the conducting layer 320, and/or the insulating layer 330 may be selected, according to some embodiments, such that the waveguide cable 300 is sufficiently flexible.

FIG. 4 is an antenna 400 that may be associated with a waveguide cable according to some embodiments. For example, one antenna 400 might be mounted at a first end of a cable portion (*e.g.*, to act as a transmitting antenna), and a second antenna may be mounted at the opposite end (*e.g.*, to act as a receiving antenna). The antenna 400 includes a transmitting/receiving portion 440, such as a horizontally polarized antenna, that converts an electrical signal into electromagnetic waves and/or electromagnetic waves into an electrical signal. The antenna 400 may also include a Surface Mounted Assembly (SMA) 450 that may be adapted to interface with a computing device.

FIG. 5 is a side cross-sectional view of a waveguide cable 500 according to some embodiments. The cable 500 may include a flexible cable portion having an axis that extends along its length, including: a dielectric medium 510, a copper wire braid layer 520 that surrounds the dielectric medium 510, and an insulating layer 530 that surrounds the copper wire braid layer 520.

A transmitting portion 540 of a first antenna 550 may extend into the dielectric medium 510 at one end of the cable 500. Similarly, a receiving portion 542 of a second

antenna 552 may extend into the dielectric medium 510 at the opposite end of the cable 500. The transmitting and receiving portions 540, 542 may comprise, for example, horizontally polarized antennas that extend along the axis of the cable. The transmitting portion 540 may be adapted to, for example, receive a digital signal (*e.g.*, from a first  
5 computing device) and to propagate energy through the dielectric medium 510. The receiving portion 542 may be adapted to, for example, receive energy and to provide a digital signal (*e.g.*, to a second computing device). According to some embodiments, other antenna arrangements may be provided. For example, vertically polarized antennae might be used to transmit and receive energy.

10 The materials and dimensions of the waveguide cable may be selected such that the electromagnetic wave will appropriately propagate from the transmitting portion 540 to the receiving portion 542. That is, the materials may act as a hollow, flexible pipe or tube through which the electromagnetic waves will flow. For example, FIG. 6 illustrates energy propagation 600 through a waveguide cable according to some embodiments. In  
15 this case, a dielectric medium 610 has a substantially circular cross-section, and the energy (*e.g.*, the electric E-field and magnetic H-field) is excited in a low order radial mode. The energy might propagate, for example, in the lowest order radial mode TM<sub>01</sub>.

Because electromagnetic waves are used to transmit the digital information, a waveguide cable may be associated with at least one relatively high frequency pass-band  
20 region. For example, FIG. 7 is a chart 700 illustrating insertion loss as a function of frequency according to some embodiments. As with FIG. 2, an x-axis represents the frequency at which digital information is transmitted in Hz (with movement along the x-axis to the right representing an increase in the rate), and a y-axis represents the insertion loss in decibels (dB) (with movement along the y-axis upwards representing an decrease in  
25 the loss, and therefore an increase in the strength of the signal). Note that the chart 700 includes a plot 710 associated with a normal electrical cable 710 (illustrated by a dashed line in FIG. 7) for comparison.

As can be seen by plot 720, the waveguide filter is associated with two high frequency pass-band regions 730, 740. Note that the region 750 between the two high  
30 frequency pass-band regions 730, 740 might be caused by, for example, interference from another mode. According to some embodiments, a multi-band modulated carrier may be used to transmit digital information using the frequencies of the pass-band regions 730,

740. Note that as the diameter of a dielectric core becomes smaller, the frequencies associated with the pass-band regions may increase. According to some embodiments, a waveguide cable having dimensions similar to those of an RG6 coaxial cable may have a pass-band region associated with approximately 30 to 40 GHz. Also note that the frequency response in these regions 720, 730 may reduce ISI problems as compared to a typical electrical cable (*e.g.*, the need for equalization may be reduced). As a result, digital information may be transmitted between computing devices, through a waveguide cable, at relatively high rates. Moreover, the use of expensive and sensitive optical components may be avoided.

FIG. 8 is a flow diagram of a method according to some embodiments. At 802, a digital signal is generated at a first computing device (*e.g.*, an electrical signal may be generated having a relatively high data rate). At 804, an electromagnetic wave associated with the digital signal propagates through a waveguide cable (*e.g.*, via a transmitting antenna at one end of the cable). The digital signal is then re-created at a second computing device in accordance with the electromagnetic wave at 806 (*e.g.*, by a receiving antenna at the opposite end of the cable). In this way, the first and second computing devices may exchange information.

The following illustrates various additional embodiments. These do not constitute a definition of all possible embodiments, and those skilled in the art will understand that many other embodiments are possible. Further, although the following embodiments are briefly described for clarity, those skilled in the art will understand how to make any changes, if necessary, to the above description to accommodate these and other embodiments and applications.

For example, although dielectric cores with substantially circular cross-sections have been described, note that dielectric core may have other shapes in accordance with any of the embodiments described herein. For example, FIG. 9 is a cross-sectional view of a waveguide cable 900 according to another embodiment. In this case, a dielectric core 910 having an elliptical or oval cross section may be provided. As a result, a conducting layer 920 and/or an insulating layer 930 may also have an elliptical or oval shape.

Similarly, dielectric cores having any other shape may be provided.

Moreover, some embodiments herein have described a transmitting or receiving antenna as being part of a waveguide cable. Note that a waveguide cable might not

include any antenna. In this case, a transmitting antenna might be formed as part of a first computing device, and a receiving antenna might be formed as part of a second computing device.

5 The several embodiments described herein are solely for the purpose of illustration. Persons skilled in the art will recognize from this description other embodiments may be practiced with modifications and alterations limited only by the claims.



## WHAT IS CLAIMED IS:

1. An apparatus, comprising:

a cable portion, including:

5 a dielectric core extending the length of the cable portion, and

a conducting layer extending the length of the cable portion and  
surrounding the dielectric core;

a first antenna, at a first end of the cable portion, to receive a digital signal and to  
propagate an electromagnetic wave through the dielectric core; and

10 a second antenna, at a second end of the cable portion opposite the first end, to  
receive the electromagnetic wave from the dielectric core and to provide the digital signal.

2. The apparatus of claim 1, wherein the cable portion is associated with an axis  
extending the length of the cable portion, and said first and second antennas comprise  
15 horizontally polarized antennas extending along the axis.

3. The apparatus of claim 1, wherein the dielectric core comprises at least one of:  
(i) TEFLON or (ii) polyurethane.

20 4. The apparatus of claim 1, wherein the conducting layer comprises a copper wire  
braid.

5. The apparatus of claim 1, further comprising:  
an insulating layer extending the length of the cable portion and surrounding the  
25 conducting layer.

6. The apparatus of claim 1, wherein the dielectric core has a substantially circular  
cross-section.

7. The apparatus of claim 1, wherein dimensions of the dielectric core, the first antenna, and the second antenna result in low order radial mode propagation of the electromagnetic wave.

5

8. The apparatus of claim 1, wherein the low order radial mode comprises TM<sub>01</sub>.

9. The apparatus of claim 1, wherein at least one of the first or second antenna is associated with a surface mounted assembly.

10

10. The apparatus of claim 1, wherein the cable portion is associated with at least one relatively high frequency pass-band region.

11. The apparatus of claim 1, wherein the cable portion is flexible.

15

12. A method, comprising:

generating a digital signal at a first computing device;

propagating an electromagnetic wave associated with the digital signal through a waveguide cable; and

20

re-creating the digital signal at a second computing device in accordance with the electromagnetic wave.

13. The method of claim 12, further wherein said generating and re-creating are associated with antennas located at each end of the waveguide cable.

25

14. The method of claim 12, wherein the waveguide cable has a dielectric core extending the length of the waveguide cable, and said propagating comprises transmitting the electromagnetic wave through the dielectric core.

15. An apparatus, comprising:

a flexible cable portion associated with an axis extending the length of the flexible cable portion, including:

5 a dielectric medium extending the length of the flexible cable portion,

a copper wire braid layer extending the length of the flexible cable portion and surrounding the dielectric medium, and

an insulating layer extending the length of the cable portion and surrounding the copper wire braid layer;

10 a first horizontally polarized antenna extending along the axis, at a first end of the flexible cable portion, to receive a digital signal and to propagate energy through the flexible cable portion; and

a second horizontally polarized antenna extending along the axis, at a second end of the flexible cable portion opposite the first end, to receive the energy from the flexible cable portion and to provide the digital signal.

16. The apparatus of claim 15, wherein the energy propagates through the dielectric medium as an electromagnetic wave.

20 17. The apparatus of claim 15, wherein the dielectric medium comprises at least one of: (i) TEFLON or (ii) polyurethane.

18. The apparatus of claim 15, wherein the dielectric medium has a substantially circular cross-section and the energy propagates in a low order radial mode.

25

19. A system, comprising:

a first computing device;

a peripheral computing device; and

a waveguide cable coupling the first computing device and the peripheral computing device, including a dielectric portion extending substantially the length of the waveguide cable.

5           20. The system of claim 19, wherein at least one of the first computing device or the second computer device is associated with at least one of: (i) a personal computer, (ii) a mobile computer, (iii) a server, (iv) a storage device, (v) a display device, (vi) a television, or (vii) a game device.

10           21. The system of claim 19, wherein the waveguide cable further includes:

a conducting portion extending the length of the cable portion and surrounding the dielectric portion;

15           a first antenna, at a first end of the waveguide cable, to receive a digital signal generated by the first computing device and to propagate an electromagnetic wave through the dielectric portion; and

a second antenna, at a second end of the waveguide cable opposite the first end, to receive the electromagnetic wave from the dielectric portion and to provide the digital signal to the peripheral computing device.

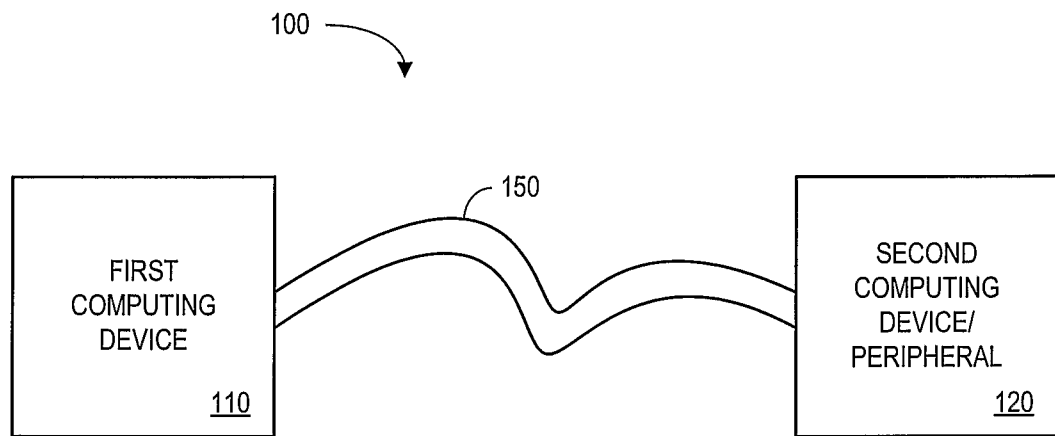


FIG. 1

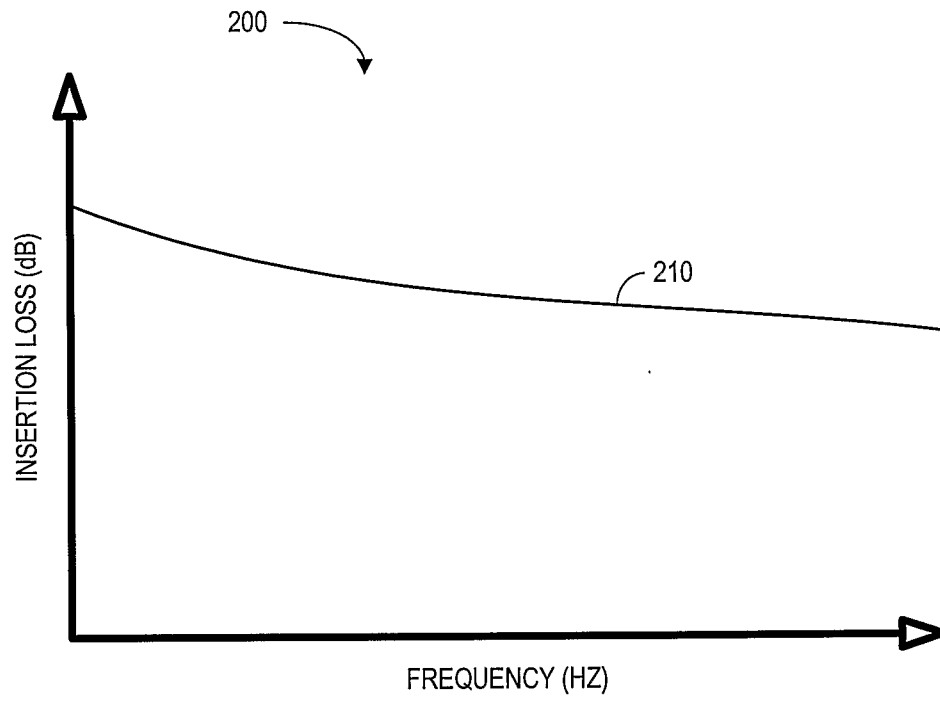


FIG. 2

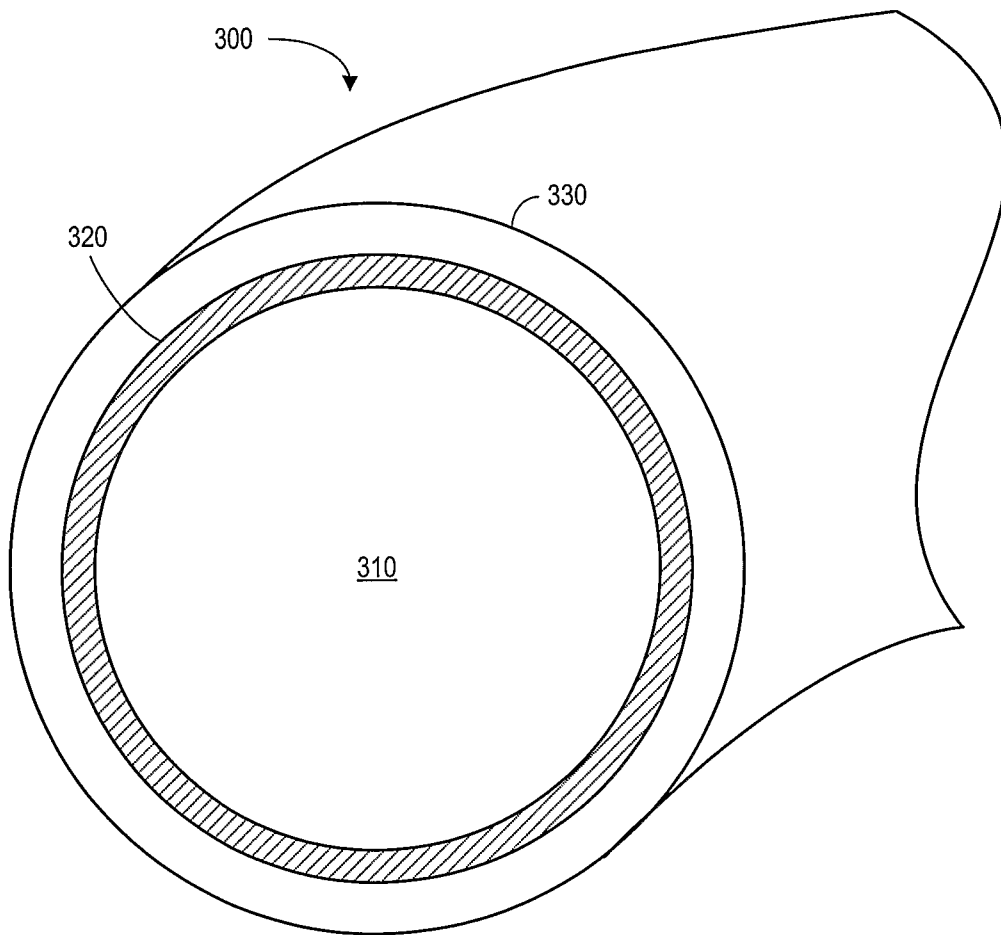


FIG. 3

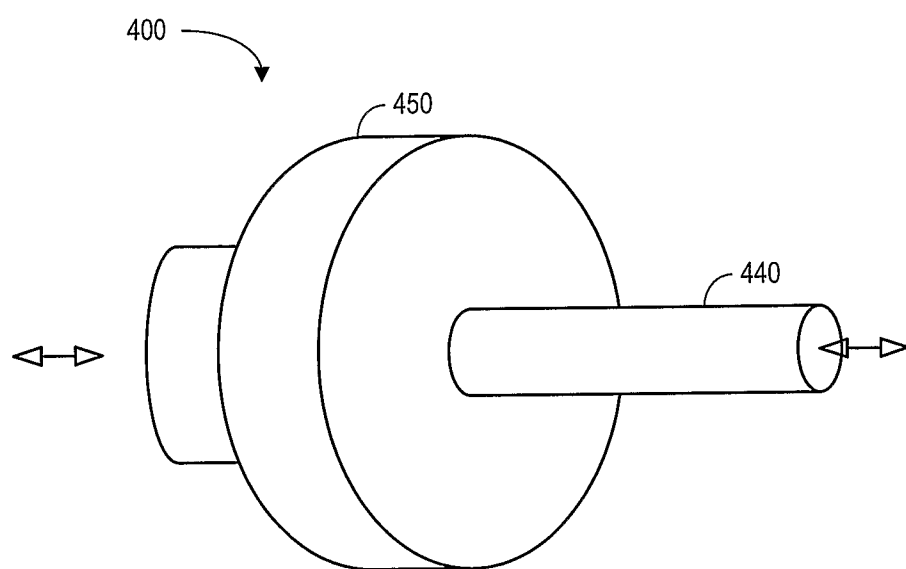


FIG. 4



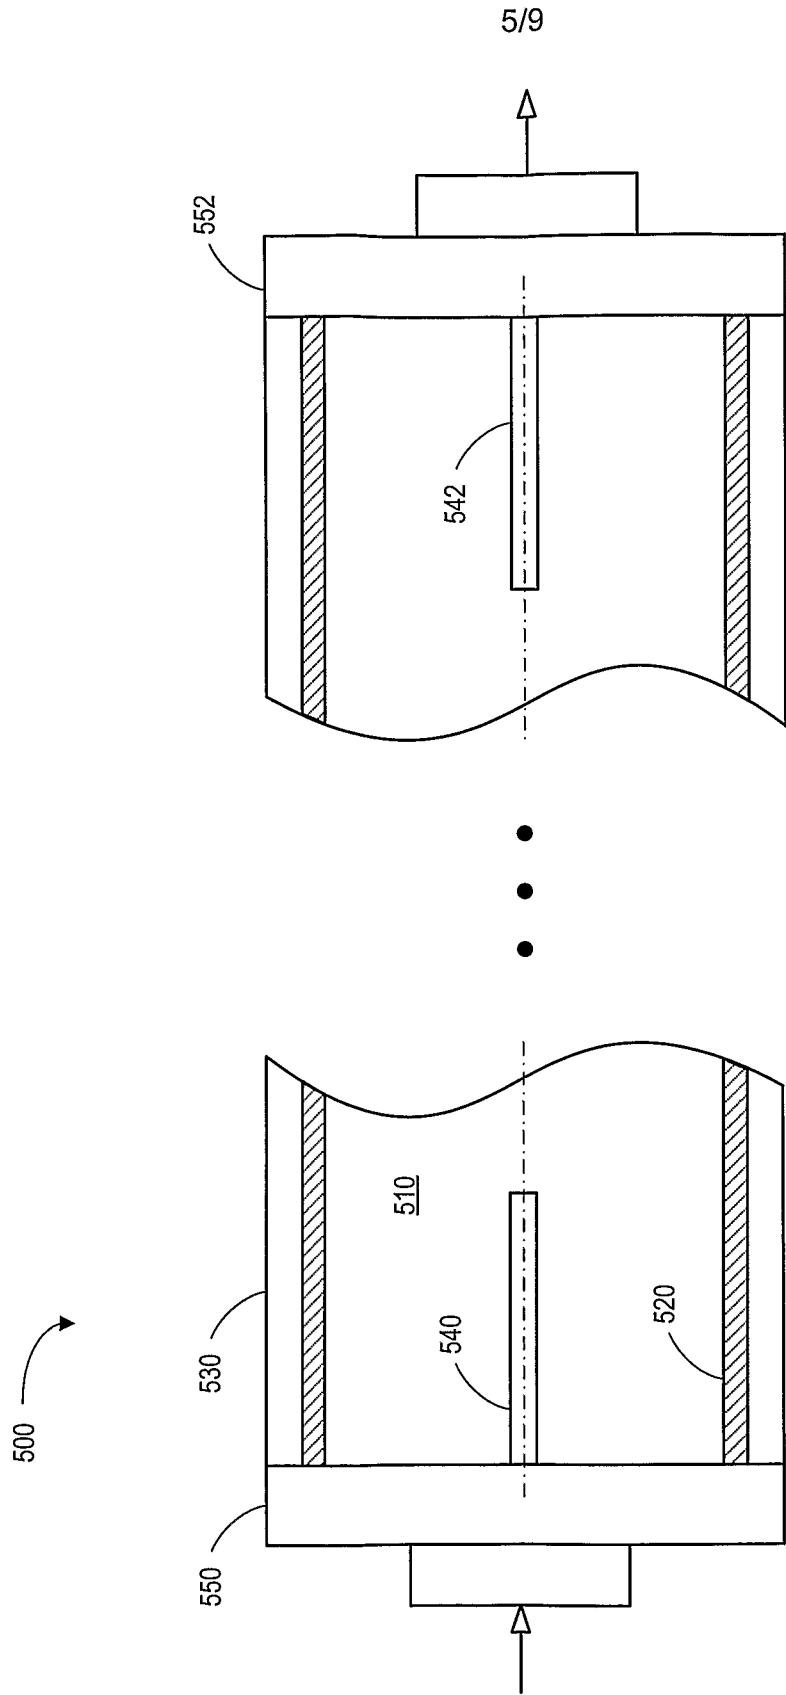


FIG. 5

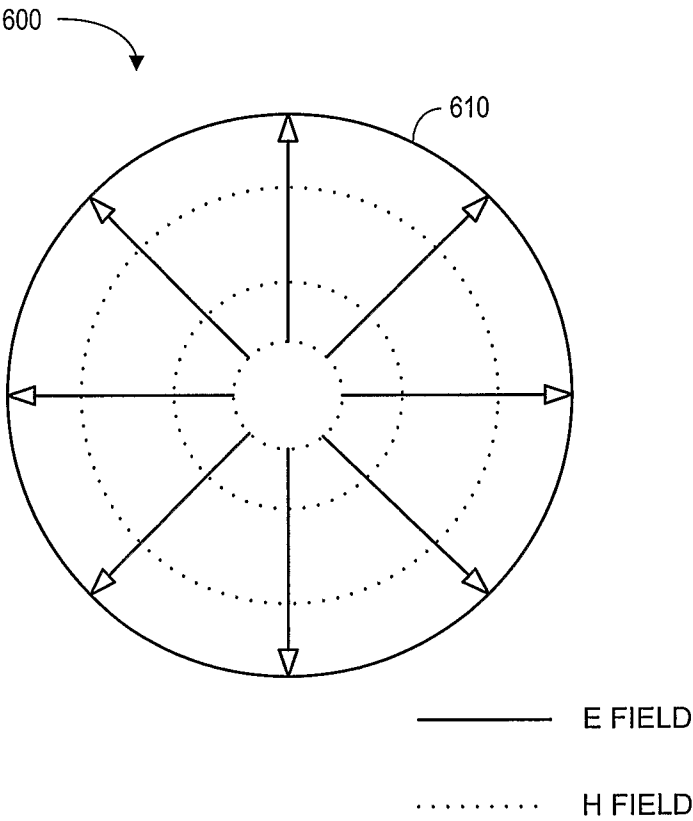


FIG. 6

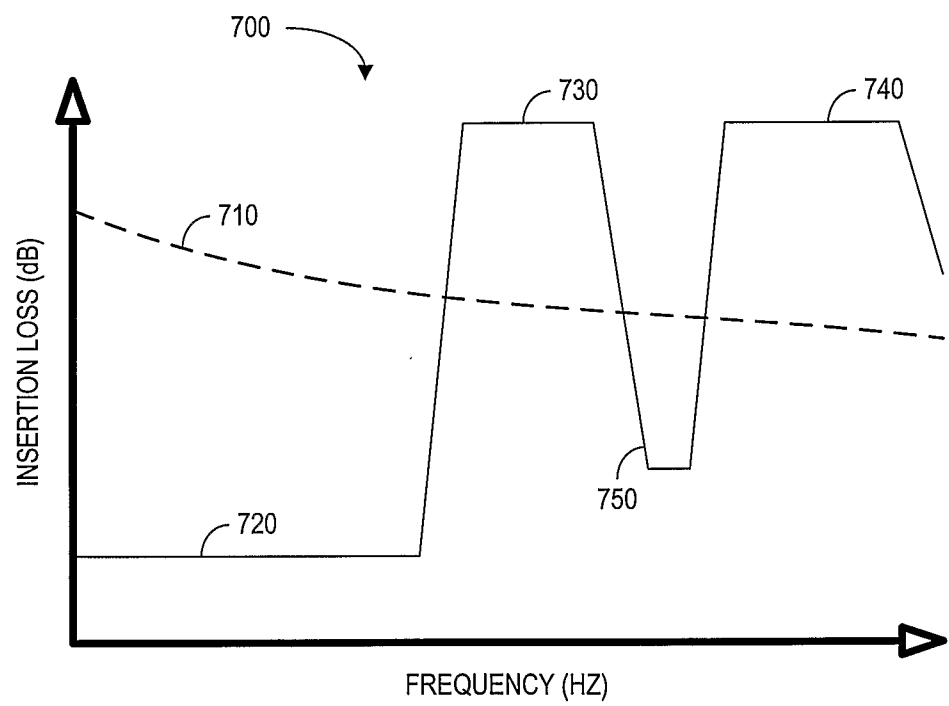


FIG. 7

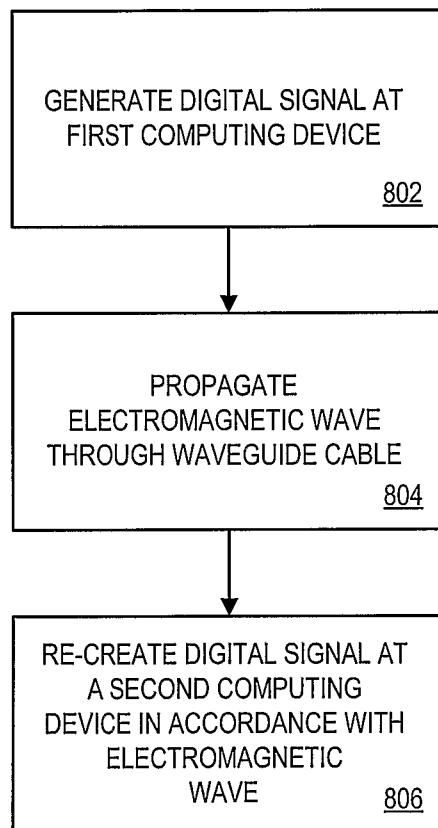


FIG. 8

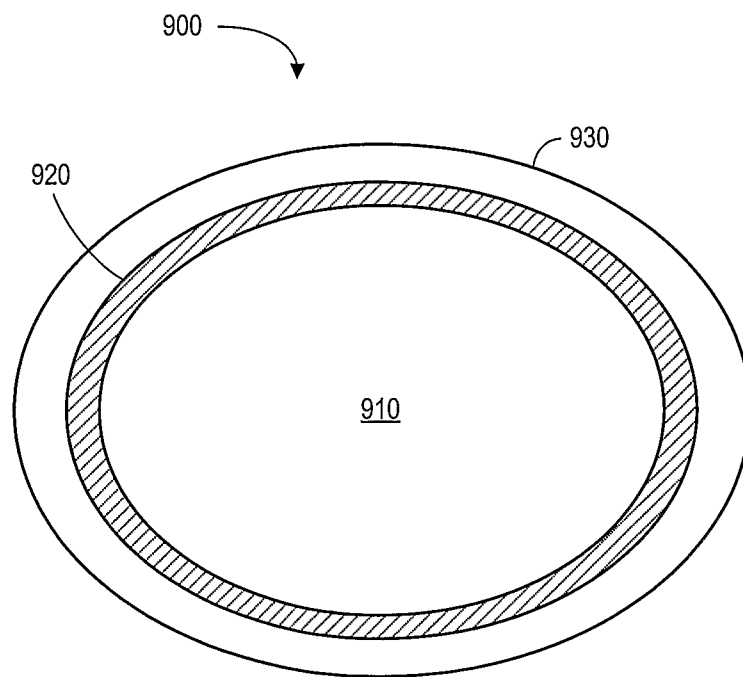


FIG. 9

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/025776

A. CLASSIFICATION OF SUBJECT MATTER  
INV. H01P3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
H01P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 785 268 A (WALTER JEFFREY A [US] ET AL) 15 November 1988 (1988-11-15) the whole document	1-21
X	FR 2 433 838 A1 (CIT ALCATEL CIT ALCATEL [FR]) 14 March 1980 (1980-03-14) page 3, lines 20-31	1-4, 6-21
X	FR 2 088 390 A (INT STANDARD ELECTRIC CORP) 7 January 1972 (1972-01-07) the whole document	1, 3-6, 11
A	US 3 066 268 A (EMIL KARBOWIAK ANTONI) 27 November 1962 (1962-11-27) claim 1	1-21
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

26 October 2006

Date of mailing of the international search report

03/11/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, Gerardus

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2006/025776

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 32 44 746 A1 (LICENTIA GMBH [DE]) 7 June 1984 (1984-06-07) abstract	1
X	----- US 5 528 208 A (KOBAYASHI HIDEKI [JP]) 18 June 1996 (1996-06-18) abstract	1
A	----- GB 2 387 544 A (MICROSULIS PLC [GB]; MICROSULIS LTD [GB] MICROsulIS LTD [GB]) 22 October 2003 (2003-10-22) abstract	1,12,15, 19
A	----- CA 2 449 596 A1 (BLESZYNSKI STANISLAW [CA]) 5 June 2005 (2005-06-05) the whole document	1-21
	-----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/025776

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4785268	A	15-11-1988	AU 1146288 A 02-02-1989
		CA 1288485 C 03-09-1991	
		DE 3882293 D1 19-08-1993	
		DE 3882293 T2 02-12-1993	
		DK 426888 A 31-01-1989	
		EP 0301674 A2 01-02-1989	
		FI 883533 A 31-01-1989	
		GB 2207816 A 08-02-1989	
		HK 122093 A 19-11-1993	
		JP 1044605 A 17-02-1989	
		NO 881968 A 31-01-1989	
		PT 87610 A 30-06-1989	
FR 2433838	A1	14-03-1980	NONE
FR 2088390	A	07-01-1972	NONE
US 3066268	A	27-11-1962	NONE
DE 3244746	A1	07-06-1984	NONE
US 5528208	A	18-06-1996	JP 2800636 B2 21-09-1998
		JP 6326505 A 25-11-1994	
GB 2387544	A	22-10-2003	AU 2003267607 A1 04-05-2004
		CA 2501241 A1 22-04-2004	
		CN 1688363 A 26-10-2005	
		EP 1551508 A1 13-07-2005	
		WO 2004033039 A1 22-04-2004	
		JP 2006501916 T 19-01-2006	
		MX PA05003753 A 17-11-2005	
		US 2006151485 A1 13-07-2006	
CA 2449596	A1	05-06-2005	NONE