



(51) International Patent Classification:

C09D 11/36 (2014.01) C09D 11/50 (2014.01)

C09K 11/06 (2006.01) C09D 11/52 (2014.01)

C09D 11/38 (2014.01) H01L 51/00 (2006.01)

(21) International Application Number:

PCT/EP2018/058844

(22) International Filing Date:

06 April 2018 (06.04.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17165767.9 10 April 2017 (10.04.2017) EP

(71) Applicant: MERCK PATENT GMBH [DE/DE]; Frankfurt Strasse 250, 64293 Darmstadt (DE).

(72) Inventors: TAN, Li; 24, Cranbury Road, EASTLEIGH SO50 5HA (GB). MISKIEWICZ, Pawel; 10 Butterfield Road, SOUTHAMPTON SO16 7EE (GB). MAY, Philip; 58 Canterbury Avenue, SIDCUP DA15 9AS (GB). WALKER, Daniel; Flat 11, Chelwood Gate, Glen Eyre Road, SOUTHAMPTON SO16 3TZ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FORMULATION OF AN ORGANIC FUNCTIONAL MATERIAL

(57) Abstract: The present invention relates to formulations containing at least one organic functional material and at least a first organic solvent, wherein said first organic solvent contains at least one carbonate-group as well as to electronic devices prepared by using these formulations.



Formulation of an Organic Functional Material

Technical Field

5 The present invention relates to formulations containing at least one organic functional material and at least a first organic solvent, wherein said first organic solvent contains at least one carbonate-group, as well as to electroluminescent devices prepared by using these formulations.

Background Art

10 Organic Light Emitting Devices (OLEDs) have been fabricated for a long time by vacuum deposition processes. Other techniques such as inkjet printing have been recently thoroughly investigated because of their advantages such as cost savings and scale-up possibilities. One of the main challenges in multi-layer printing is to identify the relevant parameters
15 to obtain a homogeneous deposition of inks on the substrate. To trigger these parameters, such as surface tension, viscosity or boiling point, some additives can be added to the formulation.

Technical Problem and Object of the Invention

20 Many solvents have been proposed in organic electronic devices for inkjet printing. However, the number of important parameters playing a role during deposition and the drying process makes the choice of the solvent very challenging. Thus, the formulations containing organic semiconductors used for deposition by inkjet printing still need to be improved. One object
25 of the present invention is to provide a formulation of an organic semiconductor which allows a controlled deposition to form organic semiconductor layers having good layer properties and efficiency performance. A further object of the present invention is to provide a formulation of an organic semiconductor which allows an uniform application of ink droplets on a
30 substrate when used e.g. in an inkjet printing method thereby giving good layer properties and efficiency performance.

Solution to Problem

The above objects of the present invention are solved by providing a formulation comprising at least one organic functional material and at least a first organic solvent, wherein said first organic solvent contains at least one carbonate-group, preferably one carbonate-group.

Advantageous Effects of Invention

The inventors have surprisingly found that the use of an organic solvent, which contains at least one carbonate-group as a first solvent allows a complete control of the surface tension and induces an effective ink deposition to form uniform and well-defined organic layers of functional materials which have good layer properties and performance.

Brief Description of Drawings

Figure 1 shows a typical layer structure of a device containing a substrate, an ITO anode, a hole-injection layer (HIL), a hole-transport layer (HTL), a green-emissive layer (G-EML), a hole blocking layer (HBL), an electron-transport layer (ETL) and an Al cathode.

Description of Embodiments


The present invention relates to a formulation containing at least one organic functional material and at least a first organic solvent, wherein said first organic solvent contains at least one carbonate-group, preferably one carbonate-group.

25

Preferred Embodiments

In a preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I)

30



wherein


- 5 R^1 and R^2 are identical or different at each occurrence, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-\text{O}-$, $-\text{S}-$, $-\text{NR}^3-$, $-\text{CONR}^3-$, $-\text{CO}-\text{O}-$, $-\text{C}=\text{O}-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$, and in which one or more hydrogen atoms may be replaced by F, or an aryl or heteroaryl group which has from 4 to 14 carbon atoms, or may form a fused heterocyclic or aryl and may be substituted by one or more nonaromatic R^3 radicals, and a plurality of substituents R^3 , either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic or aromatic ring system, which may be substituted by a plurality of substituents R^3 ; and
- 15 R^3 are identical or different at each instance, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-\text{O}-$, $-\text{S}-$, $-\text{CO}-\text{O}-$, $-\text{C}=\text{O}-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$, and in which one or more hydrogen atoms may be replaced by F, or an aryl or heteroaryl group which has from 4 to 14 carbon atoms and may be substituted by one or more nonaromatic R^3 radicals.
- 20
- 25
- 30

In a first more preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I) wherein

5 R^1 and R^2 are identical or different at each occurrence, and are an aryl or heteroaryl group which has from 4 to 14 carbon atoms, or may form a fused heterocyclic or aryl and may be substituted by one or more nonaromatic R^3 radicals, and a plurality of substituents R^3 , either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic or aromatic ring system, which
10 may be substituted by a plurality of substituents R^3 .

In a first most preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (II)

15

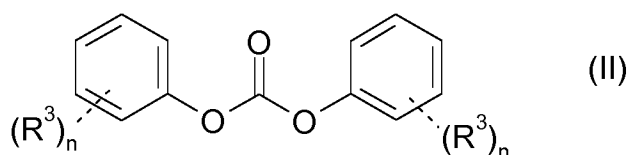

20

wherein

R^3 are identical or different at each instance, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be
25 replaced by $-O-$, $-S-$, $-CO-O-$, $-C=O-$, $-CH=CH-$ or $-C\equiv C-$, and in which one or more hydrogen atoms may be replaced by F; and
n is an integer from 0 to 5, preferably from 0 to 2 and more preferably 0 or 1.


30

In a second more preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I), wherein

- 5 R^1 is a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-O-$, $-S-$, $-NR^3-$, $-CONR^3-$, $-CO-O-$, $-C=O-$, $-CH=CH-$ or $-C\equiv C-$, and in which one or more hydrogen atoms may be replaced by F; and
- 10 R^2 is an aryl or heteroaryl group which has from 4 to 14 carbon atoms, or may form a fused heterocyclic or aryl and may be substituted by one or more nonaromatic R^3 radicals, and a plurality of substituents R^3 , either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic or aromatic
- 15 R^3 , either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic or aromatic ring system, which may be substituted by a plurality of substituents R^3 ;
- 20

In a second most preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (III)

25

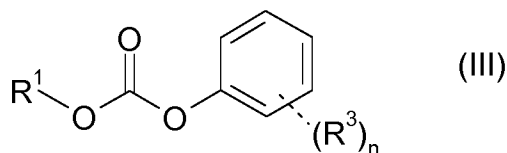

30


wherein

- 5 R^1 is a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-O-$, $-S-$, $-NR^3-$, $-CONR^3-$, $-CO-O-$, $-C=O-$, $-CH=CH-$ or $-C\equiv C-$, and in which one or more hydrogen atoms may be replaced by F;
- 10 R^3 are identical or different at each instance, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-O-$, $-S-$, $-CO-O-$, $-C=O-$, $-CH=CH-$ or $-C\equiv C-$, and in which one or more hydrogen atoms may be replaced by F; and
- 15 n is an integer from 0 to 5, preferably from 0 to 2 and more preferably 0 or 1.

20

In a third more preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I), wherein

25




30

R^1 and R^2 are identical or different at each occurrence, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to

20 carbon atoms or a branched or cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH₂ groups may be replaced by -O-, -S-, -NR³-, -CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F.

10 In a third most preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I), wherein




15 R¹ and R² are identical or different at each occurrence, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms.

20 In a fourth more preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I), wherein

R¹ is a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to 20 carbon atoms or a branched alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH₂ groups may be replaced by

-O-, -S-, -NR³-, -CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F; and
 R² is a cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH₂ groups may be replaced by -O-, -S-, -NR³-, -CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F.

In a fourth most preferred embodiment, the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (IV),

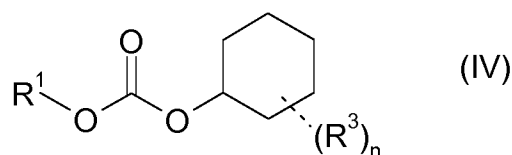







wherein







R¹ is a straight-chain alkyl group having from 1 to 20 carbon atoms or a branched alkyl group having from 3 to 20 carbon atoms, a straight-chain alkenyl group having from 2 to 20 carbon atoms or a branched alkenyl group having from 3 to 20 carbon atoms, or a straight-chain alkynyl group having from 2 to 20 carbon atoms or a branched alkynyl group having from 3 to 20 carbon atoms;








R³ are identical or different at each instance, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH₂ groups may be replaced by -O-, -S-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F; and

n is an integer from 0 to 5, preferably from 0 to 2 and more preferably 0 or 1.

5 Examples of preferred carbonate-group containing solvents and their boiling points (BP) are shown in the following Table 1.

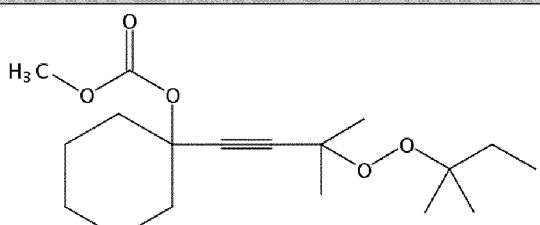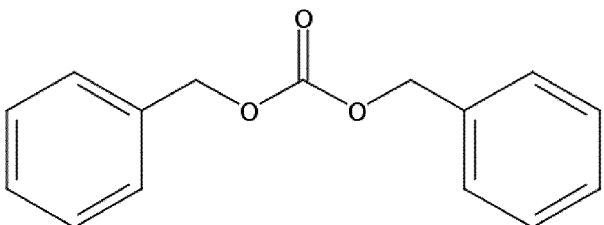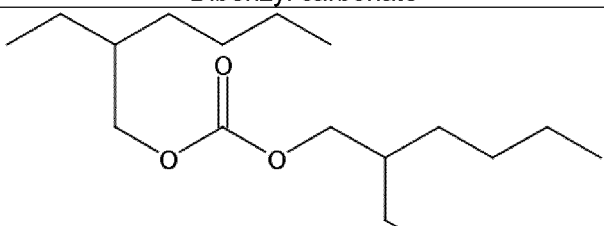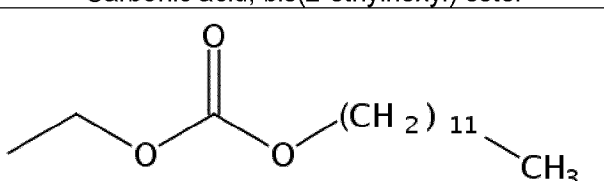	Substance	CAS	BP (°C) at 1atm
10	 Carbonic acid, 1-[3-[(1,1-dimethylpropyl)dioxy]-3-methyl-1-butyne-1-yl]cyclohexyl methyl ester	158722-12-4	400
15	 1-Octanol, 7-methyl-, carbonate (2:1)	76435-15-9	373
	 Carbonic acid, dioctyl ester	1680-31-5	350
20	 Dibenzyl carbonate	3459-92-5	350
25	 Carbonic acid, bis(2-ethylhexyl) ester	14858-73-2	340
30	 Carbonic acid, dodecyl ethyl ester	35108-03-3	318

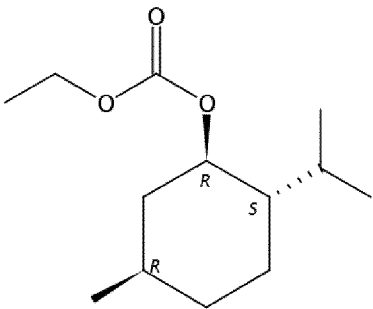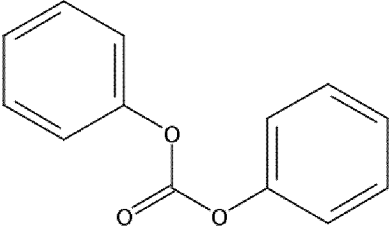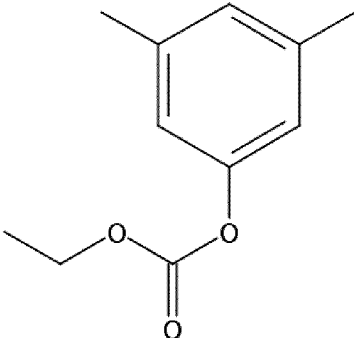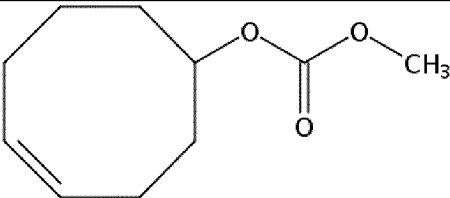5	 ethyl 5-methyl-2-(1-methylethyl)cyclohexyl ester	35106-15-1	306
10	 Diphenyl carbonate	102-09-0	302
15	 (2-tert-butylcyclohexyl) ethyl carbonate	67801-64-3	288
20	 Carbonic acid, dihexyl ester	7523-15-1	285
25	 ethyl 3,5-xylyl ester	26177-58-2	285
30	 [(4Z)-1-cyclooct-4-enyl] methyl carbonate	87731-18-8	280

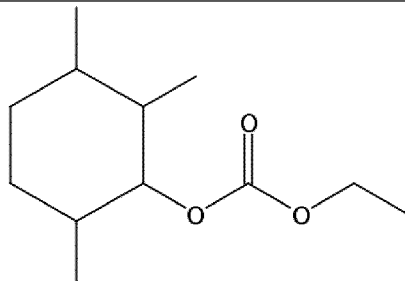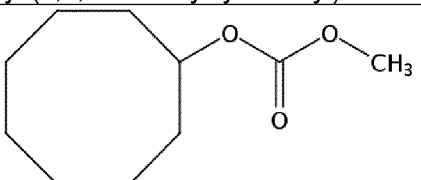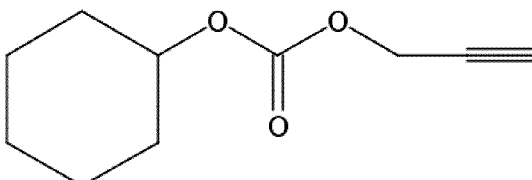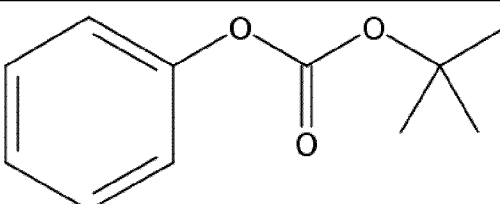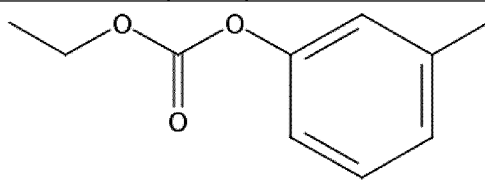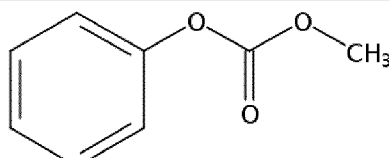5	 ethyl (2,3,6-trimethylcyclohexyl) carbonate	93981-50-1	280
10	 cyclooctyl methyl carbonate	61699-38-5	280
15	 Carbonic acid, cyclohexyl 2-propyn-1-yl ester	845253-29-4	276
20	 t-Butylphenyl carbonate	6627-89-0	270
25	 ethyl m-tolyl ester	22719-82-0	260
30	 Propylene carbonate	108-32-7	240
35	 Methyl phenyl carbonate	13509-27-8	213

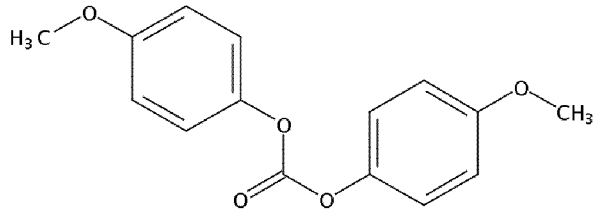
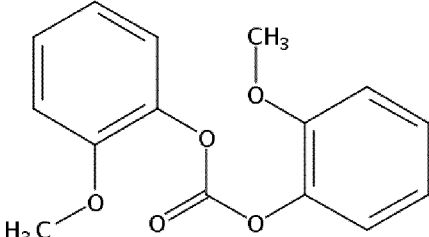

5	 Bis(4-methoxyphenyl) carbonate	5676-71-1	390
10	 Guaiacol Carbonate	553-17-3	392
	 Carbonic acid, dinonyl ester	36560-81-3	380

Table 1: Preferred carbonate-group containing solvents and their boiling points (BP).

15

Preferably, the first solvent has a surface tension of ≥ 20 mN/m. More preferably, the surface tension of the first solvent is in the range from 25 to 40 mN/m and most preferably in the range from 28 to 37.5 mN/m.

20

The content of the first solvent is preferably in the range from 50 to 100 vol.-%, more preferably in the range from 75 to 99 vol.-% and most preferably in the range from 90 to 99 vol.-%, based on the total amount of solvents in the formulation.

25

Consequently, the content of the second solvent is preferably in the range from 0 to 50 vol.-%, more preferably in the range from 1 to 25 vol.-% and most preferably in the range from 1 to 10 vol.-%, based on the total amount of solvents in the formulation.

30

Preferably, the first solvent has a boiling point in the range from 100 to 400°C, more preferably in the range from 200 to 400°C.

The formulations according to the present invention comprise in one preferred embodiment at least a second solvent which is different from the first solvent. The second solvent is employed together with the first solvent.

- 5 In one embodiment, the second solvent could be an carbonate-group containing solvent, which is different from the first solvent. Nevertheless, preferably, the second solvent does not contain an carbonate-group.

- 10 Suitable second solvents are preferably organic solvents which include inter alia, alcohols, aldehydes, ketones, ethers, esters, amides such as di-C₁₋₂-alkylformamides, sulfur compounds, nitro compounds, hydrocarbons, halogenated hydrocarbons (e.g. chlorinated hydrocarbons), aromatic or heteroaromatic hydrocarbons and halogenated aromatic or heteroaromatic hydrocarbons.

- 15 Preferably, the second solvent can be chosen from one of the following groups: substituted and non-substituted aromatic or linear esters such as ethyl benzoate, butyl benzoate; substituted and non-substituted aromatic or linear ethers such as 3-phenoxytoluene or anisole; substituted or non-
20 substituted arene derivatives such as xylene; indane derivatives such as hexamethylindane; substituted and non-substituted aromatic or linear ketones; substituted and non-substituted heterocycles such as pyrrolidinones, pyridines, pyrazines; other fluorinated or chlorinated aromatic hydrocarbons.

- 25 Particularly preferred second organic solvents are, for example, 1,2,3,4-tetramethylbenzene, 1,2,3,5-tetramethylbenzene, 1,2,3-trimethylbenzene, 1,2,4,5-tetramethylbenzene, 1,2,4-trichlorobenzene, 1,2,4-trimethylbenzene, 1,2-dihydronaphthalene, 1,2-dimethylnaphthalene, 1,3-benzo-
30 dioxolane, 1,3-diisopropylbenzene, 1,3-dimethylnaphthalene, 1,4-benzodioxane, 1,4-diisopropylbenzene, 1,4-dimethylnaphthalene, 1,5-dimethyl-

tetralin, 1-benzothiophene, thianaphthalene, 1-bromonaphthalene, 1-chloromethylnaphthalene, 1-ethylnaphthalene, 1-methoxynaphthalene, 1-methylnaphthalene, 1-methylindole, 2,3-benzofuran, 2,3-dihydrobenzofuran, 2,3-dimethylanisole, 2,4-dimethylanisole, 2,5-dimethylanisole, 2,6-dimethylanisole, 2,6-dimethylnaphthalene, 2-bromo-3-bromomethylnaphthalene, 2-bromomethylnaphthalene, 2-bromonaphthalene, 2-ethoxynaphthalene, 2-ethylnaphthalene, 2-isopropylanisole, 2-methylanisole, 2-methylindole, 3,4-dimethylanisole, 3,5-dimethylanisole, 3-bromoquinoline, 3-methylanisole, 4-methylanisole, 5-decanolide, 5-methoxyindane, 5-methoxyindole, 5-tert-butyl-m-xylene, 6-methylquinoline, 8-methylquinoline, acetophenone, anisole, benzonitrile, benzothiazole, benzyl acetate, bromobenzene, butyl benzoate, butyl phenyl ether, cyclohexylbenzene, decahydronaphthol, dimethoxytoluene, 3-phenoxytoluene, diphenyl ether, propiophenone, ethylbenzene, ethyl benzoate, hexylbenzene, indane, hexamethylindane, indene, isochroman, cumene, m-cymene, mesitylene, methyl benzoate, o-, m-, p-xylene, propyl benzoate, propylbenzene, o-dichlorobenzene, pentylbenzene, phenetol, ethoxybenzene, phenyl acetate, p-cymene, propiophenone, sec-butylbenzene, t-butylbenzene, thiophene, toluene, veratrol, monochlorobenzene, o-dichlorobenzene, pyridine, pyrazine, pyrimidine, pyrrolidinone, morpholine, dimethylacetamide, dimethyl sulfoxide, decalin and/or mixtures of these compounds.

These solvents can be employed individually or as a mixture of two, three or more solvents forming the second solvent.

25

Preferably, the second solvent has a boiling point in the range from 100 to 400°C, more preferably in the range from 150 to 350°C.

The at least one organic functional material has a solubility in the first as well as in the second solvent which is preferably in the range from 1 to 250 g/l and more preferably in the range from 1 to 50 g/l.

30

5 The content of the at least one organic functional material in the formulation is in the range from 0.001 to 20 weight-%, preferably in the range from 0.01 to 10 weight-%, more preferably in the range from 0.1 to 5 weight-% and most preferably in the range from 0.3 to 5 weight-%, based on the total weight of the formulation.

10 The formulation according to the present invention has a surface tension preferably in the range from 10 to 50 mN/m and more preferably in the range from 25 to 40 mN/m.

Furthermore, the formulation according to the present invention has a viscosity preferably in the range from 1 to 50 mPa·s, more preferably in the range from 2 to 40 mPa·s, and most preferably in the range from 2 to 20 mPa·s.

15 Preferably, the organic solvent blend comprises a surface tension in the range from 15 to 80 mN/m, more preferably in the range from 20 to 60 mN/m and most preferably in the range from 25 to 40 mN/m. The surface tension can be measured using a FTA (First Ten Angstrom) 1000 contact angle goniometer at 20°C. Details of the method are available from First
20 Ten Angstrom as published by Roger P. Woodward, Ph.D. "Surface Tension Measurements Using the Drop Shape Method". Preferably, the pendant drop method can be used to determine the surface tension. This measurement technique dispenses a drop from a needle in a bulk liquid or
25 gaseous phase. The shape of the drop results from the relationship between the surface-tension, gravity and density differences. Using the pendant drop method, the surface tension is calculated from the shadow image of a pendant drop using <http://www.kruss.de/services/education-theory/glossary/drop-shape-analysis>. A commonly used and commercially
30 available high precision drop shape analysis tool, namely FTA1000 from First Ten Ångstrom, was used to perform all surface tension measurements. The surface tension is determined by the software

5 FTA1000. All measurements were performed at room temperature which is in the range between 20°C and 22°C. The standard operating procedure includes the determination of the surface tension of each formulation using a fresh disposable drop dispensing system (syringe and needle). Each drop is measured over the duration of one minute with sixty measurements which are later on averaged. For each formulation three drops are measured. The final value is averaged over said measurements. The tool is regularly cross-checked against various liquids having well known surface tensions.

10 The viscosity of the formulations and solvents according to the present invention is measured a TA instruments ARG2 rheometer over a shear rate range of 10 to 1000 s⁻¹ using 40 mm parallel plate geometry. Measurement was taken as an average between 200 to 800 s⁻¹ where the temperature and sheer rate are exactly controlled. The viscosities given in Table 3 are the viscosities of each formulation measured at a temperature of 25°C. Each solvent is measured three times. The stated viscosity value is averaged over said measurements.

20 The formulation according to the present invention comprises at least one organic functional material which can be employed for the production of functional layers of electronic devices. Functional materials are generally the organic materials which are introduced between the anode and the cathode of an electronic device.

25 The term organic functional material denotes, inter alia, organic conductors, organic semiconductors, organic fluorescent compounds, organic phosphorescent compounds, organic light-absorbent compounds, organic light-sensitive compounds, organic photosensitisation agents and other organic photoactive compounds. The term organic functional material fur-
30 thermore encompasses organometallic complexes of transition metals, rare earths, lanthanides and actinides.

5 The organic functional material is selected from the group consisting of fluorescent emitters, phosphorescent emitters, host materials, matrix materials, exciton-blocking materials, electron-transport materials, electron-injection materials, hole-conductor materials, hole-injection materials, n-dopants, p-dopants, wide-band-gap materials, electron-blocking materials and hole-blocking materials.

10 Preferred embodiments of organic functional materials are disclosed in detail in WO 2011/076314 A1, where this document is incorporated into the present application by way of reference.

15 In a preferred embodiment, the organic functional material is an organic semiconductor selected from the group consisting of hole-injecting, hole-transporting, emitting, electron-transporting and electron-injecting materials.

20 More preferably, the organic functional material is an organic semiconductor selected from the group consisting of hole-injecting and hole-transporting materials.

25 The organic functional material can be a compound having a low molecular weight, a polymer, an oligomer or a dendrimer, where the organic functional material may also be in the form of a mixture. Thus, the formulations according to the present invention may comprise two different compounds having a low molecular weight, one compound having a low molecular weight and one polymer or two polymers (blend).

30 Organic functional materials are frequently described via the properties of the frontier orbitals, which are described in greater detail below. Molecular orbitals, in particular also the highest occupied molecular orbital (HOMO) and the lowest unoccupied molecular orbital (LUMO), their energy levels and the energy of the lowest triplet state T_1 or of the lowest excited singlet

state S_1 of the materials are determined via quantum-chemical calculations. In order to calculate organic substances without metals, firstly a geometry optimisation is carried out using the "Ground State/Semi-empirical/Default Spin/AM1/Charge 0/Spin Singlet" method. An energy calculation is subsequently carried out on the basis of the optimised geometry. The "TD-SCF/DFT/Default Spin/B3PW91" method with the "6-31G(d)" base set (charge 0, spin singlet) is used here. For metal-containing compounds, the geometry is optimised via the "Ground State/Hartree-Fock/Default Spin/LanL2MB/Charge 0/Spin Singlet" method. The energy calculation is carried out analogously to the above-described method for the organic substances, with the difference that the "LanL2DZ" base set is used for the metal atom and the "6-31G(d)" base set is used for the ligands. The energy calculation gives the HOMO energy level HE_h or LUMO energy level LE_h in hartree units. The HOMO and LUMO energy levels in electron volts calibrated with reference to cyclic voltammetry measurements are determined therefrom as follows:

$$\begin{aligned} \text{HOMO(eV)} &= ((HE_h * 27.212) - 0.9899) / 1.1206 \\ \text{LUMO(eV)} &= ((LE_h * 27.212) - 2.0041) / 1.385 \end{aligned}$$

For the purposes of the present application, these values are to be regarded as HOMO and LUMO energy levels respectively of the materials.

The lowest triplet state T_1 is defined as the energy of the triplet state having the lowest energy which arises from the quantum-chemical calculation described.

The lowest excited singlet state S_1 is defined as the energy of the excited singlet state having the lowest energy which arises from the quantum-chemical calculation described.

The method described herein is independent of the software package used and always gives the same results. Examples of frequently used programs for this purpose are "Gaussian09W" (Gaussian Inc.) and Q-Chem 4.1 (Q-Chem, Inc.).

5

Compounds having hole-injection properties, also called hole-injection materials herein, simplify or facilitate the transfer of holes, i.e. positive charges, from the anode into an organic layer. In general, a hole-injection material has an HOMO level which is in the region of or above the level of the anode, i.e. in general is at least -5.3 eV.

10

Compounds having hole-transport properties, also called hole-transport materials herein, are capable of transporting holes, i.e. positive charges, which are generally injected from the anode or an adjacent layer, for example a hole-injection layer. A hole-transport material generally has a high HOMO level of preferably at least -5.4 eV. Depending on the structure of an electronic device, it may also be possible to employ a hole-transport material as hole-injection material.

15

The preferred compounds which have hole-injection and/or hole-transport properties include, for example, triarylamine, benzidine, tetraaryl-para-phenylenediamine, triarylphosphine, phenothiazine, phenoxazine, dihydrophenazine, thianthrene, dibenzo-para-dioxin, phenoxathiylene, carbazole, azulene, thiophene, pyrrole and furan derivatives and further O-, S- or N-containing heterocycles having a high HOMO (HOMO = highest occupied molecular orbital).

20
25

As compounds which have hole-injection and/or hole-transport properties, particular mention may be made of phenylenediamine derivatives (US 3615404), arylamine derivatives (US 3567450), amino-substituted chalcone derivatives (US 3526501), styrylanthracene derivatives (JP-A-56-46234), polycyclic aromatic compounds (EP 1009041), polyaryalkane

30


derivatives (US 3615402), fluorenone derivatives (JP-A-54-110837), hydrazone derivatives (US 3717462), acylhydrazones, stilbene derivatives (JP-A-61-210363), silazane derivatives (US 4950950), polysilanes (JP-A-2-204996), aniline copolymers (JP-A-2-282263), thiophene oligomers (JP Heisei 1 (1989) 211399), polythiophenes, poly(N-vinylcarbazole) (PVK), polypyrroles, polyanilines and other electrically conducting macromolecules, porphyrin compounds (JP-A-63-2956965, US 4720432), aromatic dimethylidene-type compounds, carbazole compounds, such as, for example, CDBP, CBP, mCP, aromatic tertiary amine and styrylamine compounds (US 4127412), such as, for example, triphenylamines of the benzidine type, triphenylamines of the styrylamine type and triphenylamines of the diamine type. It is also possible to use arylamine dendrimers (JP Heisei 8 (1996) 193191), monomeric triarylamine (US 3180730), triarylamine containing one or more vinyl radicals and/or at least one functional group containing active hydrogen (US 3567450 and US 3658520), or tetraaryldiamines (the two tertiary amine units are connected via an aryl group). More triarylamine groups may also be present in the molecule. Phthalocyanine derivatives, naphthalocyanine derivatives, butadiene derivatives and quinoline derivatives, such as, for example, dipyrazino[2,3-f:2',3'-h]quinoxalinehexacarbonitrile, are also suitable.

Preference is given to aromatic tertiary amines containing at least two tertiary amine units (US 2008/0102311 A1, US 4720432 and US 5061569), such as, for example, NPD (α -NPD = 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl) (US 5061569), TPD 232 (= N,N'-bis-(N,N'-diphenyl-4-aminophenyl)-N,N'-diphenyl-4,4'-diamino-1,1'-biphenyl) or MTDATA (MTDATA or m-MTDATA = 4,4',4''-tris[3-methylphenyl]phenylamino]-triphenylamine) (JP-A-4-308688), TBDB (= N,N,N',N'-tetra(4-biphenyl)-diaminobiphenylene), TAPC (= 1,1-bis(4-di-p-tolylaminophenyl)cyclohexane), TAPPP (= 1,1-bis(4-di-p-tolylaminophenyl)-3-phenylpropane), BDTAPVB (= 1,4-bis[2-[4-[N,N-di(p-tolyl)amino]phenyl]vinyl]benzene), TTB

(= N,N,N',N'-tetra-*p*-tolyl-4,4'-diaminobiphenyl), TPD (= 4,4'-bis[N-3-methylphenyl]-N-phenylamino)biphenyl), N,N,N',N'-tetraphenyl-4,4'''-diamino-1,1',4',1'',4'',1'''-quaterphenyl, likewise tertiary amines containing carbazole units, such as, for example, TCTA (= 4-(9H-carbazol-9-yl)-N,N-bis[4-(9H-carbazol-9-yl)phenyl]benzenamine). Preference is likewise given to hexa-
 5 azatriphenylene compounds in accordance with US 2007/0092755 A1 and phthalocyanine derivatives (for example H₂Pc, CuPc (= copper phthalocyanine), CoPc, NiPc, ZnPc, PdPc, FePc, MnPc, ClAlPc, ClGaPc, ClInPc, ClSnPc, Cl₂SiPc, (HO)AlPc, (HO)GaPc, VOPc, TiOPc, MoOPc, GaPc-O-GaPc).
 10


Particular preference is given to the following triarylamine compounds of the formulae (TA-1) to (TA-12), which are disclosed in EP 1162193 B1, EP 650 955 B1, *Synth.Metals* **1997**, 91(1-3), 209, DE 19646119 A1,
 15 WO 2006/122630 A1, EP 1 860 097 A1, EP 1834945 A1, JP 08053397 A, US 6251531 B1, US 2005/0221124, JP 08292586 A, US 7399537 B2, US 2006/0061265 A1, EP 1 661 888 and WO 2009/041635. The said compounds of the formulae (TA-1) to (TA-12) may also be substituted:

20

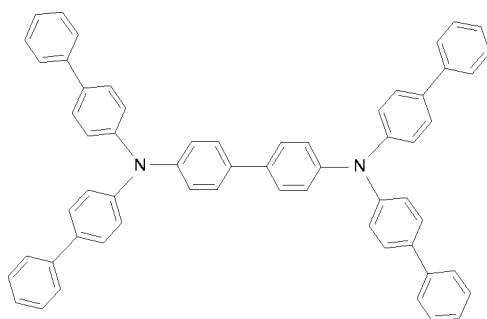


formula TA-1

25

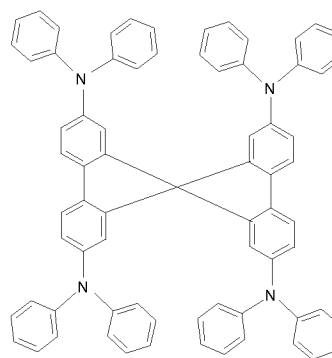


formula TA-2

30

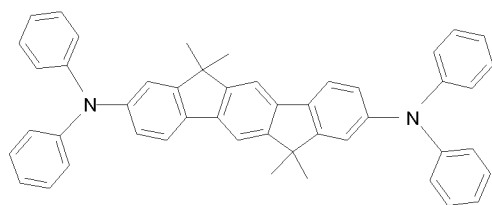


5

formula TA-3

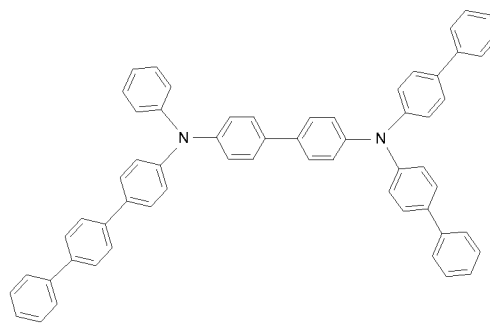


formula TA-4




10

formula TA-5




15

formula TA-6

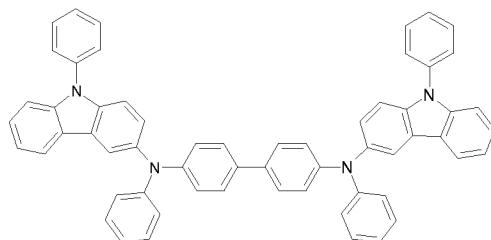


20

formula TA-7

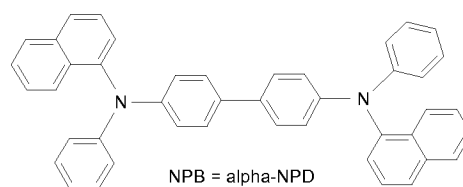


formula TA-8

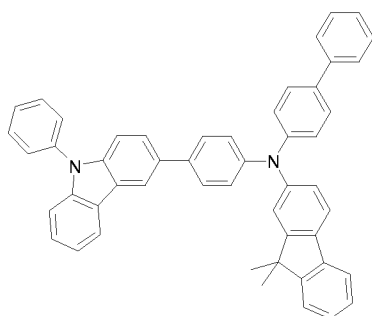


25

formula TA-9

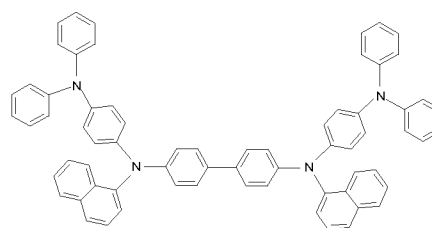


30

formula TA-10

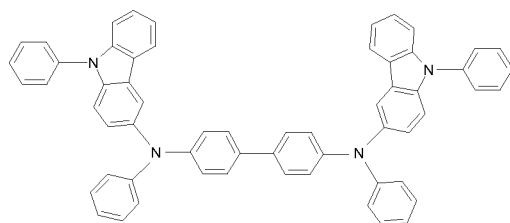

formula TA-11

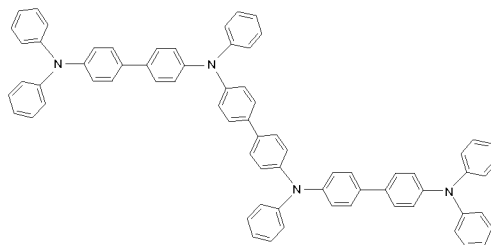

formula TA-12

Further compounds which can be employed as hole-injection materials are described in EP 0891121 A1 and EP 1029909 A1, injection layers in general in US 2004/0174116 A1.


These arylamines and heterocycles which are generally employed as hole-injection and/or hole-transport materials preferably result in an HOMO in the polymer of greater than -5.8 eV (vs. vacuum level), particularly preferably greater than -5.5 eV.

Compounds which have electron-injection and/or electron-transport properties are, for example, pyridine, pyrimidine, pyridazine, pyrazine, oxadiazole, quinoline, quinoxaline, anthracene, benzanthracene, pyrene, perylene, benzimidazole, triazine, ketone, phosphine oxide and phenazine derivatives, but also triarylboranes and further O-, S- or N-containing heterocycles having a low LUMO (LUMO = lowest unoccupied molecular orbital).

Particularly suitable compounds for electron-transporting and electron-injecting layers are metal chelates of 8-hydroxyquinoline (for example LiQ, AlQ₃, GaQ₃, MgQ₂, ZnQ₂, InQ₃, ZrQ₄), BAlQ, Ga oxinoid complexes, 4-azaphenanthren-5-ol-Be complexes (US 5529853 A, cf. formula ET-1), butadiene derivatives (US 4356429), heterocyclic optical brighteners (US 4539507), benzimidazole derivatives (US 2007/0273272 A1), such as, for example, TPBI (US 5766779, cf. formula ET-2), 1,3,5-triazines, for example spirobifluorenyltriazine derivatives (for example in accordance with DE


102008064200), pyrenes, anthracenes, tetracenes, fluorenes, spiro-
fluorenes, dendrimers, tetracenes (for example rubrene derivatives), 1,10-
phenanthroline derivatives (JP 2003-115387, JP 2004-311184, JP 2001-
267080, WO 02/043449), silacyclopentadiene derivatives (EP 1480280,
5 EP 1478032, EP 1469533), borane derivatives, such as, for example, tri-
arylborane derivatives containing Si (US 2007/0087219 A1, cf. formula ET-
3), pyridine derivatives (JP 2004-200162), phenanthrolines, especially 1,10-
phenanthroline derivatives, such as, for example, BCP and Bphen, also
several phenanthrolines connected via biphenyl or other aromatic groups
10 (US 2007-0252517 A1) or phenanthrolines connected to anthracene
(US 2007-0122656 A1, cf. formulae ET-4 and ET-5).

15

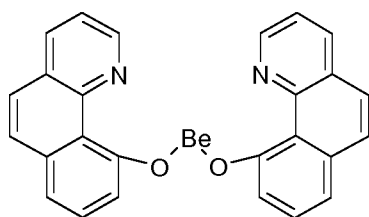

20


formula ET-1

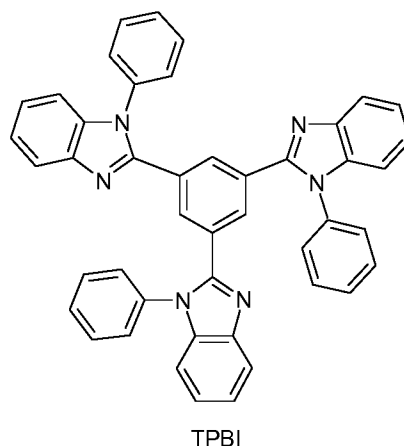


TPBI

2,2',2''-(1,3,5-benzenetriyl)tris(1-phenyl-1H-benzimidazole)
formula ET-2

25

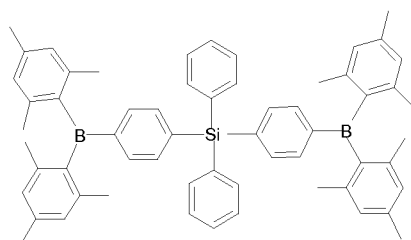


formula ET-3



formula ET-4

30



formula ET-5


5

Likewise suitable are heterocyclic organic compounds, such as, for example, thiopyran dioxides, oxazoles, triazoles, imidazoles or oxadiazoles.

Examples of the use of five-membered rings containing N, such as, for example, oxazoles, preferably 1,3,4-oxadiazoles, for example compounds of the formulae ET-6, ET-7, ET-8 and ET-9, which are disclosed, inter alia, in US 2007/0273272 A1; thiazoles, oxadiazoles, thiadiazoles, triazoles, inter alia, see US 2008/0102311 A1 and Y.A. Levin, M.S. Skorobogatova, Khimiya Geterotsiklicheskikh Soedinenii 1967 (2), 339-341, preferably compounds of the formula ET-10, silacyclopentadiene derivatives. Preferred compounds are the following of the formulae (ET-6) to (ET-10):


10

15

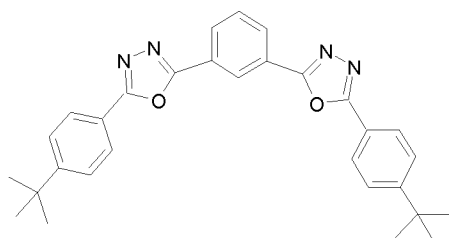


formula ET-6

20




formula ET-7

25




formula ET-8

30



formula ET-9

5



formula ET-10

10


It is also possible to employ organic compounds, such as derivatives of fluorenone, fluorenylidene methane, perylene tetracarboxylic acid, anthraquinone dimethane, diphenyl quinone, anthrone and anthraquinone-diethylenediamine.

15

Preference is given to 2,9,10-substituted anthracenes (with 1- or 2-naphthyl and 4- or 3-biphenyl) or molecules which contain two anthracene units (US 2008/0193796 A1, cf. formula ET-11). Also very advantageous is the connection of 9,10-substituted anthracene units to benzimidazole derivatives (US 2006/147747 A and EP 1551206 A1, cf. formulae ET-12 and ET-13).



20

25

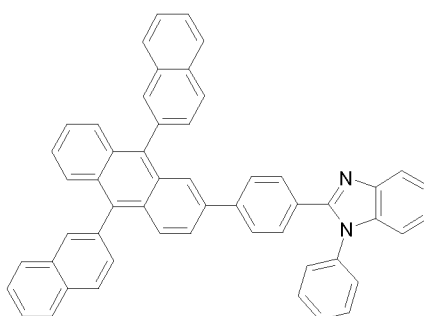

formula ET-11

30

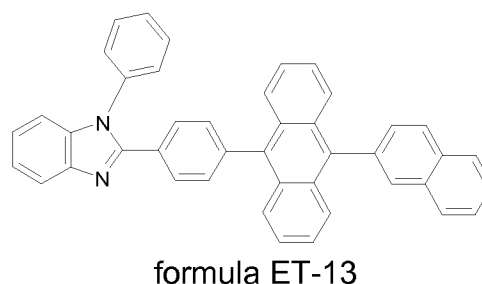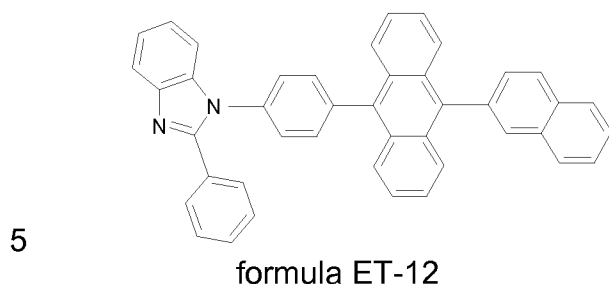

10 The compounds which are able to generate electron-injection and/or electron-transport properties preferably result in an LUMO of less than -2.5 eV (vs. vacuum level), particularly preferably less than -2.7 eV.

15 The present formulations may comprise emitters. The term emitter denotes a material which, after excitation, which can take place by transfer of any type of energy, allows a radiative transition into a ground state with emission of light. In general, two classes of emitter are known, namely fluorescent and phosphorescent emitters. The term fluorescent emitter denotes materials or compounds in which a radiative transition from an excited singlet state into the ground state takes place. The term phosphorescent emitter preferably denotes luminescent materials or compounds which

20 contain transition metals.

Emitters are frequently also called dopants if the dopants cause the properties described above in a system. A dopant in a system comprising a matrix material and a dopant is taken to mean the component whose proportion in the mixture is the smaller. Correspondingly, a matrix material in a

25 system comprising a matrix material and a dopant is taken to mean the component whose proportion in the mixture is the greater. Accordingly, the term phosphorescent emitter can also be taken to mean, for example, phosphorescent dopant.

30

Compounds which are able to emit light include, inter alia, fluorescent emitters and phosphorescent emitters. These include, inter alia, compounds containing stilbene, stilbenamine, styrylamine, coumarine, rubrene, rhodamine, thiazole, thiadiazole, cyanine, thiophene, paraphenylene, perylene, phtalocyanine, porphyrin, ketone, quinoline, imine, anthracene and/or pyrene structures. Particular preference is given to compounds which are able to emit light from the triplet state with high efficiency, even at room temperature, i.e. exhibit electrophosphorescence instead of electrofluorescence, which frequently causes an increase in the energy efficiency. Suitable for this purpose are firstly compounds which contain heavy atoms having an atomic number of greater than 36. Preference is given to compounds which contain d- or f-transition metals which satisfy the above-mentioned condition. Particular preference is given here to corresponding compounds which contain elements from group 8 to 10 (Ru, Os, Rh, Ir, Pd, Pt). Suitable functional compounds here are, for example, various complexes, as described, for example, in WO 02/068435 A1, WO 02/081488 A1, EP 1239526 A2 and WO 2004/026886 A2.

Preferred compounds which can serve as fluorescent emitters are described by way of example below. Preferred fluorescent emitters are selected from the class of the monostyrylamines, the distyrylamines, the tristyrylamines, the tetrastyrylamines, the styrylphosphines, the styryl ethers and the arylamines.

A monostyrylamine is taken to mean a compound which contains one substituted or unsubstituted styryl group and at least one, preferably aromatic, amine. A distyrylamine is taken to mean a compound which contains two substituted or unsubstituted styryl groups and at least one, preferably aromatic, amine. A tristyrylamine is taken to mean a compound which contains three substituted or unsubstituted styryl groups and at least one, preferably aromatic, amine. A tetrastyrylamine is taken to mean a compound which contains four substituted or unsubstituted styryl groups and at least one,

preferably aromatic, amine. The styryl groups are particularly preferably stilbenes, which may also be further substituted. Corresponding phosphines and ethers are defined analogously to the amines. An arylamine or an aromatic amine in the sense of the present invention is taken to mean a compound which contains three substituted or unsubstituted aromatic or heteroaromatic ring systems bonded directly to the nitrogen. At least one of these aromatic or heteroaromatic ring systems is preferably a condensed ring system, preferably having at least 14 aromatic ring atoms. Preferred examples thereof are aromatic anthracenamines, aromatic anthracenediamines, aromatic pyrenamines, aromatic pyrenediamines, aromatic chrysenamines or aromatic chrysenediamines. An aromatic anthracenamine is taken to mean a compound in which one diarylamino group is bonded directly to an anthracene group, preferably in the 9-position. An aromatic anthracenediamine is taken to mean a compound in which two diarylamino groups are bonded directly to an anthracene group, preferably in the 2,6- or 9,10-position. Aromatic pyrenamines, pyrenediamines, chrysenamines and chrysenediamines are defined analogously thereto, where the diarylamino groups are preferably bonded to the pyrene in the 1-position or in the 1,6-position.


Further preferred fluorescent emitters are selected from indenofluorenamines or indenofluorenediamines, which are described, inter alia, in WO 2006/122630; benzoindenofluorenamines or benzoindenofluorenediamines, which are described, inter alia, in WO 2008/006449; and dibenzoindenofluorenamines or dibenzoindenofluorenediamines, which are described, inter alia, in WO 2007/140847.

Examples of compounds from the class of the styrylamines which can be employed as fluorescent emitters are substituted or unsubstituted tristilbenamines or the dopants described in WO 2006/000388, WO 2006/058737,

WO 2006/000389, WO 2007/065549 and WO 2007/115610. Distyrylbenzene and distyrylbiphenyl derivatives are described in US 5121029. Further styrylamines can be found in US 2007/0122656 A1.


- 5 Particularly preferred styrylamine compounds are the compounds of the formula EM-1 described in US 7250532 B2 and the compounds of the formula EM-2 described in DE 10 2005 058557 A1:

10

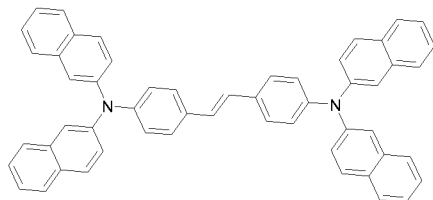

15


formula EM-1

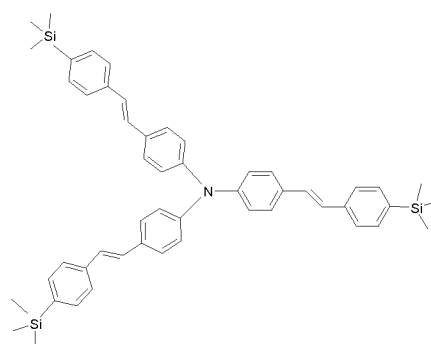

formula EM-2


- Particularly preferred triarylamine compounds are compounds of the formulae EM-3 to EM-15 disclosed in CN 1583691 A, JP 08/053397 A and US 6251531 B1, EP 1957606 A1, US 2008/0113101 A1, US 2006/210830 A ,
- 20 WO 2008/006449 and DE 102008035413 and derivatives thereof:

25

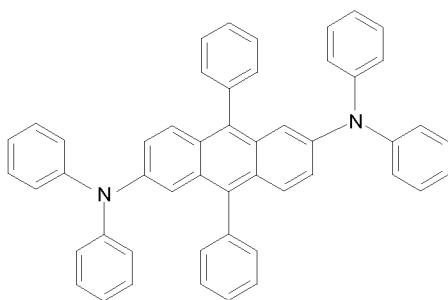


30

formula EM-3

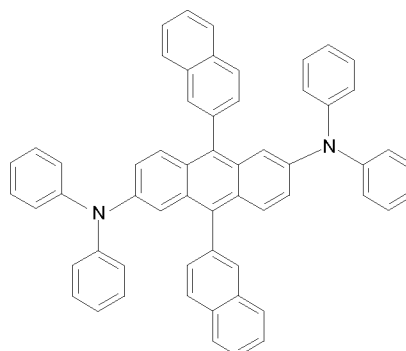


formula EM-4

5




formula EM-5

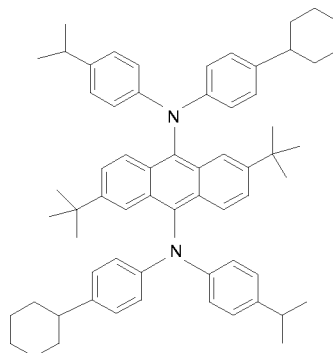


formula EM-6

10

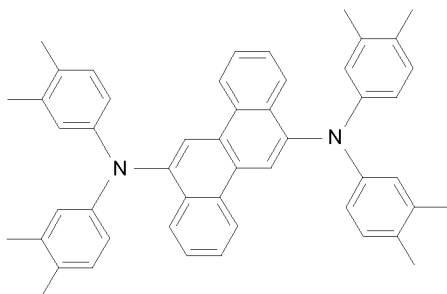


formula EM-7

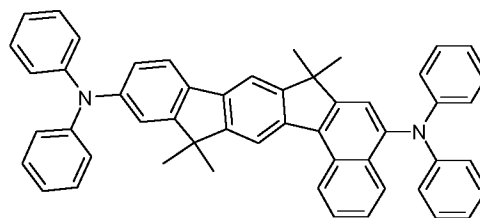


formula EM-8

15

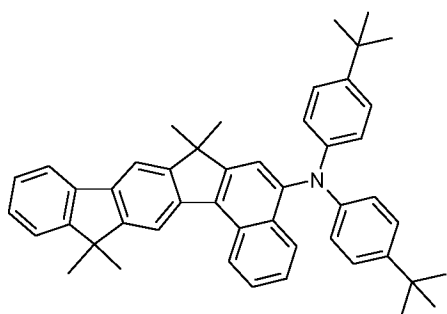


formula EM-9

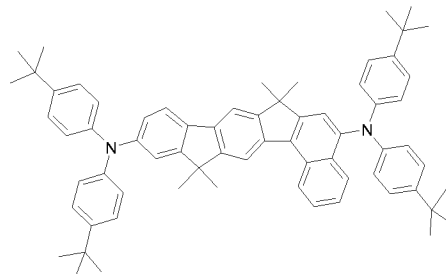


formula EM-10

20

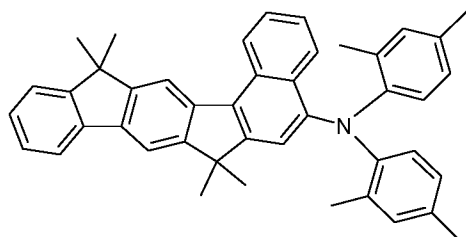

formula EM-11

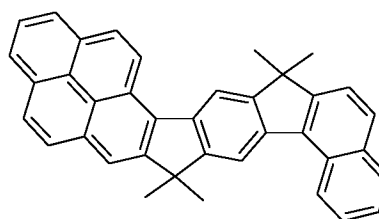


formula EM-12


25

30

5

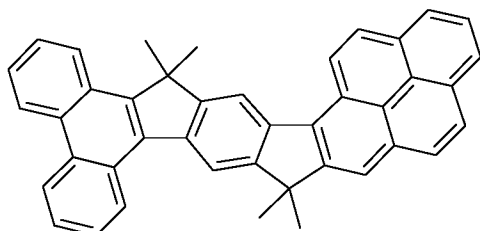


formula EM-13

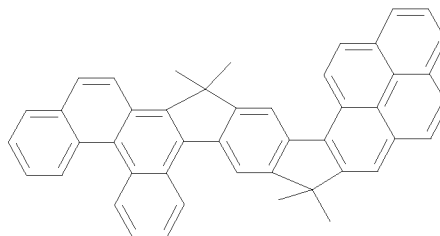

formula EM-14

10

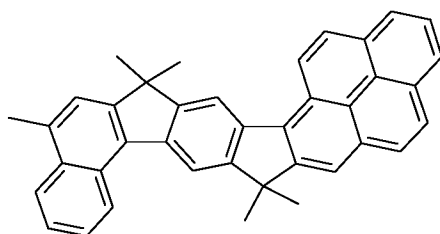

formula EM-15

15

Further preferred compounds which can be employed as fluorescent emitters are selected from derivatives of naphthalene, anthracene, tetracene, benzanthracene, benzophenanthrene (DE 10 2009 005746), fluorene, fluoranthene, perflanthene, indenoperylene, phenanthrene, perylene (US 2007/0252517 A1), pyrene, chrysene, decacycene, coronene, tetraphenylcyclopentadiene, pentaphenylcyclopentadiene, fluorene, spirofluorene, rubrene, coumarine (US 4769292, US 6020078, US 2007/0252517 A1), pyran, oxazole, benzoxazole, benzothiazole, benzimidazole, pyrazine, cinnamic acid esters, diketopyrrolopyrrole, acridone and quinacridone (US 2007/0252517 A1).

20

25

Of the anthracene compounds, particular preference is given to 9,10-substituted anthracenes, such as, for example, 9,10-diphenylanthracene and 9,10-bis(phenylethynyl)anthracene. 1,4-Bis(9'-ethynylanthracyl)benzene is also a preferred dopant.

30

Preference is likewise given to derivatives of rubrene, coumarine, rhodamine, quinacridone, such as, for example, DMQA (= N,N'-dimethylquinacri-

done), dicyanomethylenepyrans, such as, for example, DCM (= 4-(dicyanoethylene)-6-(4-dimethylaminostyryl-2-methyl)-4H-pyran), thiopyran, polymethine, pyrylium and thiapyrylium salts, periflanthene and indenoperylene.

- 5 Blue fluorescent emitters are preferably polyaromatic compounds, such as, for example, 9,10-di(2-naphthylanthracene) and other anthracene derivatives, derivatives of tetracene, xanthene, perylene, such as, for example, 2,5,8,11-tetra-*t*-butylperylene, phenylene, for example 4,4'-bis(9-ethyl-3-carbazovinylenes)-1,1'-biphenyl, fluorene, fluoranthene, arylpyrenes
10 (US 2006/0222886 A1), arylenevinylenes (US 5121029, US 5130603), bis-(azinyl)imine-boron compounds (US 2007/0092753 A1), bis(azinyl)methene compounds and carbostyryl compounds.

- Further preferred blue fluorescent emitters are described in C.H. Chen et al.: "Recent developments in organic electroluminescent materials" Macromol. Symp. 125, (1997) 1-48 and "Recent progress of molecular organic electroluminescent materials and devices" Mat. Sci. and Eng. R, 39 (2002), 143-222.

- 20 Further preferred blue-fluorescent emitters are the hydrocarbons disclosed in DE 102008035413.

- Preferred compounds which can serve as phosphorescent emitters are described below by way of example.


- 25 Examples of phosphorescent emitters are revealed by WO 00/70655, WO 01/41512, WO 02/02714, WO 02/15645, EP 1191613, EP 1191612, EP 1191614 and WO 2005/033244. In general, all phosphorescent complexes as are used in accordance with the prior art for phosphorescent
30 OLEDs and as are known to the person skilled in the art in the area of organic electroluminescence are suitable, and the person skilled in the art

will be able to use further phosphorescent complexes without inventive step.

5 Phosphorescent metal complexes preferably contain Ir, Ru, Pd, Pt, Os or Re, more preferably Ir.

Preferred ligands are 2-phenylpyridine derivatives, 7,8-benzoquinoline derivatives, 2-(2-thienyl)pyridine derivatives, 2-(1-naphthyl)pyridine derivatives, 1-phenylisoquinoline derivatives, 3-phenylisoquinoline derivatives or
10 2-phenylquinoline derivatives. All these compounds may be substituted, for example by fluoro, cyano and/or trifluoromethyl substituents for blue. Auxiliary ligands are preferably acetylacetonate or picolinic acid.

15 In particular, complexes of Pt or Pd with tetradentate ligands of the formula EM-16 are suitable

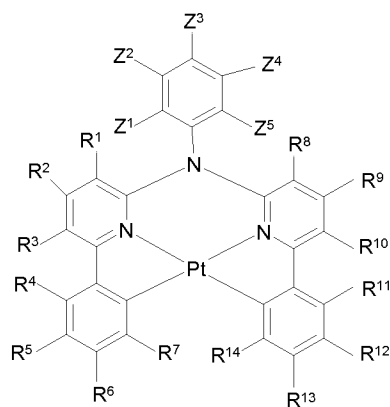

formula EM-16

25

The compounds of the formula EM-16 are described in greater detail in US 2007/0087219 A1, where, for an explanation of the substituents and indices in the above formula, reference is made to this specification for disclosure purposes. Furthermore, Pt-porphyrin complexes having an enlarged
30 ring system (US 2009/0061681 A1) and Ir complexes, for example 2,3,7,8,12,13,17,18-octaethyl-21H, 23H-porphyrin-Pt(II), tetraphenyl-Pt(II)

tetrabenzoporphyrin (US 2009/0061681 A1), *cis*-bis(2-phenylpyridinato-N,C^{2'})Pt(II), *cis*-bis(2-(2'-thienyl)pyridinato-N,C^{3'})Pt(II), *cis*-bis(2-(2'-thienyl)-quinolinato-N,C^{5'})Pt(II), (2-(4,6-difluorophenyl)pyridinato-N,C^{2'})Pt(II) (acetylacetonate), or tris(2-phenylpyridinato-N,C^{2'})Ir(III) (= Ir(ppy)₃, green), bis(2-phenylpyridinato-N,C^{2'})Ir(III) (acetylacetonate) (= Ir(ppy)₂ acetylacetonate, green, US 2001/0053462 A1, Baldo, Thompson et al. *Nature* 403, (2000), 750-753), bis(1-phenylisoquinolinato-N,C^{2'})(2-phenylpyridinato-N,C^{2'})-iridium(III), bis(2-phenylpyridinato-N,C^{2'})(1-phenylisoquinolinato-N,C^{2'})-iridium(III), bis(2-(2'-benzothienyl)pyridinato-N,C^{3'})iridium(III) (acetylacetonate), bis(2-(4',6'-difluorophenyl)pyridinato-N,C^{2'})iridium(III) (piccolinate) (Flrpic, blue), bis(2-(4',6'-difluorophenyl)pyridinato-N,C^{2'})Ir(III) (tetrakis(1-pyrazolyl)borate), tris(2-(biphenyl-3-yl)-4-tert-butylpyridine)-iridium(III), (ppz)₂Ir(5phdpym) (US 2009/0061681 A1), (45ooppz)₂-Ir(5phdpym) (US 2009/0061681 A1), derivatives of 2-phenylpyridine-Ir complexes, such as, for example, PQIr (= iridium(III) bis(2-phenylquinolyl-N,C^{2'})acetylacetonate), tris(2-phenylisoquinolinato-N,C)Ir(III) (red), bis(2-(2'-benzo[4,5-a]thienyl)pyridinato-N,C^{3'})Ir (acetylacetonate) ([Btp₂Ir(acac)], red, Adachi et al. *Appl. Phys. Lett.* 78 (2001), 1622-1624).


Likewise suitable are complexes of trivalent lanthanides, such as, for example, Tb³⁺ and Eu³⁺ (J. Kido et al. *Appl. Phys. Lett.* 65 (1994), 2124, Kido et al. *Chem. Lett.* 657, 1990, US 2007/0252517 A1), or phosphorescent complexes of Pt(II), Ir(I), Rh(I) with maleonitrile dithiolate (Johnson et al., *JACS* 105, 1983, 1795), Re(I) tricarbonyl-diimine complexes (Wrighton, *JACS* 96, 1974, 998, inter alia), Os(II) complexes with cyano ligands and bipyridyl or phenanthroline ligands (Ma et al., *Synth. Metals* 94, 1998, 245).

Further phosphorescent emitters having tridentate ligands are described in US 6824895 and US 10/729238. Red-emitting phosphorescent complexes are found in US 6835469 and US 6830828.

Particularly preferred compounds which are used as phosphorescent dopants are, inter alia, the compounds of the formula EM-17 described, inter alia, in US 2001/0053462 A1 and *Inorg. Chem.* 2001, 40(7), 1704-1711, JACS 2001, 123(18), 4304-4312, and derivatives thereof.

5

10

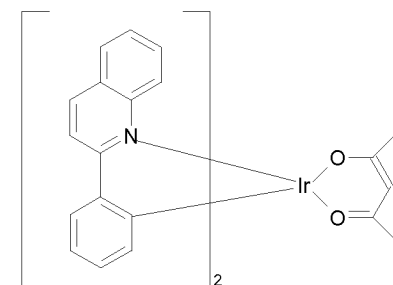


formula EM-17

Derivatives are described in US 7378162 B2, US 6835469 B2 and JP 2003/253145 A.

15


Furthermore, the compounds of the formulae EM-18 to EM-21 described in US 7238437 B2, US 2009/008607 A1 and EP 1348711, and derivatives thereof, can be employed as emitters.

20



formula EM-18


25




formula EM-19

30

5

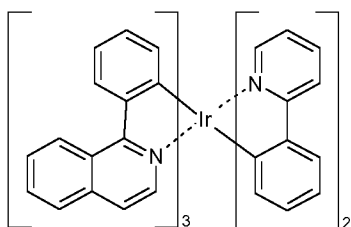

formula EM-20



formula EM-21

10

Quantum dots can likewise be employed as emitters, these materials being disclosed in detail in WO 2011/076314 A1.

15

Compounds which are employed as host materials, in particular together with emitting compounds, include materials from various classes of substances.

20

Host materials generally have larger band gaps between HOMO and LUMO than the emitter materials employed. In addition, preferred host materials exhibit properties of either a hole- or electron-transport material. Furthermore, host materials can have both electron- and hole-transport properties.

25

Host materials are in some cases also called matrix material, in particular if the host material is employed in combination with a phosphorescent emitter in an OLED.

30

Preferred host materials or co-host materials, which are employed, in particular, together with fluorescent dopants, are selected from the classes of the oligoarylenes (for example 2,2',7,7'-tetraphenylspirobifluorene in accordance with EP 676461 or dinaphthylanthracene), in particular the oligoarylenes containing condensed aromatic groups, such as, for example, anthracene, benzanthracene, benzophenanthrene (DE 10 2009 005746, WO 2009/069566), phenanthrene, tetracene, coronene, chrysene, fluorene, spirofluorene, perylene, phthaloperylene, naphthaloperylene, decacyclene,

rubrene, the oligoarylenevinylenes (for example DPVBi = 4,4'-bis(2,2-diphenylethenyl)-1,1'-biphenyl or spiro-DPVBi in accordance with EP 676461), the polypodal metal complexes (for example in accordance with WO 04/081017), in particular metal complexes of 8-hydroxyquinoline, for
5 example AlQ₃ (= aluminium(III) tris(8-hydroxyquinoline)) or bis(2-methyl-8-quinolinolato)-4-(phenylphenolinolato)aluminium, also with imidazole chelate (US 2007/0092753 A1) and the quinoline-metal complexes, amino-quinoline-metal complexes, benzoquinoline-metal complexes, the hole-conducting compounds (for example in accordance with WO 2004/058911),
10 the electron-conducting compounds, in particular ketones, phosphine oxides, sulfoxides, etc. (for example in accordance with WO 2005/084081 and WO 2005/084082), the atropisomers (for example in accordance with WO 2006/048268), the boronic acid derivatives (for example in accordance with WO 2006/117052) or the benzanthraces (for example in accordance
15 with WO 2008/145239).

Particularly preferred compounds which can serve as host materials or co-host materials are selected from the classes of the oligoarylenes, comprising anthracene, benzanthraces and/or pyrene, or atropisomers of these
20 compounds. An oligoarylene in the sense of the present invention is intended to be taken to mean a compound in which at least three aryl or arylene groups are bonded to one another.

Preferred host materials are selected, in particular, from compounds of the
25 formula (H-1),



where Ar⁴, Ar⁵, Ar⁶ are on each occurrence, identically or differently, an aryl
30 or heteroaryl group having 5 to 30 aromatic ring atoms, which may optionally be substituted, and p represents an integer in the range from 1 to 5; the

sum of the π electrons in Ar^4 , Ar^5 and Ar^6 is at least 30 if $p = 1$ and at least 36 if $p = 2$ and at least 42 if $p = 3$.


5 In the compounds of the formula (H-1), the group Ar^5 particularly preferably stands for anthracene, and the groups Ar^4 and Ar^6 are bonded in the 9- and 10-position, where these groups may optionally be substituted. Very particularly preferably, at least one of the groups Ar^4 and/or Ar^6 is a condensed aryl group selected from 1- or 2-naphthyl, 2-, 3- or 9-phenanthrenyl or 2-, 3-, 4-, 5-, 6- or 7-benzanthracenyl. Anthracene-based compounds are
10 described in US 2007/0092753 A1 and US 2007/0252517 A1, for example 2-(4-methylphenyl)-9,10-di-(2-naphthyl)anthracene, 9-(2-naphthyl)-10-(1,1'-biphenyl)anthracene and 9,10-bis[4-(2,2-diphenylethenyl)phenyl]anthracene, 9,10-diphenylanthracene, 9,10-bis(phenylethynyl)anthracene and 1,4-bis(9'-ethynylanthracenyl)benzene. Preference is also given to com-
15 pounds containing two anthracene units (US 2008/0193796 A1), for example 10,10'-bis[1,1',4',1'']terphenyl-2-yl-9,9'-bisanthracenyl.

Further preferred compounds are derivatives of arylamine, styrylamine, fluorescein, diphenylbutadiene, tetraphenylbutadiene, cyclopentadiene,
20 tetraphenylcyclopentadiene, pentaphenylcyclopentadiene, coumarine, oxadiazole, bisbenzoxazoline, oxazole, pyridine, pyrazine, imine, benzothiazole, benzoxazole, benzimidazole (US 2007/0092753 A1), for example 2,2',2''-(1,3,5-phenylene)tris[1-phenyl-1H-benzimidazole], aldazine, stilbene, styrylarylene derivatives, for example 9,10-bis[4-(2,2-diphenyl-
25 ethenyl)phenyl]anthracene, and distyrylarylene derivatives (US 5121029), diphenylethylene, vinylanthracene, diaminocarbazole, pyran, thiopyran, diketopyrrolopyrrole, polymethine, cinnamic acid esters and fluorescent dyes.

30 Particular preference is given to derivatives of arylamine and styrylamine, for example TNB (= 4,4'-bis[N-(1-naphthyl)-N-(2-naphthyl)amino]biphenyl). Metal-oxinoid complexes, such as LiQ or AlQ₃, can be used as co-hosts.


Preferred compounds with oligoarylene as matrix are disclosed in US 2003/0027016 A1, US 7326371 B2, US 2006/043858 A, WO 2007/114358, WO 2008/145239, JP 3148176 B2, EP 1009044, US 2004/018383, WO 2005/061656 A1, EP 0681019B1, WO 2004/013073A1, US 5077142, WO 2007/065678 and DE 102009005746, where particularly preferred compounds are described by the formulae H-2 to H-8.

10

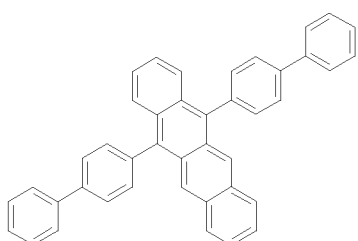


15

formula H-2

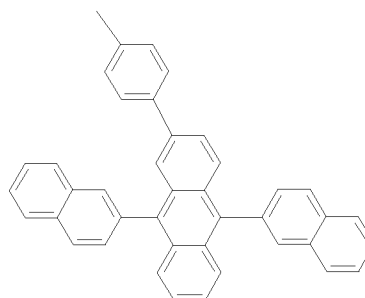


formula H-3

20

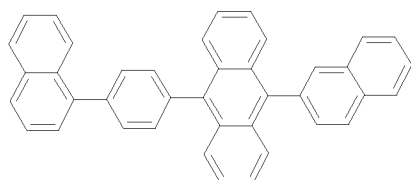


formula H-4

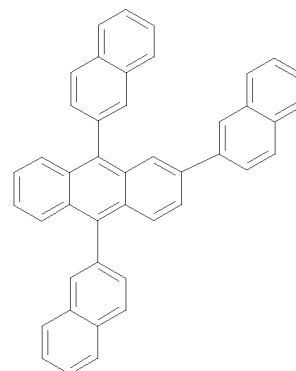


formula H-5

25

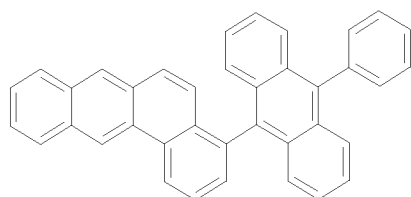


formula H-6

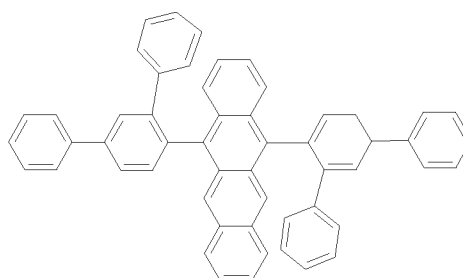

formula H-7

30

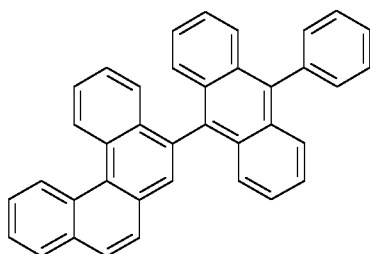


formula H-8

Furthermore, compounds which can be employed as host or matrix include materials which are employed together with phosphorescent emitters.


These compounds, which can also be employed as structural elements in polymers, include CBP (N,N-biscarbazolylbiphenyl), carbazole derivatives (for example in accordance with WO 2005/039246, US 2005/0069729, JP 2004/288381, EP 1205527 or WO 2008/086851), azacarbazoles (for example in accordance with EP 1617710, EP 1617711, EP 1731584 or JP 2005/347160), ketones (for example in accordance with WO 2004/093207 or in accordance with DE 102008033943), phosphine oxides, sulfoxides and sulfones (for example in accordance with WO 2005/003253), oligophenylenes, aromatic amines (for example in accordance with US 2005/0069729), bipolar matrix materials (for example in accordance with WO 2007/137725), silanes (for example in accordance with WO 2005/111172), 9,9-diarylfluorene derivatives (for example in accordance with DE 102008017591), azaboroles or boronic esters (for example in accordance with WO 2006/117052), triazine derivatives (for example in accordance with DE 102008036982), indolocarbazole derivatives (for example in accordance with WO 2007/063754 or WO 2008/056746), indenocarbazole derivatives (for example in accordance with DE 102009023155 and DE 102009031021), diazaphosphole derivatives (for example in accordance with DE 102009022858), triazole derivatives, oxazoles and oxazole derivatives, imidazole derivatives, polyarylalkane derivatives, pyrazoline derivatives, pyrazolone derivatives, distyrylpyrazine derivatives, thiopyran

dioxide derivatives, phenylenediamine derivatives, tertiary aromatic amines, styrylamines, amino-substituted chalcone derivatives, indoles, hydrazone derivatives, stilbene derivatives, silazane derivatives, aromatic dimethyldiene compounds, carbodiimide derivatives, metal complexes of 8-hydroxy-quinoline derivatives, such as, for example, AlQ₃, which may also contain triarylaminophenol ligands (US 2007/0134514 A1), metal complex/poly-silane compounds, and thiophene, benzothiophene and dibenzothiophene derivatives.

Examples of preferred carbazole derivatives are mCP (= 1,3-N,N-di-carbazolylbenzene (= 9,9'-(1,3-phenylene)bis-9H-carbazole)) (formula H-9), CDBP (= 9,9'-(2,2'-dimethyl[1,1'-biphenyl]-4,4'-diyl)bis-9H-carbazole), 1,3-bis(N,N'-dicarbazolyl)benzene (= 1,3-bis(carbazol-9-yl)benzene), PVK (polyvinylcarbazole), 3,5-di(9H-carbazol-9-yl)biphenyl and CMTTP (formula H-10). Particularly referred compounds are disclosed in US 2007/0128467 A1 and US 2005/0249976 A1 (formulae H-11 and H-13).

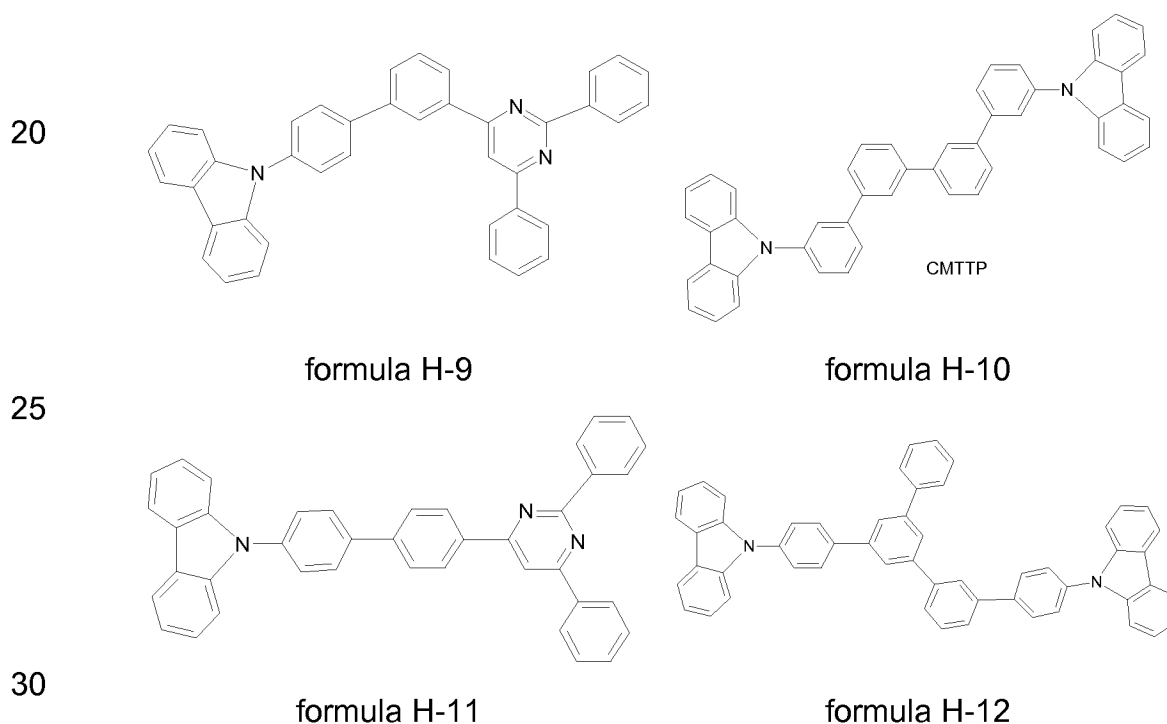

5

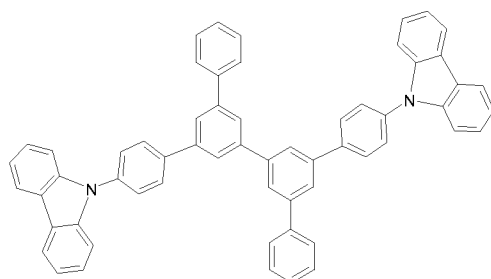


formula H-13

10

Preferred tetraaryl-Si compounds are disclosed, for example, in US 2004/0209115, US 2004/0209116, US 2007/0087219 A1 and in H. Gilman, E.A. Zuech, Chemistry & Industry (London, United Kingdom), 1960, 120.

Particularly preferred tetraaryl-Si compounds are described by the formulae H-14 to H-21.


15



UGH1

20


formula H-14

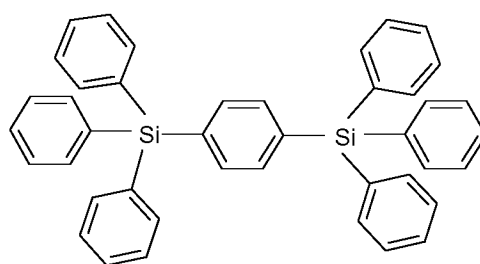

UGH2

formula H-15


25



UGH4

formula H-16


30

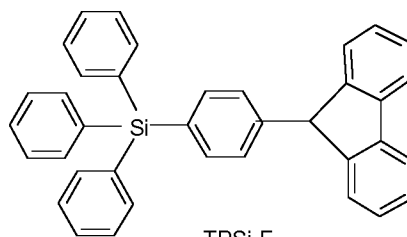


TPSi-F

Triphenyl-[4-(9-phenyl-9H-fluoren-9-yl)phenyl]silane


formula H-17

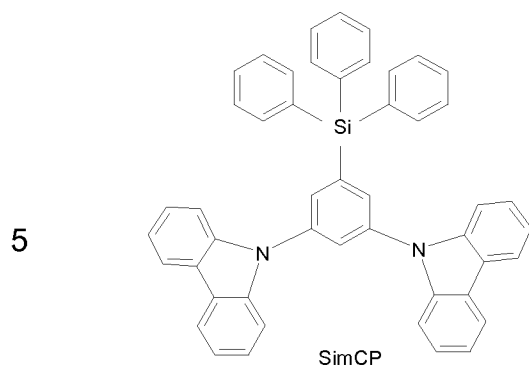


formula H-18

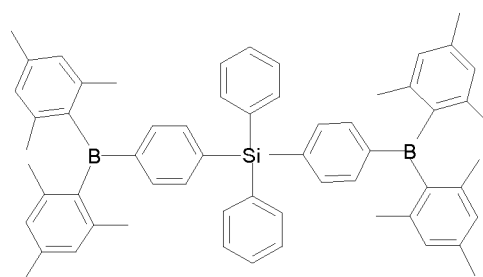

formula H-19

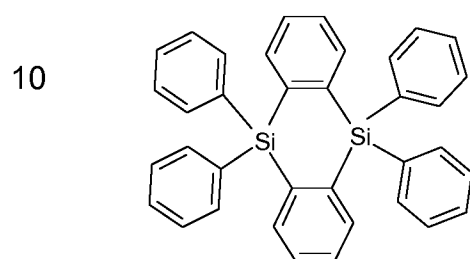

formula H-20

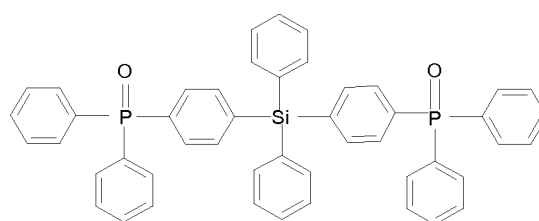


formula H-21


15

Particularly preferred compounds from group 4 for the preparation of the matrix for phosphorescent dopants are disclosed, inter alia, in DE 102009022858, DE 102009023155, EP 652273 B1, WO 2007/063754 and WO 2008/056746, where particularly preferred compounds are

20 described by the formulae H-22 to H-25.

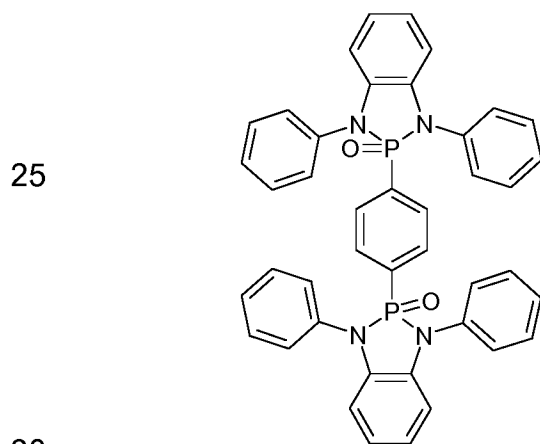


formula H-22

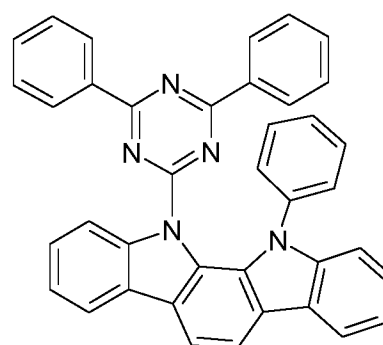


formula H-23

30

5



formula H-24

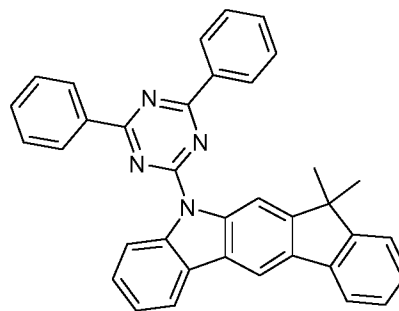

formula H-25

10

15

With respect to the functional compounds which can be employed in accordance with the invention and which can serve as host material, especial preference is given to substances which contain at least one nitrogen atom. These preferably include aromatic amines, triazine derivatives and carbazole derivatives. Thus, carbazole derivatives in particular exhibit surprisingly high efficiency. Triazine derivatives result in unexpectedly long lifetimes of the electronic devices.

20

It may also be preferred to employ a plurality of different matrix materials as a mixture, in particular at least one electron-conducting matrix material and at least one hole-conducting matrix material. Preference is likewise given to the use of a mixture of a charge-transporting matrix material and an electrically inert matrix material which is not involved in the charge transport to a significant extent, if at all, as described, for example, in WO 2010/108579.

25

30

It is furthermore possible to employ compounds which improve the transition from the singlet state to the triplet state and which, employed in support of the functional compounds having emitter properties, improve the phosphorescence properties of these compounds. Suitable for this purpose are, in particular, carbazole and bridged carbazole dimer units, as described, for example, in WO 2004/070772 A2 and WO 2004/113468 A1. Also suitable for this purpose are ketones, phosphine oxides, sulfoxides,

sulfones, silane derivatives and similar compounds, as described, for example, in WO 2005/040302 A1.

n-Dopants herein are taken to mean reducing agents, i.e. electron donors.

5 Preferred examples of n-dopants are $W(hpp)_4$ and other electron-rich metal complexes in accordance with WO 2005/086251 A2, P=N compounds (for example WO 2012/175535 A1, WO 2012/175219 A1), naphthylencarbo-
diimides (for example WO 2012/168358 A1), fluorenes (for example
WO 2012/031735 A1), free radicals and diradicals (for example
10 EP 1837926 A1, WO 2007/107306 A1), pyridines (for example EP 2452946
A1, EP 2463927 A1), N-heterocyclic compounds (for example WO
2009/000237 A1) and acridines as well as phenazines (for example US
2007/145355 A1).

15 Furthermore, the formulations may comprise a wide-band-gap material as functional material. Wide-band-gap material is taken to mean a material in the sense of the disclosure content of US 7,294,849. These systems exhibit particularly advantageous performance data in electroluminescent devices.

20 The compound employed as wide-band-gap material can preferably have a band gap of 2.5 eV or more, preferably 3.0 eV or more, particularly preferably 3.5 eV or more. The band gap can be calculated, inter alia, by means of the energy levels of the highest occupied molecular orbital (HOMO) and the lowest unoccupied molecular orbital (LUMO).

25 Furthermore, the formulations may comprise a hole-blocking material (HBM) as functional material. A hole-blocking material denotes a material which prevents or minimises the transmission of holes (positive charges) in a multilayer system, in particular if this material is arranged in the form of a
30 layer adjacent to an emission layer or a hole-conducting layer. In general, a hole-blocking material has a lower HOMO level than the hole-transport

material in the adjacent layer. Hole-blocking layers are frequently arranged between the light-emitting layer and the electron-transport layer in OLEDs.

5 It is basically possible to employ any known hole-blocking material. In addition to other hole-blocking materials described elsewhere in the present application, advantageous hole-blocking materials are metal complexes (US 2003/0068528), such as, for example, bis(2-methyl-8-quinolinolato)(4-phenylphenolato)aluminium(III) (BAIQ). Fac-tris(1-phenylpyrazolato-N,C2)-
10 iridium(III) (Ir(ppz)₃) is likewise employed for this purpose (US 2003/0175553 A1). Phenanthroline derivatives, such as, for example, BCP, or phthalimides, such as, for example, TMPP, can likewise be employed.

Furthermore, advantageous hole-blocking materials are described in WO 00/70655 A2, WO 01/41512 and WO 01/93642 A1.

15 Furthermore, the formulations may comprise an electron-blocking material (EBM) as functional material. An electron-blocking material denotes a material which prevents or minimises the transmission of electrons in a multilayer system, in particular if this material is arranged in the form of a
20 layer adjacent to an emission layer or an electron-conducting layer. In general, an electron-blocking material has a higher LUMO level than the electron-transport material in the adjacent layer.

It is basically possible to employ any known electron-blocking material. In
25 addition to other electron-blocking materials described elsewhere in the present application, advantageous electron-blocking materials are transition-metal complexes, such as, for example, Ir(ppz)₃ (US 2003/0175553).

30 The electron-blocking material can preferably be selected from amines, tri-arylamines and derivatives thereof.

Furthermore, the functional compounds which can be employed as organic functional materials in the formulations preferably have, if they are low-molecular-weight compounds, a molecular weight of $\leq 3,000$ g/mol, more preferably $\leq 2,000$ g/mol and most preferably $\leq 1,000$ g/mol.

5

Of particular interest are furthermore functional compounds which are distinguished by a high glass-transition temperature. In this connection, particularly preferred functional compounds which can be employed as organic functional material in the formulations are those which have a glass-transition temperature of $\geq 70^{\circ}\text{C}$, preferably $\geq 100^{\circ}\text{C}$, more preferably $\geq 125^{\circ}\text{C}$ and most preferably $\geq 150^{\circ}\text{C}$, determined in accordance with DIN 51005.

10

15

The formulations may also comprise polymers as organic functional materials. The compounds described above as organic functional materials, which frequently have a relatively low molecular weight, can also be mixed with a polymer. It is likewise possible to incorporate these compounds covalently into a polymer. This is possible, in particular, with compounds which are substituted by reactive leaving groups, such as bromine, iodine, chlorine, boronic acid or boronic acid ester, or by reactive, polymerisable groups, such as olefins or oxetanes. These can be used as monomers for the production of corresponding oligomers, dendrimers or polymers. The oligomerisation or polymerisation here preferably takes place via the halogen functionality or the boronic acid functionality or via the polymerisable group. It is furthermore possible to crosslink the polymers via groups of this type. The compounds and polymers according to the invention can be employed as crosslinked or uncrosslinked layer.

20

25

30


Polymers which can be employed as organic functional materials frequently contain units or structural elements which have been described in the context of the compounds described above, inter alia those as disclosed and extensively listed in WO 02/077060 A1, in WO 2005/014689 A2 and in

WO 2011/076314 A1. These are incorporated into the present application by way of reference. The functional materials can originate, for example, from the following classes:

- 5 Group 1: structural elements which are able to generate hole-injection and/or hole-transport properties;
- Group 2: structural elements which are able to generate electron-injection and/or electron-transport properties;
- 10 Group 3: structural elements which combine the properties described in relation to groups 1 and 2;
- Group 4: structural elements which have light-emitting properties, in particular phosphorescent groups;
- 15 Group 5: structural elements which improve the transition from the so-called singlet state to the triplet state;
- Group 6: structural elements which influence the morphology or also the emission colour of the resultant polymers;
- Group 7: structural elements which are typically used as backbone.
- 25 The structural elements here may also have various functions, so that a clear assignment need not be advantageous. For example, a structural element of group 1 may likewise serve as backbone.
- The polymer having hole-transport or hole-injection properties employed as organic functional material, containing structural elements from group 1, may preferably contain units which correspond to the hole-transport or hole-injection materials described above.
- 30

Further preferred structural elements of group 1 are, for example, triaryl-amine, benzidine, tetraaryl-para-phenylenediamine, carbazole, azulene, thiophene, pyrrole and furan derivatives and further O-, S- or N-containing
 5 heterocycles having a high HOMO. These arylamines and heterocycles preferably have an HOMO of above -5.8 eV (against vacuum level), particularly preferably above -5.5 eV.

Preference is given, inter alia, to polymers having hole-transport or hole-injection properties, containing at least one of the following recurring units
 10 of the formula HTP-1:

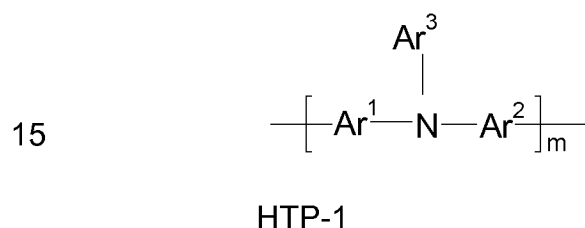


in which the symbols have the following meaning:


- 20 Ar^1 is, in each case identically or differently for different recurring units, a single bond or a monocyclic or polycyclic aryl group, which may optionally be substituted;
- 25 Ar^2 is, in each case identically or differently for different recurring units, a monocyclic or polycyclic aryl group, which may optionally be substituted;
- 30 Ar^3 is, in each case identically or differently for different recurring units, a monocyclic or polycyclic aryl group, which may optionally be substituted;

m is 1, 2 or 3.

Particular preference is given to recurring units of the formula HTP-1 which are selected from the group consisting of units of the formulae HTP-1A to HTP-1C:

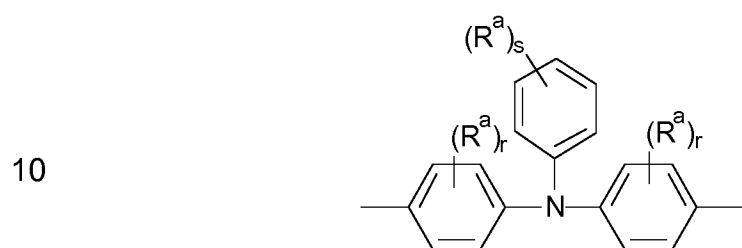


HTP-1A

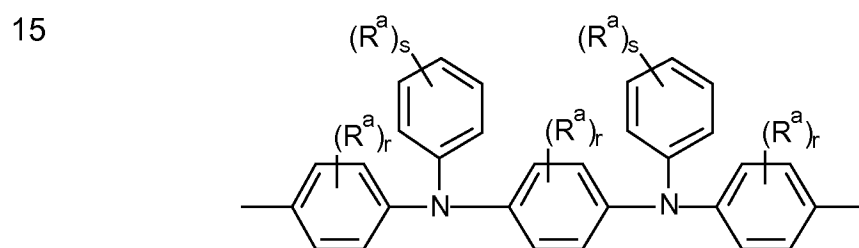

20

HTP-1B

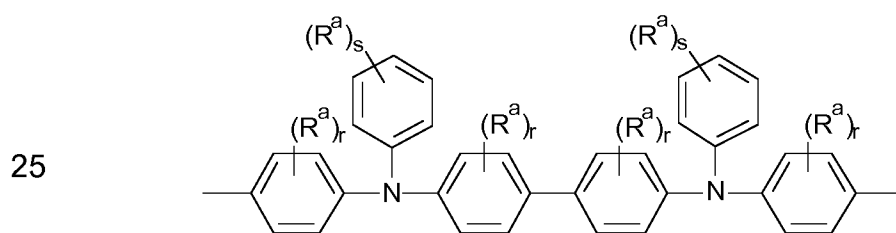

HTP-1C

in which the symbols have the following meaning:


30

5 R^a is on each occurrence, identically or differently, H, a substituted or unsubstituted aromatic or heteroaromatic group, an alkyl, cycloalkyl, alkoxy, aralkyl, aryloxy, arylthio, alkoxycarbonyl, silyl or carboxyl group, a halogen atom, a cyano group, a nitro group or a hydroxyl group;

r is 0, 1, 2, 3 or 4, and

s is 0, 1, 2, 3, 4 or 5.

10 Preference is given, inter alia, to polymers having hole-transport or hole-injection properties, containing at least one of the following recurring units of the formula HTP-2:



in which the symbols have the following meaning:

20 T^1 and T^2 are selected independently from thiophene, selenophene, thieno[2,3-b]thiophene, thieno[3,2-b]thiophene, dithienothiophene, pyrrole and aniline, where these groups may be substituted by one or more radicals R^b ;

25 R^b is selected independently on each occurrence from halogen, -CN, -NC, -NCO, -NCS, -OCN, -SCN, -C(=O)NR⁰R⁰⁰, -C(=O)X, -C(=O)R⁰, -NH₂, -NR⁰R⁰⁰, -SH, -SR⁰, -SO₃H, -SO₂R⁰, -OH, -NO₂, -CF₃, -SF₅, an optionally substituted silyl, carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms;

30 R^0 and R^{00} are each independently H or an optionally substituted carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms;

Ar⁷ and Ar⁸ represent, independently of one another, a monocyclic or polycyclic aryl or heteroaryl group, which may optionally be substituted and may optionally be bonded to the 2,3-position of one or both adjacent thiophene or selenophene groups;

c and e are, independently of one another, 0, 1, 2, 3 or 4, where $1 < c + e \leq 6$;

d and f are, independently of one another, 0, 1, 2, 3 or 4.

Preferred examples of polymers having hole-transport or hole-injection properties are described, inter alia, in WO 2007/131582 A1 and WO 2008/009343 A1.

The polymer having electron-injection and/or electron-transport properties employed as organic functional material, containing structural elements from group 2, may preferably contain units which correspond to the electron-injection and/or electron-transport materials described above.

Further preferred structural elements of group 2 which have electron-injection and/or electron-transport properties are derived, for example, from pyridine, pyrimidine, pyridazine, pyrazine, oxadiazole, quinoline, quinoxaline and phenazine groups, but also triarylborane groups or further O-, S- or N-containing heterocycles having a low LUMO level. These structural elements of group 2 preferably have an LUMO of below -2.7 eV (against vacuum level), particularly preferably below -2.8 eV.

The organic functional material can preferably be a polymer which contains structural elements from group 3, where structural elements which improve the hole and electron mobility (i.e. structural elements from groups 1 and 2) are connected directly to one another. Some of these structural elements

can serve as emitters here, where the emission colours may be shifted, for example, into the green, red or yellow. Their use is therefore advantageous, for example, for the generation of other emission colours or a broad-band emission by polymers which originally emit in blue.

5

The polymer having light-emitting properties employed as organic functional material, containing structural elements from group 4, may preferably contain units which correspond to the emitter materials described above. Preference is given here to polymers containing phosphorescent groups, in particular the emitting metal complexes described above which contain corresponding units containing elements from groups 8 to 10 (Ru, Os, Rh, Ir, Pd, Pt).

10

The polymer employed as organic functional material containing units of group 5 which improve the transition from the so-called singlet state to the triplet state can preferably be employed in support of phosphorescent compounds, preferably the polymers containing structural elements of group 4 described above. A polymeric triplet matrix can be used here.

15

Suitable for this purpose are, in particular, carbazole and connected carbazole dimer units, as described, for example, in DE 10304819 A1 and DE 10328627 A1. Also suitable for this purpose are ketone, phosphine oxide, sulfoxide, sulfone and silane derivatives and similar compounds, as described, for example, in DE 10349033 A1. Furthermore, preferred structural units can be derived from compounds which have been described above in connection with the matrix materials employed together with phosphorescent compounds.

20

25

The further organic functional material is preferably a polymer containing units of group 6 which influence the morphology and/or the emission colour of the polymers. Besides the polymers mentioned above, these are those which have at least one further aromatic or another conjugated structure

30

which do not count amongst the above-mentioned groups. These groups accordingly have only little or no effect on the charge-carrier mobilities, the non-organometallic complexes or the singlet-triplet transition.

- 5 Structural units of this type are able to influence the morphology and/or the emission colour of the resultant polymers. Depending on the structural unit, these polymers can therefore also be used as emitters.

10 In the case of fluorescent OLEDs, preference is therefore given to aromatic structural elements having 6 to 40 C atoms or also tolan, stilbene or bis-styrylarylene derivative units, each of which may be substituted by one or more radicals. Particular preference is given here to the use of groups derived from 1,4-phenylene, 1,4-naphthylene, 1,4- or 9,10-anthrylene, 1,6-, 2,7- or 4,9-pyrenylene, 3,9- or 3,10-perylenylene, 4,4'-biphenylene, 4,4''-terphenylene, 4,4'-bi-1,1'-naphthylene, 4,4'-tolanylene, 4,4'-stilbenylene or 4,4''-bisstyrylarylene derivatives.

15

20 The polymer employed as organic functional material preferably contains units of group 7, which preferably contain aromatic structures having 6 to 40 C atoms which are frequently used as backbone.

25 These include, inter alia, 4,5-dihdropyrene derivatives, 4,5,9,10-tetrahydropyrene derivatives, fluorene derivatives, which are disclosed, for example, in US 5962631, WO 2006/052457 A2 and WO 2006/118345 A1, 9,9-spirobifluorene derivatives, which are disclosed, for example, in WO 2003/020790 A1, 9,10-phenanthrene derivatives, which are disclosed, for example, in WO 2005/104264 A1, 9,10-dihydrophenanthrene derivatives, which are disclosed, for example, in WO 2005/014689 A2, 5,7-dihydrodibenzoxepine derivatives and cis- and trans-indenofluorene derivatives, which are disclosed, for example, in WO 2004/041901 A1 and WO 2004/113412 A2, and binaphthylene derivatives, which are disclosed, for example, in WO 2006/063852 A1, and further units which are disclosed,


30

for example, in WO 2005/056633 A1, EP 1344788 A1, WO 2007/043495 A1, WO 2005/033174 A1, WO 2003/099901 A1 and DE 102006003710.

Particular preference is given to structural units of group 7 which are
 5 selected from fluorene derivatives, which are disclosed, for example, in
 US 5,962,631, WO 2006/052457 A2 and WO 2006/118345 A1, spiro-
 bifluorene derivatives, which are disclosed, for example, in WO 2003/
 020790 A1, benzofluorene, dibenzofluorene, benzothiophene and dibenzo-
 fluorene groups and derivatives thereof, which are disclosed, for example,
 10 in WO 2005/056633 A1, EP 1344788 A1 and WO 2007/043495 A1.

Especially preferred structural elements of group 7 are represented by the
 general formula PB-1:

15

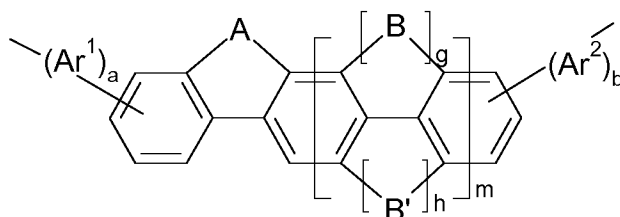

20

formula PB-1

in which the symbols and indices have the following meanings:

A, B and B' are each, also for different recurring units, identically or differ-
 25 ently, a divalent group, which is preferably selected from -CR^cR^d-, -NR^c-,
 -PR^c-, -O-, -S-, -SO-, -SO₂-, -CO-, -CS-, -CSe-, -P(=O)R^c-, -P(=S)R^c-
 and -SiR^cR^d-;

R^c and R^d are selected on each occurrence, independently, from H, halo-
 30 gen, -CN, -NC, -NCO, -NCS, -OCN, -SCN, -C(=O)NR⁰R⁰⁰, -C(=O)X,
 -C(=O)R⁰, -NH₂, -NR⁰R⁰⁰, -SH, -SR⁰, -SO₃H, -SO₂R⁰, -OH, -NO₂, -CF₃,

-SF₅, an optionally substituted silyl, carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms, where the groups R^c and R^d may optionally form a spiro group with a fluorene radical to which they are bonded;

5

X is halogen;

R⁰ and R⁰⁰ are each, independently, H or an optionally substituted carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms;

10

g is in each case, independently, 0 or 1 and h is in each case, independently, 0 or 1, where the sum of g and h in a sub-unit is preferably 1;

15

m is an integer ≥ 1 ;

Ar¹ and Ar² represent, independently of one another, a monocyclic or polycyclic aryl or heteroaryl group, which may optionally be substituted and may optionally be bonded to the 7,8-position or the 8,9-position of an indeno-fluorene group; and

20

a and b are, independently of one another, 0 or 1.


If the groups R^c and R^d form a spiro group with the fluorene group to which these groups are bonded, this group preferably represents a spiro-bifluorene.

25

Particular preference is given to recurring units of the formula PB-1 which are selected from the group consisting of units of the formulae PB-1A to PB-1E:


30

5

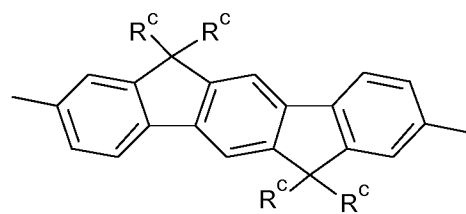


formula PB-1A

10

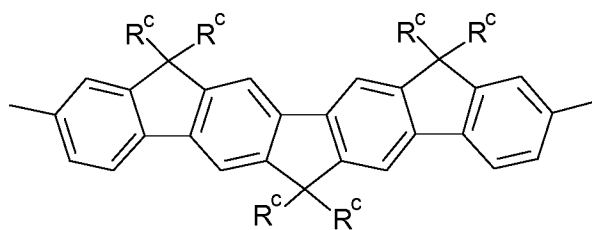

formula PB-1B


15

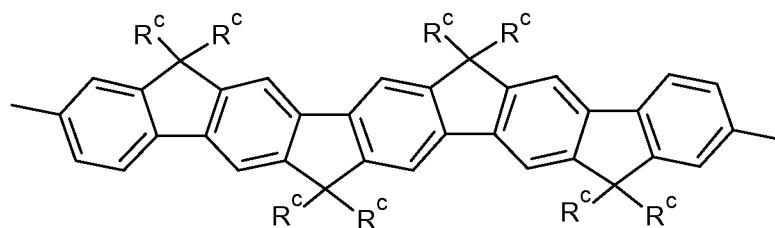

formula PB-1C


20

25

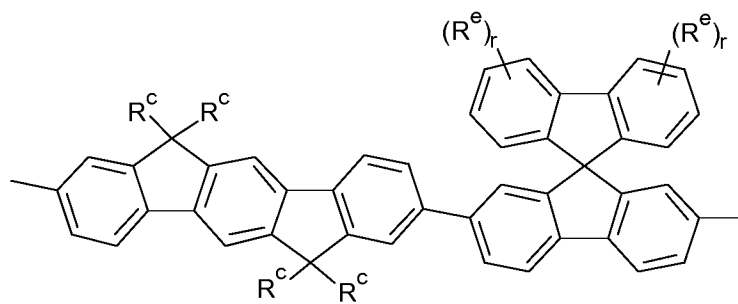

formula PB-1D

30

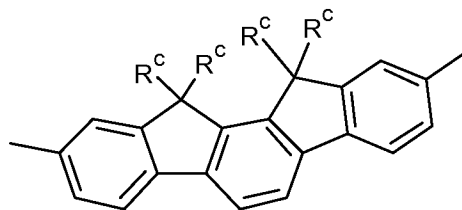


formula PB-1E

where R^c has the meaning described above for formula PB-1, r is 0, 1, 2, 3 or 4, and R^e has the same meaning as the radical R^c.


R^e is preferably -F, -Cl, -Br, -I, -CN, -NO₂, -NCO, -NCS, -OCN, -SCN, -C(=O)NR⁰R⁰⁰, -C(=O)X, -C(=O)R⁰, -NR⁰R⁰⁰, an optionally substituted silyl, aryl or heteroaryl group having 4 to 40, preferably 6 to 20, C atoms, or a straight-chain, branched or cyclic alkyl, alkoxy, alkylcarbonyl, alkoxy-carbonyl, alkylcarbonyloxy or alkoxy-carbonyloxy group having 1 to 20, preferably 1 to 12, C atoms, where one or more hydrogen atoms may optionally be substituted by F or Cl, and the groups R⁰, R⁰⁰ and X have the meaning described above for formula PB-1.

Particular preference is given to recurring units of the formula PB-1 which are selected from the group consisting of units of the formulae PB-1F to PB-1I:

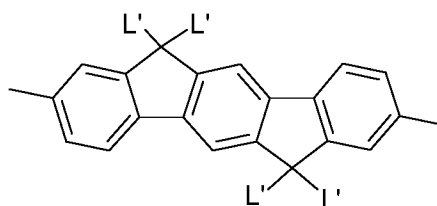


formula PB-1F

5

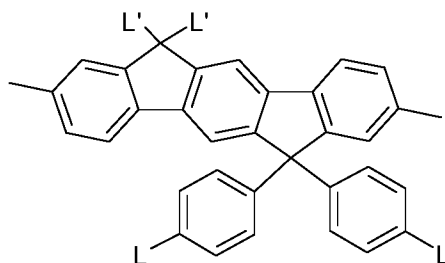

formula PB-1G


10

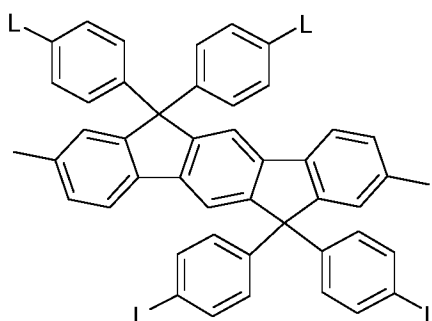

formula PB-1H

15

20

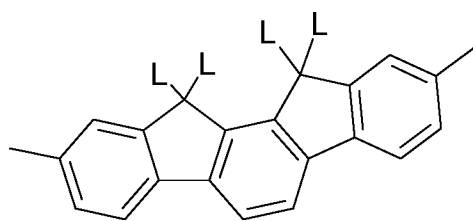

formula PB-1I

in which the symbols have the following meaning:

25 L is H, halogen or an optionally fluorinated, linear or branched alkyl or alkoxy group having 1 to 12 C atoms and preferably stands for H, F, methyl, i-propyl, t-butyl, n-pentoxyl or trifluoromethyl; and

30 L' is an optionally fluorinated, linear or branched alkyl or alkoxy group having 1 to 12 C atoms and preferably stands for n-octyl or n-octyloxy.

For carrying out the present invention, preference is given to polymers which contain more than one of the structural elements of groups 1 to 7 described above. It may furthermore be provided that the polymers preferably contain more than one of the structural elements from one group described above, i.e. comprise mixtures of structural elements selected from one group.

Particular preference is given, in particular, to polymers which, besides at least one structural element which has light-emitting properties (group 4), preferably at least one phosphorescent group, additionally contain at least one further structural element of groups 1 to 3, 5 or 6 described above, where these are preferably selected from groups 1 to 3.

The proportion of the various classes of groups, if present in the polymer, can be in broad ranges, where these are known to the person skilled in the art. Surprising advantages can be achieved if the proportion of one class present in a polymer, which is in each case selected from the structural elements of groups 1 to 7 described above, is preferably in each case ≥ 5 mol%, particularly preferably in each case ≥ 10 mol%.

The preparation of white-emitting copolymers is described in detail, inter alia, in DE 10343606 A1.

In order to improve the solubility, the polymers may contain corresponding groups. It may preferably be provided that the polymers contain substituents, so that on average at least 2 non-aromatic carbon atoms, particularly preferably at least 4 and especially preferably at least 8 non-aromatic carbon atoms are present per recurring unit, where the average relates to the number average. Individual carbon atoms here may be replaced, for example, by O or S. However, it is possible for a certain proportion, optionally all recurring units, to contain no substituents which contain non-aromatic carbon atoms. Short-chain substituents are preferred here, since long-chain

substituents can have adverse effects on layers which can be obtained using organic functional materials. The substituents preferably contain at most 12 carbon atoms, preferably at most 8 carbon atoms and particularly preferably at most 6 carbon atoms in a linear chain.

5

The polymer employed in accordance with the invention as organic functional material can be a random, alternating or regioregular copolymer, a block copolymer or a combination of these copolymer forms.

10 In a further embodiment, the polymer employed as organic functional material can be a non-conjugated polymer having side chains, where this embodiment is particularly important for phosphorescent OLEDs based on polymers. In general, phosphorescent polymers can be obtained by free-radical copolymerisation of vinyl compounds, where these vinyl compounds
15 contain at least one unit having a phosphorescent emitter and/or at least one charge-transport unit, as is disclosed, inter alia, in US 7250226 B2. Further phosphorescent polymers are described, inter alia, in JP 2007/211243 A2, JP 2007/197574 A2, US 7250226 B2 and JP 2007/059939 A.

20 In a further preferred embodiment, the non-conjugated polymers contain backbone units, which are connected to one another by spacer units. Examples of such triplet emitters which are based on non-conjugated polymers based on backbone units are disclosed, for example, in DE 102009023154.

25

In a further preferred embodiment, the non-conjugated polymer can be designed as fluorescent emitter. Preferred fluorescent emitters which are based on non-conjugated polymers having side chains contain anthracene or benzanthracene groups or derivatives of these groups in the side chain,
30 where these polymers are disclosed, for example, in JP 2005/108556, JP 2005/285661 and JP 2003/338375.

These polymers can frequently be employed as electron- or hole-transport materials, where these polymers are preferably designed as non-conjugated polymers.

- 5 Furthermore, the functional compounds employed as organic functional materials in the formulations preferably have, in the case of polymeric compounds, a molecular weight M_w of $\geq 10,000$ g/mol, particularly preferably $\geq 20,000$ g/mol and especially preferably $\geq 50,000$ g/mol.
- 10 The molecular weight M_w of the polymers here is preferably in the range from 10,000 to 2,000,000 g/mol, particularly preferably in the range from 20,000 to 1,000,000 g/mol and very particularly preferably in the range from 50,000 to 300,000 g/mol. The molecular weight M_w is determined by means of GPC (= gel permeation chromatography) against an internal polystyrene
- 15 standard.

The publications cited above for description of the functional compounds are incorporated into the present application by way of reference for disclosure purposes.

- 20 The formulations according to the invention may comprise all organic functional materials which are necessary for the production of the respective functional layer of the electronic device. If, for example, a hole-transport, hole-injection, electron-transport or electron-injection layer is built
- 25 up precisely from one functional compound, the formulation comprises precisely this compound as organic functional material. If an emission layer comprises, for example, an emitter in combination with a matrix or host material, the formulation comprises, as organic functional material, precisely the mixture of emitter and matrix or host material, as described in
- 30 greater detail elsewhere in the present application.

- Besides the said components, the formulation according to the invention may comprise further additives and processing assistants. These include, inter alia, surface-active substances (surfactants), lubricants and greases, additives which modify the viscosity, additives which increase the conductivity, dispersants, hydrophobicising agents, adhesion promoters, flow improvers, antifoams, deaerating agents, diluents, which may be reactive or unreactive, fillers, assistants, processing assistants, dyes, pigments, stabilisers, sensitisers, nanoparticles and inhibitors.
- 10 The present invention furthermore relates to a process for the preparation of a formulation according to the invention, wherein the at least first organic solvent, which contains at least one carbonate-group, and the at least one organic functional material, which can be employed for the production of functional layers of electronic devices, are mixed.
- 15 A formulation in accordance with the present invention can be employed for the production of a layer or multilayered structure in which the organic functional materials are present in layers, as are required for the production of preferred electronic or opto-electronic components, such as OLEDs.
- 20 The formulation of the present invention can preferably be employed for the formation of functional layers on a substrate or one of the layers applied to the substrate. The substrates can either have bank structures or not.
- 25 The present invention likewise relates to a process for the production of an electronic device in which a formulation according to the present invention is applied to a substrate and dried.
- 30 The functional layers can be produced, for example, by flood coating, dip coating, spray coating, spin coating, screen printing, relief printing, gravure printing, rotary printing, roller coating, flexographic printing, offset printing or

nozzle printing, preferably ink-jet printing on a substrate or one of the layers applied to the substrate.

5 After the application of a formulation according to the invention to a substrate or a functional layer already applied, a drying step can be carried out in order to remove the solvent from the continuous phase described above. The drying can preferably be carried out at relatively low temperature and over a relatively long period in order to avoid bubble formation and to obtain a uniform coating. The drying can preferably be carried out at a
10 temperature in the range from 80 to 300°C, more preferably 150 to 250°C and most preferably 160 to 200°C. The drying here can preferably be carried out at a pressure in the range from 10^{-6} mbar to 2 bar, more preferably in the range from 10^{-2} mbar to 1 bar and most preferably in the range from 10^{-1} mbar to 100 mbar. During the drying process, the
15 temperature of the substrates can be vary from -15°C to 250°C. The duration of the drying depends on the degree of drying to be achieved, where small amounts of water can optionally be removed at relatively high temperature and in combination with sintering, which is preferably to be carried out.

20 It may furthermore be provided that the process is repeated a number of times, with formation of different or identical functional layers. Crosslinking of the functional layer formed can take place here in order to prevent dissolution thereof, as is disclosed, for example, in EP 0 637 899 A1.

25 The present invention also relates to an electronic device obtainable by a process for the production of an electronic device.

30 The present invention furthermore relates to an electronic device having at least one functional layer comprising at least one organic functional material which is obtainable by the above-mentioned process for the production of an electronic device.

An electronic device is taken to mean a device which comprises anode, cathode and at least one functional layer in between, where this functional layer comprises at least one organic or organometallic compound.

5

The organic electronic device is preferably an organic electroluminescent device (OLED), a polymeric electroluminescent device (PLED), an organic integrated circuit (O-IC), an organic field-effect transistor (O-FET), an organic thin-film transistor (O-TFT), an organic, light-emitting transistor (O-LET), an organic solar cell (O-SC), an organic photovoltaic (OPV) cell, an organic, optical detector, an organic photoreceptor, an organic field-quench device (O-FQD), an organic electrical sensor, a light-emitting electrochemical cell (LEC) or an organic laser diode (O-laser), more preferably an organic electroluminescent device (OLED) or a polymeric electroluminescent device (PLED).

10

15

Active components are generally the organic or inorganic materials which are introduced between the anode and the cathode, where these active components effect, maintain and/or improve the properties of the electronic device, for example its performance and/or its lifetime, for example charge-injection, charge-transport or charge-blocking materials, but in particular emission materials and matrix materials. The organic functional material which can be employed for the production of functional layers of electronic devices accordingly preferably comprises an active component of the electronic device.

20

25

Organic electroluminescent devices are a preferred embodiment of the present invention. The organic electroluminescent device comprises a cathode, an anode and at least one emitting layer.

30

It is furthermore preferred to employ a mixture of two or more triplet emitters together with a matrix. The triplet emitter having the shorter-wave

emission spectrum serves as co-matrix here for the triplet emitter having the longer-wave emission spectrum.

- 5 The proportion of the matrix material in the emitting layer in this case is preferably between 50 and 99.9% by vol., more preferably between 80 and 99.5% by vol. and most preferably between 92 and 99.5% by vol. for fluorescent emitting layers and between 85 and 97% by vol. for phosphorescent emitting layers.
- 10 Correspondingly, the proportion of the dopant is preferably between 0.1 and 50% by vol., more preferably between 0.5 and 20% by vol. and most preferably between 0.5 and 8% by vol. for fluorescent emitting layers and between 3 and 15% by vol. for phosphorescent emitting layers.
- 15 An emitting layer of an organic electroluminescent device may also encompass systems which comprise a plurality of matrix materials (mixed-matrix systems) and/or a plurality of dopants. In this case too, the dopants are generally the materials whose proportion in the system is the smaller and the matrix materials are the materials whose proportion in the system is the
- 20 greater. In individual cases, however, the proportion of an individual matrix material in the system may be smaller than the proportion of an individual dopant.
- 25 The mixed-matrix systems preferably comprise two or three different matrix materials, more preferably two different matrix materials. One of the two materials here is preferably a material having hole-transporting properties and the other material is a material having electron-transporting properties. However, the desired electron-transporting and hole-transporting properties of the mixed-matrix components may also be combined principally or
- 30 completely in a single mixed-matrix component, where the further mixed-matrix component(s) fulfil(s) other functions. The two different matrix materials may be present here in a ratio of 1:50 to 1:1, preferably 1:20 to

1:1, more preferably 1:10 to 1:1 and most preferably 1:4 to 1:1. Mixed-matrix systems are preferably employed in phosphorescent organic electroluminescent devices. Further details on mixed-matrix systems can be found, for example, in WO 2010/108579.

5

Apart from these layers, an organic electroluminescent device may also comprise further layers, for example in each case one or more hole-injection layers, hole-transport layers, hole-blocking layers, electron-transport layers, electron-injection layers, exciton-blocking layers, electron-blocking layers, charge-generation layers (IDMC 2003, Taiwan; Session 21 OLED (5), T. Matsumoto, T. Nakada, J. Endo, K. Mori, N. Kawamura, A. Yokoi, J. Kido, *Multiphoton Organic EL Device Having Charge Generation Layer*) and/or organic or inorganic p/n junctions. It is possible here for one or more hole-transport layers to be p-doped, for example with metal oxides, such as MoO₃ or WO₃, or with (per)fluorinated electron-deficient aromatic compounds, and/or for one or more electron-transport layers to be n-doped. It is likewise possible for interlayers, which have, for example, an exciton-blocking function and/or control the charge balance in the electroluminescent device, to be introduced between two emitting layers. However, it should be pointed out that each of these layers does not necessarily have to be present. These layers may likewise be present on use of the formulations according to the invention, as defined above.

15

In a further embodiment of the present invention, the device comprises a plurality of layers. The formulation according to the present invention can preferably be employed here for the production of a hole-transport, hole-injection, electron-transport, electron-injection and/or emission layer.

20

The present invention accordingly also relates to an electronic device which comprises at least three layers, but in a preferred embodiment all said layers, from hole-injection, hole-transport, emission, electron-transport, electron-injection, charge-blocking and/or charge-generation layer and in

25

30

which at least one layer has been obtained by means of a formulation to be employed in accordance with the present invention. The thickness of the layers, for example the hole-transport and/or hole-injection layer, can preferably be in the range from 1 to 500 nm, more preferably in the range
5 from 2 to 200 nm.

The device may furthermore comprise layers built up from further low-molecular-weight compounds or polymers which have not been applied by the use of formulations according to the present invention. These can also
10 be produced by evaporation of low-molecular-weight compounds in a high vacuum.

It may additionally be preferred to use the compounds to be employed not as the pure substance, but instead as a mixture (blend) together with further polymeric, oligomeric, dendritic or low-molecular-weight substances of
15 any desired type. These may, for example, improve the electronic properties or themselves emit.

In a preferred embodiment of the present invention, the formulations
20 according to the invention comprise organic functional materials which are employed as host materials or matrix materials in an emitting layer. The formulation here may comprise the emitters described above in addition to the host materials or matrix materials. The organic electroluminescent device here may comprise one or more emitting layers. If a plurality of
25 emission layers are present, these preferably have a plurality of emission maxima between 380 nm and 750 nm, resulting overall in white emission, i.e. various emitting compounds which are able to fluoresce or phosphoresce are used in the emitting layers. Very particular preference is given to three-layer systems, where the three layers exhibit blue, green and orange
30 or red emission (for the basic structure see, for example, WO 2005/011013). White-emitting devices are suitable, for example, as backlighting of LCD displays or for general lighting applications.

It is also possible for a plurality of OLEDs to be arranged one above the other, enabling a further increase in efficiency with respect to the light yield to be achieved.

5

In order to improve the coupling-out of light, the final organic layer on the light-exit side in OLEDs can, for example, also be in the form of a nano-foam, resulting in a reduction in the proportion of total reflection.

10

Preference is furthermore given to an organic electroluminescent device in which one or more layers are applied by means of a sublimation process, in which the materials are applied by vapour deposition in vacuum sublimation units at a pressure below 10^{-5} mbar, preferably below 10^{-6} mbar, more preferably below 10^{-7} mbar.

15

It may furthermore be provided that one or more layers of an electronic device according to the present invention are applied by means of the OVPD (organic vapour phase deposition) process or with the aid of carrier-gas sublimation, in which the materials are applied at a pressure between 10^{-5} mbar and 1 bar.

20

It may furthermore be provided that one or more layers of an electronic device according to the present invention are produced from solution, such as, for example, by spin coating, or by means of any desired printing process, such as, for example, screen printing, flexographic printing, gravure printing or offset printing, but particularly preferably LITI (light induced thermal imaging, thermal transfer printing) or ink-jet printing.

25

These layers may also be applied by a process in which no compound of the formula (I), (II), (IIa), (III) or (IIIa) is employed. An orthogonal solvent can preferably be used here, which, although dissolving the functional

30

material of a layer to be applied, does not dissolve the layer to which the functional material is applied.

- 5 The device usually comprises a cathode and an anode (electrodes). The electrodes (cathode, anode) are selected for the purposes of the present invention in such a way that their band energies correspond as closely as possible to those of the adjacent, organic layers in order to ensure highly efficient electron or hole injection.
- 10 The cathode preferably comprises metal complexes, metals having a low work function, metal alloys or multilayered structures comprising various metals, such as, for example, alkaline-earth metals, alkali metals, main-group metals or lanthanoids (for example Ca, Ba, Mg, Al, In, Mg, Yb, Sm, etc.). In the case of multilayered structures, further metals which have a
- 15 relatively high work function, such as, for example, Ag and Ag nanowire (Ag NW) can also be used in addition to the said metals, in which case combinations of the metals, such as, for example, Ca/Ag or Ba/Ag, are generally used. It may also be preferred to introduce a thin interlayer of a material having a high dielectric constant between a metallic cathode and
- 20 the organic semiconductor. Suitable for this purpose are, for example, alkali-metal or alkaline-earth metal fluorides, but also the corresponding oxides (for example LiF, Li₂O, BaF₂, MgO, NaF, etc.). The layer thickness of this layer is preferably between 0.1 and 10 nm, more preferably between 0.2 and 8 nm, and most preferably between 0.5 and 5 nm.
- 25 The anode preferably comprises materials having a high work function. The anode preferably has a potential greater than 4.5 eV vs. vacuum. Suitable for this purpose are on the one hand metals having a high redox potential, such as, for example, Ag, Pt or Au. On the other hand, metal/metal oxide
- 30 electrodes (for example Al/Ni/NiO_x, Al/PtO_x) may also be preferred. For some applications, at least one of the electrodes must be transparent in order to facilitate either irradiation of the organic material (O-SCs) or the

coupling-out of light (OLEDs/PLEDs, O-lasers). A preferred structure uses a transparent anode. Preferred anode materials here are conductive, mixed metal oxides. Particular preference is given to indium tin oxide (ITO) or indium zinc oxide (IZO). Preference is furthermore given to conductive, 5 doped organic materials, in particular conductive, doped polymers, such as, for example, poly(ethylenedioxythiophene) (PEDOT) and polyaniline (PANI) or derivatives of these polymers. It is furthermore preferred for a p-doped hole-transport material to be applied as hole-injection layer to the anode, where suitable p-dopants are metal oxides, for example MoO_3 or WO_3 , or 10 (per)fluorinated electron-deficient aromatic compounds. Further suitable p-dopants are HAT-CN (hexacyanohexaazatriphenylene) or the compound NPD9 from Novaled. A layer of this type simplifies hole injection in materials having a low HOMO, i.e. an HOMO with a large value.

15 In general, all materials as are used for the layers in accordance with the prior art can be used in the further layers, and the person skilled in the art will be able to combine each of these materials with the materials according to the invention in an electronic device without inventive step.

20 The device is correspondingly structured in a manner known per se, depending on the application, provided with contacts and finally hermetically sealed, since the lifetime of such devices is drastically shortened in the presence of water and/or air.

25 The formulations according to the invention and the electronic devices, in particular organic electroluminescent devices, obtainable therefrom are distinguished over the prior art by one or more of the following surprising advantages:

30 1. The electronic devices obtainable using the formulations according to the invention exhibit very high stability and a very long lifetime compared with electronic devices obtained using conventional methods.

2. The formulations according to the invention can be processed using conventional methods, so that cost advantages can also be achieved thereby.
- 5
3. The organic functional materials employed in the formulations according to the invention are not subject to any particular restrictions, enabling the process of the present invention to be employed comprehensively.
- 10
4. The coatings obtainable using the formulations of the present invention exhibit excellent quality, in particular with respect to the uniformity of the coating.
- 15
- These above-mentioned advantages are not accompanied by an impairment of the other electronic properties.

It should be pointed out that variations of the embodiments described in the present invention fall within the scope of this invention. Each feature disclosed in the present invention can, unless this is explicitly excluded, be replaced by alternative features which serve the same, an equivalent or a similar purpose. Thus, each feature disclosed in the present invention is, unless stated otherwise, to be regarded as an example of a generic series or as an equivalent or similar feature.

20

25

All features of the present invention can be combined with one another in any way, unless certain features and/or steps are mutually exclusive. This applies, in particular, to preferred features of the present invention. Equally, features of non-essential combinations can be used separately (and not in combination).

30

5 It should furthermore be pointed out that many of the features, and in particular those of the preferred embodiments of the present invention, are themselves inventive and are not to be regarded merely as part of the embodiments of the present invention. For these features, independent protection can be sought in addition or as an alternative to each invention presently claimed.

10 The teaching on technical action disclosed with the present invention can be abstracted and combined with other examples.

The invention is explained in greater detail below with reference to working examples, but without being restricted thereby.

15 The person skilled in the art will be able to use the descriptions to produce further electronic devices according to the invention without the need to employ inventive skill and thus can carry out the invention throughout the range claimed.

20

25

30

Working Examples

The working examples presented below were made using the device structure shown in Figure 1. The hole-injection layer (HIL) and hole transport layer (HTL) of all examples were prepared by an inkjet printing process to achieve the desired thickness. For the emissive layer, the individual solvents used in Examples 1 and 2 are listed in Table 2 below.

Solvent(s) used	Viscosity (cPoise)	Surface Tension (dyne/cm)	Boiling point (°C)
Tert-butyl phenyl carbonate	8.5	31.8	270
Methyl phenyl carbonate	3.8	36.5	213

Table 2: List of solvents used in Examples 1 and 2.

The viscosity of the formulations and solvents was measured using a TA instruments ARG2 rheometer over a shear rate range of 10 to 1000 s⁻¹ using 40 mm parallel plate geometry. Measurement was taken as an average between 200 to 800 s⁻¹ where the temperature and shear rate are exactly controlled. The viscosities given in Table 3 are the viscosities of each formulation measured at a temperature of 25°C. Each solvent is measured three times. The stated viscosity value is averaged over said measurements.

Preferably, the organic solvent blend can comprise a surface tension in the range from 15 to 80 mN/m, more preferably in the range from 20 to 60 mN/m and most preferably in the range from 25 to 40 mN/m. The surface tension can be measured using a FTA (First Ten Angstrom) 1000 contact angle goniometer at 20°C. Details of the method are available from First Ten Angstrom as published by Roger P. Woodward, Ph.D. "Surface Tension Measurements Using the Drop Shape Method". Preferably, the pendant drop method can be used to determine the surface tension. All

measurements were performed at room temperature being in the range between 20°C and 22°C. For each formulation three drops are measured. The final value is averaged over said measurements. The tool is regularly cross-checked against various liquids having well known surface tensions.

5

Examples 1 and 2 are fabricated by using the same architecture where the HIL and HTL are inject printed to achieve same thicknesses. The solvent(s) used in the EML are different and the details are listed in Table 3.

10

Example	Layer	Solvent(s)/(%)	Conc. (g/L)	Solvent(s) viscosity (cPoise)	Solvent(s) surface tension (dyne/cm)
1	Green EML	Tert-butyl phenyl carbonate	12	8.5	31.8
2	Green EML	Methyl phenyl carbonate	19	3.8	36.5

15

Table 3: Details of formulations used in Examples 1 and 2

20

Description of the Fabrication Process

Glass substrates covered with pre-structured ITO and bank material were cleaned using ultrasonication in isopropanol followed by de-ionized water, then dried using an air-gun and a subsequent annealing on a hot-plate at 230°C for 2 hours.


25

A hole-injection layer (HIL) using PEDOT-PSS (Clevios Al4083, Heraeus) was inkjet-printed onto the substrate and dried in vacuum. The HIL was then annealed at 185°C for 30 minutes in air.


30

On top of the HIL, a hole-transport layer (HTL) was inkjet-printed, dried in vacuum and annealed at 210°C for 30 minutes in nitrogen atmosphere. As


material for the hole-transport layer polymer HTM-1 was used. The structure of the polymer HTM-1 is the following:

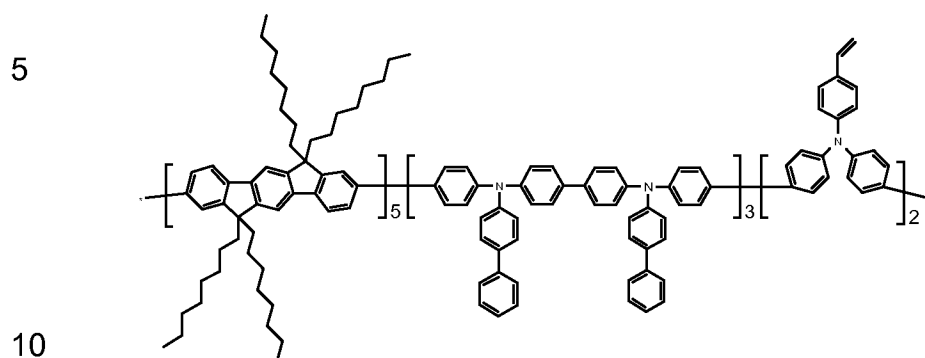


The green emissive layer (G-EML) was also inkjet-printed, vacuum dried and annealed at 160°C for 10 minutes in nitrogen atmosphere. The ink for the green emissive layer contained in all working examples two host materials (i.e. HM-1 and HM-2) as well as one triplett emitter (EM-1). The materials were used in the following ratio: HM-1 : HM-2 : EM-1 = 2 : 2 : 1. The structures of these materials are the following:

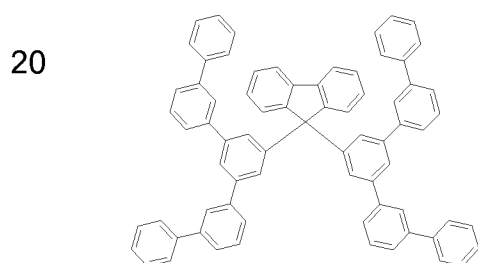

HM-1

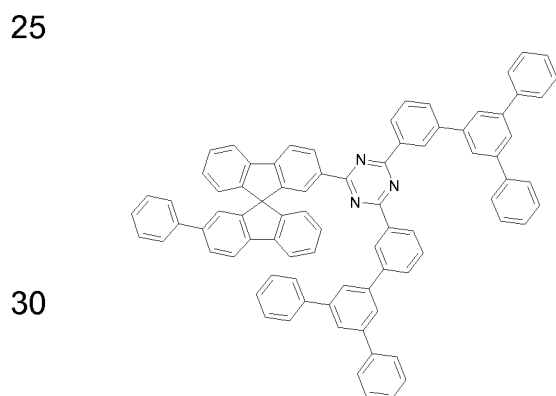

HM-2




EM-1

All the inkjet printing processes were done under yellow light and under ambient conditions.

The devices were then transferred into the vacuum deposition chamber where the deposition of a hole blocking layer (HBL), an electron-transport layer (ETL), and a cathode (Al) was done using thermal evaporation. The devices were then characterized in the glovebox.

As a hole-blocking material for the hole blocking layer ETM-1 was used. The material has the following structure:



ETM-1

In the electron transport layer (ETL) a 50:50 mixture of ETM-1 and LiQ was used. LiQ is lithium 8-hydroxyquinolate.

To measure the OLED performance in current density-luminance-voltage performance, the device is driven by sweeping voltage from -5V to 25 V provided by a Keithley 2400 source measure unit. The voltage over the OLED device as well as the current through the OLED devices are recorded by the Keithley 2400 SMU. The brightness of the device is

detected with a calibrated photodiode. The photo current is measured with a Keithley 6485/E picoammeter. For the spectra, the brightness sensor is replaced by a glass fiber which is connected to an Ocean Optics USB2000+ spectrometer.

5

Results and Discussion

Example 1

An inkjet printed OLED device is prepared with the printed layer using Tert-butyl phenyl carbonate as solvent for the emissive layer. The structure of the pixelated OLED device is glass / ITO / HIL (40 nm) / HTM (20 nm) / EML (60nm) / HBL (10 nm) / ETL (40 nm) / Al whereby the bank was pre-fabricated on the substrate to form pixelated device. In this case, the green emissive materials dissolved in Tert-butyl phenyl carbonate at 12 mg/ml concentration.

15

The luminance efficiency at 1000 cd/m² is 65.32 cd/A. The efficiency of this OLED device is very good the voltage at 1000 cd/m² is 7.35 V.

Example 2

An inkjet printed OLED device is prepared with the printed layer using Methyl phenyl carbonate as solvent for the emissive layer. The structure of the pixelated OLED device is glass / ITO / HIL (40 nm) / HTM (20 nm) / EML (60nm) / HBL (10 nm) / ETL (40 nm) / Al whereby the bank was pre-fabricated on the substrate to form pixelated device. In this case, the green emissive materials dissolved in Methyl phenyl carbonate at 19 mg/ml concentration.

25

The luminance efficiency at 1000 cd/m² is 42.27 cd/A. The efficiency of this OLED device is good the voltage at 1000 cd/m² is 10.56 V

30

The measured values of all examples are summarized in the following Table 4.

5

Example	Voltage [V] @ 1000 cd/m ²	Voltage [V] @ 5000 cd/m ²	Efficiency [cd/A] @ 1000 cd/m ²	Efficiency [cd/A] @ 5000 cd/m ²
1	7.35	10.28	65.32	61.2
2	10.56	14.5	42.27	40.74

Table 4: Measured values of Examples 1 and 2

10

15


20

25

30

Patent Claims

1. Formulation containing at least one organic functional material and at least a first organic solvent, wherein said first organic solvent contains at least one carbonate-group, preferably one carbonate-group.
2. Formulation according to claim 1, wherein the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I)



wherein

- R^1 and R^2 are identical or different at each occurrence, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched or cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-\text{O}-$, $-\text{S}-$, $-\text{NR}^3-$, $-\text{CONR}^3-$, $-\text{CO}-\text{O}-$, $-\text{C}=\text{O}-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$, and in which one or more hydrogen atoms may be replaced by F, or an aryl or heteroaryl group which has from 4 to 14 carbon atoms, or may form a fused heterocyclic or aryl and may be substituted by one or more nonaromatic R^3 radicals, and a plurality of substituents R^3 , either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic or aromatic

ring system, which may be substituted by a plurality of substituents R^3 ; and

R^3 are identical or different at each instance, and are a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH_2 groups may be replaced by $-O-$, $-S-$, $-CO-O-$, $-C=O-$, $-CH=CH-$ or $-C\equiv C-$, and in which one or more hydrogen atoms may be replaced by F, or an aryl or heteroaryl group which has from 4 to 14 carbon atoms and may be substituted by one or more nonaromatic R^3 radicals.

3. Formulation according to claim 2, wherein the first organic solvent, which contains one carbonate-group, is a carbonate-group group containing solvent according to general formula (I) wherein

R^1 and R^2 are identical or different at each occurrence, and are an aryl or heteroaryl group which has from 4 to 14 carbon atoms, or may form a fused heterocyclic or aryl and may be substituted by one or more nonaromatic R^3 radicals, and a plurality of substituents R^3 , either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic or aromatic ring system, which may be substituted by a plurality of substituents R^3 .

4. Formulation according to claim 2, wherein the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I) wherein

R^1 is a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or

alkenyloxy group having from 2 to 20 carbon atoms or a
branched or cyclic alkenyl or alkenyloxy group having from 3 to
20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group
having from 2 to 20 carbon atoms or a branched or cyclic alkynyl
or alkynyloxy group having from 3 to 20 carbon atoms, in which
one or more nonadjacent CH₂ groups may be replaced by -O-,
-S-, -NR³-, -CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in
which one or more hydrogen atoms may be replaced by F; and
R² is an aryl or heteroaryl group which has from 4 to 14 carbon
atoms, or may form a fused heterocyclic or aryl and may be
substituted by one or more nonaromatic R³ radicals, and a
plurality of substituents R³, either on the same ring or on the two
different rings, may together in turn form a mono- or polycyclic,
aliphatic or aromatic ring system, which may be substituted by a
plurality of substituents R³;

5. Formulation according to claim 2, wherein the first organic solvent,
which contains one carbonate-group, is a carbonate-group containing
solvent according to general formula (I)
wherein
R¹ and R² are identical or different at each occurrence, and are a
straight-chain alkyl or alkoxy group having from 1 to 20 carbon
atoms or a branched or cyclic alkyl or alkoxy group having from 3
to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group
having from 2 to 20 carbon atoms or a branched or cyclic alkenyl
or alkenyloxy group having from 3 to 20 carbon atoms, or a
straight-chain alkynyl or alkynyloxy group having from 2 to 20
carbon atoms or a branched or cyclic alkynyl or alkynyloxy group
having from 3 to 20 carbon atoms, in which one or more
nonadjacent CH₂ groups may be replaced by -O-, -S-, -NR³-,

-CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F.

- 5 6. Formulation according to claim 2, wherein the first organic solvent, which contains one carbonate-group, is a carbonate-group containing solvent according to general formula (I)

wherein

10 R¹ is a straight-chain alkyl or alkoxy group having from 1 to 20 carbon atoms or a branched alkyl or alkoxy group having from 3 to 20 carbon atoms, a straight-chain alkenyl or alkenyloxy group having from 2 to 20 carbon atoms or a branched alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a straight-chain alkynyl or alkynyloxy group having from 2 to 20 carbon atoms or a branched alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH₂ groups may be replaced by -O-, -S-, -NR³-, -CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F; and

15 20 R² is a cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, a cyclic alkenyl or alkenyloxy group having from 3 to 20 carbon atoms, or a cyclic alkynyl or alkynyloxy group having from 3 to 20 carbon atoms, in which one or more nonadjacent CH₂ groups may be replaced by -O-, -S-, -NR³-, -CONR³-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F.

- 25 7. Formulation according to one or more of claims 1 to 6, wherein the first solvent has a surface tension of ≥ 25 mN/m.

8. Formulation according to one or more of claims 1 to 7, wherein the content of the first solvent is in the range from 50 to 100 vol.-%, based on the total amount of solvents in the formulation.
- 5 9. Formulation according to one or more of claims 1 to 8, wherein the first solvent has a boiling point in the range from 100 to 400°C.
- 10 10. Formulation according to one or more of claims 1 to 9, wherein the formulation comprises at least one second solvent which is different from the first solvent.
11. Formulation according to one or more of claims 1 to 10, wherein the second solvent has a boiling point in the range from 100 to 400°C.
- 15 12. Formulation according to one or more of claims 1 to 11, wherein the at least one organic functional material has a solubility in the first as well as in the second solvent in the range from 1 to 250 g/l.
13. Formulation according to one or more of claims 1 to 12, wherein the formulation has a surface tension in the range from 1 to 70 mN/m.
- 20 14. Formulation according to one or more of claims 1 to 13, wherein the formulation has a viscosity in the range from 1 to 50 mPa·s.
- 25 15. Formulation according to one or more of claims 1 to 14, wherein the content of the at least one organic functional material in the formulation is in the range from 0.001 to 20 weight-%, based on the total weight of the formulation.
- 30 16. Formulation according to one or more of claims 1 to 15, wherein the at least one organic functional material is selected from the group consisting of organic conductors, organic semiconductors, organic fluorescent compounds, organic phosphorescent compounds, organic

light-absorbent compounds, organic light-sensitive compounds, organic photosensitisation agents and other organic photoactive compounds such as organometallic complexes of transition metals, rare earths, lanthanides and actinides.

5

17. Formulation according to claim 16, wherein the at least one organic functional material is selected from the group consisting of fluorescent emitters, phosphorescent emitters, host materials, matrix materials, exciton-blocking materials, electron-transport materials, electron-injection materials, hole-conductor materials, hole-injection materials, n-dopants, p-dopants, wide-band-gap materials, electron-blocking materials and hole-blocking materials.

10

15

18. Formulation according to claim 16, wherein the at least one organic functional material is an organic semiconductor selected from the group consisting of hole-injecting, hole-transporting, emitting, electron-transporting and electron-injecting materials.

20

19. Formulation according to claim 18, wherein the at least one organic semiconductor is selected from the group consisting of hole-injecting and hole-transporting materials.

25

20. Formulation according to claim 19, wherein the hole-injecting and hole-transporting material is a polymeric compound or a blend of a polymeric compound and a non-polymeric compound.

30

21. Process for the preparation of a formulation according to one or more of claims 1 to 20, wherein the at least one organic functional material and the at least first solvent are mixed.

22. Process for the preparation of an electroluminescent device, wherein at least one layer of the electroluminescent device is prepared in that a formulation according to one of more of claims 1 to 20 is deposited, preferably printed, on a surface and subsequently dried.

23. Electroluminescent device, wherein at least one layer is prepared in that a formulation according to one or more of claims 1 to 20 is deposited, preferably printed, on a surface and subsequently dried.

5

10

15

20

25

30

5	100 nm	Al Cathode
	40 nm	ETL
	10 nm	HBL
	60 nm	EML (Examples 1 and 2)
	20 nm	HTL
	40 nm	HIL
	50 nm	ITO Anode
		Substrate

Figure 1

10

15

20

25

30

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/058844

A. CLASSIFICATION OF SUBJECT MATTER INV. C09D11/36 C09K11/06 C09D11/38 C09D11/50 C09D11/52 H01L51/00 ADD. According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C09D C09K H01L Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, CHEM ABS Data, WPI Data														
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>KR 2010 0032491 A (DONGWOO FINE CHEM CO LTD [KR]) 26 March 2010 (2010-03-26) paragraphs [0040] - [0047]; table 1 claims -----</td> <td>1,2, 7-19, 21-23</td> </tr> <tr> <td>X</td> <td>US 2009/256117 A1 (SESHADRI VENKATARAMANAN [US] ET AL) 15 October 2009 (2009-10-15) claims paragraphs [0084], [0086] -----</td> <td>1,2,8-23</td> </tr> <tr> <td>X</td> <td>US 2013/256603 A1 (CHESTERFIELD REID JOHN [US] ET AL) 3 October 2013 (2013-10-03) claims; examples ----- -/-</td> <td>1,2,7, 9-23</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	KR 2010 0032491 A (DONGWOO FINE CHEM CO LTD [KR]) 26 March 2010 (2010-03-26) paragraphs [0040] - [0047]; table 1 claims -----	1,2, 7-19, 21-23	X	US 2009/256117 A1 (SESHADRI VENKATARAMANAN [US] ET AL) 15 October 2009 (2009-10-15) claims paragraphs [0084], [0086] -----	1,2,8-23	X	US 2013/256603 A1 (CHESTERFIELD REID JOHN [US] ET AL) 3 October 2013 (2013-10-03) claims; examples ----- -/-	1,2,7, 9-23
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	KR 2010 0032491 A (DONGWOO FINE CHEM CO LTD [KR]) 26 March 2010 (2010-03-26) paragraphs [0040] - [0047]; table 1 claims -----	1,2, 7-19, 21-23												
X	US 2009/256117 A1 (SESHADRI VENKATARAMANAN [US] ET AL) 15 October 2009 (2009-10-15) claims paragraphs [0084], [0086] -----	1,2,8-23												
X	US 2013/256603 A1 (CHESTERFIELD REID JOHN [US] ET AL) 3 October 2013 (2013-10-03) claims; examples ----- -/-	1,2,7, 9-23												
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.														
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family														
Date of the actual completion of the international search 11 June 2018		Date of mailing of the international search report 22/06/2018												
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Haider, Ursula												

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2018/058844

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/127335 A1 (HUNTSMAN SPEC CHEM CORP [US]; PARR RODNEY W [AU]; DARRAGAS KATTY F [BE] 30 November 2006 (2006-11-30) claim 1; table 1 -----	1-7, 9-17,21
X	US 2016/216408 A1 (TANAKA TOMOHIKO [JP] ET AL) 28 July 2016 (2016-07-28) Synthesis examples -----	1-3,7-21
X	US 6 410 643 B1 (SWANSON MELVIN J [US]) 25 June 2002 (2002-06-25) example 2 -----	1,2,4, 7-15,21
X	EP 2 253 710 A1 (UBE INDUSTRIES [JP]) 24 November 2010 (2010-11-24) claims; examples -----	1,2,5-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/058844

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
KR 20100032491	A	26-03-2010	NONE	
US 2009256117	A1	15-10-2009	CA 2720694 A1 CN 102056959 A CN 102850728 A EP 2276788 A1 EP 2851383 A1 HK 1174656 A1 JP 5683020 B2 JP 2011516695 A KR 20110008077 A US 2009256117 A1 US 2015028322 A1 WO 2009126918 A1	15-10-2009 11-05-2011 02-01-2013 26-01-2011 25-03-2015 02-09-2016 11-03-2015 26-05-2011 25-01-2011 15-10-2009 29-01-2015 15-10-2009
US 2013256603	A1	03-10-2013	CN 103262278 A EP 2656411 A1 JP 2014504021 A KR 20130143627 A US 2013256603 A1 WO 2012088194 A1	21-08-2013 30-10-2013 13-02-2014 31-12-2013 03-10-2013 28-06-2012
WO 2006127335	A1	30-11-2006	TW 200700513 A WO 2006127335 A1	01-01-2007 30-11-2006
US 2016216408	A1	28-07-2016	CN 104067151 A EP 2757394 A1 JP 2013076982 A KR 20140069158 A TW 201323481 A US 2014268333 A1 US 2016216408 A1 WO 2013039179 A1	24-09-2014 23-07-2014 25-04-2013 09-06-2014 16-06-2013 18-09-2014 28-07-2016 21-03-2013
US 6410643	B1	25-06-2002	AT 323098 T AU 3484501 A CA 2399043 A1 DE 60118714 T2 EP 1268505 A2 JP 5048193 B2 JP 2003525945 A MX PA02007445 A US 6410643 B1 WO 0166554 A2	15-04-2006 17-09-2001 13-09-2001 01-02-2007 02-01-2003 17-10-2012 02-09-2003 28-01-2003 25-06-2002 13-09-2001
EP 2253710	A1	24-11-2010	EP 2253710 A1 ES 2618255 T3 JP 5402646 B2 JP WO2009102069 A1 WO 2009102069 A1	24-11-2010 21-06-2017 29-01-2014 16-06-2011 20-08-2009