(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 1 440 221 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
07.12.2005 Bulletin 2005/49

(21) Application number: **02801400.9**

(22) Date of filing: **11.10.2002**

(51) Int Cl.[7]: **E21B 43/12**, E21B 43/34, E21B 43/40

(86) International application number:
PCT/GB2002/004648

(87) International publication number:
WO 2003/033865 (24.04.2003 Gazette 2003/17)

(54) **COMBINATION WELL KICK OFF AND GAS LIFT BOOSTER UNIT**

KOMBINIERTE BOHRLOCHSTIMULATIONS- UND GASLIFTVERSTÄRKEREINHEIT

UNITE COMBINEE DE DEMARRAGE DE PUITS ET DE SURPRESSEUR D'EXTRACTION PAR EJECTION

(84) Designated Contracting States:
GB NL

(30) Priority: **11.10.2001 US 328526 P**

(43) Date of publication of application:
28.07.2004 Bulletin 2004/31

(73) Proprietor: **WEATHERFORD/LAMB, INC.**
Houston Texas 77027 (US)

(72) Inventors:
- **CURTIS, Glen, A.**
Sugar Land, TX 77479 (US)
- **CHITTY, Gregory, H.**
Houston, TX 77007 (US)

(74) Representative:
Talbot-Ponsonby, Daniel Frederick
Marks & Clerk
4220 Nash Court
Oxford Business Park South
Oxford OX4 2RU (GB)

(56) References cited:
WO-A-00/75510
WO-A-01/71158
WO-A-93/07391
GB-A- 1 061 743
US-A- 5 048 603
US-A- 5 390 743
US-A- 5 992 517

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 440 221 B1

Description

[0001] The present invention generally relates to a system and a method to kick off or maintain a well. More particularly, the invention relates to the use of pressurized gas to increase productivity of a well. More particularly still, the invention relates to stimulating and maintaining a well using gas from wellbore fluid or adjacent pipeline.

[0002] Oil and gas wells include a wellbore formed in the earth to access hydrocarbon bearing formations. Typically, a borehole is initially formed and thereafter the borehole is lined with steel pipe, or casing in order to prevent cave in and facilitate the isolation of portions of the wellbore. To complete the well, at least one area of the wellbore casing is perforated to form a fluid path for the hydrocarbons. Fluids can be produced from oil and gas wells by utilizing internal pressure within a producing zone to lift the fluid through the wellbore to the surface of the earth. As a formation matures and some significant percentage of the product is recovered, a reduction of formation pressure occurs. With this reduction in formation pressure, the wellbore fluid eventually no longer flows without some form of artificial assistance, despite the presence of product in the formations. Artificial assistance may be accomplished in many different ways. However, one common form of artificial assistance is the use of a gas such as nitrogen to lighten the wellbore fluid to allow the wellbore fluid to flow out of the wellbore. The following are several examples illustrating how artificial assistance may be used to stimulate the wellbore or efficiently perform a downhole operation.

[0003] In one example, artificial assistance is used to stimulate a shut-in well. Typically, a wellbore becomes shut-in as the internal formation pressure becomes insufficient to urge fluid to the surface of the well allowing back pressure from a hydrostatic head of fluid in the wellbore to stop the well from producing. This is known in the industry as "killing" or "shutting-in" the well. Thereafter, some form of artificial means is needed to stimulate the shut-in well and restart production. One common method is the use of nitrogen to stimulate or "kick off" the well. Typically, nitrogen arrives at the well site in a liquid state along with injection equipment. Nitrogen injection equipment typically includes a pump system, reservoir of liquid nitrogen and a coiled tubing unit to inject the nitrogen into the well. During the injection process, excess heat from an engine driver expands the liquid nitrogen into nitrogen gas. The gas is injected under pressure through the coiled tubing and enters the hydrostatic fluid column in the wellbore. As the lighter gas enters the well stream, the hydrostatic fluid pressure decreases, allowing the remaining reservoir pressure within a producing zone to lift the fluid through the wellbore, thereby restarting production of the well.

[0004] In another example, artificial assistance may be used to clean out a well. Generally, the well incurs damage during drilling and completion operation called skin damage or the reservoir may be of the type that requires fracturing to achieve full commercialisation. Typically, some form of hydraulic fracturing treatment is used to achieve commercial success. For example, in an "acid frac", hydrochloric acid treatment is used in a carbonate formation to etch open faces of induced fractures. When the treatment is complete, the fracture closes and the etched surfaces provide a high conductivity path from the reservoir to the wellbore. In some situations, small sized particles are mixed with fracturing fluid to hold fractures open after the hydraulic fracturing treatment. This is known in the industry as "prop and frac". In addition to the naturally occurring sand grains, manmade or specially engineered proppants, such as resin coated sand or high strength ceramic material, may also be used to form the fracturing mixture used to "prop and frac". Proppant materials are carefully sorted for size and sphericity to provide an effective means to prop open the fractures, thereby allowing fluid from the reservoir to enter the wellbore. However, both the "acid frac" and "prop and frac" create wellbore material such as fines that may further damage the wellbore by restricting the flow of the reservoir fluid into the wellbore. Typically, a cleaning method using nitrogen gas is employed to clean out the sand and fines from the wellbore.

[0005] In another example, artificial assistance may be employed to lighten the drilling fluid in a deep water drilling operation. Typically, a deep water drilling operation requires the pressure created by the downhole mud be maintained at a slightly greater pressure than the reservoir pressure. The slight difference between the pressure created by the mud weight and the reservoir pressure is known in the industry as a "trip margin". For example, if the pressure created by the mud weight is much greater than the reservoir pressure, the formation fluid is forced back into the reservoir, causing the reservoir to clog and not produce efficiently. On the contrary, if the pressure created by the mud weight is much less than the reservoir pressure, the formation fluid will force all the mud out, damaging the wellbore. In order to maintain the proper trip margin, a gas may be injected into the wellbore to regulate the mud weight. Additionally, the reduction in drilling fluid pressure may allow casing points to be removed, thereby reducing the cost of drilling in deep water.

[0006] Stimulating a well or increasing the efficiency of a downhole operation using pressurized gas, such as nitrogen, has several drawbacks. For example, the injection equipment must be transported to the platform or the well site. Due to space limitations, especially offshore, the extra equipment is a burden. Additionally, nitrogen injected at a lower end of a wellbore does not change the surface pressure of the well. Eventually this surface pressure may cause the well to load back up with fluid and kill the well again. Also, nitrogen equipment includes a standard group of components and they are typically not designed for a specific well. This means that all the equipment must necessarily be transported

to a well even though the well requires a reduced amount of pressure of gas.

[0007] The use of pressurized gas is also useful on wells with reduced flow rates. An older producing well with a reduced flow rate may need some type of pressure boost in order for its production fluid or gas production to enter a flow line with fluid from other higher pressure wells. Internal pressure within a producing zone in these wells may diminish over time and become insufficient to urge the fluid up the wellbore. Therefore, a gas lift injection system is used in conjunction with the internal pressure to urge the fluid up a wellbore. Gas lift systems require an outside gas source, a flow line, and a downhole assembly containing a string of gas lift valves with different operating pressures, and a compressor. The outside gas source may be natural gas brought to the low pressure well from other wells. The gas is compressed and injected downhole, creating pressure in the annulus between the casing and the downhole tubing. The gas is forced through the gas lift valves into the tubing string, starting with the gas valve located at the highest point in contact with the hydrostatic fluid column in the tubing. As the gas enters the liquid column it carries fluid up and out of the tubing. As the hydrostatic fluid column falls below the first gas valve, the second highest valve opens, injecting gas while the higher valve closes. The sequence continues until each valve opens and closes down to the lowest valve on the string, which then remains open to continue to urge fluid up the tubing string.

[0008] Maintaining a well using gas lift techniques has several deficiencies. For example, if adequate pressure is not available from a local gas source, gas must be pressurized offsite and returned to the well for stimulation. An additional flow line must be added or, to avoid friction loss in a line, a compressor must be installed to compress the gas from the nearby wells. Many offshore platforms do not have the space available to integrate a local separation system along with a gas lift compressor on site. Also, a source well must always be available to provide natural gas for a struggling well. Depending on the location this may be a problem for wells that are separated by long distances or if the source well flow when combined with the flow from the stimulated well will have an adverse affect.

[0009] In view of the deficiencies of the current nitrogen stimulation and/or gas lift methods for stimulating and maintaining production from a well, a need exists for a fluid system that does not require additional onsite equipment. There is a further need for a fluid system that does not exclusively rely on an outside gas source for maintaining adequate gas pressure.

[0010] US 5390743, WO 00/75510 and WO 01/71158 describe systems for use with undersea wells in which gas separated from the well fluid is used to assist in lifting well fluid from the wellhead to the surface.

[0011] The present invention generally relates to a system and method for using a gas in a well. In one aspect of the present invention there is provided a system for utilizing a gas in a well includes a source of fluid and at least one multiphase pump for transporting the fluid. The system further includes a separator for separating the gas from the fluid and an injection means for injecting the gas into the well. A portion of the source fluid is from at least one nearby well. The gas may be used for kicking off a shut-in well by the simultaneous injection of the gas into the shut-in well and the reduction of the wellhead pressure. The gas may also be used for maintaining production of the well, cleaning out the well or lightening the wellbore fluid in a deep water well. Further aspects and preferred features are set out in claim 2 *et seq.*

[0012] The multiphase pump may form part of a portable multiphase pump system. The pump system may include a support member, with the multiphase pump disposed on the support member. The pump system further includes a pressure compensated pump disposed on the support member, the pressure compensated pump supplies hydraulic fluid to the multiphase pump. The pump system also includes a power unit disposed on the support member, the power unit provides energy to the pressure compensated pump.

[0013] In another aspect, the invention provides a method for recycling gas from a wellbore fluid. The method includes the steps of communicating the wellbore fluid to a separator and separating a gas from the wellbore fluid. The method further includes the steps of delivering a portion of the gas to at least one multiphase pump and pumping the gas to a well. Additional fluid from a nearby well is also communicated to the separator.

[0014] Thus, at least in prefeavd embodiments, the invention provides a fluid system that stimulates by pushing gas into the weli to lighten the hydrostatic fluid so the well can flow while simultaneously lowering the wellhead pressure of the stimulated well by pulling up on it by a multiphase pump.

[0015] Some preferred embodiments of the invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Figure 1 illustrates an exemplary multiphase pump system;

Figure 2 is a schematic view of a combination well kick off and gas lift booster fluid circuit;

Figure 3 is a schematic view of a fluid circuit with an alternative source for kicking off a shut-in well;

Figure 4 is a schematic view of a fluid circuit for maintaining well production;

Figure 5 is a schematic view of a fluid handling circuit for cleaning out a well after the completion of a prop and frac job; and

Figure 6 is a schematic view of a fluid handling circuit for assisting a deep water drilling operation.

[0016] Figure 1 illustrates an exemplary multiphase pump system 100. In one embodiment, the multiphase pump system 100 may be connected to an outlet on a wellhead. The multiphase pump system 100 includes a multiphase pump 105, a pressure compensated pump 140 and a power unit 110 mounted on a support member 155. The support member 155 permits the pump system 100 to be moved as one unit. Additionally, the multiphase pump 105 is designed to handle fluids containing one or more phases, including solids, water, gas, oil, and combinations thereof. The multiphase pump 105 has two pairs of driving cylinders 145, 146 placed in line with the respective vertically disposed plungers 120, 130. Although the pairs of cylinders 145, 146 are disclosed, it is contemplated that the aspects of the present invention may be used with one cylinder or any number of cylinders.

[0017] The pressure compensated pump 140 supplies hydraulic fluid to the cylinders 145, 146 to control the movement of the plungers 120, 130. The power unit 110 provides energy to the pressure compensated pump 140 to drive the plungers 120, 130. Additionally, the plungers 120, 130 are designed to move in alternating cycles. As the plunger 120 is driven towards its retracted position, a limit switch is triggered towards the end of the plunger's 120 movement. This limit switch causes a shuttle valve (not shown) to shift. In turn, a swash plate (not shown) of the compensated pump 140 is caused to reverse angle, thereby redirecting the hydraulic fluid to the cylinders 146. As a result, the plunger 130 is pushed downward to its retracted position. The plunger 130 triggers a limit switch towards the end of its movement, thereby causing the pump 140 to redirect the hydraulic fluid to the cylinders 145. In this manner, plungers 120, 130 are caused to move in alternating cycles.

[0018] Generally, suction is created as the plunger 120 moves toward an extended position. The suction causes fluid to enter the multiphase pump 105 through a process inlet 125 and fill a first cavity (not shown). At the same time, the plunger 130 moves in an opposite direction toward a retracted position. This causes the plunger 130 to expel fluid to an outlet 135. The plungers 120, 130 move in the opposite directions causing continuous flow of fluid from the inlet 125 to the discharge 135. In this respect, the plungers 120, 130 operate as a pair of substantially counter-synchronous fluid pumps.

[0019] Figure 2 is a schematic view of a combination well kick off and gas lift booster fluid circuit 200. For ease of explanation the invention will first be described generally with respect to Figure 2, thereafter more specifically with figures 3 to 6. The fluid circuit 200 connects a wellbore outlet 210 to a wellbore inlet 240. The fluid circuit 200 includes the multiphase pump 105 that is connected to the outlet 210 to draw down the wellhead pressure and obtain wellbore fluid. After pressurizing the wellbore fluid in the multiphase pump 105, the wellbore fluid is pumped into a two-phase separator 205 to extract the gas from the fluid. The fluid portion of the wellbore fluid is sent directly into the pipeline through line 230 while the pressurized gas extracted from the wellbore fluid flows through a gas outlet 320 into a metering device 220. The metering device 220 selectively controls the amount of pressurized gas flow to the inlet 240 while excess gas is directed to a gas pipeline through line 235 or recombined with the pipeline fluid. As the gas enters the well 215, the gas is typically pumped through coil tubing (not shown) in a tubing string 330 to lighten the hydrostatic fluid column in the well 215 to stimulate or maintain production.

[0020] Figure 3 is a schematic view of a fluid circuit 300 with an alternative source 305 for kicking off a shut-in well 315. In a typical shut-in well 315, the hydrostatic fluid column pressure in the tubing string 330 is greater than the internal pressure of a formation 345 therefore no movement of fluid through the wellbore outlet 320. In order to kick off or stimulate the well 315 back into production, the hydrostatic fluid column pressure must be reduced by injecting gas into the well 315 and utilizing the pump 105. As discussed, there is no movement of fluid from the shut-in well 315 into line 335, therefore gas enters the circuit 300 from the alternative source 305. As illustrated on Figure 3, the alternative source 305 consists of non-separated wellbore fluid from a local producing well. However, other forms of alternative sources may be employed, such as gas from a reservoir, so long as they are capable of supplying a sufficient amount of gas.

[0021] The fluid circuit 300 connects the wellbore outlet 320 to a wellbore inlet 355. The fluid circuit includes a valve 310 to control the amount of the alternative source 305 entering line 335. The alternative source 305 flows through line 335 into the multiphase pump 105. Thereafter, the source 305 is pressurized and pumped into the two-phase separator 205. The extracted fluids are pushed from the separator 205 to the line 230 using the separator pressure. The extracted pressurized gas is diverted out the gas outlet 320, where the flow is metered by the metering device 220 and directed back toward the well 315. The pressurized gas is forced through a gas lift injection system 325 to reduce the hydrostatic fluid column pressure in the tubing string 330.

[0022] The gas lift injection system 325 typically includes a plurality of gas valves 340 to distribute the gas in the tubing string 330. Generally, the gas flows through the gas valve 340 located at the highest point in contact with the hydrostatic fluid column in the tubing string 330. As the gas enters the liquid column it expands, forcing fluid up and out of the tubing string 330. After the hydrostatic fluid column falls below the highest gas valve 340, then the next highest valve 340 opens injecting gas while the highest valve 340 closes. The sequence continues until each valve 340 opens and closes down to

the lowest valve 340 on the string, which remains open to continue to urge fluid up the tubing string 330. Alternatively, if the well 315 does not have a gas lift injection system 325, coiled tubing (not shown) may be inserted into the tubing string 330 to transport pressurized gas into the tubing string 330 to stimulate the well 315. In either case, after the well 315 is stimulated, the well 315 should be maintained to extend the response of the well stimulation.

[0023] In another aspect of this invention, the simultaneous injection of gas into the well 315 and the reduction of wellhead pressure by the multiphase pump 105 results in a push-pull effect. In other words, the gas volume required by the gas lift assembly 325 is reduced because the wellhead pressure is reduced by the multiphase pump 105. Therefore, the well 315 may be kicked off or stimulated in an effective manner.

[0024] Figure 4 is a schematic view of a fluid circuit 400 for maintaining well 405 production. The fluid circuit 400 connects a wellbore outlet 420 to a wellbore inlet 440 as natural gas from a wellbore fluid is used to maintain the gas lift assembly 325. As shown, the pump 105 draws wellbore fluid from the wellbore outlet 420 to pressurize wellbore fluid and subsequently pump into the two-stage separator 205. Thereafter, the fluid portion is pushed from the separator 205 into the line 230 using the pressure created in the separator 205 while the extracted pressurized gas exits out the gas outlet 320. Thereafter, the gas enters the metering device 220 where a portion of the gas is returned to the well 405 for operation of the gas lift assembly 325. The remaining portion of gas is directed though line 410 into a gas line. Alternatively, the remaining portion of gas may be recombined with the fluid exiting out of the separator 205 or directed to other wells requiring gas for artificial assistance. In either case, the gas entering the well 405 is forced through the gas lift injection system 325 into the tubing string 330, thereby maintaining production. In this respect, no additional gas lines are required to maintain the production of the well 405 since the initial gas injected into the gas injection system 325 is reused.

[0025] As shown on Figure 4, the circuit 400 may optionally include a gas source 410 for providing gas for the gas injection system 325 at any desired time during operation, such as in the beginning of the operation, intermittently during operation, or continuously during operation. The amount of gas from the source 410 is controlled by a valve 415, thereby allowing the operator to modulate between a dual well flow and pressure regulation. The gas source 410 may come from a variety of sources such as wellbore fluid from a local well or a gas reservoir. The gas source 410 combines with the wellbore fluid of the well 405 in line 335 and thereafter enters the pump 105 through the process described above.

[0026] In another aspect of this invention, the multiphase pump 105 pulls the wellbore fluid from the well 405 resulting in a reduction of wellhead pressure. In this manner, the gas volume required by the gas lift assembly 325 is reduced and production is maximized. Therefore, the well 405 is less likely to build up with a hydrostatic fluid column.

[0027] Figure 5 shows a fluid handling circuit 500 for cleaning out a well 510 after the completion of a prop and frac job. Typically, the prop and frac job deposits a large amount of sand or pellets downhole to prop open a formation 540. Thereafter, the well 510 is cleaned out by injecting gas or a mixture of gas and fluid to remove the excess sand or pellets from the formation 540 allowing wellbore fluid to exit the formation 540.

[0028] The circuit 500 connects a wellbore outlet 515 to a wellbore inlet 520. An optional fluid feed line 525 is connected to the well inlet 520 for supplying the liquid portion of the cleaning fluid. The wellbore inlet 520 may also optionally include a gas supply 530 for providing gas used to lighten the cleaning fluid at any desired time during operation, such as in the beginning of the operation, intermittently during operation, or continuously during operation.

[0029] Wellbore fluid returning from the wellbore annulus 535 exits the wellbore outlet 515 and is directed to a primary separator 505. The primary separator 505 may consist of a pressure vessel separator or a four-phase separator. Four phase separators are known in the art. An exemplary separator suitable for use with the present invention is disclosed in U.S. Patent No. 5,857,522 issued to *Bradfield, et al.,* which patent is herein incorporated by reference in its entirety. The wellbore fluid is processed in the separator 505 to produce separate streams of solid, oil, liquid, and gas. Although a four-phase separator is disclosed herein, other types of separators known to a person of ordinary skill in the art are equally applicable.

[0030] Generally, the wellbore fluid entering into the separator 505 passes to a first stage of the separator 505. Solids (sludge), such as drilled cuttings, present in the wellbore fluid are removed in the first stage by gravity forces that are aided by centrifugal action of a device (not shown) disposed in the separator 505. Because solids are heavier than the remaining fluids, the solids collect at the bottom of the separator 505 and are removed therefrom through line 585. The remaining wellbore fluid is substantially free of solids when it passes to a second stage.

[0031] The second stage essentially acts as a three-phase separator to separate into different streams gas, oil, and liquid present in the wellbore fluid. The separated gas stream varies in composition but usually includes the gas in the cleaning fluid and small amounts of entrained fine solids and liquids. Due to its composition, the gas stream is sometimes referred to as wet gas.

[0032] According to aspects of the present invention, the wet gas may be recycled and re-used in the cleaning operation. As shown in Figure 5, the wet gas is discharged from the separator 505 through wet gas line 560 which is connected to the well inlet 520. Typically, the wet gas leaving the separator 505 is low in pressure.

Therefore, it would be desirable to increase the pressure of the wet gas. However, as discussed above, the wet gas may include three different phases, namely, solid, liquid, and gas as shown in the embodiment. Therefore, a multiphase pump 105 may be connected to the wet gas line 560 to boost the pressure of the wet gas. The multiphase pump 105 is designed to handle fluids containing one or more phases, including solids, water, gas, oil, and combinations thereof.

[0033] Even though the wet gas contains three phases, the multiphase pump 105 may effectively increase the pressure of the wet gas in the wet gas line 560 and recycle the wet gas back to the well inlet 520. In this respect, the fluid handling circuit 500 according to aspects of the present invention may significantly reduce the requirements of separation equipment for recycling the wet gas. Moreover, the multiphase pump 105 will allow recovery or recycling of low pressure gas. In this manner, valuable wellbore fluid gas such as nitrogen and natural gas may be recycled and/or recaptured.

[0034] The fluid handling circuit 500 may include a flare line 565 connected to the wet gas line 560. The flare line 565 may be used to discharge excess wet gas in the wet gas line 560. The flare line 565 may direct the excess wet gas to a flare stack or a collecting unit for other manners of disposal.

[0035] The oil contained in the wellbore fluid is separated at the second stage. The separated oil collects in a tank (not shown) placed in the second stage of the separator 505. When the oil reaches a predetermined level in the tank, the oil is removed from the separator 505 through line 580. Typically, the oil is disposed in an oil tank for recovery.

[0036] Finally, liquid that is substantially free of oil collects in a chamber or reservoir (not shown). Typically, the liquid consists substantially of water. When the liquid reaches a predetermined level, it is discharged to a fluid supply 550 through line 575. In this manner, the liquid may be recycled for use during the cleaning operation. The circuit 500 may optionally include a secondary separator (not shown) to separate out any gas remaining in the liquid before delivering it to the fluid supply 550. The separated gas may either be flared or delivered to the wet gas line 560 through a line (not shown) connecting line 575 to line 560. From the fluid supply 550, the liquid may be delivered to the well inlet 520 by a pump 555.

[0037] In another embodiment, an export line 570 may be connected to the wet gas line 560. When natural gas is used as the lightening gas or the cleaning occurs in a producing formation, the wet gas leaving the separator 505 will contain valuable natural gas. The multiphase pump 105 may be used to increase the wet gas pressure to that of the export line 570. Thereafter, the wet gas may be captured and realized by directing the gas stream to the export line 570. As a result, the well 510 may start producing for an operator even before the cleaning of the well 510 is completed.

[0038] In another embodiment, a wet screw compressor 590 may be connected to the wet gas line 560. The wet screw compressor 590 is an apparatus for pumping large volumes of wet gas from a low pressure to a medium pressure. In this respect, the wet screw compressor 590 may economically pump the wet gas into the export line 570 during the cleaning operation. In addition, the wet screw compressor 590 may pump the wet gas to the multiphase pump 105 at a higher pressure, thereby allowing the multiphase pump 105 to move a larger volume of wet gas to the well inlet 520.

[0039] In operation, the wellbore fluid exiting the well outlet 515 enters the separator 505 for separation as shown in Figure 5. The wellbore fluid is processed in the separator 505 to produce separate streams of solids, liquids, oil, and gas. The solids are removed from the separator 505 through line 585. The oil is removed from the separator 505 through line 580. The liquid is removed from the separator 505 through line 575 and delivered to the fluid supply 550 for recycling. The gas is removed from the separator 505 through line 560. From there, the wet gas enters the multiphase pump 105 where its pressure is increased to facilitate transport through the circuit 500. Even though the wet gas contains more than one phase, the multiphase pump 105 may effectively increase the pressure of the wet gas. The wet gas leaving the multiphase pump 105 is directed to the well inlet 520 through line 560 and re-used. Alternatively, if the wet gas contains hydrocarbons, the export line 570 may be opened to deliver the hydrocarbons for sale or other use. If excess wet gas exists, the flare line 565 may be opened to direct wet gas to a flare stack for disposal. In this manner, the wet gas in the wellbore fluid may be recycled, collected, or otherwise disposed.

[0040] As shown in Figure 5, the circuit 500 may optionally include a second gas supply 532 connected to the separator 505. The second gas supply 532 may be used as an additional source of gas such as nitrogen. Additionally, the second gas supply 532 may assist with transient fluid flow management common with cleaning operations.

[0041] Figure 6 shows a fluid handling circuit 600 for assisting a deep water drilling operation. Typically, a deep water drilling operation includes a floating vessel 610 and a riser system 615. During the drilling operation, drilling fluid is pumped through a drill string 620. Thereafter, wellbore fluid, a mixture of drilling fluid and formation fluid, exits up the annulus 535. The wellbore fluid enters the fluid handling circuit 600 through a wellbore outlet 640. The circuit 600 connects the wellbore outlet 640 to a wellbore inlet 645. The wellbore inlet 645 is connected to a gas distribution line 625. The gas distribution line 625 communicates gas into the annulus 535 to lighten the wellbore fluid, thereby encouraging the wellbore fluid to flow out of the annulus 535. The wellbore inlet 645 may optionally include a gas supply 530 for providing gas used to lighten the wellbore fluid at any desired time during operation, such as in the beginning

of the operation, intermittently during operation, or continuously during operation.

[0042] Wellbore fluid from the wellbore annulus 535 exits the wellbore outlet 640 and is directed to the primary separator 505. The primary separator 505 may consist of a pressure vessel separator or a four-phase separator. Generally, the wellbore fluid entering into the separator 505 passes to a first stage where the solids are removed. The remaining wellbore fluid is substantially free of solids when it passes to a second stage. The second stage essentially acts as a three-phase separator to separate gas, oil, and liquid present in the wellbore fluid into different streams. The separated gas stream is referred to as wet gas.

[0043] According to aspects of the present invention, the wet gas may be recycled and re-used to enhance the deep water drilling operation. As shown in Figure 6, the wet gas is discharged from the separator 505 through wet gas line 560, which is connected to the well inlet 645. Typically, the wet gas leaving the separator 505 is low in pressure. Therefore, it would be desirable to increase the pressure of the wet gas through the multiphase pump 105. Even though the wet gas contains three phases, the multiphase pump 105 may effectively increase the pressure of the wet gas in the wet gas line 560 and recycle the wet gas back to the well inlet 645. In this respect, the fluid handling circuit 600 according to aspects of the present invention may significantly reduce the requirements of separation equipment for recycling the wet gas. Moreover, the multiphase pump 105 will allow recovery or recycling of low pressure gas. In this manner, valuable wellbore fluid gas such as nitrogen and natural gas may be recycled and/or recaptured.

[0044] The fluid handling circuit 600 may include a flare line 565 connected to the wet gas line 560. The flare line 565 may be used to discharge excess wet gas in the wet gas line 560. The flare line 565 may direct the excess wet gas to a flare stack or a collecting unit for other manners of disposal.

[0045] The oil contained in the wellbore fluid is separated at the second stage. The separated oil collects in a tank (not shown) placed in the second stage of the separator 505. When the oil reaches a predetermined level in the tank, the oil is removed from the separator 505 through line 580. Typically, the oil is disposed in an oil tank for recovery. Additionally, liquid that is substantially free of oil collects in a chamber or reservoir (not shown). Typically, the liquid consists substantially of water. When the liquid reaches a predetermined level, it is discharged to the fluid supply 550 through line 575. In this manner, the liquid may be recycled for use during the drilling operation. The circuit 600 may optionally include a secondary separator (not shown) to separate out any gas remaining in the liquid before delivering it to the fluid supply 550. The separated gas may either be flared or delivered to the wet gas line 560 through a line (not shown) connecting line 575 to line 560. From the fluid supply 550, the liquid may be delivered to the well inlet 645 by the pump 555.

[0046] In another embodiment, a wet screw compressor 655 may be connected to the wet gas line 560. The wet screw compressor 655 is an apparatus for pumping large volumes of wet gas from a low pressure to a medium pressure. In this respect, the wet screw compressor 655 may pump the wet gas to the multiphase pump 105 at a higher pressure, thereby allowing the multiphase pump 105 to move a larger volume of wet gas to the well inlet 645.

[0047] In operation, the wellbore fluid exiting the well outlet 640 enters the separator 505 for separation as shown in Figure 6. The wellbore fluid is processed in the separator 505 to produce separate streams of solids, liquids, oil, and gas. The solids are removed from the separator 505 through line 585. The oil is removed from the separator 505 through line 580. The gas is removed from the separator 505 through line 560. From there, the wet gas enters the multiphase pump 105 where its pressure is increased to facilitate transport through the circuit 600. Even though the wet gas contains more than one phase, the multiphase pump 105 may effectively increase the pressure of the wet gas. The wet gas leaving the multiphase pump 105 is directed to the well inlet 645 through line 560 and thereafter communicated through the line 625 into the annulus 535 to lighten the wellbore fluid, thereby encouraging the wellbore fluid to flow out of the annulus 535. If excess wet gas exists, the flare line 565 may be opened to direct wet gas to a flare stack for disposal. In this manner, the wet gas in the wellbore fluid may be recycled, collected, or otherwise disposed.

[0048] As shown in Figure 6, the circuit 600 may optionally include a second gas supply 532 connected to the separator 505. The second gas supply 532 may be used as an additional source of gas such as nitrogen. Additionally, the second gas supply 532 may assist with transient fluid flow management common with underbalanced drilling operations.

[0049] While the foregoing is directed to embodiments of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

Claims

1. A system for utilizing a gas in a well, comprising:

a source of fluid (305);
at least one multiphase pump (105) for transporting the fluid;
a separator (205;505) for separating phases in the fluid so as to separate gas from the fluid;
and an injector (355) for injecting the gas from the separator into the well;

characterised in that a portion of the source

fluid is from at least one nearby well comprised in the system.

2. A system as claimed in claim 1, wherein the at least one multiphase pump (105) is a wet screw compressor.

3. A system as claimed in claim 1, wherein the at least one multiphase pump (105) is a ram pump.

4. A system as claimed in claim 3, wherein the ram pump (105) consists of a pair of plungers (120;130), each plunger movable between an extended position and a retracted position.

5. A system as claimed in claim 4, wherein the plungers (120,130) are moved by a fluid operated cylinder (145,146).

6. A system as claimed in any preceding claim, further including a wet screw compressor (590) to increase the volume of fluid to the at least one multiphase pump (105).

7. A system as claimed in claim 6, wherein the wet screw compressor is arranged to pump a wet gas to an export line (570).

8. A system as claimed in any preceding claim, wherein the well is a shut-in well (315) and the gas is used to kick off the shut-in well.

9. A system as claimed in claim 8, arranged so that a first portion of the gas is injected into the shut-in well (315) and a second portion of the gas is sent to an export line (370).

10. A system as claimed in claim 8 or 9, wherein the source of fluid includes an alternative (305) source in selective communication with the at least one multiphase pump.

11. A system as claimed in claim 10, wherein the alternative source (305) consists of wellbore fluid from at least one wellhead.

12. A system as claimed in claim 10, wherein the alternative source (305) consists of gas from a gas reservoir.

13. A system as claimed in claim 10, 11 or 12, wherein the alternative source (305) provides fluid to the at least one multiphase pump (105), whereby the fluid is pressurized and pumped to the separator (205).

14. A system as claimed in any of claims 8 to 13, wherein the at least one multiphase pump (105) is in communication with the shut-in well (315) to reduce a wellhead pressure in the shut-in well.

15. A system as claimed in claim 14, wherein the gas injected into the shut-in well (315) and the simultaneous reduction of the wellhead pressure by the multiphase pump (105) stimulate the shut-in well.

16. A system as claimed in any of claims 1 to 7, wherein the injector includes a gas lift assembly (325) and the gas is used to increase production from the well.

17. A system as claimed in claim 16, wherein the fluid is communicated to the at least one multiphase pump (105) and thereby pressurized and pumped to the separator (205).

18. A system as claimed in claim 16 or 17, wherein the gas is injected into the gas lift assembly (325) to increase production of the well.

19. A system as claimed in any preceding claim, wherein the separator (205) removes solids and liquids from the fluid.

20. A system as claimed in any of claims 1 to 7, wherein the well contains deposits of sand and the gas is used to clean out the well.

21. A system as claimed in claim 20, wherein the gas is a wet gas.

22. A system as claimed in claim 21, wherein the wet gas is selected from the group consisting of nitrogen, hydrocarbon, and combinations thereof.

23. A system as claimed in claim 21 or 22, wherein a first portion of the wet gas is communicated to the at least one multiphase pump to be pressurized and a second portion of the wet gas is communicated to an export line.

24. A system as claimed in claim 21, 22 or 23, wherein the wet gas is pumped into the well to remove the sand from the well.

25. A system as claimed in any of claims 1 to 7, wherein the well comprises a riser system (615), whereby the gas is used to lighten the fluid in the riser system.

26. A system as claimed in claim 25, wherein the gas is a wet gas.

27. A system as claimed in claim 26, wherein the wet gas is communicated to the at least one multiphase pump (105) to be pressurized and pumped through a gas distribution line to lighten the fluid flowing up the riser system (615).

28. A system as claimed in any of claims 20 to 27, wherein the fluid is communicated to the separator (505).

29. A system as claimed in any preceding claim, wherein the source of fluid includes the well.

30. A system as claimed in any of claims 1 to 28, wherein the source of fluid comprises a gas line.

31. A system as claimed in any preceding claim, wherein the multiphase pump (105) is part of a portable multiphase pump system (100), the portable multiphase pump system further comprising:

a support member (155) operatively connected to the multiphase pump; and
a power unit operatively connected to the multiphase pump, the power unit for providing energy to the multiphase pump.

32. A system as claimed in claim 31, wherein the portable multiphase pump system (100) further comprises a pressure compensated pump (140).

33. A system as claimed in claim 32, wherein the pressure compensated pump (140) is operatively connected to the multiphase pump (105) and supplies fluid to the multiphase pump.

34. A method for recycling gas from a wellbore fluid, comprising:

communicating the wellbore fluid to a separator (205;505);
separating a gas from the wellbore fluid;
delivering a portion of the gas to at least one multiphase pump (105); and
pumping the gas to a well;

characterised by delivering additional fluid from a nearby well (305) to the separator.

35. A method as claimed in claim 34, further including the step of recycling the gas.

36. A method as claimed in claim 34 or 35, wherein the gas comprises one or more phases.

37. A method as claimed in claim 34, 35 or 36, further including the step of delivering the gas to an export line.

38. A method as claimed in any of claims 34 to 37, wherein the at least one multiphase pump (105) is a ram pump.

39. A method as claimed in claim 38, wherein the ram pump (105) consists of a pair of plungers, each plunger movable between an extended position and a retracted position.

40. A method as claimed in claim 39, wherein the plungers (120,130) are moved by a fluid operated cylinder (145,146).

41. A method as claimed in any of claims 34 to 40, further comprising using a wet screw compressor (390) to increase the volume of fluid to the at least one multiphase pump (105).

42. A method as claimed in claim 41, wherein the wet screw compressor (590) may pump a wet gas to an export line (570).

43. A method as claimed in any of claims 34 to 42, further including the step of stimulating the production of the well.

44. A method as claimed in any of claims 34 to 42, further including the step of operating a gas lift injection system (325) by forcing the wet gas into the gas lift injection system.

45. A method as claimed in any of claims 34 to 42, further including the step of cleaning sand out of the well.

46. A method as claimed in any of claims 34 to 42, further including the step of drilling a deep water well using a floating vessel (610), a riser system (615) and a gas distribution line (625).

47. A method as claimed in claim 46, wherein the wet gas is communicated from floating vessel (610) through the gas distribution line (625) into the riser system (615) to lighten the wellbore fluid flowing up the riser system.

Patentansprüche

1. System zum Verwenden eines Gases in einem Bohrloch, wobei das System folgendes umfaßt:

eine Fluidquelle (305),
wenigstens eine Mehrphasenpumpe (105) zum Fördern des Fluids,
einen Abscheider (205; 505) zum Abscheiden von Phasen im Fluid, um so Gas aus dem Fluid abzuscheiden,
und eine Einpreßvorrichtung (355) zum Einpressen des Gases aus dem Abscheider in das Bohrloch,

dadurch gekennzeichnet, daß ein Teil des

Quellenfluids aus wenigstens einem nahegelegenen Bohrloch ist, das in dem System enthalten ist.

2. System nach Anspruch 1, wobei die wenigstens eine Mehrphasenpumpe (105) ein Naßschraubenverdichter ist.

3. System nach Anspruch 1, wobei die wenigstens eine Mehrphasenpumpe (105) eine Druckpumpe ist.

4. System nach Anspruch 3, wobei die Druckpumpe (105) aus einem Paar von Druckkolben (120; 130) besteht, wobei jeder Druckkolben zwischen einer ausgefahrenen Position und einer eingezogenen Position bewegt werden kann.

5. System nach Anspruch 4, wobei die Druckkolben (120, 130) durch einen fluidbetriebenen Zylinder (145, 146) bewegt werden.

6. System nach einem der vorhergehenden Ansprüche, das ferner einen Naßschraubenverdichter (590) einschließt, um das Fluidvolumen zu der wenigstens einen Mehrphasenpumpe zu steigern.

7. System nach Anspruch 6, wobei der Naßschraubenverdichter so angeordnet wird, daß er ein Naßgas zu einer Ausfuhrleitung (570) pumpt.

8. System nach einem der vorhergehenden Ansprüche, wobei das Bohrloch ein geschlossenes Bohrloch (315) ist und das Gas benutzt wird, um das geschlossene Bohrloch zu eröffnen.

9. System nach Anspruch 8, so angeordnet, daß ein erster Teil des Gases in das geschlossene Bohrloch (315) eingepreßt wird und ein zweiter Teil des Gases zu einer Ausfuhrleitung (370) geschickt wird.

10. System nach Anspruch 8 oder 9, wobei die Fluidquelle eine alternative (305) Quelle in selektiver Verbindung mit der wenigstens einen Mehrphasenpumpe einschließt.

11. System nach Anspruch 10, wobei die alternative Quelle (305) aus Fördermedium aus wenigstens einem Förderkopf besteht.

12. System nach Anspruch 10, wobei die alternative Quelle (305) aus Gas aus einem Gasbehälter besteht.

13. System nach Anspruch 10, 11 oder 12, wobei die alternative Quelle (305) der wenigstens einen Mehrphasenpumpe (105) Fluid zuführt, wodurch das Fluid unter Druck gesetzt und zum Abscheider (205) gepumpt wird.

14. System nach einem der Ansprüche 8 bis 13, wobei die wenigstens eine Mehrphasenpumpe (105) in Verbindung mit dem geschlossenen Bohrloch (315) steht, um einen Förderkopfdruck in dem geschlossenen Bohrloch zu verringern.

15. System nach Anspruch 14, wobei das in das geschlossene Bohrloch (315) eingepreßte Gas und das gleichzeitige Verringern des Förderkopfdrucks durch die Mehrphasenpumpe (105) das geschlossene Bohrloch stimulieren.

16. System nach einem der Ansprüche 1 bis 7, wobei die Einpreßvorrichtung eine Gasliftbaugruppe (325) einschließt und das Gas benutzt wird, um die Förderung aus dem Bohrloch zu steigern.

17. System nach Anspruch 16, wobei das Fluid der wenigstens einen Mehrphasenpumpe (105) zugeleitet und dadurch unter Druck gesetzt und zum Abscheider (205) gepumpt wird.

18. System nach Anspruch 16 oder 17, wobei das Gas in die Gasliftbaugruppe (325) eingepreßt wird, um die Förderung des Bohrlochs zu steigern.

19. System nach einem der vorhergehenden Ansprüche, wobei der Abscheider (205) Feststoffe und Flüssigkeiten aus dem Fluid entfernt.

20. System nach einem der Ansprüche 1 bis 7, wobei das Bohrloch Ablagerungen von Sand enthält und das Gas benutzt wird, um das Bohrloch auszuräumen.

21. System nach Anspruch 20, wobei das Gas ein Naßgas ist.

22. System nach Anspruch 21, wobei das Naßgas aus der Gruppe ausgewählt wird, die aus Stickstoff, Kohlenwasserstoff und Verbindungen derselben besteht.

23. System nach Anspruch 21 oder 22, wobei ein erster Teil des Naßgases der wenigstens einen Mehrphasenpumpe (105) zugeleitet wird, um unter Druck gesetzt zu werden, und ein zweiter Teil des Naßgases einer Ausfuhrleitung zugeleitet wird.

24. System nach Anspruch 21, 22 oder 23, wobei das Naßgas in das Bohrloch gepumpt wird, um den Sand aus dem Bohrloch zu entfernen.

25. System nach einem der Ansprüche 1 bis 7, wobei das Bohrloch ein Steigleitungssystem (615) umfaßt, wodurch das Gas benutzt wird, um das Fluid im Steigleitungssystem leichter zu machen.

26. System nach Anspruch 25, wobei das Gas ein Naßgas ist.

27. System nach Anspruch 26, wobei das Naßgas der wenigstens einen Mehrphasenpumpe (105) zugeleitet wird, um unter Druck gesetzt und durch eine Gasverteilungsleitung gepumpt zu werden, um das Fluid, das im Steigleitungssystem (615) emporströmt, leichter zu machen.

28. System nach einem der Ansprüche 20 bis 27, wobei das Fluid dem Abscheider (505) zugeleitet wird.

29. System nach einem der vorhergehenden Ansprüche, wobei die Fluidquelle das Bohrloch einschließt.

30. System nach einem der Ansprüche 1 bis 28, wobei die Fluidquelle eine Gasleitung umfaßt.

31. System nach einem der vorhergehenden Ansprüche, wobei die Mehrphasenpumpe (105) Teil eines tragbaren Mehrphasenpumpsystems (100) ist, wobei das tragbare Mehrphasenpumpsystem ferner folgendes umfaßt:

ein wirksam mit der Mehrphasenpumpe verbundenes Stützelement (155) und

eine wirksam mit der Mehrphasenpumpe verbundene Antriebseinheit, wobei die Antriebseinheit zur Energiezufuhr für die Mehrphasenpumpe dient.

32. System nach Anspruch 31, wobei das tragbare Mehrphasenpumpsystern (100) ferner eine Druckausgleichpumpe (140) umfaßt.

33. System nach Anspruch 32, wobei die Druckausgleichpumpe (140) wirksam mit der Mehrphasenpumpe (105) verbunden wird und der Mehrphasenpumpe Fluid zuführt.

34. Verfahren zum Zurückführen von Gas aus einem Fördermedium, wobei das Verfahren folgendes umfaßt:

Zuleiten des Fördermediums zu einem Abscheider (205; 505),
Abscheiden eines Gases aus dem Fördermedium,
Zuführen eines Teils des Gases zu wenigstens einer Mehrphasenpumpe (105) und
Pumpen des Gases zu einem Bohrloch,

gekennzeichnet durch Zuführen zusätzlichen Fluids von einem nahegelegenen Bohrloch (305) zu dem Abscheider.

35. Verfahren nach Anspruch 34, das ferner den Schritt einschließt, das Gas zurückzuführen.

36. Verfahren nach Anspruch 34 oder 35, wobei das Gas eine oder mehrere Phasen umfaßt.

37. Verfahren nach Anspruch 34, 35 oder 36, das ferner den Schritt einschließt, das Gas einer Ausfuhrleitung zuzuführen.

38. Verfahren nach einem der Ansprüche 34 bis 37, wobei die wenigstens eine Mehrphasenpumpe (105) eine Druckpumpe ist.

39. Verfahren nach Anspruch 38, wobei die Druckpumpe (105) aus einem Paar von Druckkolben besteht, wobei jeder Druckkolben zwischen einer ausgefahrenen Position und einer eingezogenen Position bewegt werden kann.

40. Verfahren nach Anspruch 39, wobei die Druckkolben (120, 130) durch einen fluidbetriebenen Zylinder (145, 146) bewegt werden.

41. Verfahren nach einem der Ansprüche 34 bis 40, das ferner umfaßt, einen Naßschraubenverdichter (590) zu benutzen, um das Fluidvolumen der wenigstens einen Mehrphasenpumpe (105) zu steigern.

42. Verfahren nach Anspruch 41, wobei der Naßschraubenverdichter (590) ein Naßgas zu einer Ausfuhrleitung (570) pumpen kann.

43. Verfahren nach einem der Ansprüche 34 bis 42, das ferner den Schritt einschließt, die Förderung des Bohrlochs zu stimulieren.

44. Verfahren nach einem der Ansprüche 34 bis 42, das ferner den Schritt einschließt, ein Gaslifteinpreßsystem (325) durch Drücken des Naßgases in das Gaslifteinpreßsystem zu betreiben.

45. Verfahren nach einem der Ansprüche 34 bis 42, das ferner den Schritt einschließt, Sand aus dem Bohrloch auszuräumen.

46. Verfahren nach einem der Ansprüche 34 bis 42, das ferner den Schritt einschließt, unter Benutzung eines schwimmenden Schiffs (610), eines Steigleitungssystems (615) und einer Gasverteilungsleitung (625) ein Tiefwasserbohrloch zu bohren.

47. Verfahren nach Anspruch 46, wobei das Naßgas von dem schwimmenden Schiff (610) durch die Gasverteilungsleitung (625) in das Steigleitungssystem (615) geleitet wird, um das Fördermedium, das im Steigleitungssystem emporströmt, leichter

zu machen.

Revendications

1. Système d'utilisation d'un gaz dans un puits, comprenant:

   une source de fluide (305);
   au moins une pompe polyphasique (105) pour transporter le fluide;
   un séparateur (205; 505) pour séparer les phases dans le fluide de sorte à séparer le gaz du fluide;
   et un injecteur (355) pour injecter le gaz provenant du séparateur dans le puits;

   caractérisé en ce qu'une partie du fluide de la source provient d'au moins une source proche du puits comprise dans le système.

2. Système selon la revendication 1, dans lequel la au moins une pompe polyphasique (105) est constituée par un compresseur à vis en régime humide.

3. Système selon la revendication 1, dans lequel la au moins une pompe polyphasique (105) est une pompe à vérin.

4. Système selon la revendication 3, dans lequel la pompe à vérin (105) comprend une paire de pistons (120; 130), chaque piston pouvant être déplacé entre une position étendue et une position rétractée.

5. Système selon la revendication 4, dans lequel les pistons (120, 130) son déplacés par un cylindre actionné par le fluide (145, 146).

6. Système selon l'une quelconque des revendications précédentes, englobant en outre un compresseur à vis en régime humide (590) pour accroître le volume du fluide amené à la au moins une pompe polyphasique (105).

7. Système selon la revendication 6, dans lequel le compresseur à vis en régime humide est destiné à pomper un gaz humide vers une conduite de transfert.

8. Système selon l'une quelconque des revendications précédentes, dans lequel le puits est un puits non exploité (315), le gaz servant au démarrage du puits non exploité.

9. Système selon la revendication 8, agencé de sorte qu'une première partie du gaz est injectée dans le puits non exploité (315), une deuxième partie du gaz étant amenée vers une conduite de transfert (370).

10. Système selon les revendications 8 ou 9, dans laquelle source de fluide englobe une autre source (305), en communication sélective avec la au moins une pompe polyphasique.

11. Système selon la revendication 10, dans lequel l'autre source (305) contient du fluide de puits de forage d'au moins une tête de puits.

12. Système selon la revendication 10, dans lequel l'autre source (305) contient du gaz d'un réservoir de gaz.

13. Système selon les revendications 10, 11 ou 12, dans lequel l'autre source (305) amène du fluide vers la au moins une pompe polyphasique (105), le fluide étant ainsi mis sous pression et pompé vers le séparateur (205).

14. Système selon l'une quelconque des revendications 8 à 13, dans lequel la au moins une pompe polyphasique (105) est en communication avec le puits non exploité (315) pour réduire une pression de la tête de puis dans le puits non exploité.

15. Système selon la revendication 14, dans lequel le gaz injecté dans le puits non exploité (315) et la réduction simultanée de la pression de la tête de puits par la pompe polyphasique (105) entraînent une stimulation du puits non exploité.

16. Système selon l'une quelconque des revendications 1 à 7, dans lequel l'injecteur englobe un assemblage d'extraction par éjection (325), le gaz servant à accroître la production du puits.

17. Système selon la revendication 16, dans lequel le fluide est amené vers la au moins une pompe polyphasique (105) en vue de sa mise sous pression et de son pompage vers le séparateur (205).

18. Système selon les revendications 16 ou 17, dans lequel le gaz est injecté dans l'assemblage d'extraction par éjection (325) pour accroître la production du puits.

19. Système selon l'une quelconque des revendications précédentes, dans lequel le séparateur (205) élimine les solides et les liquides du fluide.

20. Système selon l'une quelconque des revendications 1 à 7, dans lequel le puits contient des dépôts de sable, le gaz servant à nettoyer le puits.

21. Système selon la revendication 20, dans lequel le gaz est un gaz humide.

22. Système selon la revendication 21, dans lequel le gaz humide est sélectionné dans le groupe constitué d'azote, d'hydrocarbures et de combinaisons correspondantes.

23. Système selon les revendications 21 ou 22, dans lequel une première partie du gaz humide est amenée vers la au moins une pompe polyphasique en vue de sa mise sous pression, une deuxième partie du gaz humide étant amenée vers une conduite de transfert.

24. Système selon les revendications 21, 22 ou 23, dans lequel le gaz humide est pompé dans le puits pour éliminer le sable du puits.

25. Système selon l'une quelconque des revendications 1 à 7, dans lequel le puits comprend un système de colonne montante (615), le gaz servant ainsi à détendre le fluide dans le système de colonne montante.

26. Système selon la revendication 25, dans lequel le gaz est un gaz humide.

27. Système selon la revendication 26, dans lequel le gaz humide est amené vers la au moins une pompe polyphasique (105) en vue de sa mise sous pression et de son pompage à travers une conduite de distribution de gaz pour détendre le fluide s'écoulant vers le système de colonne montante (615).

28. Système selon l'une quelconque des revendications 20 à 27, dans lequel le fluide est amené vers le séparateur (505).

29. Système selon l'une quelconque des revendications précédentes, dans lequel la source de fluide englobe un puits.

30. Système selon l'une quelconque des revendications 1 à 28, dans lequel la source de fluide comprend un conduite de gaz.

31. Système selon l'une quelconque des revendications précédentes, dans lequel la pompe polyphasique (105) fait partie d'un système de pompe polyphasique portatif (100), le système de pompe polyphasique portatif comprenant:

un élément de support (155), connecté en service à la pompe polyphasique; et
une unité d'alimentation connectée en service à la pompe polyphasique, l'unité d'alimentation servant à alimenter en énergie la pompe polyphasique.

32. Système selon la revendication 31, dans lequel le système de pompe polyphasique portatif (100) comprend en outre une pompe à compensation de pression (140).

33. Système selon la revendication 32, dans lequel la pompe à compensation de pression (140) est connectée en service à la pompe polyphasique (105) et amène du fluide vers la pompe polyphasique.

34. Procédé de recyclage de gaz à partir d'un fluide d'un puits de forage, comprenant les étapes ci-dessous:

amenée du fluide du puits de forage vers un séparateur (205; 505)
séparation d'un gaz du fluide du puits de forage;
amenée d'une partie du gaz vers au moins une pompe polyphasique (105); et
pompage du gaz vers un puits;

caractérisé par l'étape d'amenée d'un fluide additionnel d'un puits porche (305) vers le séparateur.

35. Procédé selon la revendication 34, englobant en outre l'étape de recyclage du gaz.

36. Procédé selon les revendications 34 ou 35, dans lequel le gaz comprend une ou plusieurs phases.

37. Procédé selon les revendications 34, 35 ou 36, comprenant en outre l'étape d'amenée du gaz vers une conduite de transfert.

38. Procédé selon l'une quelconque des revendications 34 à 37, dans lequel la au moins une pompe polyphasique (105) est une pompe à vérin.

39. Procédé selon la revendication 38, dans lequel la pompe à vérin (105) comprend une paire de pistons, chaque piston pouvant être déplacé entre une position étendue et une position rétractée.

40. Procédé selon la revendication 39, dans lequel les pistons (120, 130) sont déplacés par un cylindre actionné par le fluide (145, 146).

41. Procédé selon l'une quelconque des revendications 34 à 40, comprenant en outre l'utilisation d'un compresseur à vis en régime humide (590) pour accroître le volume de fluide amené vers la au moins une pompe polyphasique (105).

42. Procédé selon la revendication 41, dans lequel le compresseur à vis en régime humide (590) peut pomper un gaz humide vers une conduite de transfert (570).

43. Procédé selon l'une quelconque des revendications 34 à 42, englobant en outre l'étape de stimulation de la production du puits.

44. Procédé selon l'une quelconque des revendications 34 à 42, englobant en outre l'étape d'actionnement d'un système d'extraction par éjection (325) en entraînant le gaz humide dans le système d'extraction par éjection.

45. Procédé selon l'une quelconque des revendications 34 à 42, englobant en outre l'étape d'élimination du sable du puits.

46. Procédé selon l'une quelconque des revendications 36 à 42, englobant en outre l'étape de forage d'un puits d'eau profond par l'intermédiaire d'un engin de forage flottant (610), d'un système de colonne montante (615) et d'une conduite de distribution de gaz (625).

47. Procédé selon la revendication 40, dans lequel le gaz humide est amené de l'engin de forage flottant (610) à travers la conduite de distribution de gaz (625) dans le système de colonne montante (615) pour détendre le fluide du puits de forage remontant le long du système de colonne montante.

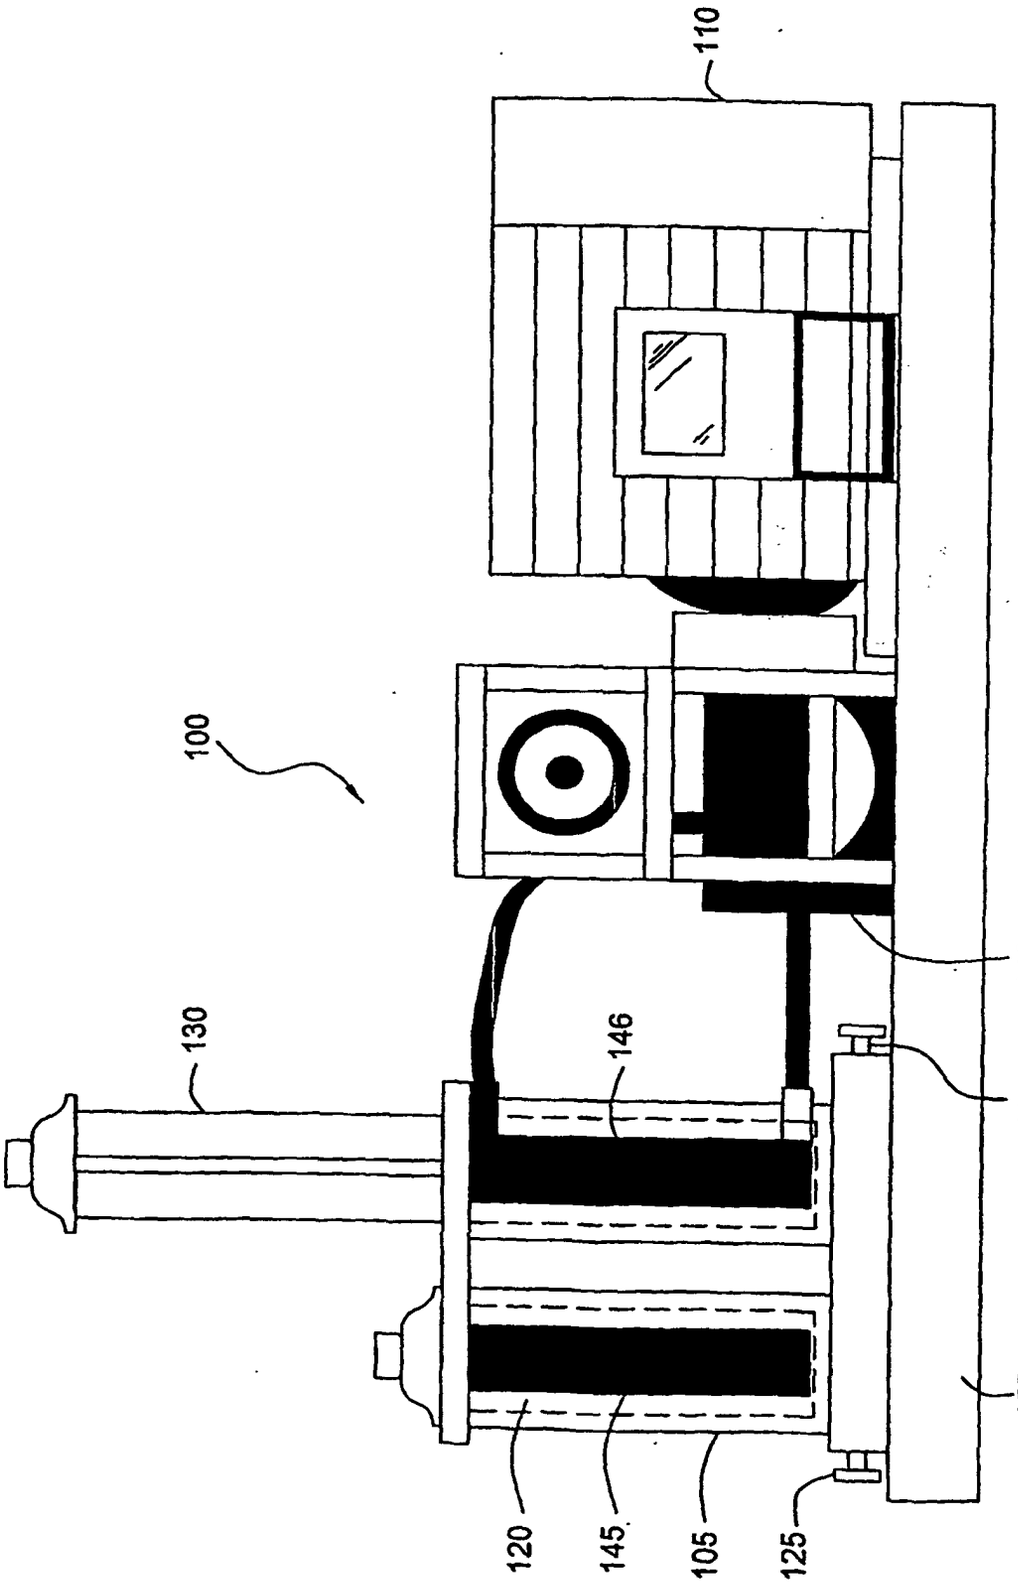

FIG. 1

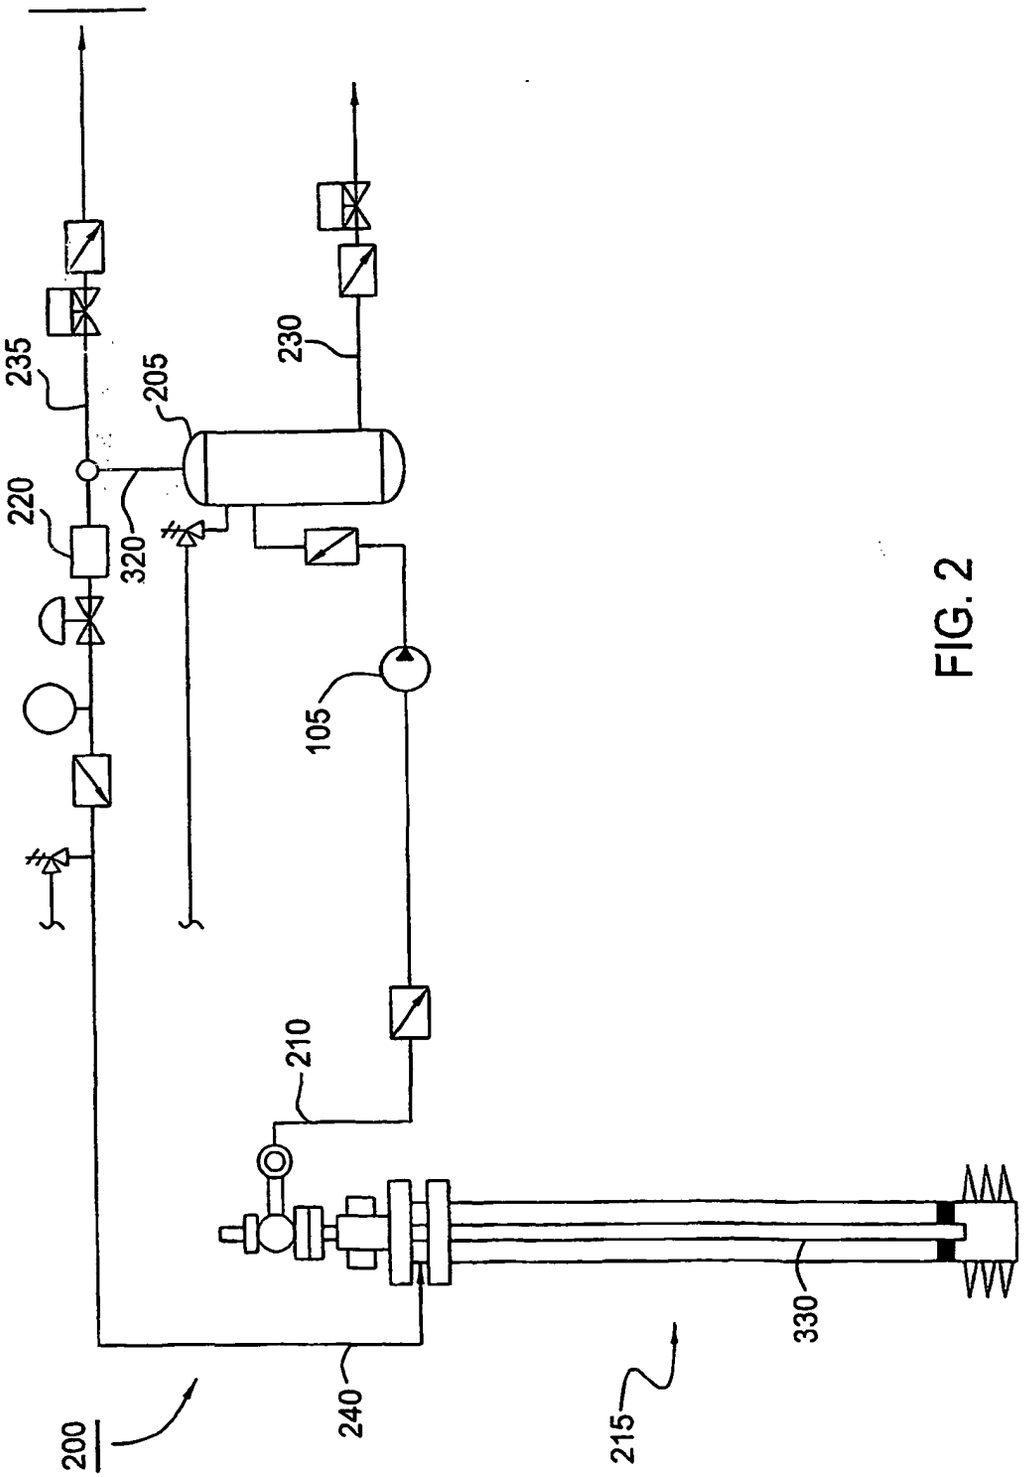

FIG. 2

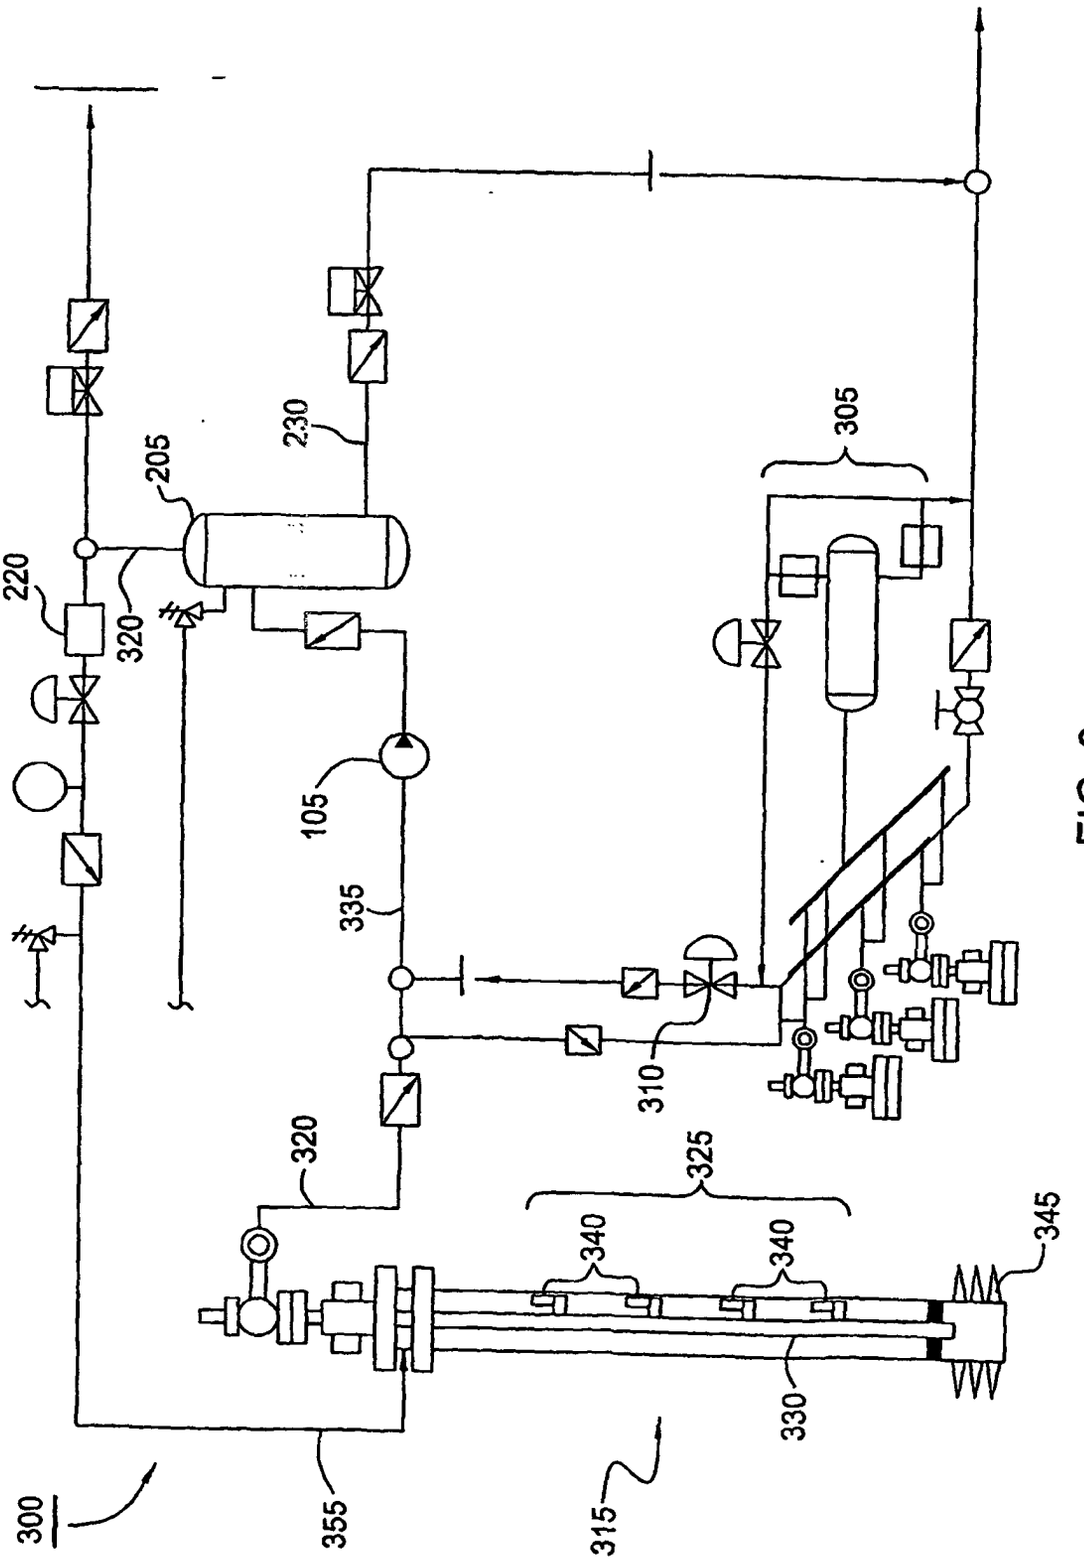
300
355
315
205
230
220
320
105
335
310
305
320
325
340
340
345
330

FIG. 3

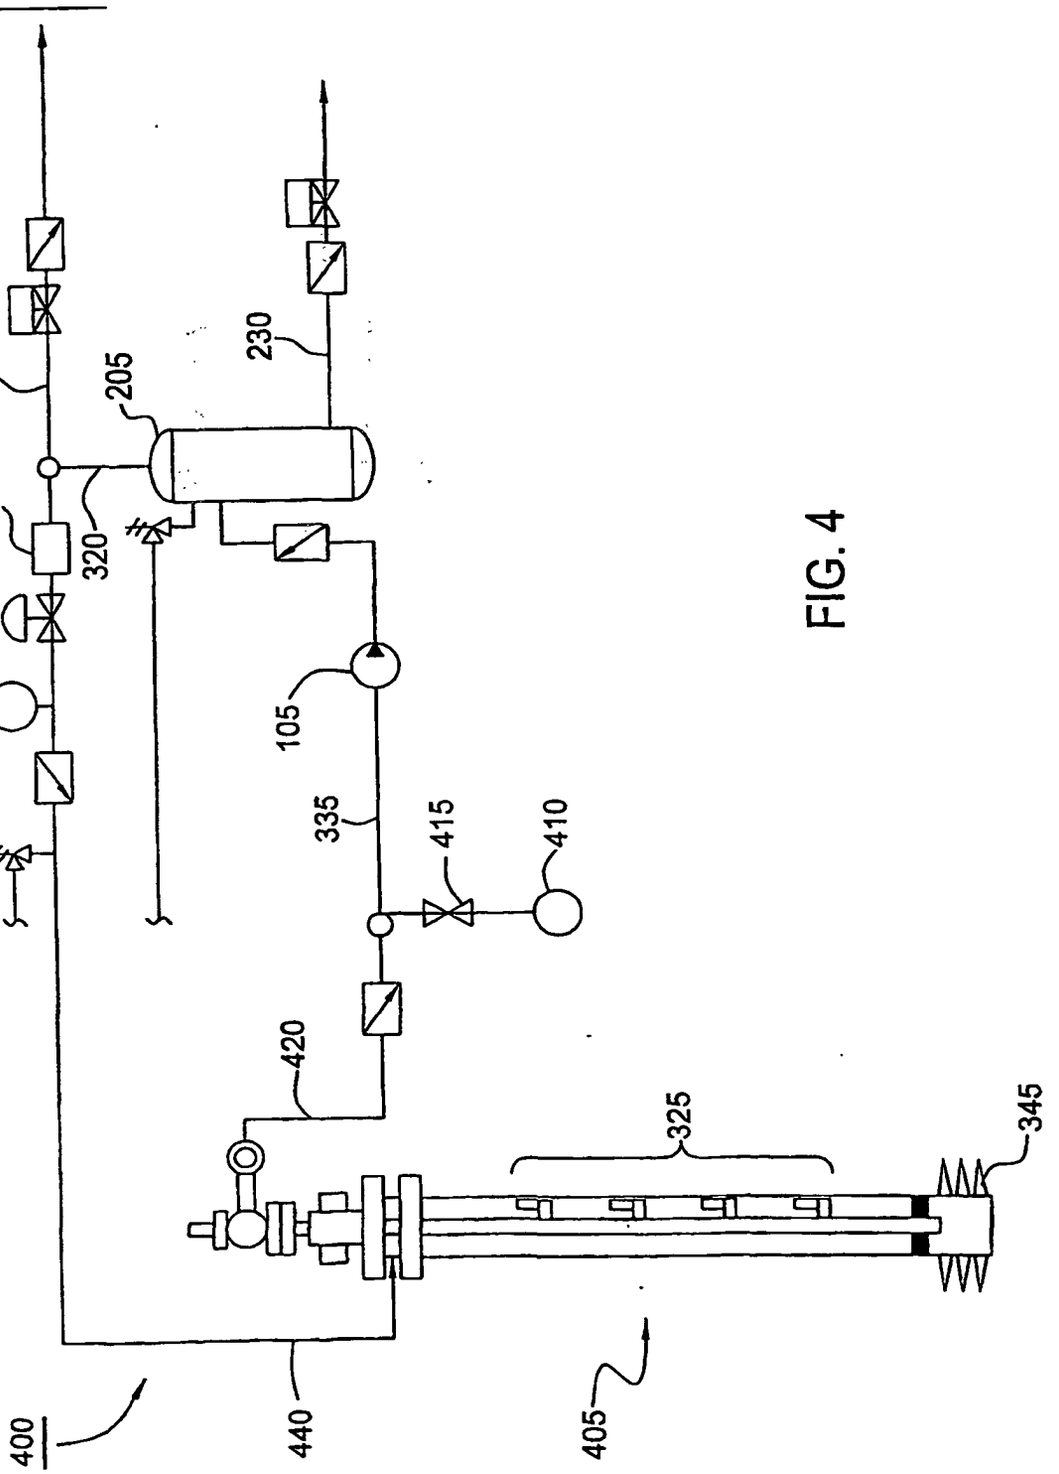

FIG. 4

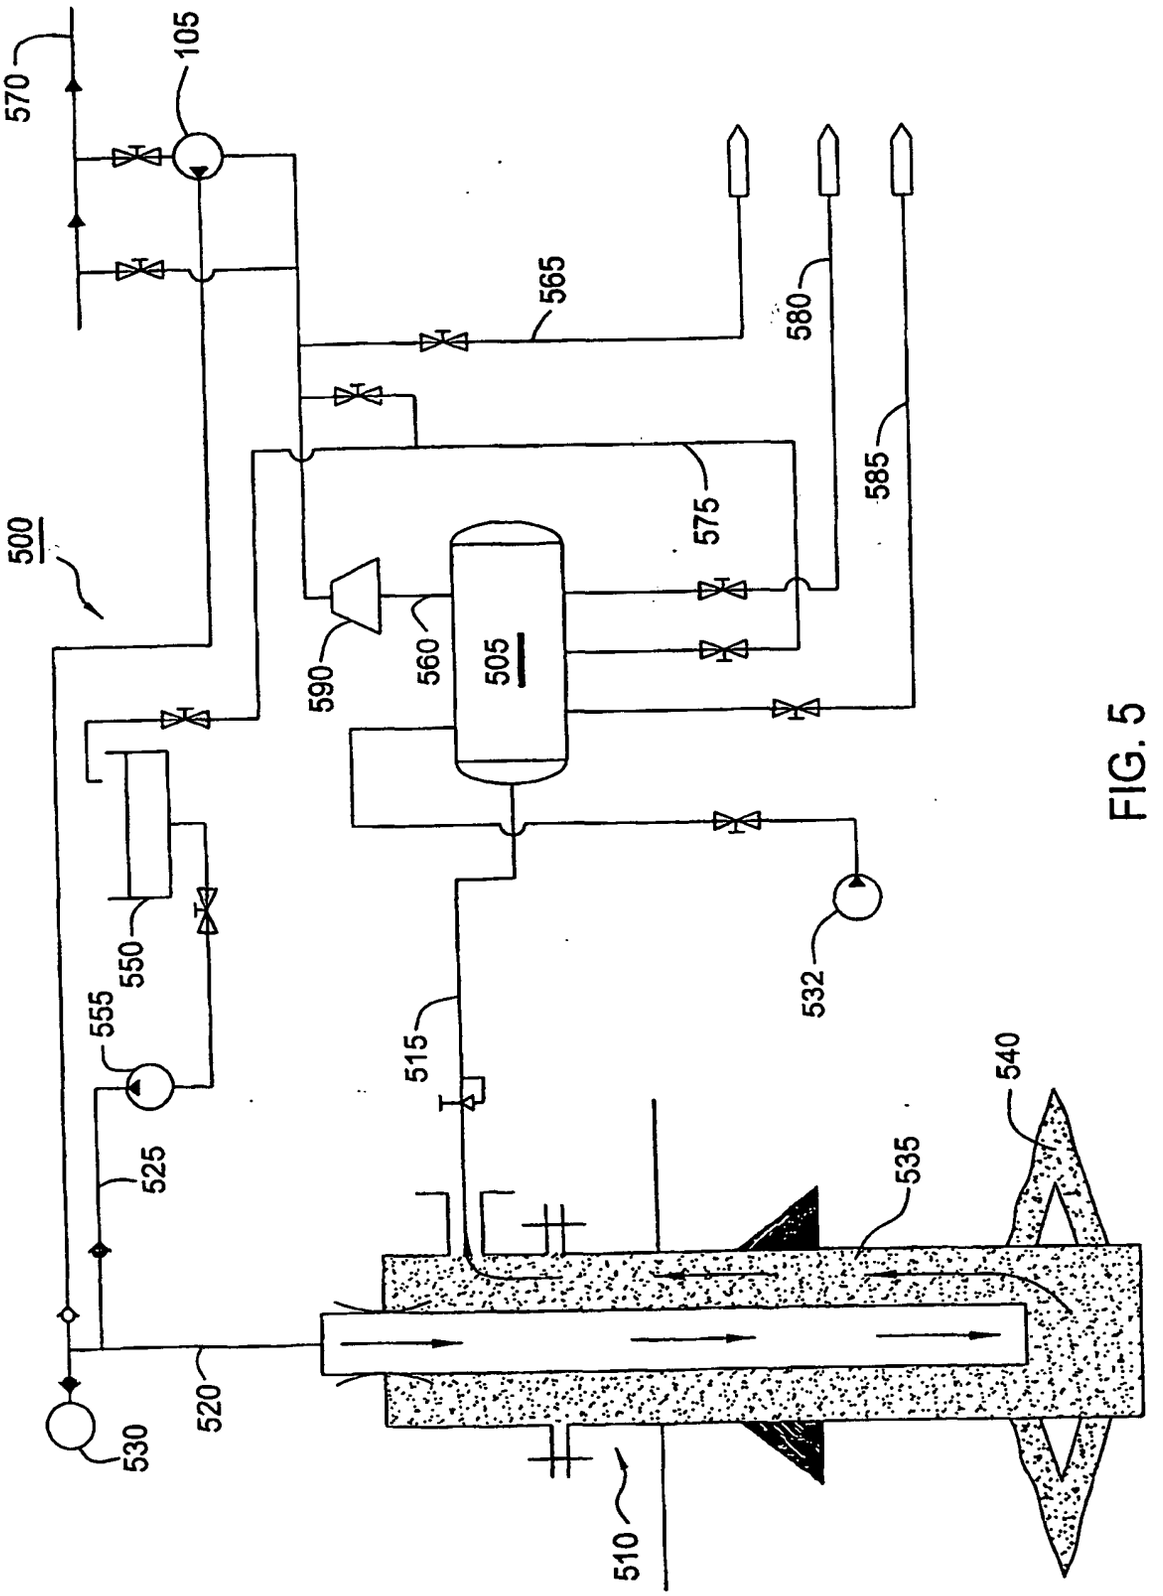
570
105
565
580
585
575
500
590
560
505
550
555
515
532
540
535
525
520
530
510

FIG. 5

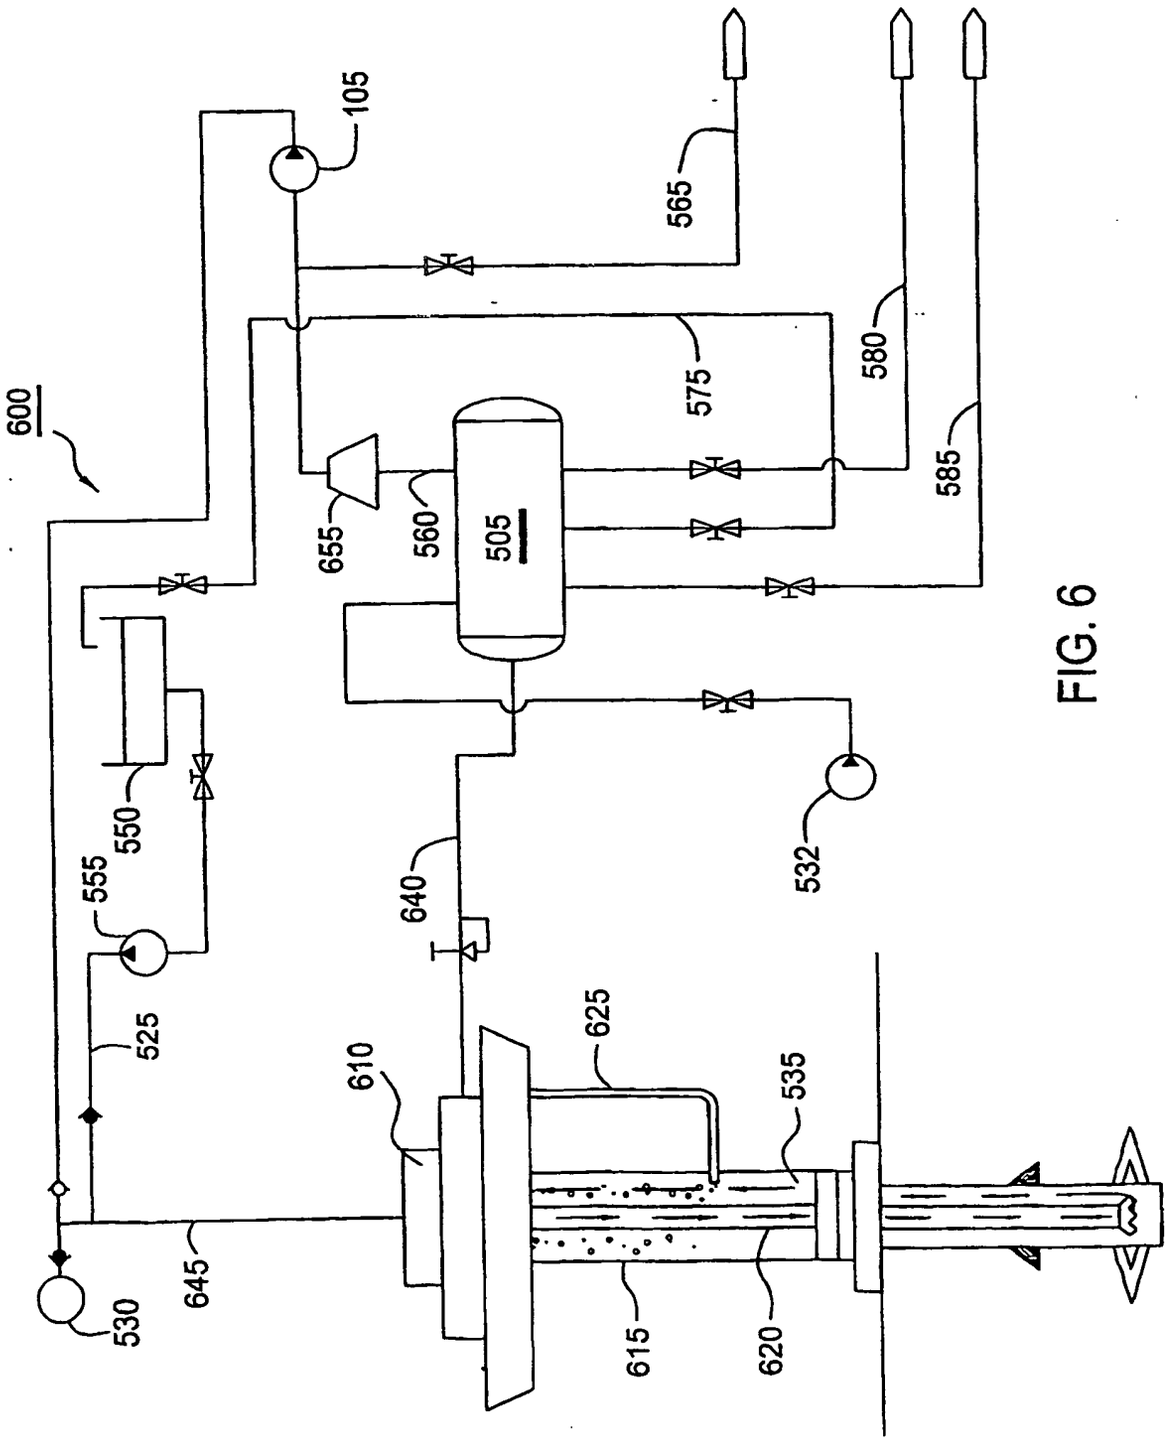
600
105
565
580
575
585
655
560
505
550
555
525
640
532
610
625
535
645
530
615
620

FIG. 6