



(51) International Patent Classification:

B32B 15/08 (2006.01) *B32B 3/08* (2006.01)
B32B 15/085 (2006.01) *B32B 3/26* (2006.01)
B32B 15/20 (2006.01) *B65D 5/70* (2006.01)
B32B 27/10 (2006.01) *B65D 5/74* (2006.01)
B32B 27/32 (2006.01)

(21) International Application Number:

PCT/EP2015/059281

(22) International Filing Date:

29 April 2015 (29.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1450541-6 7 May 2014 (07.05.2014) SE

(71) Applicant: **TETRA LAVAL HOLDINGS & FINANCE S.A.** [CH/CH]; 70, Avenue Général-Guisan, CH-1009 Pully (CH).

(72) Inventors: **BJÖRK, Jonas**; Terminalgatan 2, S-222 36 Lund (SE). **HÅKANSSON, Bengt**; Bjärrödsbyaväg 209-23 Lerboda, S-275 95 Sjöbo (SE).

(74) Agent: **ASSOCIATION "TETRA PAK - ATTORNEYS SE" NO. 417**; AB Tetra Pak, Patent Department Ruben Rausingsgata, S-22186 Lund (SE).


(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PACKAGING MATERIAL LAMINATE STRUCTURE

FIG 1

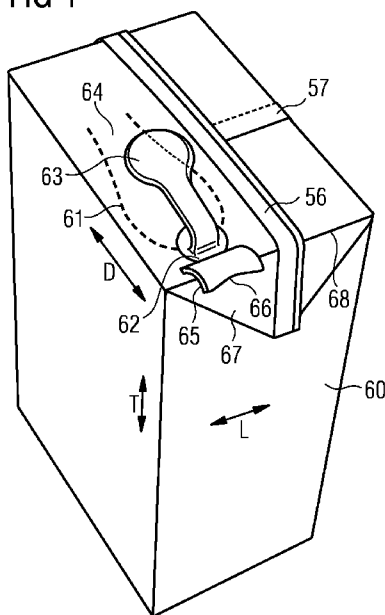

(57) Abstract: A packaging material laminate structure comprises a first side, a second side opposite the first side and an attenuated area. An opening device is arranged with a first portion on the first side, with a second portion on the second side and with a first material bridge connecting both portions through the attenuated area. A consumer opening area is defined on the packaging material laminate and arranged such that packaging material laminate is ruptured on using the plastic opening device to open the consumer opening area. A pouring support device adjacent to the consumer opening area is having a pouring portion arranged on the first side and a support portion on the second side, wherein the pouring portion and the support portion are connected via a second material bridge through the attenuated area.

Published:

— *with international search report (Art. 21(3))*

Packaging material laminate structure

The present invention relates to a packaging material laminate structure and to a container thereof.

5

BACKGROUND OF THE INVENTION

Packaging containers of the single use disposable type for liquid foods are often produced from a packaging material based on paperboard or carton. Such container is for example be employed for aseptic packaging of liquid foods such as milk, fruit juices etc, marketed and sold for long term ambient storage. The packaging material in this known packaging container is typically a laminate comprising a bulk layer of paper or paperboard, outer, liquid-tight layers of thermoplastics, a gas barrier layer, most commonly an aluminium foil and finally one or more inside layers composed of one or several part layers, comprising heat-sealable adhesive polymers and/or heat-sealable polyolefins.

Commonly, the packaging container have an opening device in order to facilitate consumer opening, many different types of opening devices including pull-tabs or moulded opening devices, as for example discussed in WO03/095199 and WO/2009/000927

The packaging containers are generally produced by means of modern, high-speed packaging machines of the type that continuously form, fill and seal packages from a web or from prefabricated blanks of packaging material. Typically many thousands of packages may be prepared per hour.

Despite the efforts and achievements, there's still a need for reliable and cheap openings for such containers.

SUMMARY OF THE INVENTION

The present invention proposes a package material laminate structure with a subject matter according to independent claim 1 and a packaging container thereof according to independent claim 19.

In an embodiment a packaging material laminate structure comprises a first side, a second side opposite the first side and an attenuated area. The first side refers to the outer or decor layer side, the side being visible to the consumer. The second side refers to the inner side, which is normally in contact with the beverage or liquid. A plastic opening device is arranged with a first portion on the first side and with a second portion on the second side, wherein the first and second portion of the plastic opening device are connected via a first material bridge through the attenuated area. Such bridge as well as the first and second portion can be formed by moulding and particular by injection moulding, wherein the molten material forming the first and second portion penetrates through the attenuated area thereby forming the bridge.

A consumer opening area is defined on the packaging material laminate by one or more weakened areas or lines such that the packaging material laminate is ruptured on using the plastic opening device to open the consumer opening area. Finally, a pouring support device is provided and adjacent to the consumer opening area. The pouring support is having a pouring portion arranged on the first side and a support portion on the second side. The pouring portion and the support portion are con-

nected via a second material bridge through the attenuated area.

The present invention provides a cheap and easy opening,
5 while maintaining good pouring particular in package container made from said material and filled with a liquid completely or to a very high level.

In an embodiment, the pouring support is separated from
10 the opening device on the first side. More particular the first portion of the opening device and the pouring portion of the pouring support are separated on the first side. The respective second portions of the opening device and the support portion of pouring support
15 may form a common portion on the second side.

The packaging material laminate structure may comprise a bulk layer, a barrier layer and at least one laminate layer, wherein the attenuated area lacks at least the
20 bulk layer. Packaging material layers suitable for the purpose of the present invention are described in detail in WO2004/089628 or WO03/095199, whose the content related to the packaging material structure is incorporated herein by reference.

25

In another embodiment, the packaging material laminate comprises one or more weakened areas or lines. Those lines are defining the consumer opening area. Further during opening of the consumer opening area, the package
30 material laminate is ruptured along those weakened lines. In other words the weakened lines facilitate rupturing of the package material laminate along those lines. In a further embodiment, one or more weakened areas or lines are arranged adjacent to the attenuated

area as to support rupture of the packaging material laminate to open the consumer opening area.

Another aspect of the invention is related to the inner
5 side of the packaging material laminate structure. In
one embodiment the second portion of the opening device
on the second, inner side comprises a weakened line at
least partly following the one or more weakened areas or
lines on the first side. In other words, the material
10 deposited on the second side of the packaging material
laminate during the manufacturing process comprises also
one or more weakened lines as to facilitate rupturing of
the packaging material laminate in a defined way.

15 In addition, the second portion may comprise a weakened
line that is at least partly overlapping the attenuated
area. As the attenuated area is ruptured first when
opening the consumer opening area, the weakened line on
the second portion supports further rupturing in a pre-
20 defined manner. The second portion and the support por-
tion of the pouring support can form an integral common
portion on the second side. This may increase robustness
when opening the package.

25 In another aspect, the pouring portion comprises a lat-
eral dimension, which is greater than a lateral dimen-
sion of one of the attenuated area and the consumer
opening area. The parts of the pouring portion exceeding
the attenuated area may be slightly connected to the up-
30 permost material layer of the packaging material layer,
but otherwise not directly linked to the material
bridge. In other words, the material bridge of the pour-
ing support only penetrates through the attenuated area
in this embodiment but not through the bulk layer or the
35 whole packaging material laminate structure including
the bulk layer.

In an embodiment, a lateral dimension of the second ma-

terial bridge is smaller than a lateral dimension of one of the first material bridge and/or the pouring portion.

5 The pouring portion may comprise a pouring lip distanced from the first side. Said pouring lip comprises a laterally rounded shape with its outermost lateral edges of the lip having a greater distance to the packaging material than a central part of the lip.

10

The packaging material laminate can be used to produce containers having an opening and pouring support according to the present invention.

15 DESCRIPTION OF THE DRAWING

In the following, the present invention will be explained in greater details using the accompanying drawings, in which

Figure 1 shows a perspective view of a package in accordance with an embodiment of the present invention;
20 Figure 1A illustrates a front view of a pouring support according to the present invention;

Figure 1B illustrates a side view of the pouring support;

25 Figure 2 shows an embodiment of a packaging material laminate for a package container according to the present invention;

Figure 3 shows another example of an opening in accordance with the present invention;

30 Figure 4 shows a further embodiment of an opening of the present invention;

Figure 5 illustrates a bottom view of an embodiment according to the present invention.

35 Similar references refer to the same or similar fea-

tures.

DETAILED DESCRIPTION

5 In the following the term "lateral" or "lateral direction L" refers to a direction perpendicular to a normal pouring direction of the package. The term "longitudinal" or "longitudinal direction D" refers to the normal pouring direction. Consequently, the term "T" refers to
10 the remaining transversal direction. Consequently, the terms "lateral", longitudinal or transversal dimension refer to the dimension of the feature in the respective direction.

15 Fig. 1 shows an example of a packaging container 60 in accordance with the present invention and made from material described later. The packaging container is particularly suitable for liquid or semi-liquid food products such as beverages, sauces, soups or the like. Typi-
20 cally, such a package has a volume of about 100 to 2000 ml.

The package container is of brick-type and comprises a top side, on which an opening device 63 is moulded to,
25 transversal and longitudinal seals 56 and 57, respectively. The opening device is on form of a tab and injection moulded through attenuation 62. The term "injection moulded" means that during the manufacturing process, plastic material is injected through the attenua-
30 tion as to from the tab 63 and a corresponding part, (not shown) on the inside of the package. During the injection moulding process, the plastics penetrate the attenuation 62 forming a material bridge through the at-

tenuation 62. When opening the container by pulling the tap, the bridge and inside portion provide rigidity and stability to overcome the force necessary to rupture the perforation line 61.

5

Attenuation 62 is a pre-laminated hole, meaning the cardboard of container 60 is removed in this area and only one or more plastic layers and/or aluminium foils layers are provided.

10

Starting from the attenuation 62, two weakened lines 61 are provided and extend from attenuation 62 substantially in the same direction as tab 63 is arranged. The weakened lines 61, made of a perforation define a consumer area 64. When opening the packaging container 60, this area is ruptured by pulling the tab 63, creating an opening for pouring the liquid.

The packaging container also comprises a pouring support 20 65 in form of a rounded lid protruding the flap 67 attached to the side of the package container. The pouring support's 65 lateral dimension (dimension in lateral direction L) exceeds the dimension of the attenuation or hole 62. A middle portion of support 65 is however arranged over attenuation 62 and also injection moulded. 25 Due to the injection moulding, a portion of pouring support penetrates through the attenuation 62, forming a bridge and connects to a corresponding part on the inside of the package. That inside portion is also connected to the inside portion connected to tab 63 forming 30 a common inside portion (not shown). The lateral dimension of pouring support 65 can be similar to the maximal lateral dimension of the consumer area 64 to facilitate

proper pouring. Area 69 of the pouring support exceeding the attenuation 62 is only slightly connected with the uppermost layer of packaging material laminate 60. They are not directly extending into the material laminate
5 forming a bridge like in the attenuation 62. Pouring support 65 has a rounded shape in longitudinal direction, placing it apart from the package container surface. The outermost edge 66 is arranged substantially parallel the package edge 68, but it is slightly rounded
10 from the front view.

Figure 1A illustrates a front view of the pouring support 65. Front edge 66 is shaped in form of a circle segment, similar to a "smile". Parts of the upper surface 65a can be seen due to specific shape which resembles the form of a lip. The "smile" shape of the lip results that the central part of the lip has a smaller distance from the packaging material than the outermost edges. This enables the liquid to flow along the central
15 part when pouring resulting in less spoilage. Figure 1B illustrates a side view of the pouring support 65. References "L," "D", "T" indicate the respective directions.

Figure 2 is a schematic view on the first side of a part of a web of packaging material 20. For illustration purposes, Figure 2 contains packaging material layout for a single packaging container. The packaging material can either be formed of individual blanks (like illustrated
25 in the embodiment of Figure 2, where exactly one container layout is shown), or in form of a continuous web, where a multiple of webs area arranged on each other.

Each layout or blank is having a weakened line or area 21, which in the embodiment illustrated, is in direct contact with an attenuation or hole 22. Hole 22 in this step is already pre-laminated, meaning that some or more
5 layers of aluminium foil and/or plastic layers like LDPE or PP are laminated on the cardboard layer, effectively closing holes 22. Those layers act as oxygen and light barrier in the final stage of the container.

10 The weakened line 21 at least partly defines a consumer opening area 24, which for example may be bigger or smaller than the area defined by the weakened lines or area 21. In the embodiment the weakened line is made of a perforation and comprises a slight s-shape with its
15 bulge adjacent to the hole 22. The maximal dimension y (lateral) of such bulge is higher than the dimension x in the distant area of the area framed by the two weakened lines 21

20 The web of packaging material of Figure 2 also comprises several crease lines 25 which are intended to assist in forming and folding of the packaging container. During the manufacturing process of the package container, the web will be folded along those crease lines to provide
25 an appealing appearance. The area, on which the hole 22 is arranged, will be placed on top of the resulting packaging container.

Each type of packaging container has its specific crease
30 pattern to form different shapes of packaging containers.

The packaging material according to the embodiment of

Figure 2 comprises on top a decor layer of a polyolefin such as a suitable LDPE or PP attached to a paper or paperboard layer. The decor layer can be used for example to provide a cover a printed pattern, the hole 22 and
5 the weakened lines 21 on a paper or paperboard layer. The paperboard layer, on the side opposite the decor layer, has a laminate layer selected from suitable polyolefins such as LDPE or PP. The laminate layer provides adhesion to an oxygen barrier layer, which is also ar-
10 ranged on side of the paper or paperboard layer opposite the decor layer. The barrier layer provides the desired barrier such as oxygen, light, water and vapour barrier depending on the specific need determined by the product to be packed. The barrier layer can for example be an
15 aluminium foil or a vapour deposited film, such as a metalized or vapour deposition coated, such as PECVD coated film. On the side opposite the laminate layer the adhesive polymer is arranged on the barrier layer. The adhesive may for example be applied by extrusion coat-
20 ing, when the barrier layer is aluminium foil the adhesive could be a suitable adhesive marketed under the trade name Nucrel®. On the side opposite the barrier layer, the adhesive is provided with a heat-sealable layer such as a suitable polyolefin such as PE or PP or
25 blends thereof. The heat-sealable layer is the layer facing the product in the finished packed packaging container. The heat-sealable material can be arranged by extrusion coating, or by a pre-made film through film lamination.

30

Figure 3 is a schematic illustration of an outer part of a packaging container made of a packaging material 60, for example as described in Figure 1 or Figure 2. The

embodiment comprises a handle 63 for opening a consumer area 64 by pulling the handle to rupture the perforation line 61. Handle 63 comprises a plastic tab by moulding, e.g. injection moulding. For this purpose plastic is injected through circle shaped attenuation 62 to form on the upper side the visible tab and on the lower side a support section covering the attenuated area and parts of the adjacent packaging material structure. Support section and tab is connected via a plastic material bridge. The embodiment also comprises a pouring support lid 65 which has a slightly rounded shape 65c. Outermost end portion 66 of the pouring support is slightly rounded and protrudes the edge 60a of the packaging material laminate and package container. The pouring support is also moulded, e.g. injection moulded onto the surface of the attenuated area 62. More particular, the pouring support is rigidly connected to a material bridge, produced by injection moulding, through the attenuated area 62 to a support portion on the lower surface of the packaging material (not shown). The support portion of both, the tap 63 and the pouring support 65 form a common support on the lower side of the packaging material laminate in the attenuated area and adjacent areas of packaging material laminate 60. Thereby a strong support is achieved if a consumer rips the consumer area open.

Figure 5 shows a view of the packaging material laminate from the lower side illustrating the support portions. The support portion 67 is a common support portion made of plastic and rigidly attached to the packaging material laminate 60 on the lower side. A first support portion 67a is connected via a material bridge (not shown)

to the pouring support on the upper side. A second support portion 63a in the area of the attenuated area 62a is connected to the tab 63. Weakened lines 61a in the plastic support portion follow the perforation or weakened lines 61 in the package material laminate. Lines 61a shall support or facilitate a rupture of the consumer area along the pre-defined weakened lines 61.

Fig 4 is a schematic illustration of an outer part of a packaging container made of a packaging material 60, for example as described in Fig 1, and the illustration includes a handle for consumer opening, i.e. a tab section 63 which is a plastic tab made by moulding, e.g. injection moulding. The illustration additionally includes attenuation or hole 62, two weakened lines 61 extending from attenuation 62 thereby defining a consumer opening area 64. Compared to the embodiments illustrated by Figure 3 the illustration in Figure 4 illustrates another design of the attenuation or hole 62. The length of pouring support 65 exceeds the lateral dimension of attenuation 62 and consumer opening area 64. Pouring support is attached to the attenuated area by injection moulding. The portion arranged over the packaging material laminate is however not rigidly connected, i.e. there's no material bridge through the material laminate. The pouring support may only be connected with the uppermost laminate layer of packaging material layer in those areas 69.

REFERENCE LIST

- 56 seal
- 57 seal
- 5 60 packaging material laminate, package
- 61 weakened lines, perforation
- 61a attenuation edge
- 62 attenuation, hole
- 63 tab
- 10 64 consumer area
- 65 pouring support
- 65a top side
- 66 outer edge of pouring support
- 67 support portion
- 15 69 protruding areas

CLAIMS

1. A packaging material laminate structure (60) comprising:
 - 5 - a first side, a second side opposite the first side and a attenuated area (62);
 - a plastic opening device (63) arranged with a first portion (63) on the first side and with a second portion (63a) on the second side, wherein the first and
10 second portion (63, 63a) of the plastic opening device are connected via a first material bridge through the attenuated area (62);
 - a consumer opening area (64) on the packaging material laminate structure (60), that packaging material
15 laminate is ruptured in a defined manner on using the plastic opening device (63) to open the consumer opening area (64);
 - a pouring support (65) device adjacent to the consumer opening area (64) having a pouring portion arranged on the first side and a support portion (67a)
20 on the second side, wherein the pouring portion and the support portion (67a) are connected via a second material bridge through the attenuated area (62).
- 25 2. The packaging material according to claim 1, wherein the second portion (63a) of the plastic opening device and the support portion (67a) of the pouring support form an integral portion (67) on the second side.
- 30 3. The packaging material laminate according to any of the preceding claims, comprising a bulk layer, a barrier layer and at least one laminate layer, wherein the attenuated area lacks at least the bulk layer.
- 35 4. The packaging material laminate according to any of the preceding claims, further comprising one or more weakened areas or lines (61), said areas or lines

(61) defining the consumer opening area (64), such that the package material laminate is ruptured at least partly along these areas or lines (61) during opening.

5

5. The packaging material of claim 4, wherein the one or more weakened areas or lines (61) are arranged adjacent to the attenuated area (62) as to support rupture of the packaging material laminate to open the consumer opening area (64).

10

6. The packaging material of any one of claim 4 to 5, wherein the second portion (63a) on the second side comprises a weakened line at least partly following the one or more weakened areas or lines (61) on the first side.

15

7. The packaging material according to any of the preceding claims, wherein the second portion (63a) comprises a weakened line that is at least partly overlapping the attenuated area (62).

20

8. The packaging material according to any of the preceding claims, wherein the pouring portion (65) comprises a lateral dimension which is greater than a lateral dimension of one of the attenuated area (62) and the consumer opening area (64).

25

9. The packaging material according to any of the preceding claims, wherein the pouring portion comprises a pouring lip (65a) distanced from the first side of the package material laminate.

30

10. The packaging material according to claim 9, wherein said pouring lip comprises a laterally rounded shape with its outermost edges of the lip having a greater distance to the packaging material laminate than a central part of the lip.

35

11. The packaging material according to any of the preceding claims, wherein a lateral dimension of the second material bridge is smaller than a lateral dimension of one of the first material bridge and pouring
5 ing portion.
12. Container for a liquid comprising the packaging material of any of the preceding claims.
- 10 13. Container of claim 12, wherein the outermost edge of the pouring support protrudes a ridge (68) of the container.

1/4

FIG 1

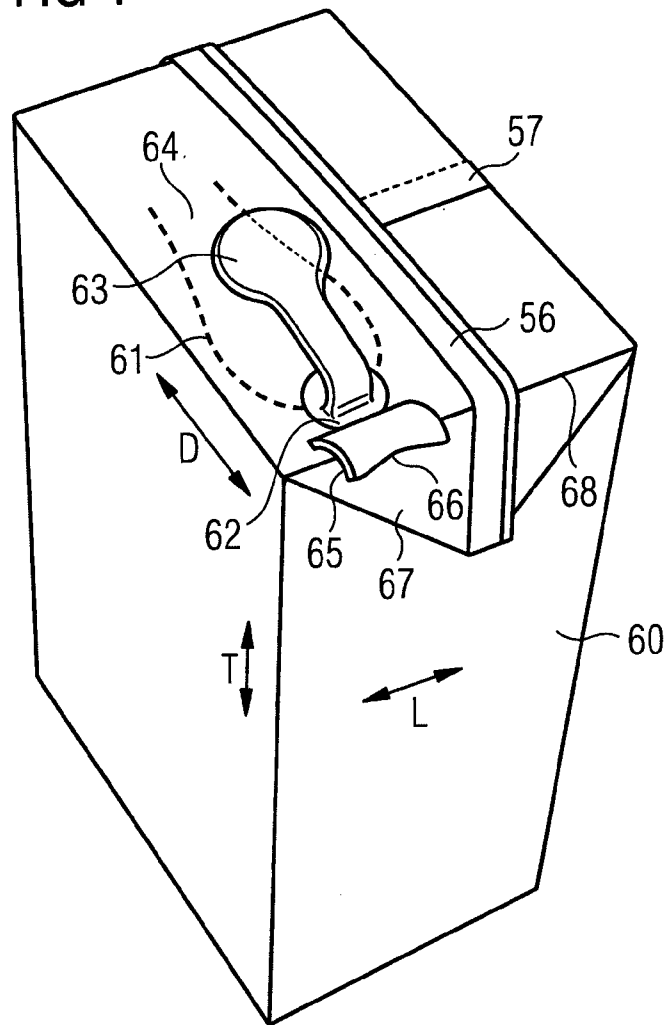


FIG 1A

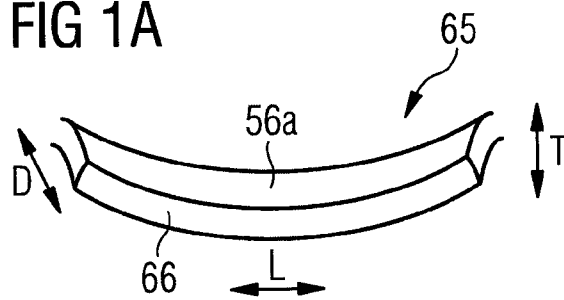


FIG 1B




FIG 2

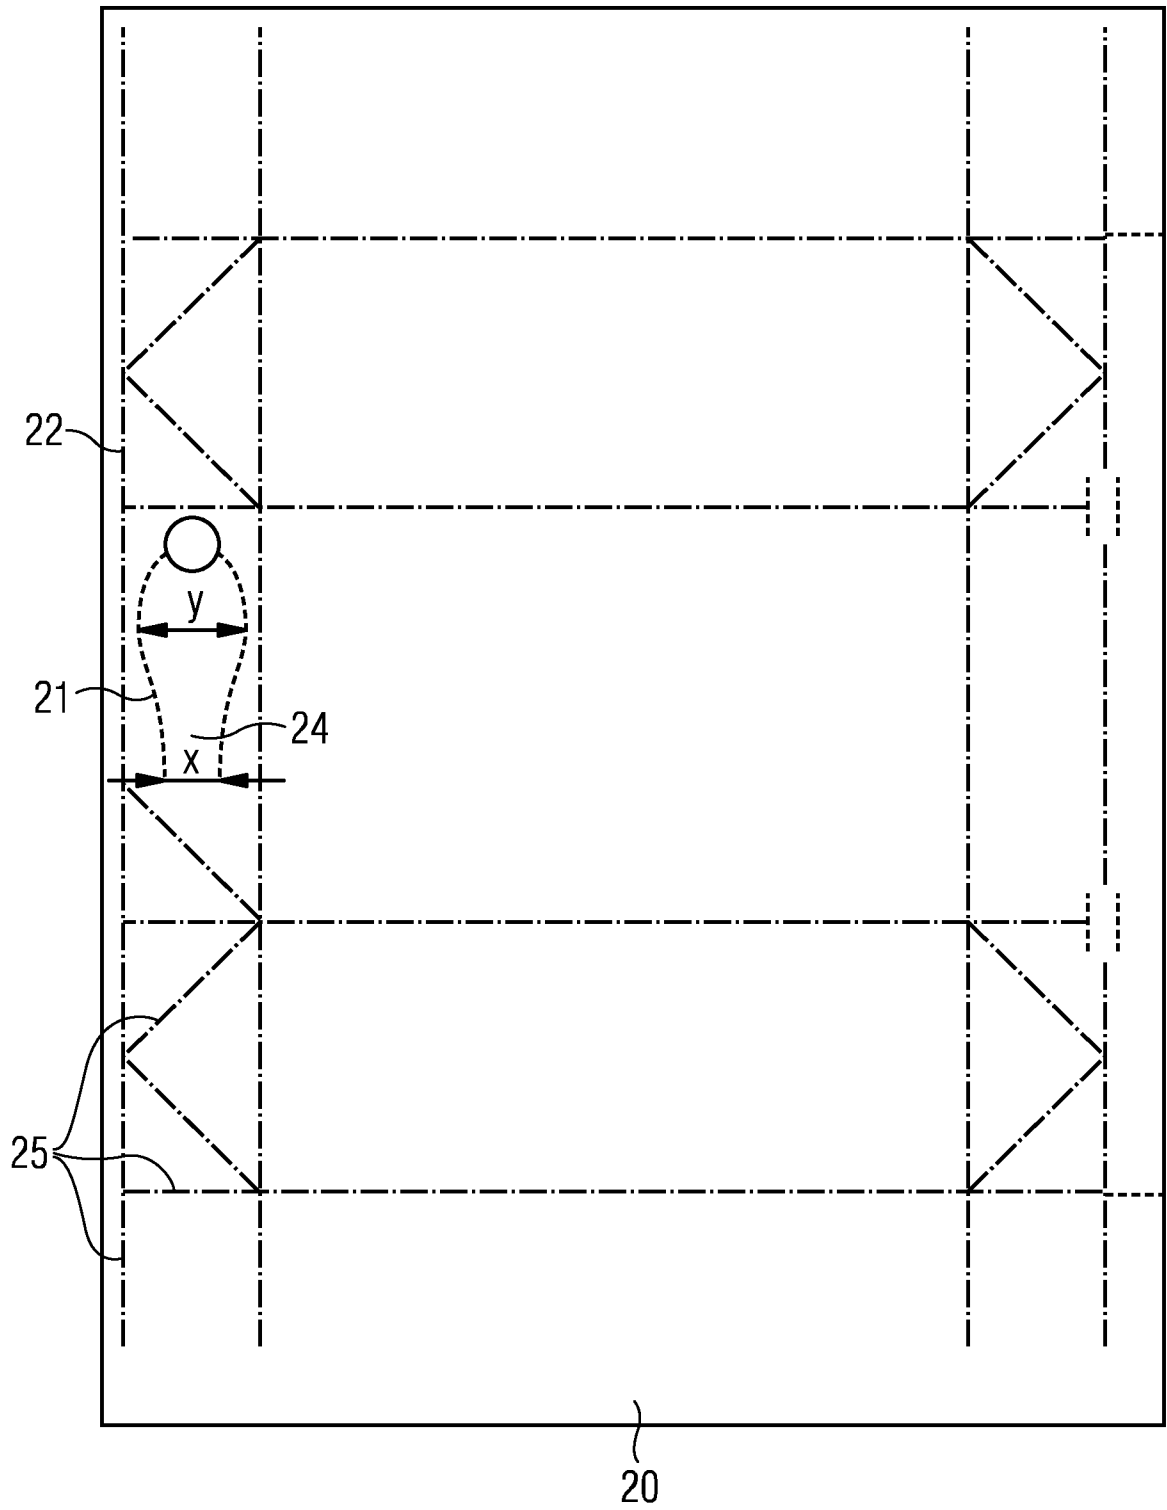


FIG 3

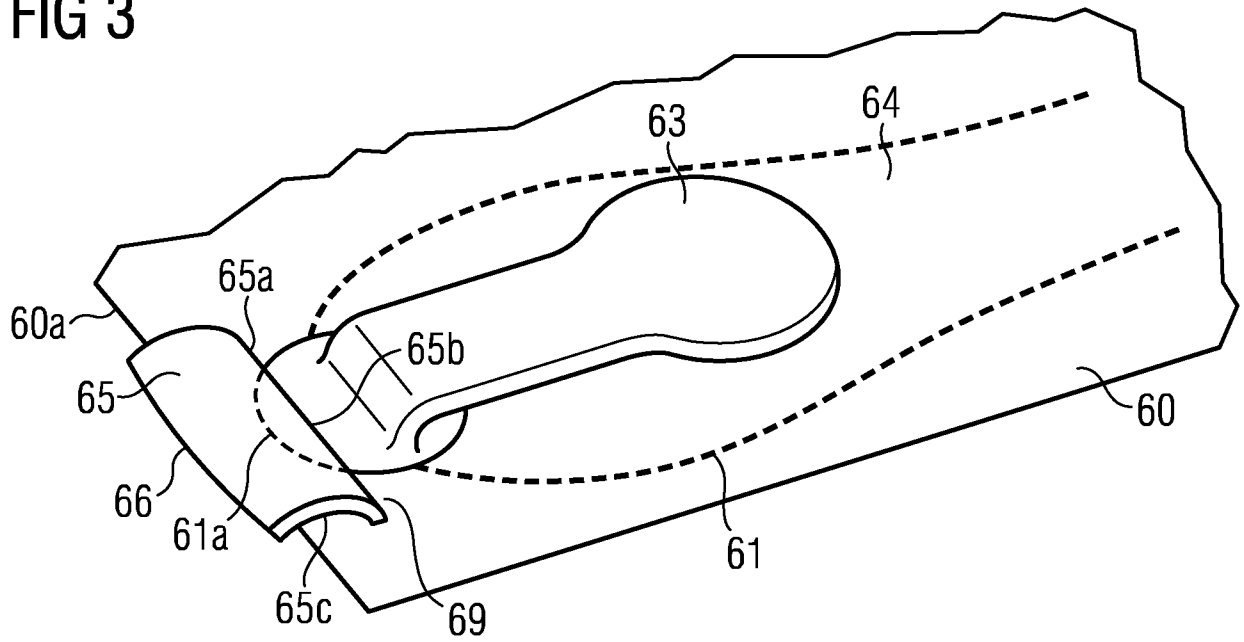


FIG 4


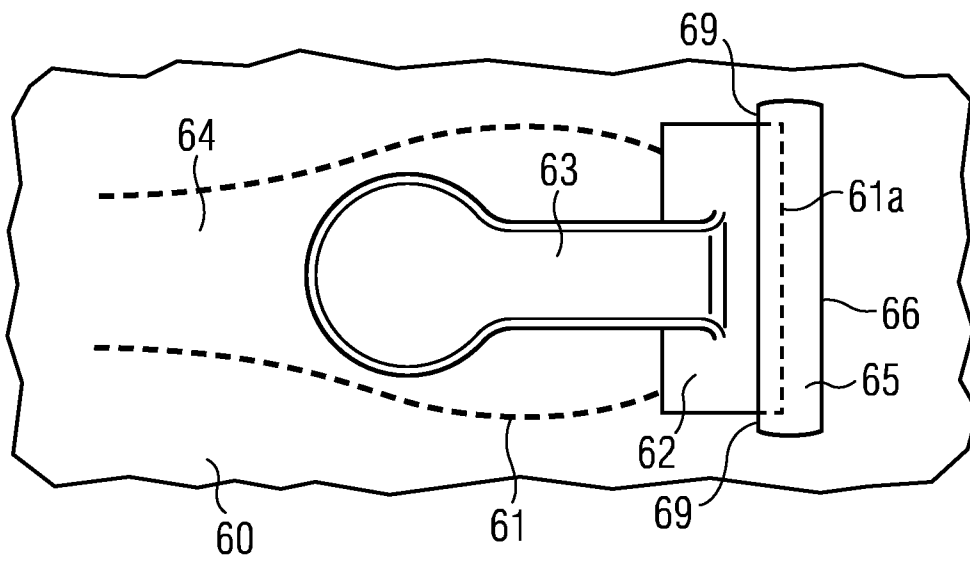


FIG 5

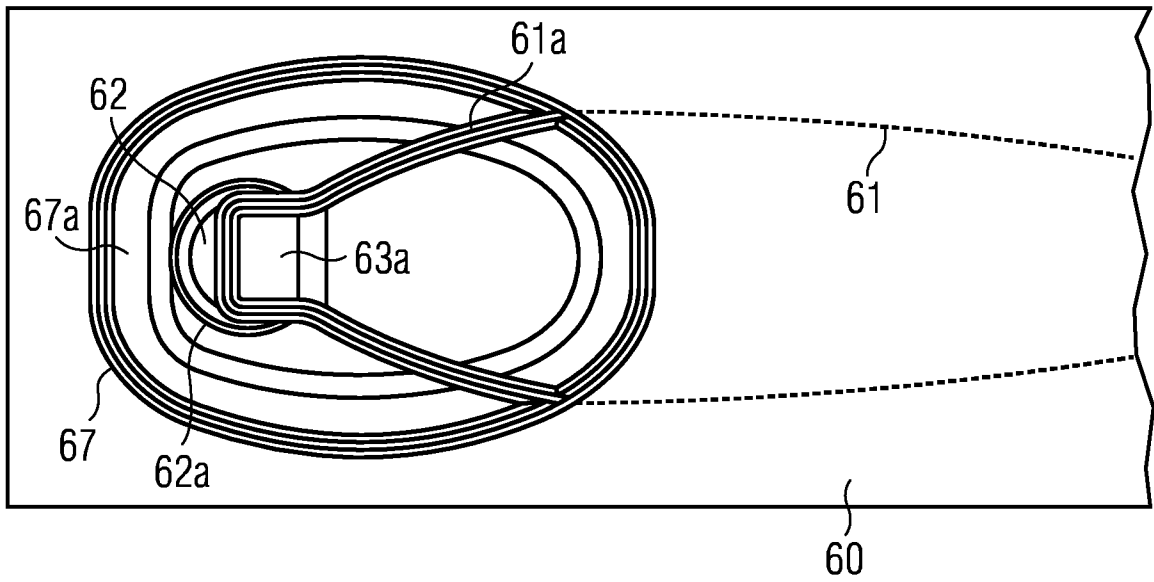

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/059281

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B32B15/08 B32B15/085 B32B15/20 B32B27/10 B32B27/32
 B32B3/08 B32B3/26 B65D5/70 B65D5/74

ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 B32B B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 828 138 A (ANDERSSON PER M [CH]) 9 May 1989 (1989-05-09) column 1, line 59 - line 64 figures 2,3,4 column 2, line 15 - line 16 column 2, line 36 - line 42 -----	1-13
A	EP 0 444 862 A1 (JUJO PAPER CO LTD [JP]) 4 September 1991 (1991-09-04) column 3, line 34 - line 36 figures 3,4 -----	1-13
A	DE 38 32 412 A1 (DAINIPPON PRINTING CO LTD [JP]) 13 April 1989 (1989-04-13) figures 16,17,20-24 column 12, line 10 - line 22 column 13, line 6 - line 12 column 14, line 25 - line 28 -----	1-13
	-/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 25 June 2015	Date of mailing of the international search report 03/07/2015
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Flores de Paco, M
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/059281

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 10 2008 002853 A1 (SIG TECHNOLOGY AG [CH]) 3 December 2009 (2009-12-03) claim 1 figures 5,7	1-13
A	----- US 5 029 752 A (ANDERSSON PAR M [CH]) 9 July 1991 (1991-07-09) figures 4,5,8 -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2015/059281

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 4828138	A	09-05-1989	AU 600366 B2	09-08-1990
			AU 1776488 A	22-12-1988
			CA 1316130 C	13-04-1993
			CH 673821 A5	12-04-1990
			DE 3880205 D1	19-05-1993
			EP 0295423 A2	21-12-1988
			ES 2039500 T3	01-10-1993
			JP S63317453 A	26-12-1988
			SU 1755708 A3	15-08-1992
			US 4828138 A	09-05-1989
EP 0444862	A1	04-09-1991	DE 69103550 D1	29-09-1994
			DE 69103550 T2	09-02-1995
			EP 0444862 A1	04-09-1991
			JP H0627542 Y2	27-07-1994
			JP H03111936 U	15-11-1991
DE 3832412	A1	13-04-1989	NONE	
DE 102008002853	A1	03-12-2009	NONE	
US 5029752	A	09-07-1991	AT 111847 T	15-10-1994
			AU 641175 B2	16-09-1993
			AU 6215590 A	14-03-1991
			CA 2024526 A1	06-03-1991
			CH 679850 A5	30-04-1992
			DE 59007225 D1	27-10-1994
			DK 0416256 T3	14-11-1994
			EP 0416256 A2	13-03-1991
			ES 2059917 T3	16-11-1994
			JP H0398849 A	24-04-1991
US 5029752 A	09-07-1991			