(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 August 2011 (18.08.2011)

PCT

(10) International Publication Number
WO 2011/100740 A2

(51) International Patent Classification:
H01R 13/658 (2011.01) *H01R 12/71* (2011.01)

(21) International Application Number:
PCT/US2011/024880

(22) International Filing Date:
15 February 2011 (15.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/304,708 15 February 2010 (15.02.2010) US

(71) Applicant *(for all designated States except US)*: **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, Illinois 60532 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **CASHER, Patrick R.** [US/US]; c/o Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US). **KACHLIC, Jerry** [US/US]; c/o Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US). **ROWLANDS, Michael** [US/US]; c/o Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US). **REGNIER, Kent E.** [US/US]; c/o Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US).

(74) Agent: **SHELDON, Stephen L.**; Molex Incorporated, 2222 Wellington Court, Lisle, Illinois 60532 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

WO 2011/100740 A2

(54) **Title**: DIFFERENTIALLY COUPLED CONNECTOR

(57) **Abstract**: A connector is provided with a pair of terminals configured to provide a differential signal pair. A ground terminal is positioned on opposing sides of the differential pair. The body of the differential pair is configured so as to bring the differential pair closer together. In an embodiment, the % coupling on the differential pair is increase at least 10% more than a design where the four terminals are positioned at a constant pitch between the tail and the contact.

DIFFERENTIALLY COUPLED CONNECTOR

BACKGROUND OF THE INVENTION

RELATED APPLICATIONS

[0001] This application claims priority of United States Provisional Application No. 61/304,708, filed February 15, 2010, which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates to the field of connectors, more specifically to connectors suitable for use in high data rate applications.

DESCRIPTION OF RELATED ART

[0003] One known connector configuration is commonly referred to as a small form-factor pluggable (SFP) connector. SFP style connectors can be configured to provide two high data rate channels and a number of lower data rate channels. As can be appreciated, this configuration is sometimes referred to as a 1X connector as it provides for one channel of data communication for transmitting and one channel for receiving. Other connectors with similar form factors can provide more high data rate channels such as 4X connectors that provide four transmit and four receive channels. Because of the relatively small size, SFP-style connectors have proven useful for mounting in racks and other applications were space is at a premium and because of its performance, have also proven useful in relatively high performance applications. With ever increasing demands for more and more data, however, existing designs, even if potentially suitable for 10 Gbps data rates or greater, have begun to be less attractive for use in applications where it is generally desirable that the connector be somewhat future proof. Therefore, certain individuals would appreciate a SFP style connector that is suitable for applications where a higher data rates might be desired.

BRIEF SUMMARY OF THE INVENTION

[0004] A connector is provided that includes a housing. The housing includes a mating face with a slot that has a width and a first and second side. The slot can include a plurality of terminals on the first and second side of the slot, the terminals respectively positioned in a first and second row. At least two pairs of terminals in the first row are configured to provide a differentially coupled signal pair. A ground terminal is positioned on each side of each signal pair. A terminal block can be supported by the housing and can support the first row of terminals in the housing and the terminal block can extend the length of the slot. The signal pairs can be configured to provide data rates of 16 Gbps or 20 Gbps or even 25 Gbps.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The present invention is illustrated by way of example and not limited in the accompanying figures in which like reference numerals indicate similar elements and in which:

[0006] Figure 1A illustrates a perspective view of an embodiment of a connector with a slot.

[0007] Figure 1B illustrates another perspective view of the connector depicted in Figure 1A.

[0008] Figure 1C illustrates an elevated side view of the connector depicted in Figure 1A.

[0009] Figure 1D illustrates an elevated front view of the connector depicted in Figure 1A.

[0010] Figure 2 illustrates a perspective view of a cross-section of the connector depicted in Figure 1A.

[0011] Figure 3 illustrates a partial perspective view of the connector depicted in Figure 1A.

[0012] Figure 4 illustrates a perspective view of an embodiment of a set of terminals supported by a terminal block.

[0013] Figure 5 illustrates a partial elevated rear view of an embodiment of a set of terminals supported by a terminal block.

[0014] Figure 6 illustrates a partial elevated top view of an embodiment of a terminal block and terminals.

[0015] Figure 7 illustrates a perspective view of an embodiment of terminals that can be supported by a terminal block.

[0016] Figure 8 illustrate a perspective view of an alternative embodiment of terminals that can be supported by a terminal block and an alignment block.

[0017] Figure 9 illustrates a perspective view of the terminals depicted in Figure 8 without the alignment block.

[0018] Figure 10 is an elevated side view of an embodiment of a set of terminals that include an alignment block.

[0019] Figure 11 illustrates a perspective view of an embodiment of a connector.

[0020] Figure 12 illustrates an enlarged perspective view the connector depicted in Figure 11.

[0021] Figure 13 illustrates another perspective view of the connector depicted in Figure 11.

[0022] Figure 14 illustrates another perspective view of the connector depicted in Figure 11.

[0023] Figure 15 illustrates a perspective view of an embodiment of two terminal sets suitable for use in the connector depicted in Figure 11.

[0024] Figure 16 illustrates a perspective simplified view of an embodiment of two terminal sets suitable for use in the connector depicted in Figure 11.

[0025] Figure 17 illustrates an enlarged perspective view of terminals in a first terminal set.

[0026] Figure 18 illustrates a perspective simplified view of an embodiment of a first terminal set.

[0027] Figure 19 illustrates a perspective cross-sectional view of the embodiment depicted in Figure 18.

[0028] Figure 20 illustrates a perspective view of an embodiment of a second terminal set.

[0029] Figure 21 illustrates a perspective cross-sectional view of the embodiment depicted in Figure 20.

[0030] Figure 22 illustrates a perspective cross-section view of the connector depicted in Figure 11.

[0031] Figure 23 illustrates a perspective view of another embodiment of a connector housing.

[0032] Figure 24 illustrates a perspective view of an embodiment of two interlocked terminal sets.

[0033] Figure 25 illustrates a perspective exploded view of the terminal sets depicted in Figure 24.

[0034] Figure 26 illustrates a perspective view of a cross-section taken along line C-C of the interlocked terminal set depicted in Figure 24.

DETAILED DESCRIPTION OF THE INVENTION

[0035] The detailed description that follows describes exemplary embodiments and is not intended to be limited to the expressly disclosed combination(s). Therefore, unless otherwise noted, features disclosed herein may be combined together to form additional combinations that were not otherwise shown for purposes of brevity.

[0036] Connectors commonly use one or more sets of terminal supported by a housing. Depending on the application, the housing may be mounted on a circuit board by itself (e.g., for internal applications) and when there is a desire to control EMI interfering with and being emitted from the connector it can be surrounded by a cage (e.g., for external applications). The disclosure provided herein is directed toward a connector that in certain embodiment is suitable for both internal and external applications and could be used with any appropriate cage design.

[0037] Figures 1A-6 illustrate views and features of an embodiment of a connector suitable to be mounted on a circuit board and to provide what is often referred to as 1X channel (e.g., one transmit and one receive channel). The connector includes a support face 10 and a mating face 11 and further includes a mounting side 12 on a housing 50 that has a front side 50A and a rear side 50B. The mounting side 12 is typically configured to be mounted on a support circuit board. The mating face 11 includes a slot 20 with a first side 20a and a second side 20b and a first set of terminals 70 and a second set of terminals 60 are positioned in the slot so as to provide a row 21 of contacts. The support face 10 includes a channel 52 that supports a terminal block 80. Each terminal in the first and second set includes a tail 72, 62, a body 73, 63 and a contact 74, 64.

[0038] To support and position the first set of terminals 70, the terminal block 80 can be inserted into the channel 52. As depicted, the terminal block in inserted from the rear side 50B toward the front side 50A, preferably in a manner parallel to a supporting circuit board. Unlike conventional waferized terminals (such as typically would be used for a stacked connector), however, the depicted embodiment allows the terminal block to be inserted into

the housing in a first direction while provide a row 21 of contacts with the row of contacts being perpendicular to the insertion direction. In an embodiment, arms 82, 86 are mounted in notches 54, 56 in the channel 52 and the notches 54, 56 and the arms 82, 86 can be polarized so that the terminal block can only be inserted in a desired orientation.

[0039] As can be appreciated, signal terminals 70B are positioned so as to provide a signal pair 91 and 93 and both signal pairs are surrounded on both sides by ground terminals 70A. As can be further appreciated, a distance 102A (which is between terminals that form a signal pair) is less than a distance 103A. Similarly, as can be appreciated from Figure 5, distance 102B is less than distance 103B. Thus, away from the tail and contact portions of the terminals, which as depicted are at a constant pitch and spacing, the spacing between the signal terminals that form the signal pair varies so as to provide the desired amount of preferential coupling. Due to the change in dielectric constants, it has been determined that it is beneficial to change the width of the terminals 70B from width 101A in the free portion to width 101B in the block portion (assuming that the thickness is not substantially changed). Thus, the interfaces 110 provide relatively constant tails and contacts widths and spacing to make mating of the connector straightforward while the signal pair spacing is adjusted to provide the desirable electrical performance.

[0040] As can be appreciated, the terminals supported by the terminal block are at a first pitch at the contact and have a second pitch in the body section. As can be further appreciated, the terminals body has a free portion and a block portion, the block portion residing in the terminal block. To account for the change in dielectric constant caused by the use of the terminal block, the terminals can have one pitch between the free body and another pitch in the terminal block portion. In any event, as can be appreciated from Figure 5, the distance between terminals that form the signal pair can increase in the block portion compare to the distance between the same terminals in the free portion.

[0041] At the contact location it is difficult to vary the pitch due the desire to have a consistent and reliable connector with a series of contact pads on a mating card. It has been determined, however, that reducing the pitch between the differential pairs in the body

section can provide a beneficial decrease cross talk. For example, in a connector with a 0.5 dB dip in insertion loss at about 8 GHz, by using preferential differential coupling it is possible to decrease the insertion loss to about 0.1 dB dip and to move the frequency of this dip loss out to frequencies greater than 11 GHz. Another measurement of the improvement can be determined by the crosstalk, which has a corresponding rise at the frequency of the insertion loss dip. An existing connector was tested and had crosstalk of about 20 dB at about 5 GHz. When the connector was configured in a manner similar to what is depicted in Figures 1A-7, the crosstalk was reduced to about 45 dB, a 25 dB reduction.

[0042] In a typical first ground terminal 70A, first signal terminal 70B, second signal terminal 70B, second ground terminal 70A arrangement, the spacing between the grounds and signals terminals is kept constant. This is particularly true for stitch SMT style connectors, such as known SFP or QSFP connectors as it is difficult (and perhaps impossible) to vary the distance between stitched terminals if the contacts are going to be kept at a constant pitch. Thus, the distance might be 0.47 mm between each adjacent terminal (which could be 0.33 mm wide so as to provide a desired 0.8 mm pitch). This leads to situation where 33% of the energy is carried via signal pair coupling and 66% of the energy is carried via the signal-to-ground structure.

[0043] It has been determined that the energy carried via the multi-terminal ground structure can create resonances that cause dips in insertion loss (and corresponding increases in crosstalk,) such as noted above. Therefore, it can be beneficial to increase the % coupling on a differential pair 91, 93. It should be noted that while two differential pair are illustrated in Figures 1A-7, these features can also be used on connectors with more than two differential pair.

[0044] It has been determined that one beneficial way to increase the % coupling on the signal terminals is to change the distance between the terminals. The use of blanked terminals supported by a terminal block as illustrated helps allow the distance to be varied. Because of interactions between the terminals, assuming that the ground and signal terminals have a uniform cross-section and associated housing portions, it has been determined that for

x (in mm) equal to the distance between the differential pair and y (in mm) equal to the distance between a differential terminal and a ground terminal, the following simple relationship of (1/x)/[(1/y)+(1/x)+(1/y)] provides the percent of energy carried via differential coupling for most symmetric terminal systems. In an embodiment where the distance between each body is 0.47 mm, for example, the formula for the % coupling via the signal pair is 1/.47/[(1/.47)+(1/.47)+(1/.47)] and this equals 0.33 or 33 % coupling. By decreasing the distance between the terminals that make up the differential pair (and or increasing the distance between the signal terminals and the adjacent ground terminals), however, it is possible to provide solutions where the % coupling on the signal pair is increased by at least 10% compared to the symmetric case so as to reduce the energy carried via the ground structure, which tends to reduce potential resonant energy on the ground terminals. The reduction in energy on the ground terminals reduces amount of energy that is reflected and thus helps reduce crosstalk. As can be appreciated, further benefits can be obtained if a 20% increase in % coupling is obtained and even more benefits can be obtained if a 30% increase in % coupling is obtained. While the amount of increase in % coupling that is sufficient to ensure low crosstalk (e.g., less than 40 dB) due to energy reflections on the ground terminal will vary, it is expected that increasing the % coupling by about 30% will typically be sufficient.

[0045] As can be appreciated, further increases in % coupling versus the symmetric case can provide further benefit. For example, in an embodiment such as is depicted in Figure 5, distance 103A could be 0.325 mm and the distance 102A could be 0.2 mm. With the above noted assumptions on terminal design, this would result in a calculated value of 0.448 or 44.8% energy carried via differential coupling. A sample with a design as shown in Figures 1A-7 that included distances of 0.325 and distances 0.2 was tested. The common mode impedance was tested as being 65 ohms and the differential impedance was 100 ohms. Using the formula %coupling = (Zeven-Zodd)/(Zeven+Zodd), where Zodd=Zdiff/2 and Zeven = 2*Zcomm, the %coupling = (2*Zcom)-(Zdiff/2)/[2*Zcom+Zdiff/2] = (130-50)/(130+50) = 80/180 = 44.4 %. Thus, the experimental results map well with the theoretical results.

[0046] As there is generally a desire to provide a consistent impedance through the terminal, there are limits on how large of a percentage increase in % coupling is feasible. The terminal design illustrated in Figures 1A-7, for example, while providing a consistent 0.8 mm pitch at the contact, has about a 35% increase in % coupling as it goes from the standard 33% coupling to 44.8 percent coupling (or 44.4% coupling if the test data is used). Further increases over the standard 33% coupling might require changes in terminal geometry that would cause the differential impedance to vary away from an intended value.

[0047] In any event, it is beneficial to vary the ratio of the distance between the signal terminals that make up the differential pair and the distance between adjacent ground and signal terminals such that the % coupling is at least 36.5% (the 10% increase in coupling over the standard 33% coupling) and more beneficially is at least 39.6% (the 20 percent increase in coupling over the standard 33% coupling). Further benefits can be obtained by having at least a 30% increase in coupling (to about 43% coupling).

[0048] Because of the change in dielectric material, the terminals have a varied pitch and material thickness so as to reduce changes in impedance. The distance 102B is 0.45 mm and the distance 103B is 0.60 mm, which results in a % coupling of 40 %. Thus, there is at least a 20% increase over the standard 33% coupling through the terminal body. It should be noted, therefore, while there are benefits to keeping the increase in % coupling consistent, in practice significant performance improvements can be obtained even if the increase in % coupling varies along the terminal. It should be further noted that as depicted, the distance the terminal is in the terminal block is about 2.7 mm and the total length of the terminal is slightly greater than 8 mm, thus terminal block occupies about a third of the total terminal length and based on a weighted average, the increase in % coupling is .33(7/33)+.66(11.8/33), which equal about an average of about a 30.6 percent increase in % coupling. Generally speaking, using the weighted average allows the length of the terminal as well as other variations to be accounted for and is often beneficial.

[0049] Figures 8-10 illustrate features of an optional alignment block 177 and, as can be appreciated, the terminal block has been omitted for purposes of showing other features. As

illustrated and discussed above, the terminals can be supported by the terminal block and the contact can extend in a cantilevered fashion from the terminal block. While this design is effective, it tends to require a refined manufacturing process with good quality control. To further improve reliability, an alignment block 177 can be included (such as is depicted in Figure 8). The alignment block 177 helps ensure pitch between the contacts is controlled. If the alignment block 177 is not restrained by the corresponding connector housing, the terminals can still flex from the terminal block. As can be further appreciated, if there is a desire to have a first make, last break feature, such a feature can be provided on the contact pads of the mating circuit card. However, the terminals coupled by the alignment bar will tend to deflect together as a group. It should be noted that the alignment block 177 is only shown spanning across a single differential pair and such a design may be preferable (e.g., multiple alignment blocks may be provided). However, if desired, the alignment bar can extend transversely to some other number of differential pairs and can even extend across all the terminals supported by the terminal block. As can be appreciated, extending across all the terminals helps provide further support for each individual terminal in a transverse direction.

[0050] The alignment bar 177 can be positioned near the contacts 74 and in an embodiment a front face 177a of the alignment bar 177 is positioned so that distance SD between the front face 177a and a center point 64a of the contact 64 is less than 20 mm. In another embodiment, the front face 177a can be positioned so that SD is less than 10 mm. If the distance SD is reduced, the alignment bar 177 can provide greater transverse support at the contact. To help ensure the alignment bar is retained in the desired position on the terminals, alignment notches 178 can be provided in the terminals. The alignment notch may also be beneficial in maintaining consistent impedance through the differential pair. However, if the alignment bar is small then the alignment notch it is expected to have only a minor impact on the impedance and can be omitted if it is not determined to be beneficial in maintaining the position of the alignment bar 178.

[0051] Another embodiment of a connector 200 is depicted in Figures 11-22. The connector 200 includes a housing 210 with a top side 210a, a support side 210b, a mating face 210c and a support face 210d. A slot 215 is provided in the mating face 210c and terminal grooves 220a, 220b are provided on opposing sides of the slot 215. As can be appreciated, the terminal grooves can extend from the slot to the corresponding side of the connector. While not required, such a configuration allows the dielectric value experienced by the terminals to be reduced.

[0052] Similarly to configuration of the connector 10, the terminals are arranged in rows. As depicted, the terminals in the lower side of the slot 215 have a row of tails 270a, a row of contacts 270b and a row of bodies 270c while the terminals in the upper side of the slot 215 have a row of bodies 240c, a row of contacts 240b and a row of tails 240a. The terminals are thus arranged in a first terminal set 239 and a second terminal set 270. The first terminal set 239 supports the terminals with a block 240 that is insert-molded onto the corresponding terminals. Similarly, the second terminal set 270 has a block 271 that is insert-molded onto the terminals. The blocks 240, 271 can be inserted into a channel 218 on the support face 210d and, as depicted, can be supported by cross-brace 217. Thus, the surface 218a and the cross-brace 217 support the block 240 and the surface 218b and the cross-brace 217 support the block 271. It should be noted that in an alternative embodiment, the block 240 and the block 271 could be configured so that they engage and support each other (thus removing the need for the cross-brace) and the cross-brace could be omitted. Thus, a number of possible variations exist for structures that could be used to support the terminal sets.

[0053] The depicted terminals of the first terminal set 239 are arranged so that there is a first signal pair 250a (which includes signal terminals 242a and 243a), a second signal pair 250b, a third signal pair 250c and a fourth signal pair 250d. As can be appreciated, ground terminals 241a-241f are positioned so that each signal pair is surrounded on two sides by a ground terminal. As noted above, in a convention connector such a configuration would tend to cause the differential coupling to carry about 33% of the energy. However, with the

depicted arrangement (more of which will be discussed below) the differential coupling can care more than 40% of the energy, as was discussed above.

[0054] As shown, the signal pair 250a has terminals 242a and 243a that are separated by a distance D1 between the tails 240a and the block 240, are separated distance D6 in the block and are separated by a distance D4 between the block and the contacts 240b. In an embodiment, distance D2 and D3 are the same and D7 and D8 are also the same. Thus, each signal terminal is separated from an adjacent ground terminal by a distance D2 between the tail 240a and the block 240, by a distance D7 in the block 240, and by a distance D5 between the block 240 and the contact 240b. Thus, as depicted, the distance between the terminals in a signal pair (D1, D6 and D4 going from the tail to the contact) is less than the distance between a signal and adjacent ground (D2, D7 and D5 going from the tail to the contact). Or to put it another way, the pitch between the bodies of the terminal in a signal pair is less than the pitch between the bodies of an adjacent signal and ground terminal. However, the pitch between the tails and the contacts is substantially constant along the row of tails 240a and contacts 240c. Thus, tail mating interface 245 and contact mating interface 246 for each terminal in the first terminal set 239 can be on the same pitch. As signal terminals in the first set shift to a closer arrangement between point P1 and P2, which allows a substantial portion of the signal terminals to be preferentially coupled (thus providing the desired increase in amount of energy being carried on the signal terminals, as well as the reduction in crosstalk).

[0055] The second terminal set 270 also is depicted with four signal pairs 280a-280d and each signal pair is surrounded on two sides by a ground terminal, as discussed with respect to the first terminal set 239. For example, tail interface 275 and contact interface 276 are provided on a constant pitch while the bodies of the signal pairs are at a lesser pitch compared to a body of the terminals of the signal pair and the adjacent ground terminal. Thus, distance S2 is less than distance S1 and S3 (which may be the same) and distance S5 is less than distance S4 and S6 (which may be the same) and distance S8 is less than distance S7 and S9 (which may be the same). Similarly to the terminals discussed above, the reduction in

pitch takes place between point P3 and P4 (thus along a majority of the length of the terminal).

[0056] Thus, Figures 11-22 illustrate an embodiment that could be used as a 4X connector (3.g., 4 high data rate transmit channels and 4 high data rate receive channels). Such a connector, for example, would be suitable to provide a 25 Gbps data rate. As with the embodiment depicted in Figures 1A-7, the signal pairs are positioned closer together so as to increase the % of differential coupling.

[0057] In the embodiment depicted, the first terminal set 239 is also supported by a tail frame 230 that includes a cross-bar 231. The tail frame 230 helps control alignment of the terminal tails prior to mounting the terminals on a circuit board. The tail frame 230 can be inserted into notches 222a, 222b so that the tail frame 230 is securely supported by the housing 210.

[0058] Figures 23-26 illustrate another embodiment of a connector construction. As can be appreciated, a housing 310 includes a channel 318 but the channel 318 omits a cross-bar. Instead, terminals sets 339, 370 are configured to be inserted into the channel and to help support each other. In an embodiment, the self-support can be accomplished by having housings 340, 371 of the terminal sets 339, 370 coupled together. The coupling of the housings 340, 371 can be accomplished in any desirable manner and as depicted, may be accomplished by having the terminal sets interlocked such that a flange 349 engages shoulder 379 (which form a locking slot). Thus, the housings can engage each other and then be inserted into the channel so combination of the housings and the channel support the terminals.

[0059] As can be appreciated, the housing 340 can include a combed edge 348. While not required, it has been determined that the combed edge 348 allows for a more gradual transition between the block portion and the free portion and thus can help further improve electrical performance. It should also be noted that while contact rows 340b, 370b are similar to above embodiments, rows of tails 340a, 370a are slightly different, specifically the tail

portion of each terminal is substantially the same as an adjacent terminals. This optional configuration may be helpful in tuning an electrical response of the terminals.

[0060] The disclosure provided herein describes features in terms of preferred and exemplary embodiments thereof. Numerous other embodiments, modifications and variations within the scope and spirit of the appended claims will occur to persons of ordinary skill in the art from a review of this disclosure.

We claim:

1. A connector comprising:

a housing with a mating face and a support face and a mounting side, wherein a slot is positioned in the mating face, the slot having a first side with a first set of terminal grooves and a second side with a second set of terminal grooves and a width define by the first and second side, and the housing further includes a channel in the support face;

a terminal block mounted in the first channel;

a first set of terminals extending from the mounting side to the first set of terminal grooves, the first set of terminals forming a first row of terminals in the slot, the first row of terminals including a first and second differential pair spaced apart by at least one ground terminal, each of the terminals that form the first and second differential pair including a tail, a contact and a body, wherein the terminal block supports the first set of terminals, wherein the body of each of the terminals that form the first and second differential pair has a block portion and a free portion, the block portion positioned in the terminal block and having a first width and the free portion having a second width different than the first width; and

a second set of terminals extending from the mounting face to the second set of terminal grooves, the second set of terminals forming a second row of terminals.

2. The connector of claim 1, wherein the terminals that form the first and second differential pair are at a first pitch at the contact and are at a second pitch at the body, the second pitch being less than the first pitch.

3. The connector of claim 2, wherein the signal pairs have a block portion and a free portion and the block portion is separated by a first distance and the free portion is separated by a second distance, the first distance being greater than the second distance.

4. The connector of claim 3, wherein the first and second signal pair are impendence matched differentially between the tail and the contact so as to provide less than 10 dB of return lose out to a signaling frequency corresponding to a 3 dB application bandwidth.

5. The connector of claim 4, wherein the signaling frequency is at least 15 GHz.

6. The connector of claim 5, wherein the terminal block is a first terminal block and the second set of terminals is supported by a second terminal block, the second terminal block supported by the channel.

7. The connector of claim 6, wherein there are at least two signal pairs supported by the second terminal block that are each configured to function as a differential pair.

8. A connector comprising:

a housing with a mating face and a support face and a mounting side, wherein a slot is positioned in the mating face, the slot having a first side with a first set of terminal grooves and a second side with a second set of terminal grooves and a width define by the first and second side, and the housing further includes a channel in the support face;

a terminal block mounted in the first channel;

a first set of terminals extending from the mounting side to the first set of terminal grooves, the first set of terminals forming a first row of terminals in the slot, the first row of terminals including a first and second pair of signal terminals that are each surrounded on both sides of the signal terminals by a ground terminal, each of the terminals including a tail, a contact and a body, wherein the bodies of the terminals that form the pair of signal terminals are positioned closer together compared to the body of the ground terminal and the body of a signal terminal.

9. The connector of claim 8, wherein the contacts of the terminals that form the pair of signal terminals are outwardly offset such that the contacts of the signal terminals and ground terminals are at a consistent pitch.

10. The connector of claim 9, wherein the pair of signal terminals are configured to be differentially coupled so that at least 36.5% percent of the energy is carried via the pair of signal terminals.

11. The connector of claim 10, wherein the pair of signal terminals are configured to be differentially coupled so that at least 39.6% percent of the energy is carried via the pair of signal terminals.

12. The connector of claim 11, wherein the tails of terminals that form the signal pairs are outwardly offset so that the tails of the ground and signal terminals are at a consistent pitch.

13. A connector, comprising:

a housing with a mating face, a mounting side and a support face, the housing including a slot positioned in the mating face, the slot having a width and a first side with a set of terminal grooves, the housing further including a channel in the support face;

a set of terminals extending from the mounting side to the set of terminal grooves on the first side, the set of terminals forming a row on the first side of the slot, the row including a first and second signal pair each surrounded on two sides by a ground terminal, each of the terminals including a tail, a contact and a body; and

a terminal block mounted in the first channel, the terminal block supporting the set of terminals, wherein the each body of the terminals that form the first and second signal pair has a block portion and a free portion, the block portion having a first width and the free portion having a second width different than the first width, the block portion positioned in the terminal block, wherein the signal pair is configured so as to provide less than 10 dB of return loss when used as a differential pair at a signaling frequency of 15 GHz.

14. The connector of claim 13, wherein the crosstalk is less than 40 dB at up to the signaling frequency.

15. The connector of claim 14, wherein the free portion is at a first pitch and the block portion is a second pitch that is greater than the first pitch.

16. The connector of claim 15, wherein the free portion of the bodies of the signal pair are at a pitch that is less than a pitch of the contacts of the signal pair.

17. The connector of claim 16, further comprising a second set of terminals that extend from the mounting side to a second side of the slot, the second set of terminals directly supported by the housing.

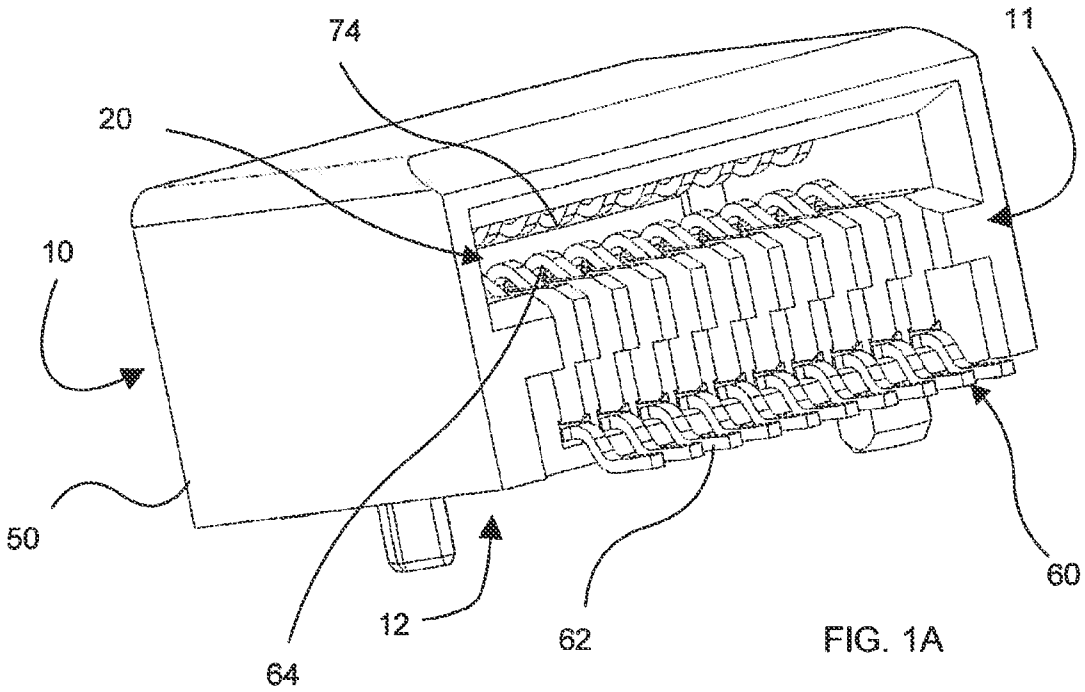


FIG. 1A

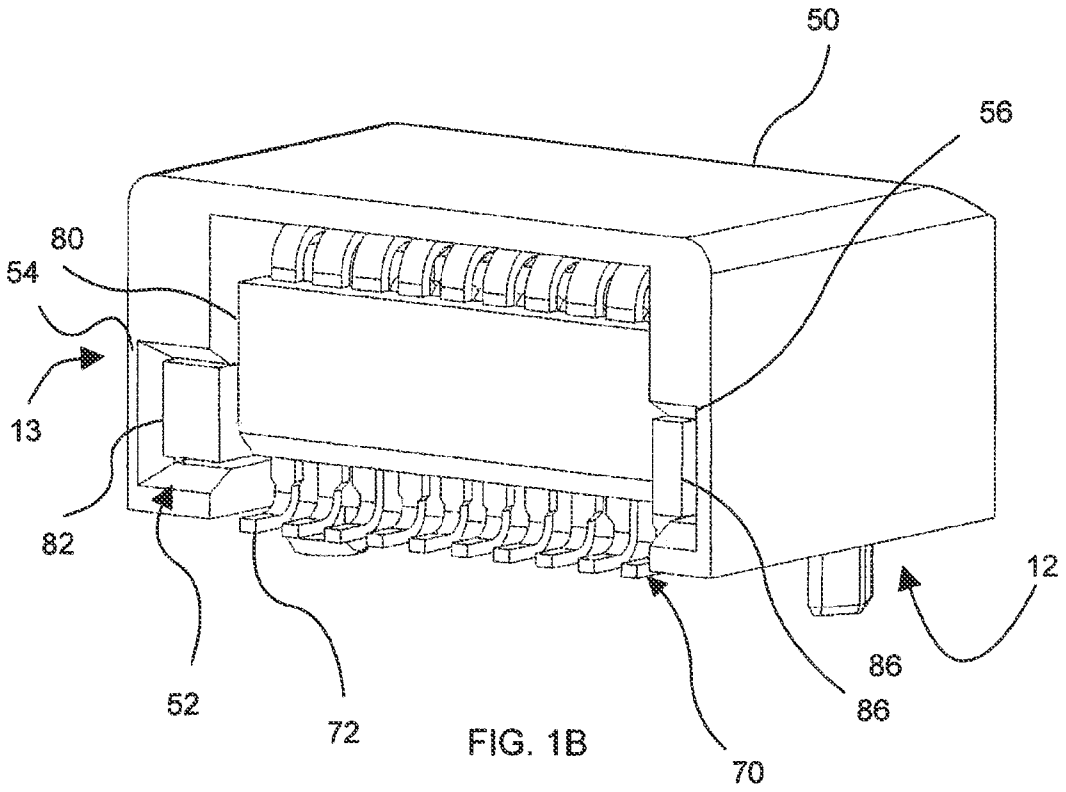


FIG. 1B

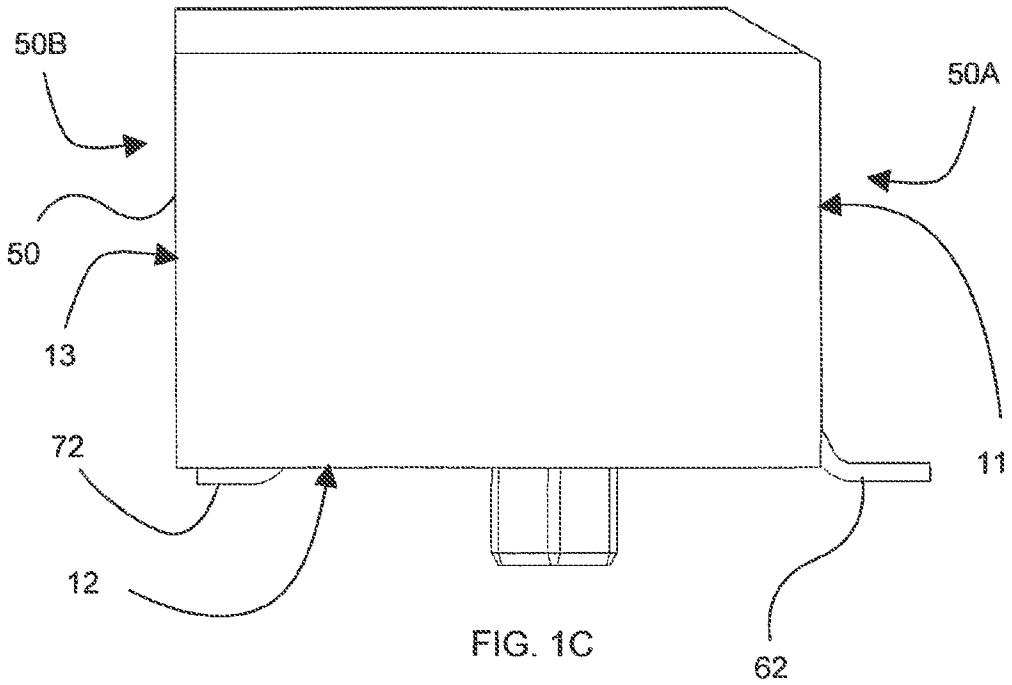


FIG. 1C

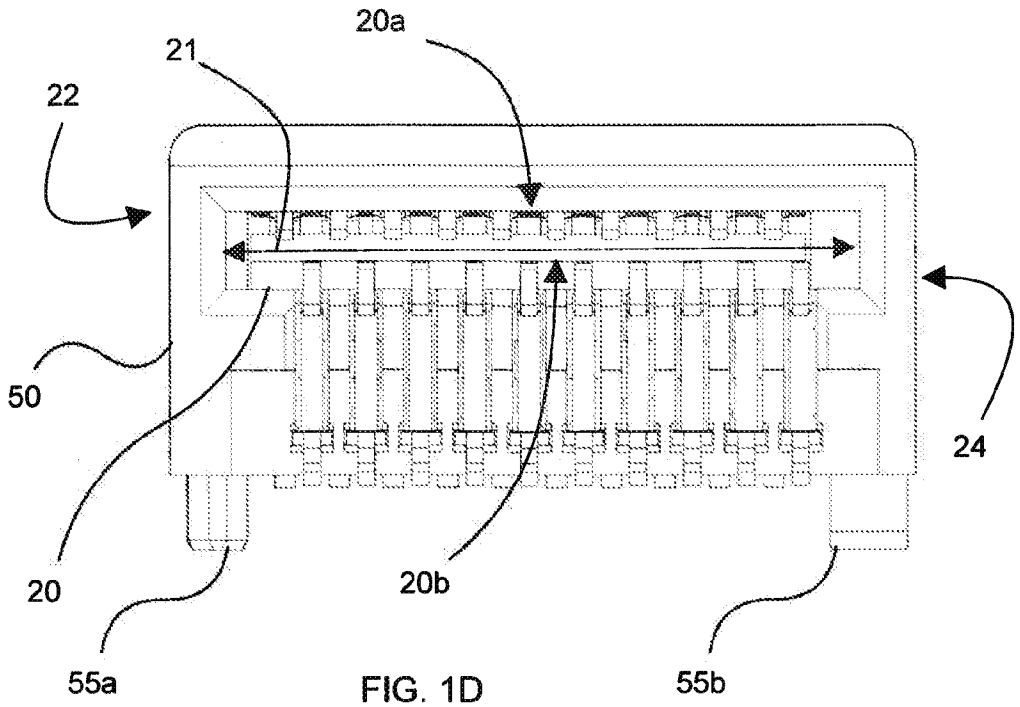


FIG. 1D

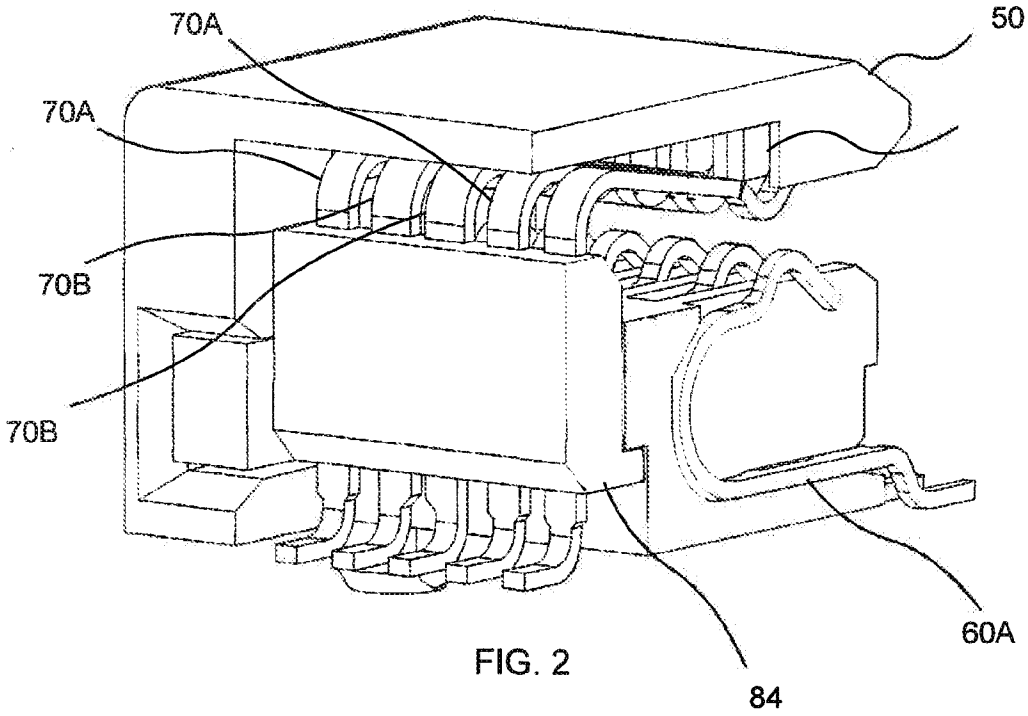

70A
50
70A
70B
70B
60A
84

FIG. 2

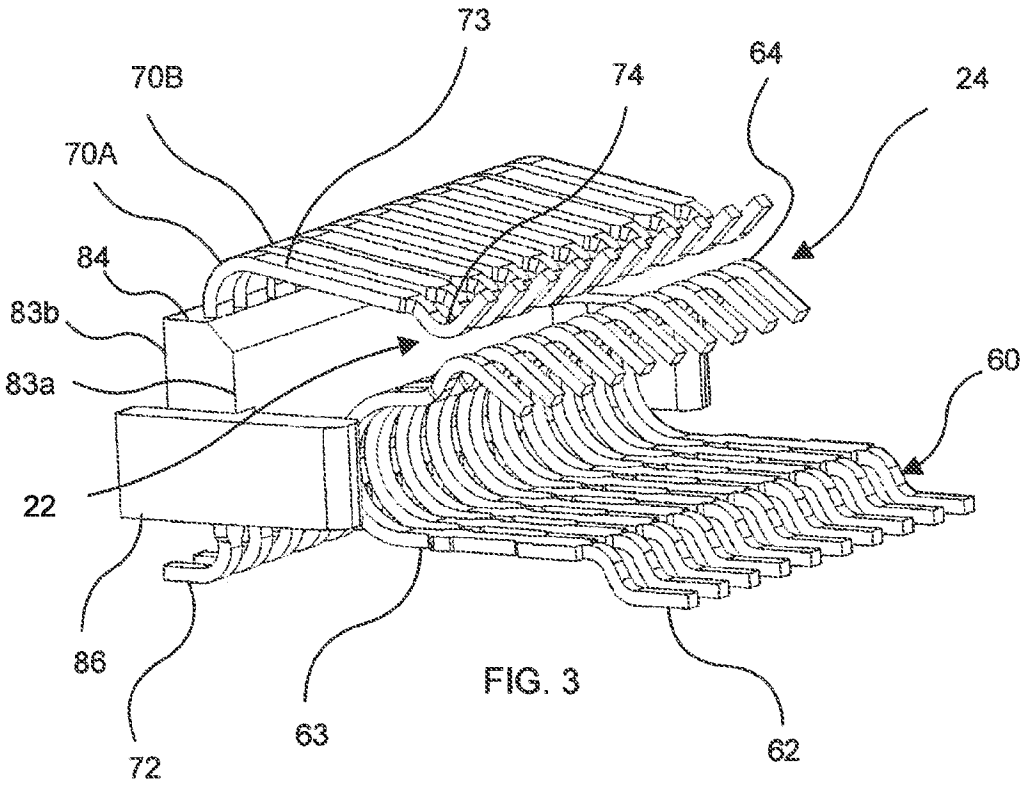

73
70B
74
64
24
70A
84
83b
83a
60
22
86
72
63
62

FIG. 3

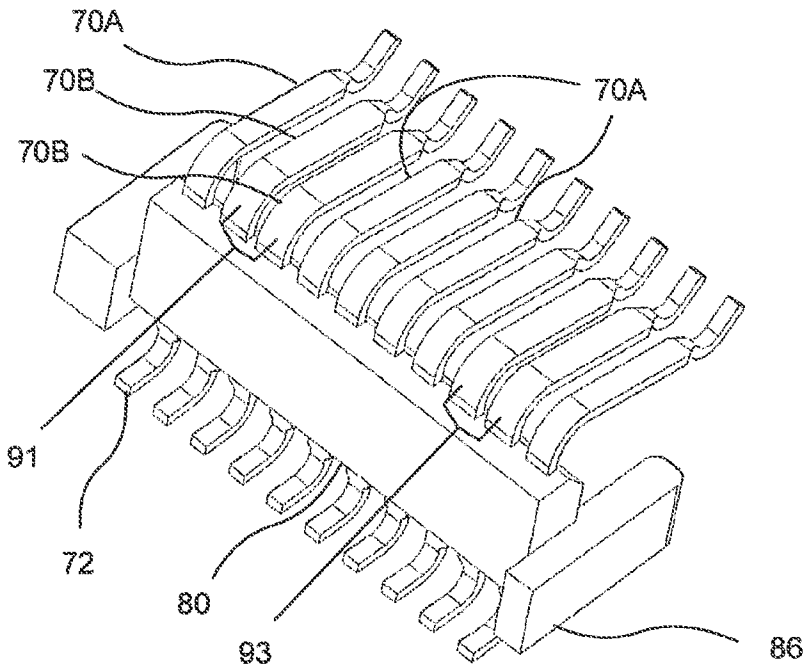

70A
70B
70B
70A
91
72
80
93
86

FIG. 4

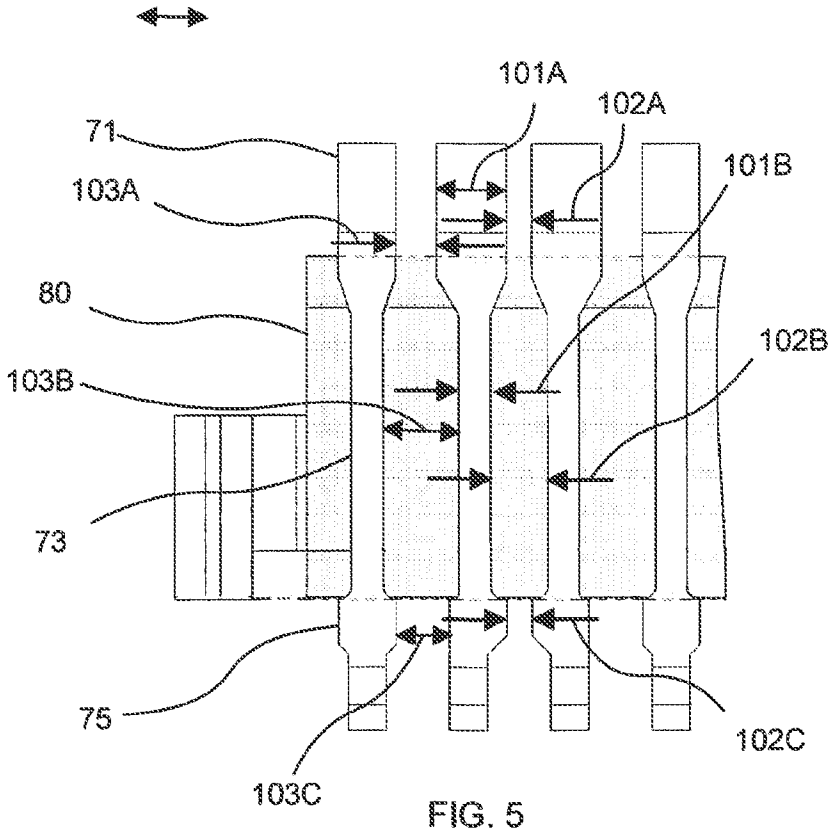

101A
102A
71
101B
103A
80
102B
103B
73
75
102C
103C

FIG. 5

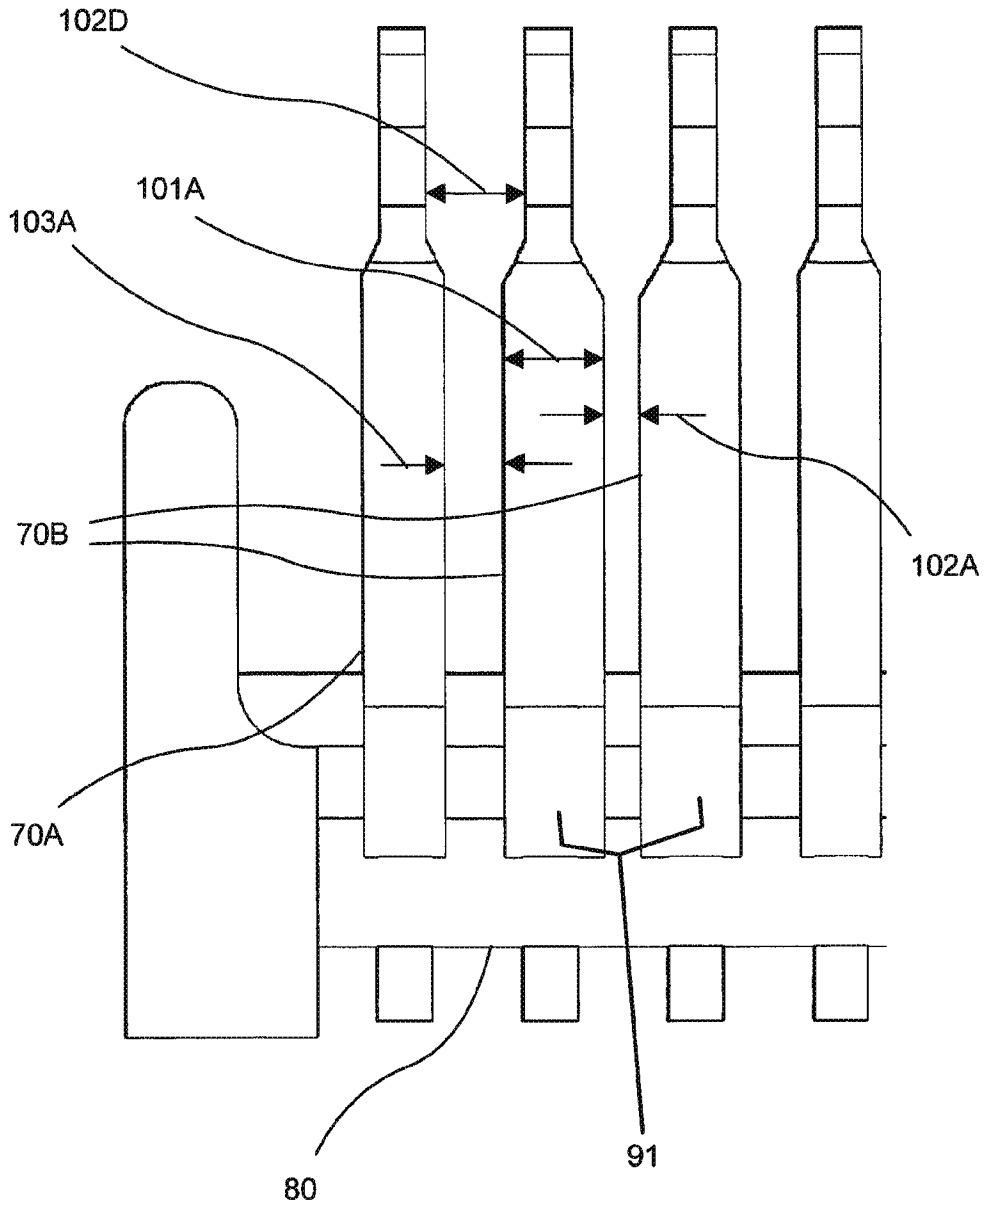


FIG. 6

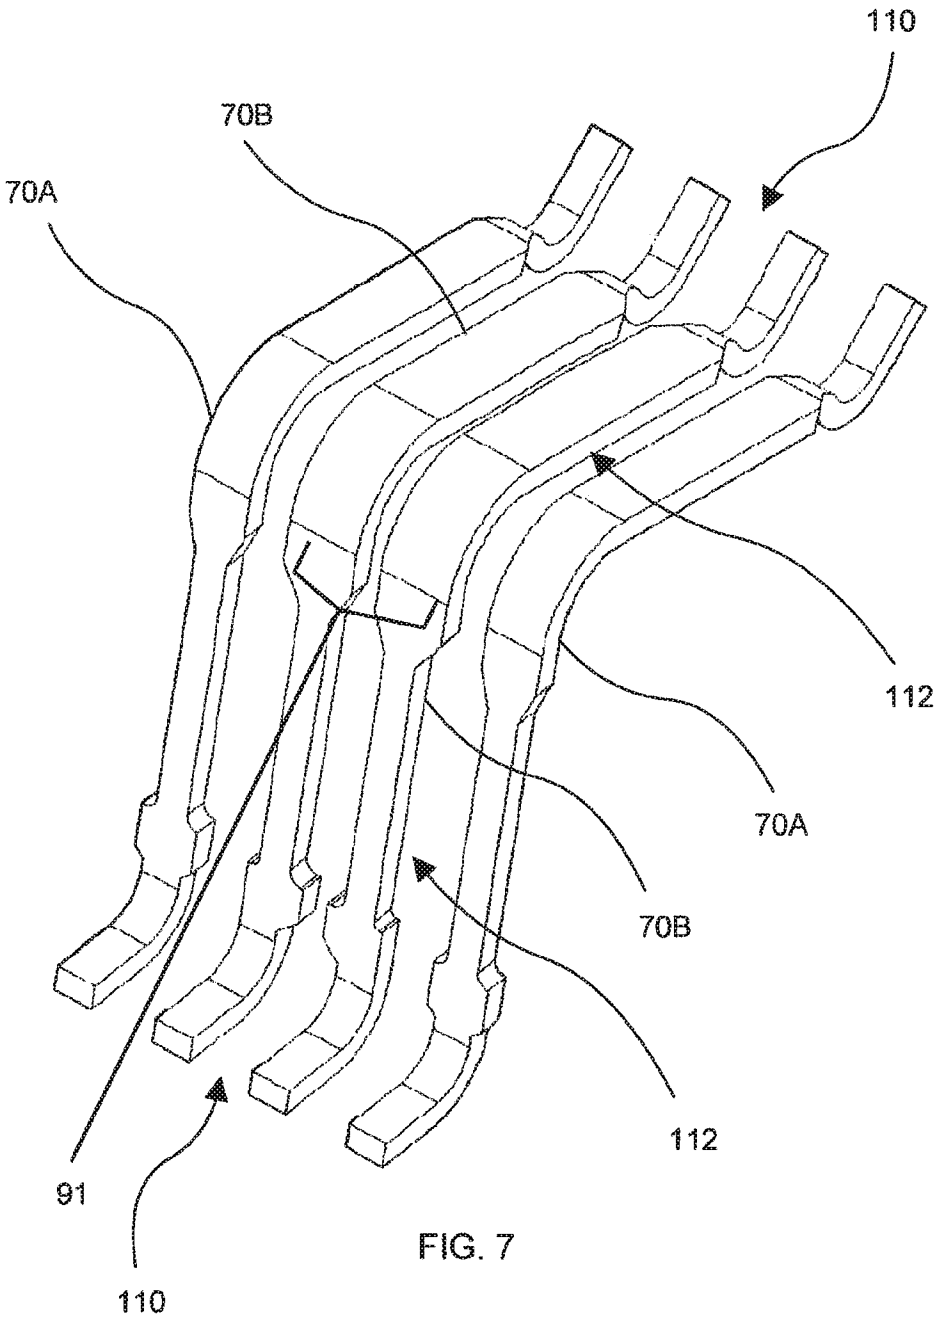


FIG. 7

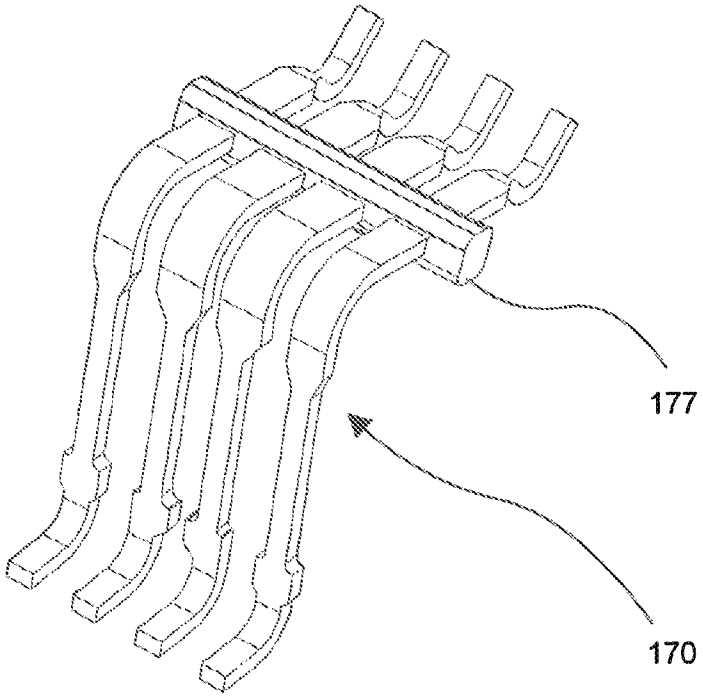


FIG. 8

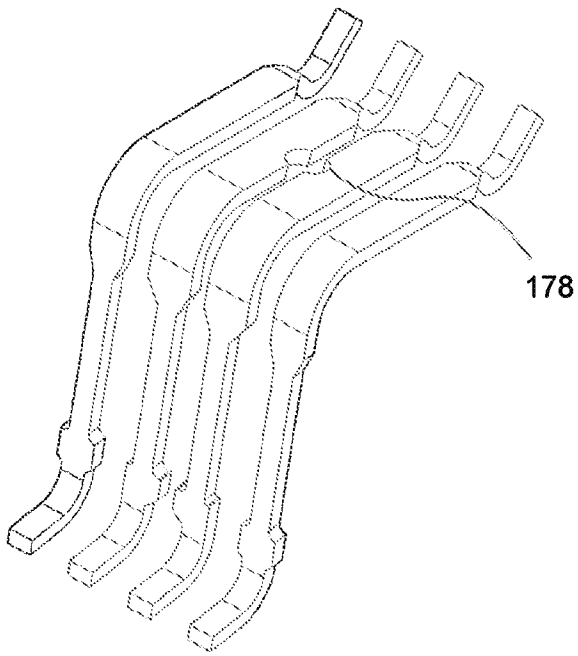


FIG. 9

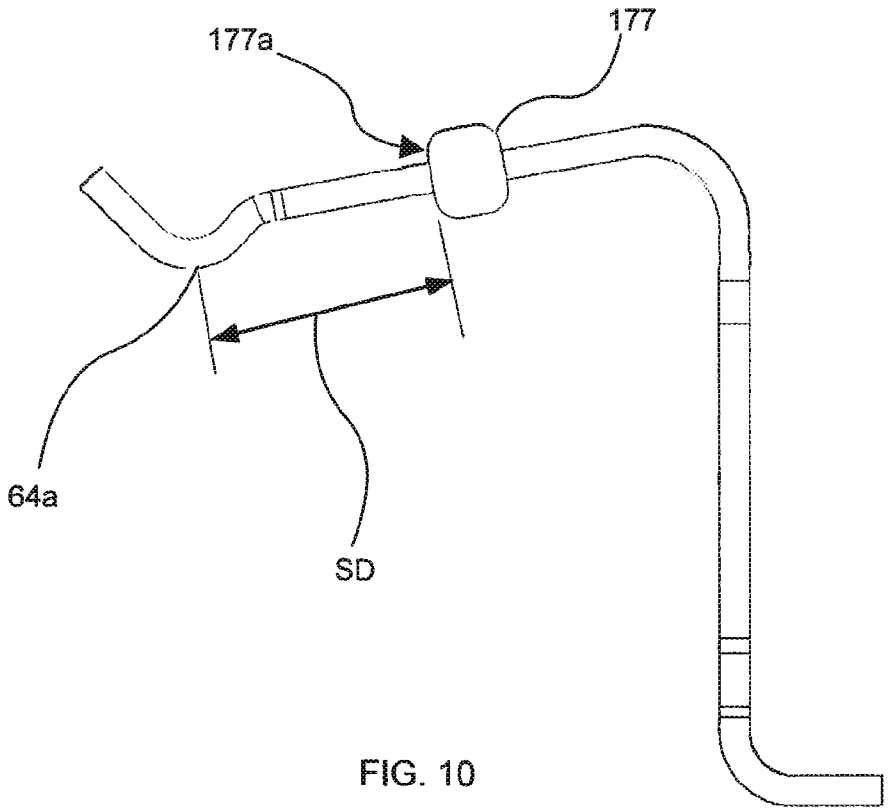


FIG. 10

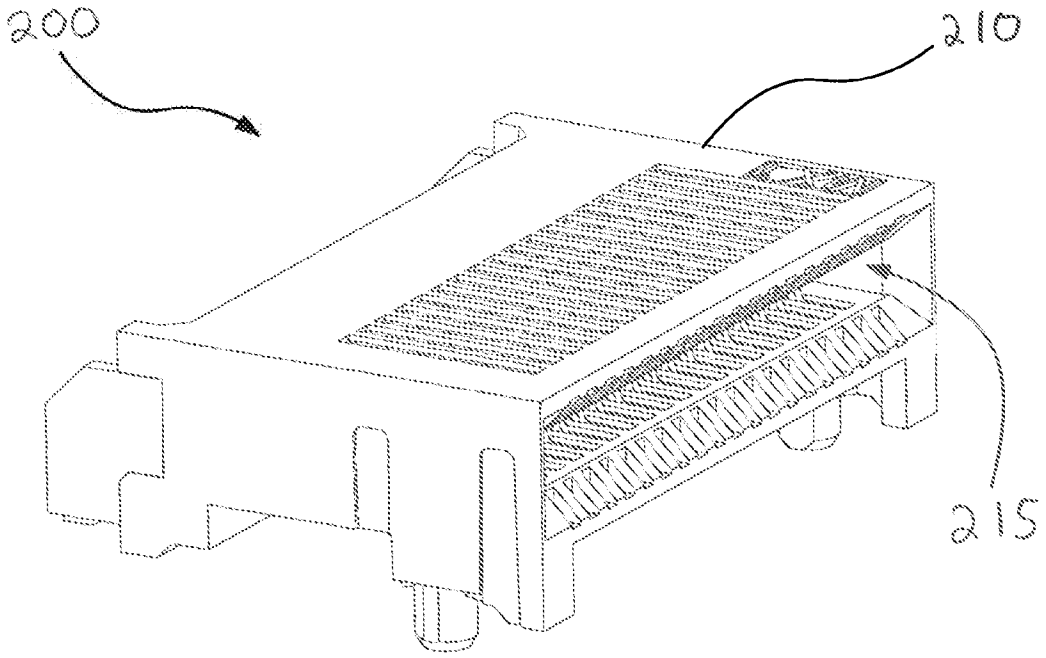


FIG. 11

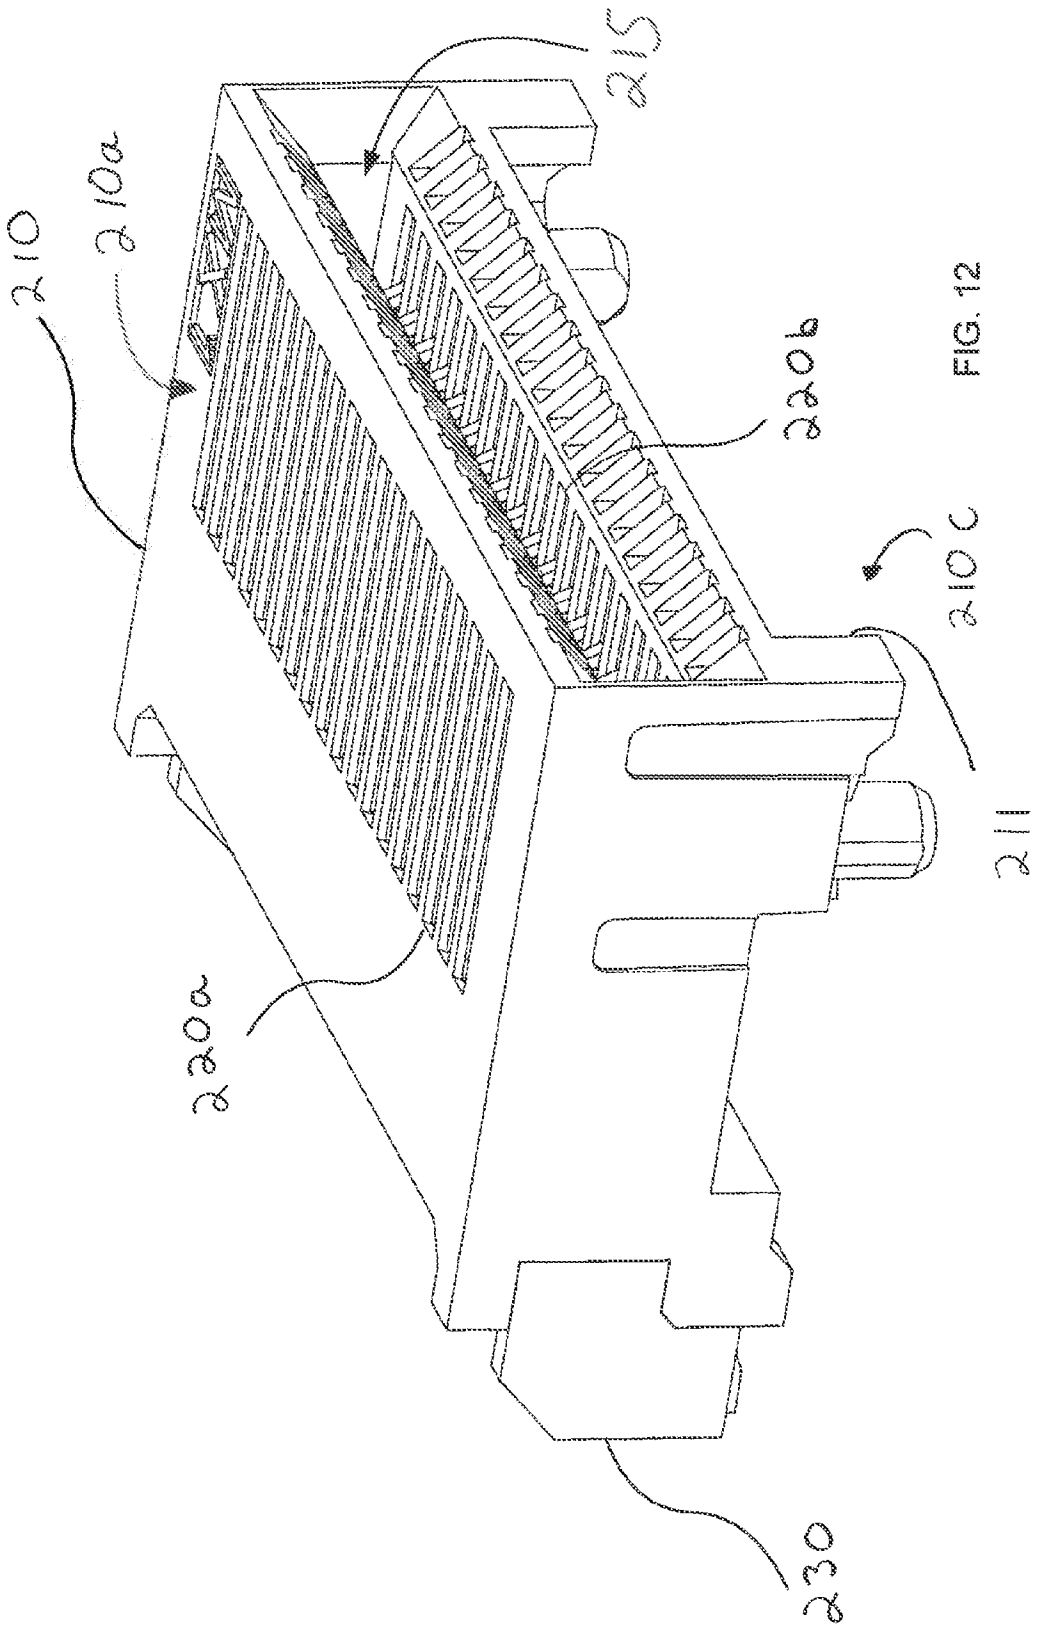


FIG. 12

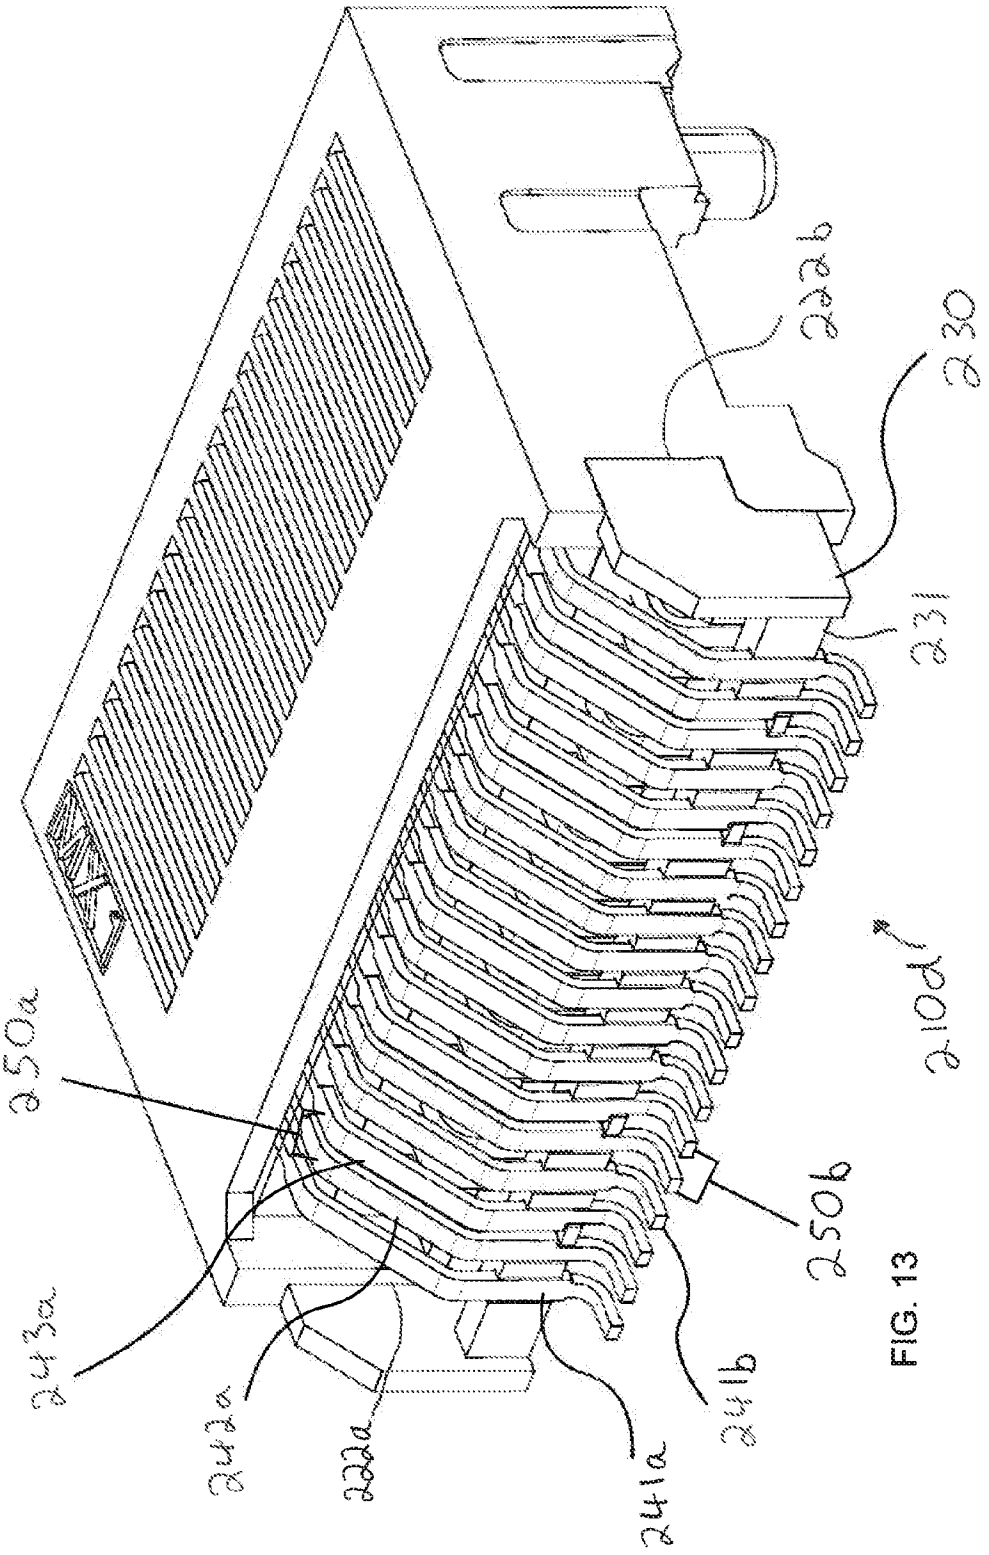


FIG. 13

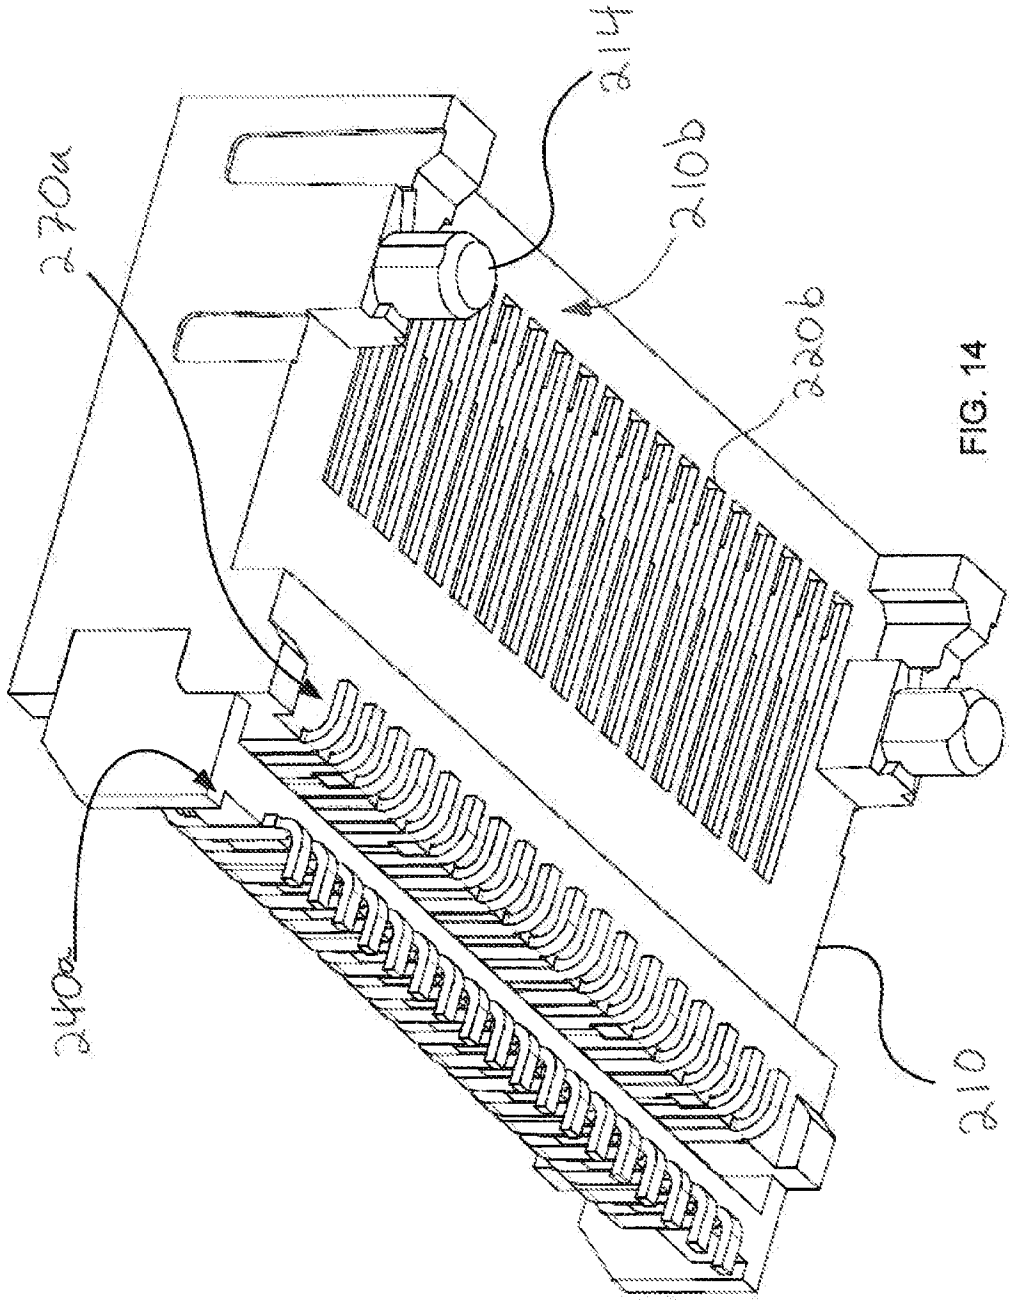


FIG. 14

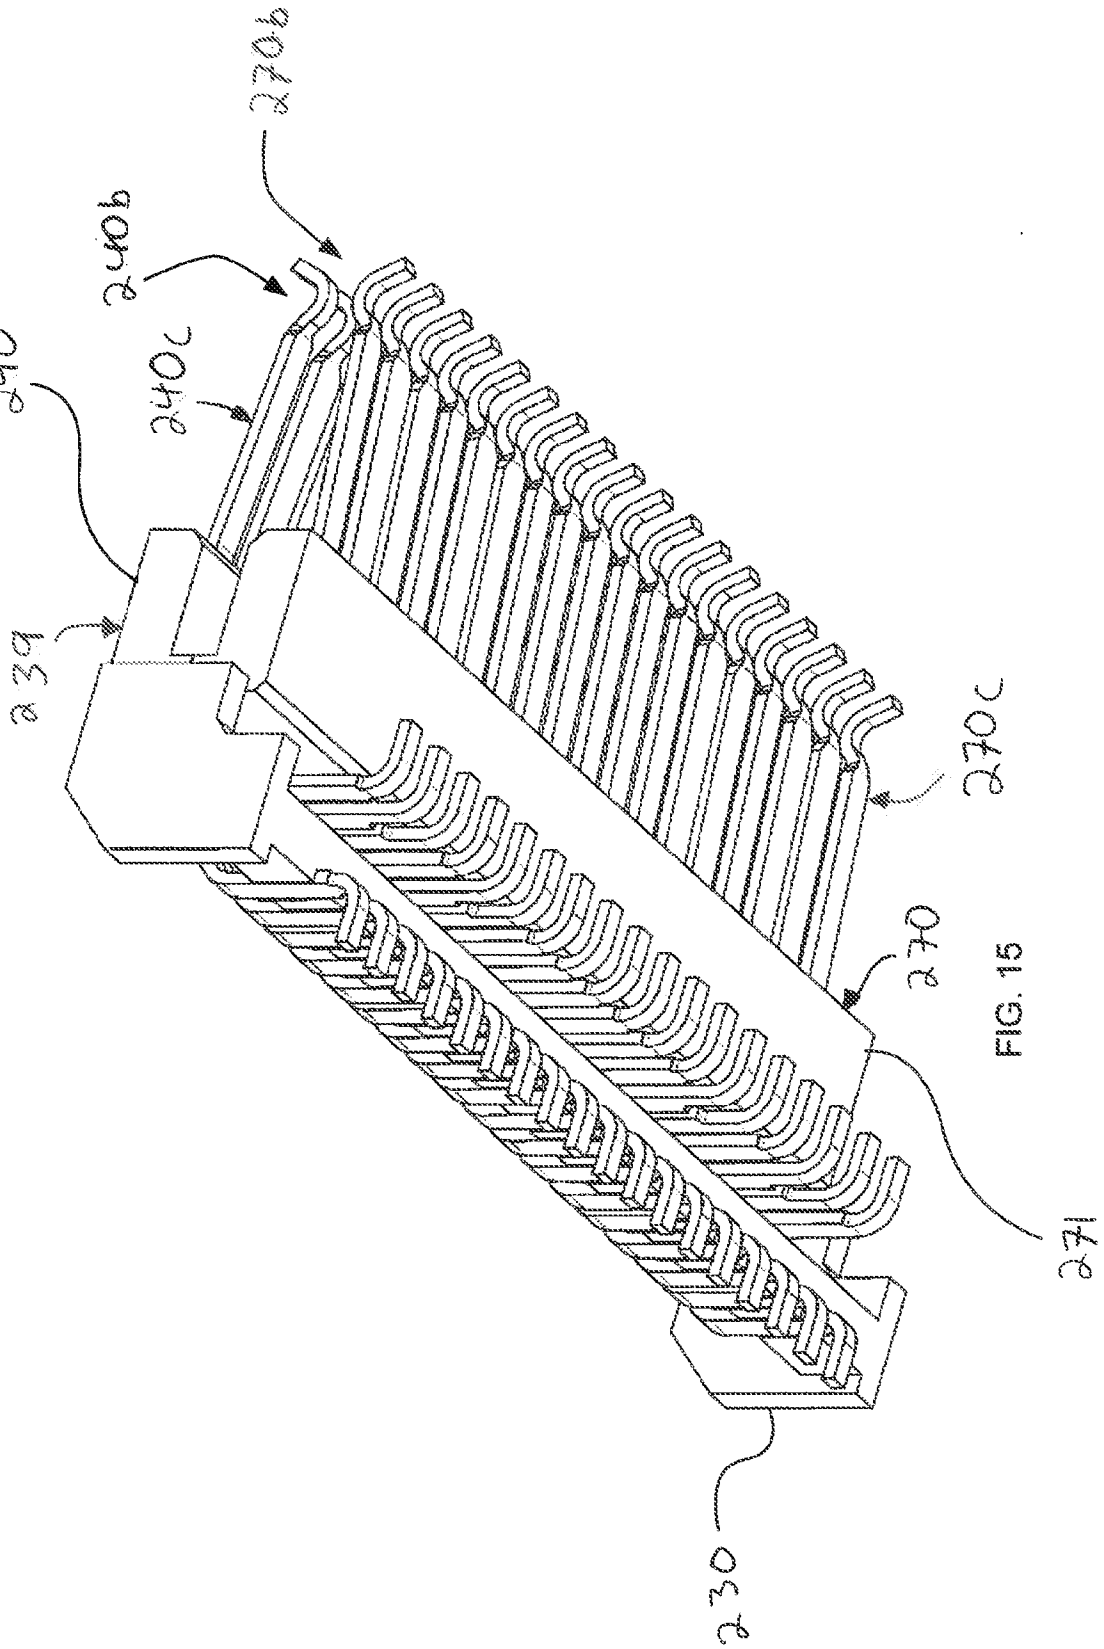


FIG. 15

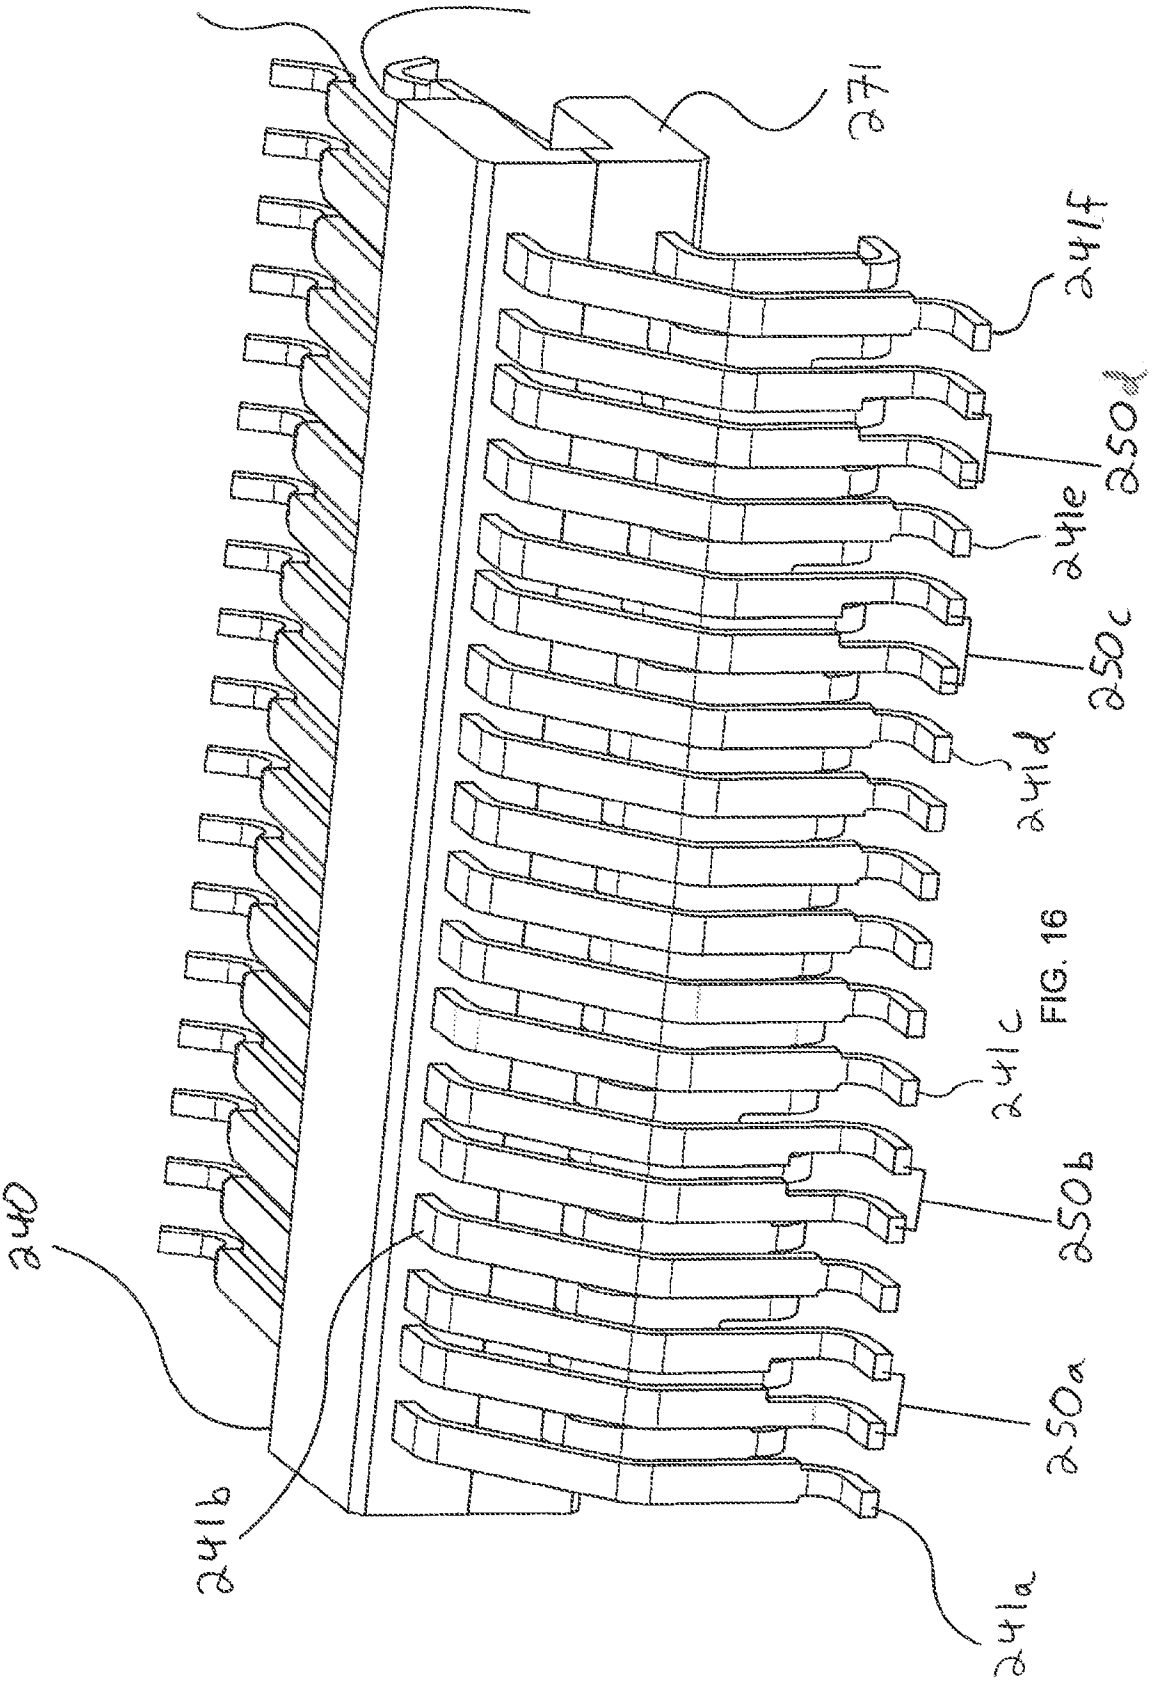


FIG. 16

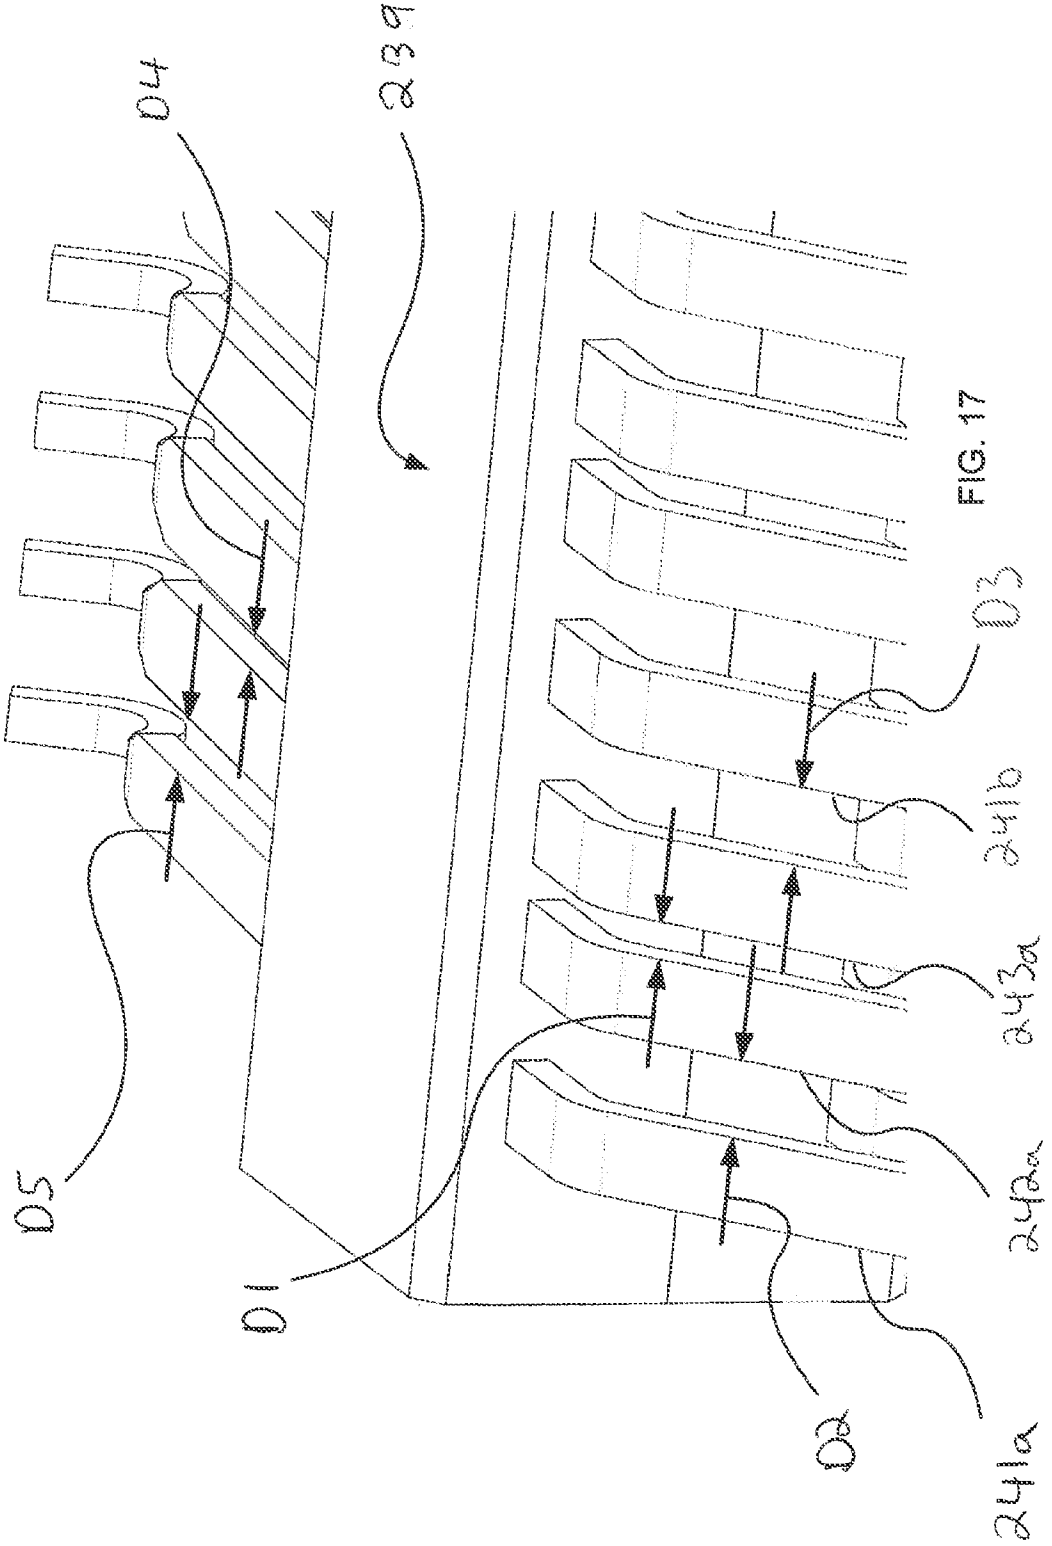


FIG. 17

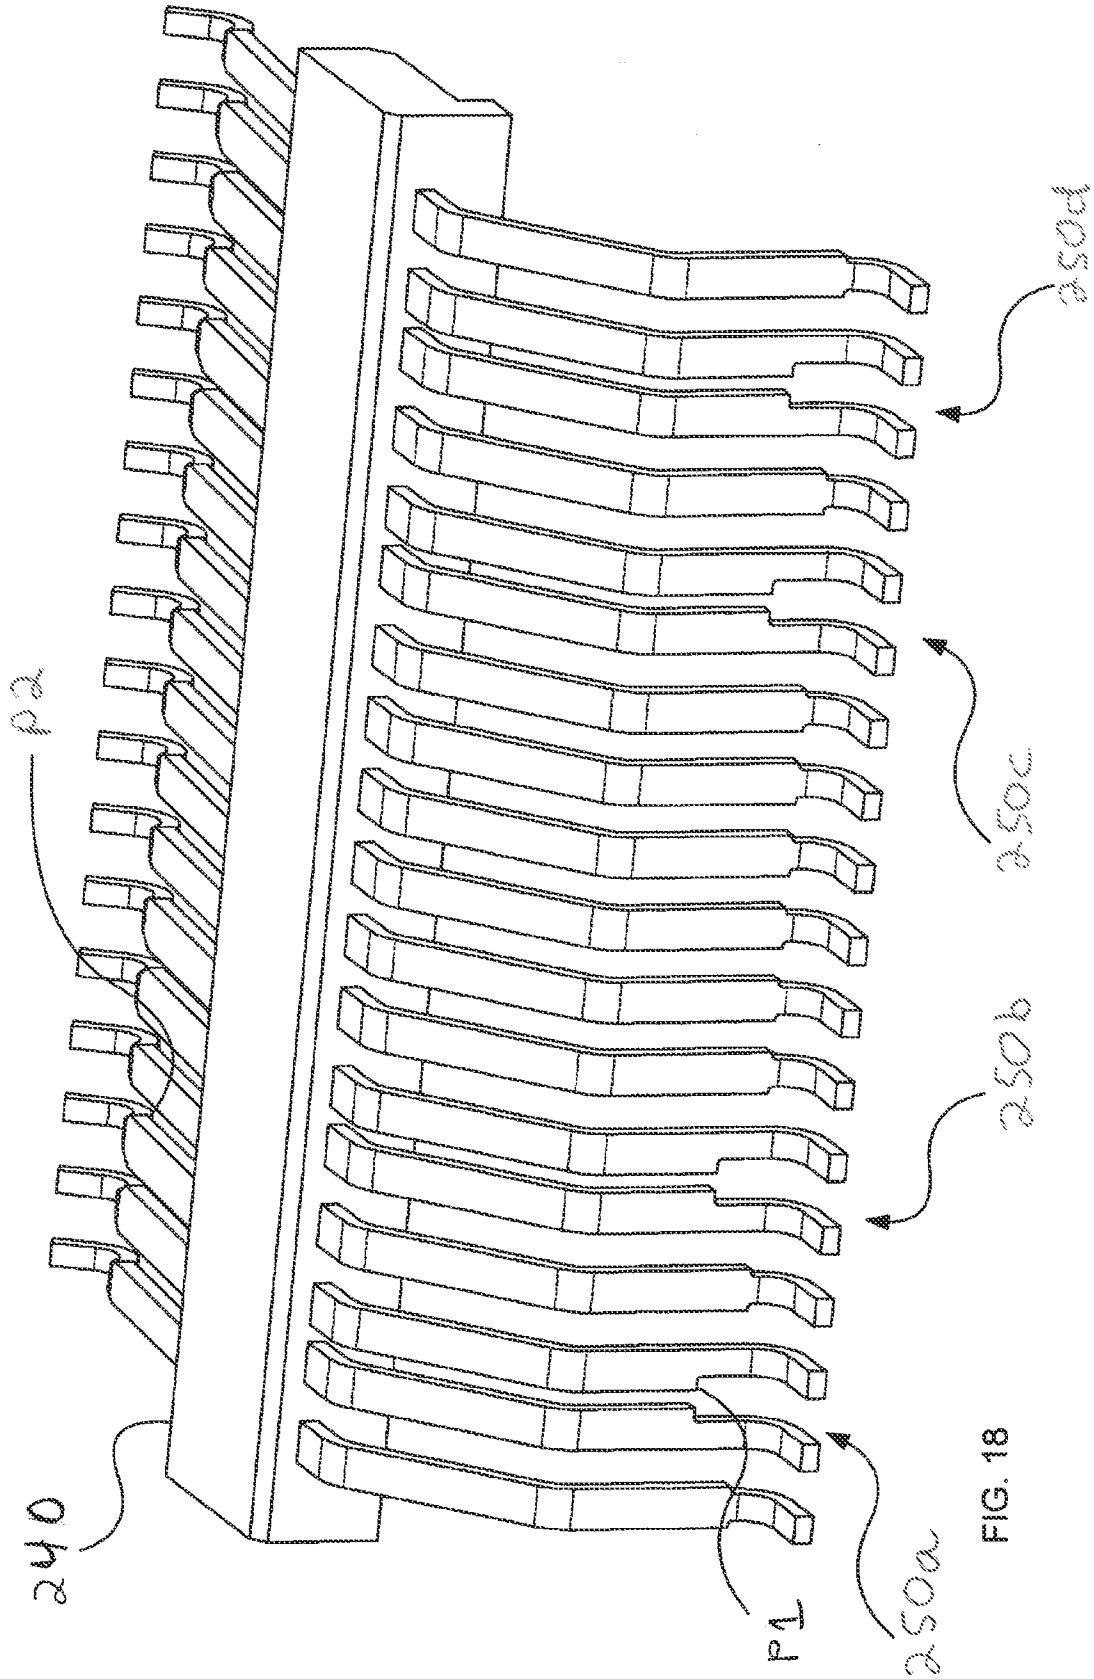


FIG. 18

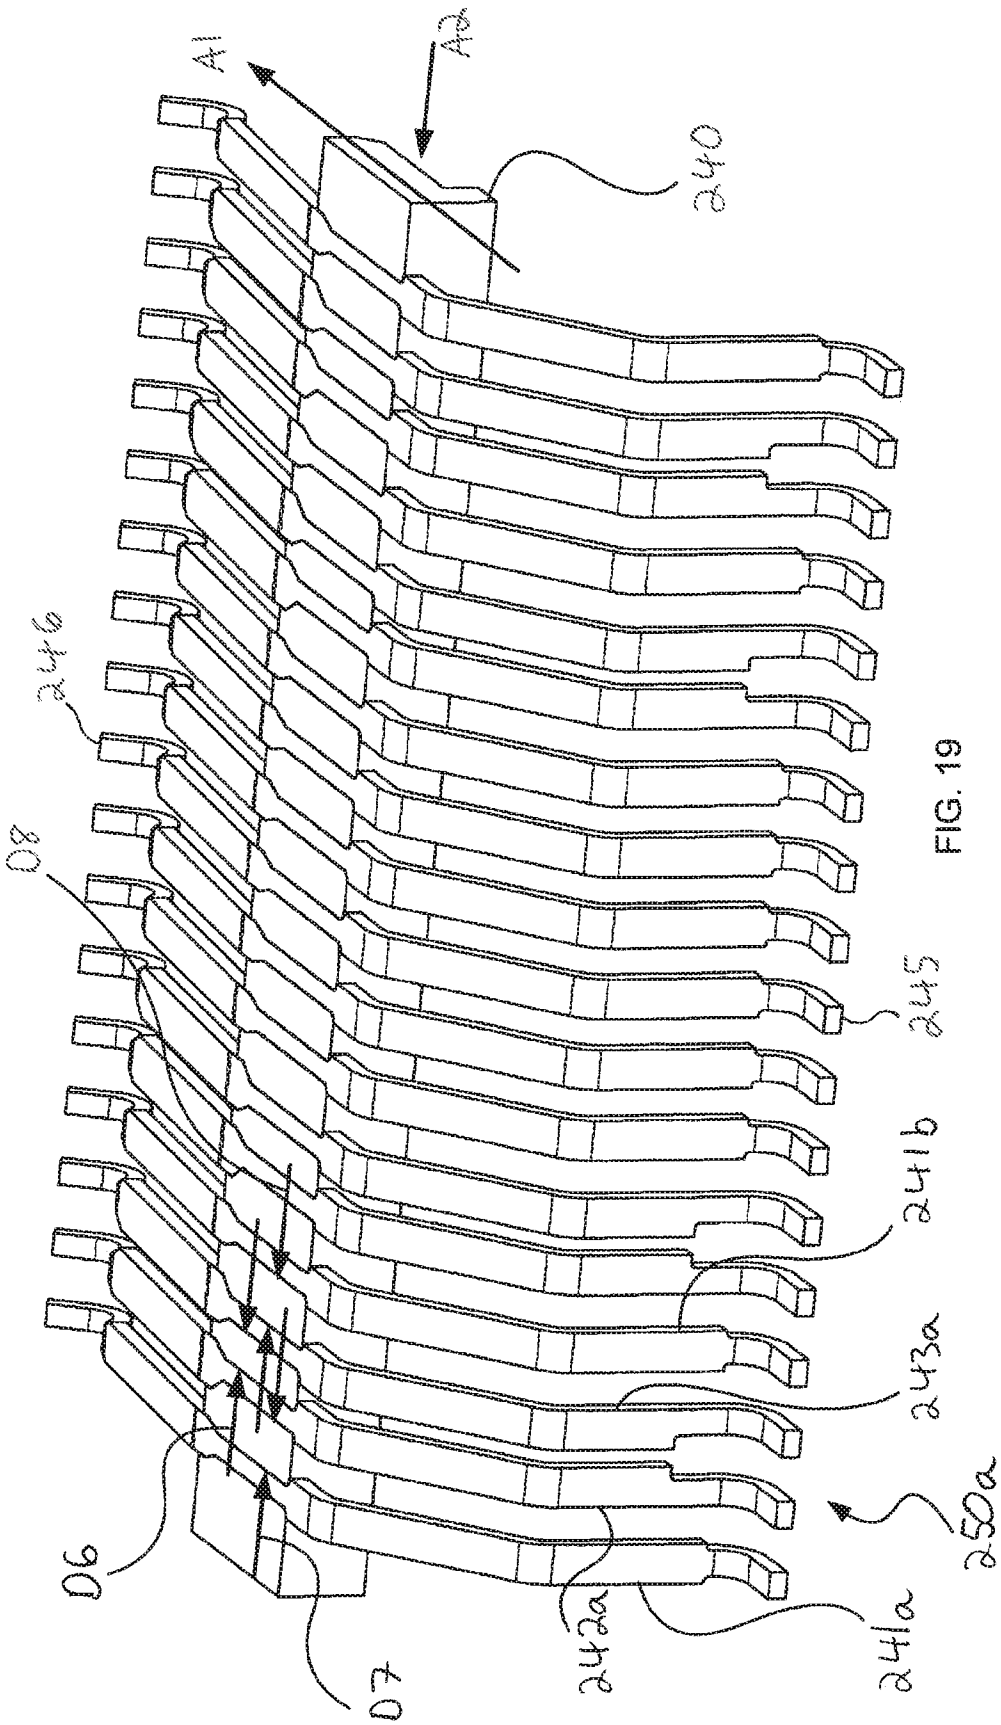


FIG. 19

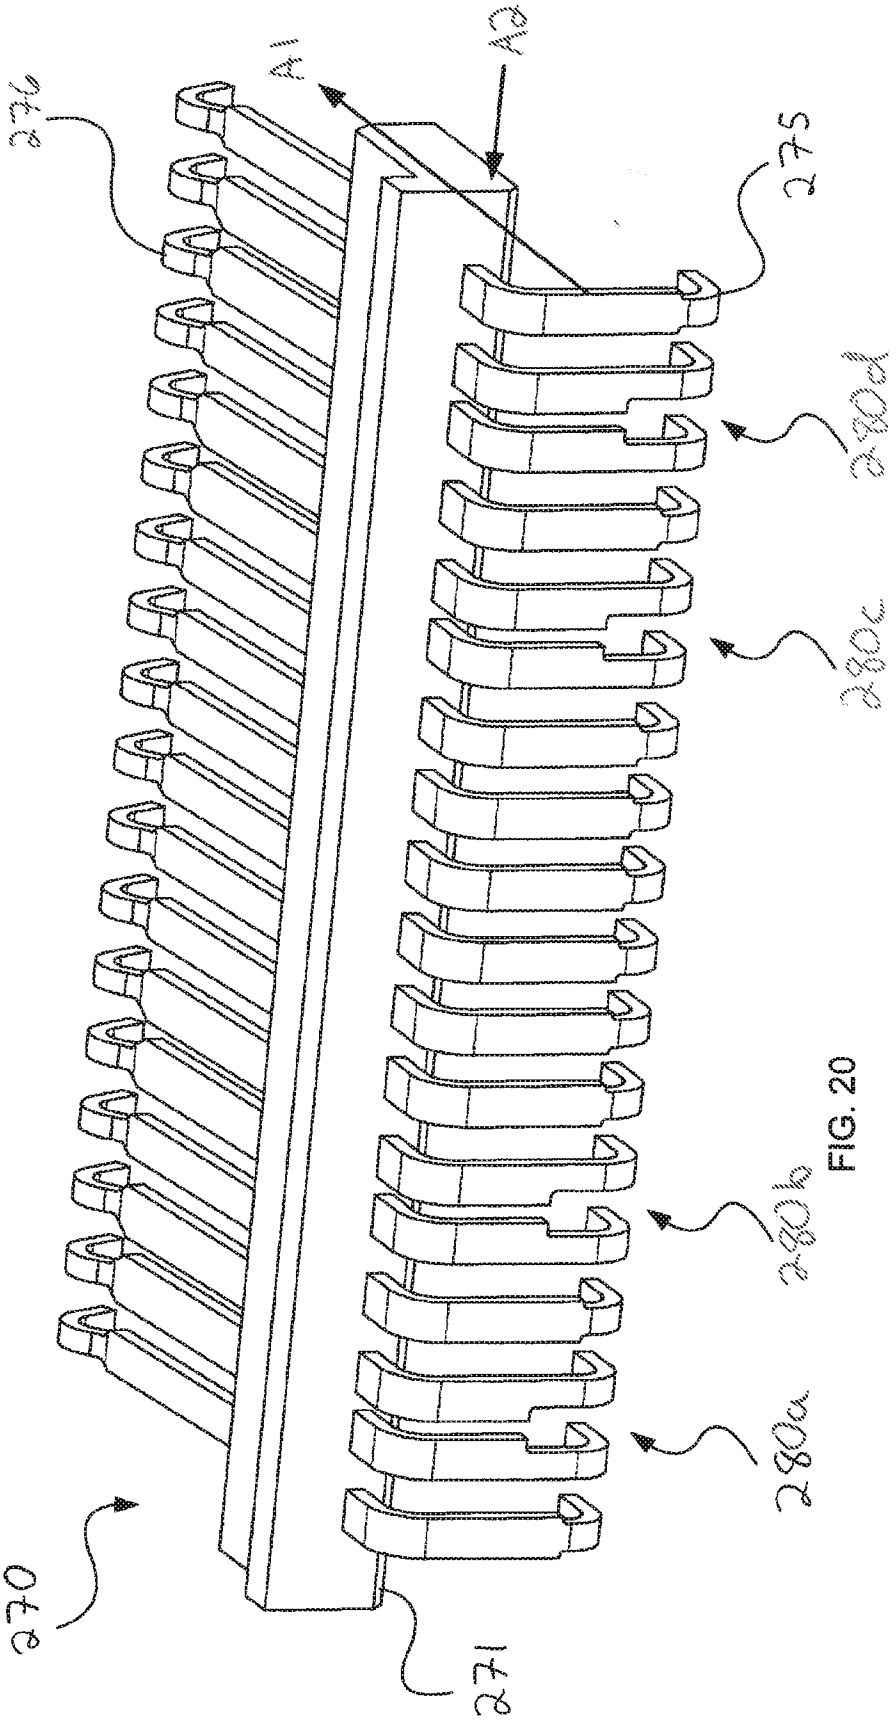


FIG. 20

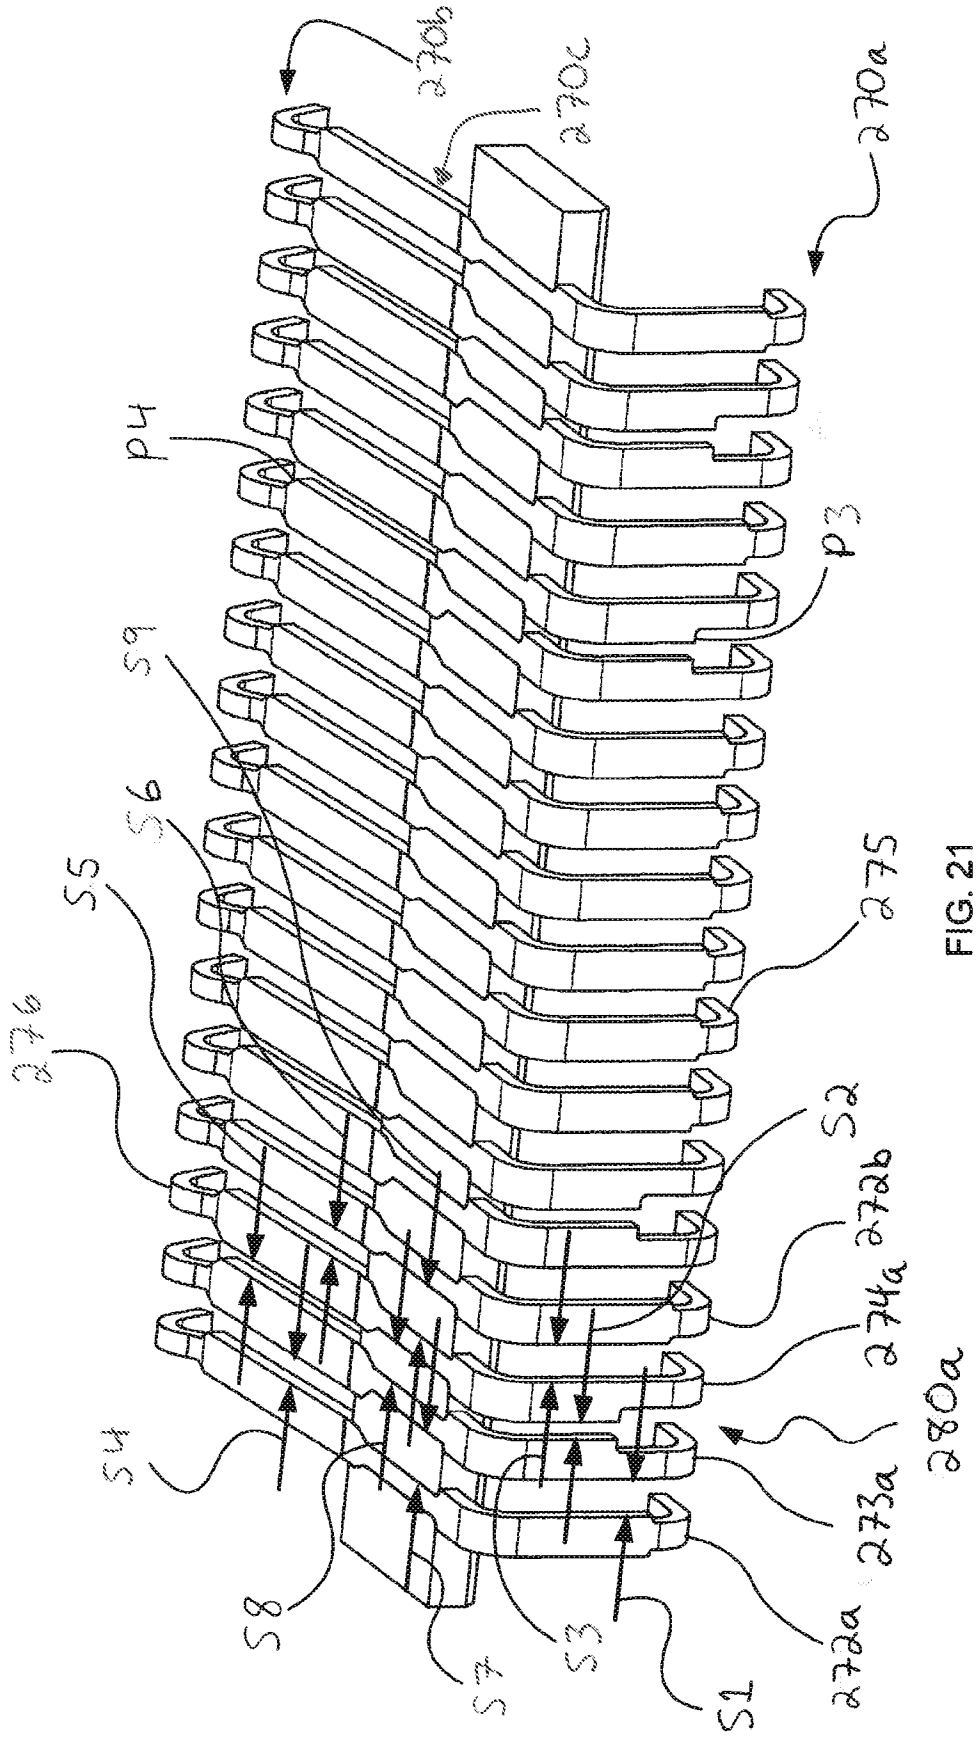

270b
270c
270a
p4
p3
S9
S6
S5
275
276
S2
272b
274a
S4
280a
273a
S8
272a
S7
S3
S1

FIG. 21

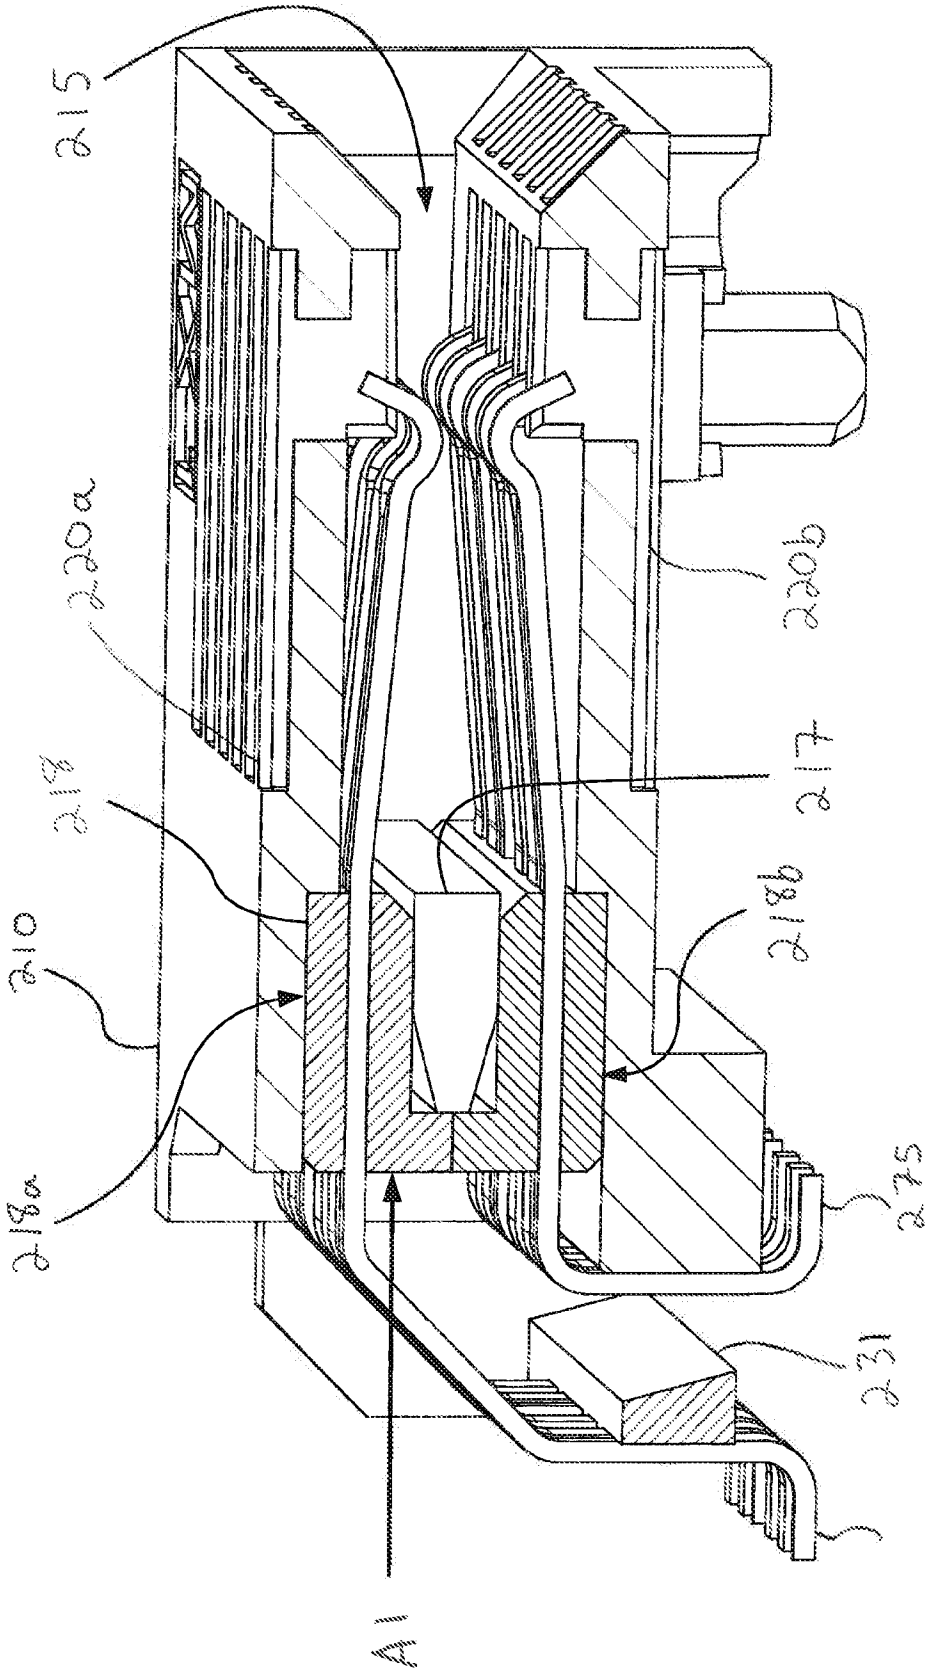


FIG. 22

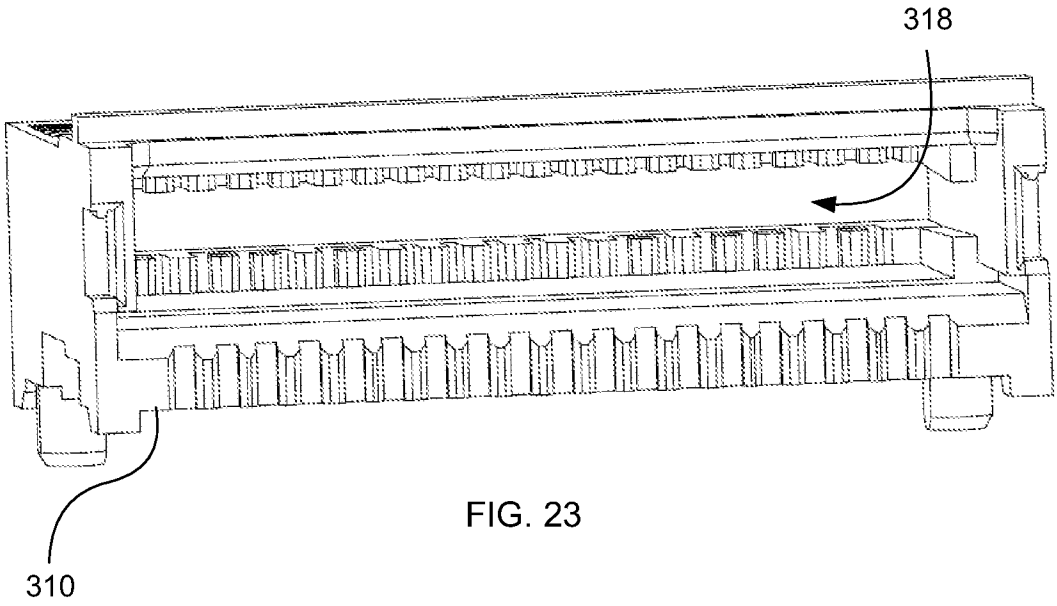


FIG. 23

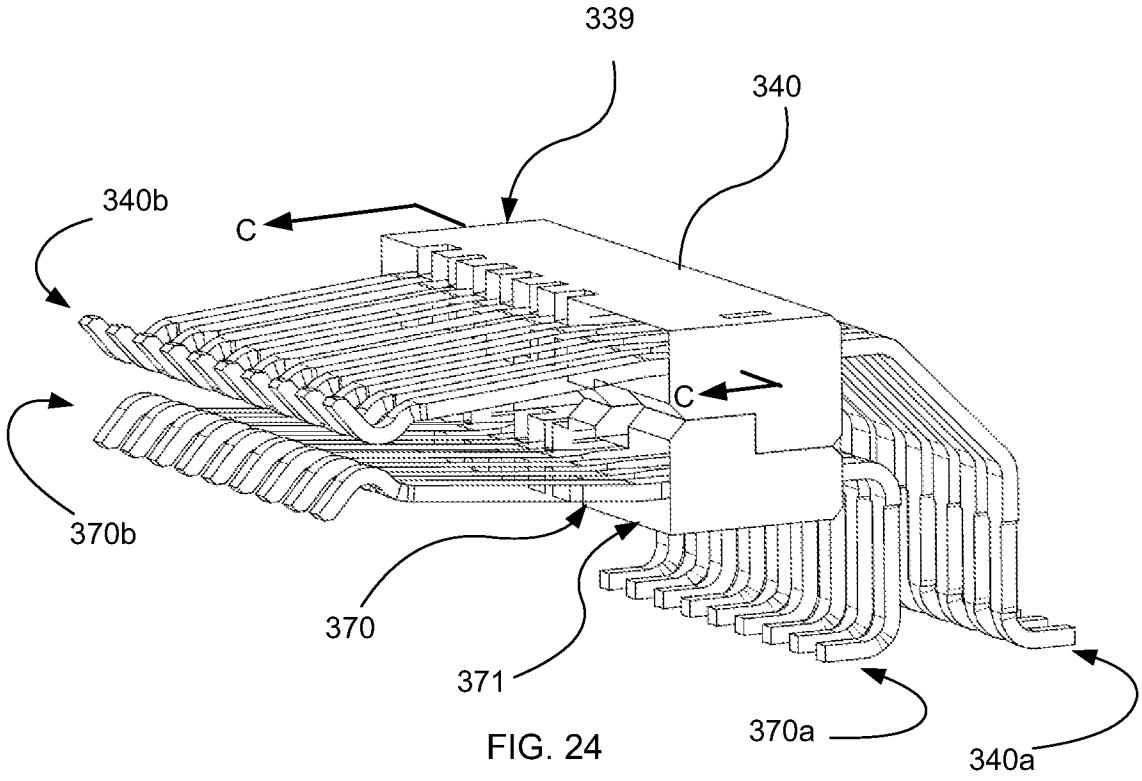


FIG. 24

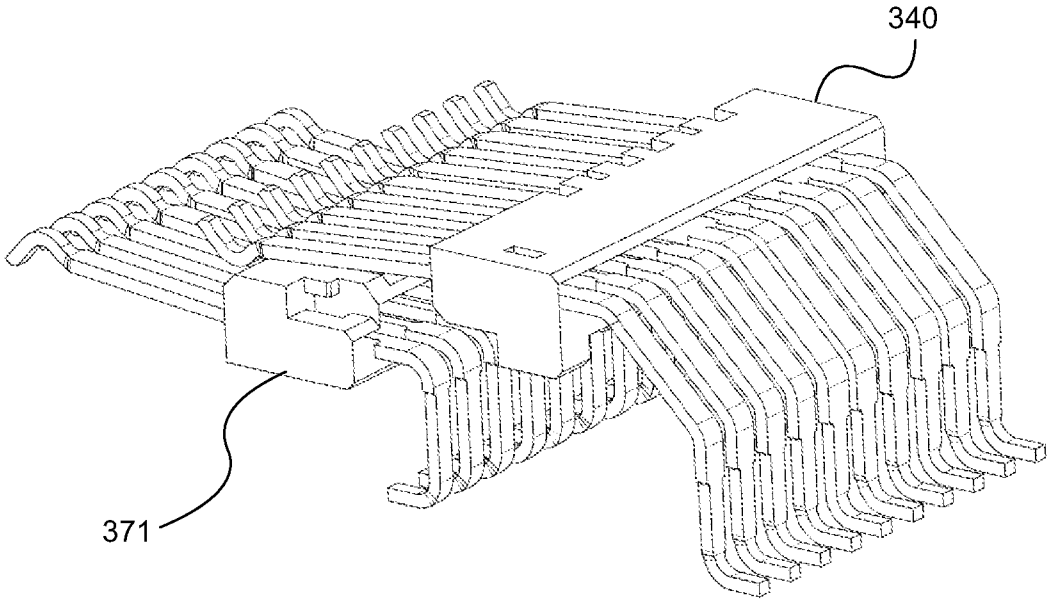


FIG. 25

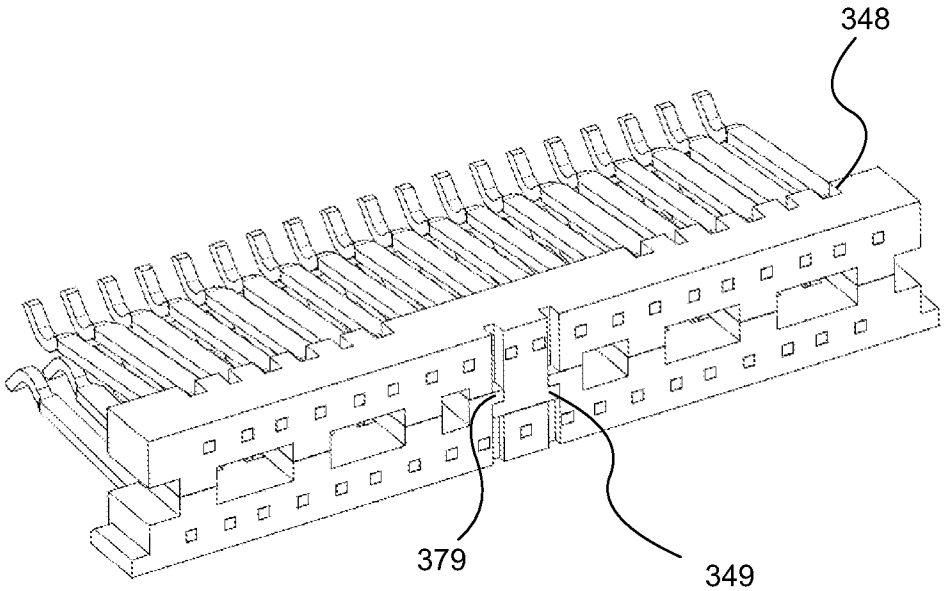


FIG. 26