




- (51) International Patent Classification:
B65D 43/02 (2006.01) B65D 51/16 (2006.01)
A45D 34/00 (2006.01)
- (21) International Application Number:
PCT/EP2015/064598
- (22) International Filing Date:
26 June 2015 (26.06.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14175358.2 2 July 2014 (02.07.2014) EP
- (71) Applicant (for AE, AG, AU, BB, BH, BN, BW, BZ, CA, CY, EG, GB, GD, GH, GM, IE, IL, IN, KE, KN, LC, LK, LS, MT, MW, MY, NA, NG, NZ, OM, PG, QA, RW, SA, SC, SD, SG, SL, SZ, TT, TZ, UG, VC, ZA, ZM, ZW only): **UNILEVER PLC** [GB/GB]; Unilever House, 100 Victoria Embankment, London, Greater London EC4Y 0DY (GB).
- (71) Applicant (for all designated States except AE, AG, AU, BB, BH, BN, BW, BZ, CA, CY, EG, GB, GD, GH, GM, IE, IL, IN, KE, KN, LC, LK, LS, MT, MW, MY, NA, NG, NZ, OM, PG, QA, RW, SA, SC, SD, SG, SL, SZ, TT, TZ, UG, US, VC, ZA, ZM, ZW): **UNILEVER N.V.** [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL).

- (71) Applicant (for US only): **CONOPCO, INC., D/B/A UNILEVER** [US/US]; 800 Sylvan Avenue AG West, S. Wing, Englewood Cliffs, NJ 07632 (US).
- (72) Inventors: **BROWN, Oliver, Benjamin**; DCA Design International, 19 Church Street, Warwick CV34 4AB (GB). **JONES, Christopher, John**; DCA Design International, 19 Church Street, Warwick CV34 4AB (GB). **MOORE, David**; DCA Design International, 19 Church Street, Warwick CV34 4AB (GB). **RANDALL, Graham, Paul**; Unilever R&D Port Sunlight, Quarry Road East, Bebington, Wirral Merseyside CH63 3JW (GB).
- (74) Agent: **JAMES, Helen, Sarah**; Unilever PLC, Unilever Patent Group, Colworth House, Sharnbrook, Bedford, Bedfordshire MK44 1LQ (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: CONTAINER

Fig. 1a

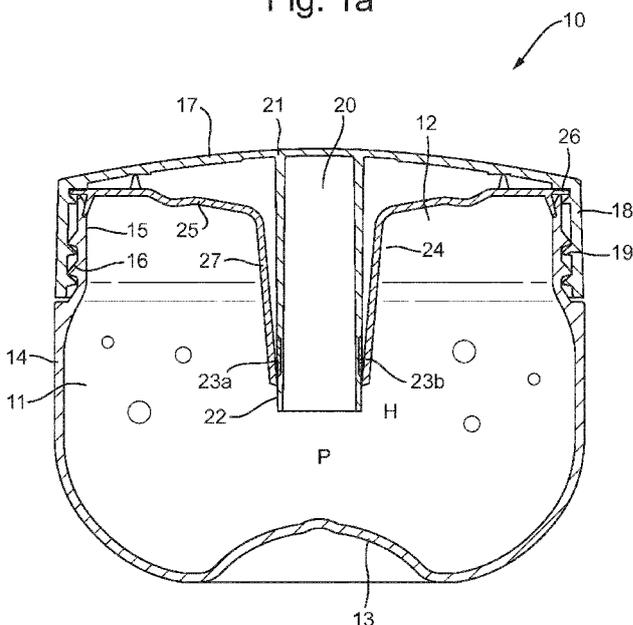

(57) Abstract: The invention provides a container (10) for the packaging of a fluent product (P) which off-gases, the container comprising: a container body (11) for receiving and storing product and a removable lid (12) for closing the container body; in which the lid is provided with a venting assembly (20, 23a, 23b, 24) extending into the container body; in which the venting assembly has a closed position which is effective to close the container body and a venting position permitting the venting of gas from the container body; whereby, when the container body is partially filled with a fluent product which off-gases, the venting assembly moves to the venting position in response to excessive pressure from accumulated gas, and reverts to the closed position upon release of the excessive pressure, thus effecting periodic venting of the container body; and whereby the spatial arrangement of the venting assembly within the container body provides for venting of the container body independently of the orientation of the container, whilst retaining the product within the container body. The container is especially suitable for the packaging of viscous or semisolid products which incorporate an oxidizing agent, such as creams or gels for the bleaching or colouring of hair.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

CONTAINER

Field of the Invention

5

This invention relates to containers and more particularly to containers for the packaging of fluent products which off-gas.

Background of the Invention and Prior Art

10

Household or industrial products which contain active chemicals and ingredients often release gases when packaged in containers. As a result, pressure differences may build up between the inside of a closed container and the ambient pressure. If these pressure differences are not adequately resolved, then over time the container may swell, distort or even rupture and leak its contents. Thin-walled, partially flexible containers are particularly sensitive to the problem. Fluctuations in temperature and altitude during shipping or storage may also exacerbate the problem.

15

One approach to the problem of pressure build up involves the incorporation of selective barrier materials which are impermeable to liquids, but permeable to gases. GB 1 464 344 describes a self-venting closure comprising a gas-permeable membrane covering an orifice to the exterior. EP 593 840 discloses a container made of a thermoplastic material comprising a network of microchannels. This network of microchannels is permeable to gases, but not to liquids.

25

One drawback of the above approach is that the membranes or microchannels may lose at least part of their gas-permeability if they come into contact with liquid product inside the container. Furthermore, liquid products which are viscous or which have some affinity for the membranes or microchannels may adhere to them or block them following such contact instead of draining away back into the container package. Therefore the container loses venting capacity. There are many instances which can lead to such contact, such as the product agitation which normally occurs during shipment and transportation, or tilting or inversion of the container itself during storage.

30

- 2 -

It is an object of the present invention to provide an improved container for the packaging of fluent products which off-gas, which provides for venting of the container body independently of the orientation of the container, whilst retaining the product within the container body.

Another object of the invention is to provide an improved container for the packaging of viscous or semisolid products (such as gels, pastes, creams or lotions) which off-gas.

10 Summary of the Invention

The present invention provides a container for the packaging of a fluent product which off-gases, the container comprising:

15 a container body for receiving and storing product and a removable lid for closing the container body;

in which the lid is provided with a venting assembly extending into the container body;

20 in which the venting assembly has a closed position which is effective to close the container body and a venting position permitting the venting of gas from the container body;

whereby, when the container body is partially filled with a fluent product which off-gases, the venting assembly moves to the venting position in response to excessive pressure from accumulated gas, and reverts to the closed position upon release of the excessive pressure, thus effecting periodic venting of the container body;

and whereby the spatial arrangement of the venting assembly within the container body provides for venting of the container body independently of the orientation of the container, whilst retaining the product within the container body.

- 3 -

In a typical container according to the invention, the container body comprises a container base and a container wall extending from the base, the wall having an upper portion defining the mouth of the container body and bearing a threaded surface;

5 the removable lid comprises a top portion and a depending skirt portion; the depending skirt portion bearing a threaded surface configured for engagement with a corresponding threaded surface of the mouth of the container body, and

10 the venting assembly comprises a hollow venting tube provided on an inner surface of the top portion of the lid and configured such that it extends into the interior of the container body when then lid is engaged with the body; the hollow venting tube having an upper end in sealed contact with the inner surface of the top portion of the lid and a lower end bearing one or more apertures for the intake of accumulated gas; and a venting tube liner of resilient flexible material having an disc shaped portion with a circumferential edge
15 adapted for engagement with an inner surface of the lid and at least one tubular portion extending from the disc shaped portion and configured such that it shrouds the hollow venting tube when the venting tube liner is engaged with the lid.

The venting tube liner as defined above is movable from a closed position, covering the
20 one or more apertures in the hollow venting tube and effective to close the container body, to a venting position exposing the one or more apertures in the hollow venting tube; and permitting venting of gas from the container body.

25 When the container body is partially filled with a fluent product which off-gases, the venting tube liner moves to the venting position in response to excessive pressure from accumulated gas, and reverts to the closed position upon release of the excessive pressure, thus effecting periodic venting of the container body.

30 The spatial arrangement of the hollow venting tube within the container body provides for venting of the container body independently of the orientation of the container, whilst retaining the product within the container body.

- 4 -

In a typical container according to the invention, the container wall surrounds and encloses an interior volume of the container body, and includes a peripheral section disposed at least a minimum radius r from a first axis within the interior volume; and a pair of end sections disposed generally transverse to the first axis and joined peripherally to the peripheral sections. The venting assembly extends along the first axis with the end sections of the container wall each being separated from the one or more apertures of the hollow venting tube along the first axis by a distance h ; such that when the interior volume is partially filled with product, the product has a depth of less than h when the first axis is disposed vertically and less than r when the first axis is disposed horizontally.

In a preferred container according to the invention, the container wall surrounds and encloses an interior volume of the container body having a geometric centre that is generally equidistant from opposite points of the container wall, and the venting assembly is disposed centrally in three dimensions within the interior volume; such that when the interior volume is partially filled with product, the one or more apertures of the hollow venting tube remain in the head space of the product regardless of the orientation of the container.

Typically, in a partially filled container according to the present invention, product occupies a volume ranging from $0.1v$ to $0.75v$, where v is the interior volume of the container body. Preferably product occupies a volume of from $0.15v$ to $0.50v$, more preferably from $0.2v$ to $0.4v$.

In a preferred form of container according to the invention, the ratio of the height of the container to the largest inner diameter of the mouth of the container body is 3:1 or less. More preferably the ratio is 1:1 or less, and most preferably the ratio ranges from 4:5 to 1:2.

Preferably, the container base has a flat or slightly concave surface to allow a stable position on a flat surface.

- 5 -

The height of the container is the vertical distance between the flat surface of the container base, or the edge of the concave surface of the container base, to the mouth of the container body.

- 5 Preferably the height of the container is from 45 to 65 mm and more preferably from 50 to 60mm.

- 10 A particularly preferred form of container according to the invention has a generally cylindrical shape and is configured such that the flat surface of the container base, or the edge of the concave surface of the container base, is located parallel to the surface which is spanned by the mouth of the container body.

The mouth of the container body is preferably rounded in shape, such as annular or elliptical, in order to facilitate handling and/or product removal by the consumer.

15

The largest inner diameter of the mouth of the container body (generally the diameter of an annular mouth or the length of the major axis of an ellipsoidal mouth) is typically at least 50 mm, preferably from 60 to 80mm, more preferably from 65 to 75 mm.

- 20 The mouth of the container body typically has a surface area of at least 50% of the surface area of the container base, preferably at least 80% of the surface area of the container base. More preferably the mouth of the container body has a surface area of from 85% to 115% of the surface area of the container base.

- 25 Preferably the container has an interior volume from 100 to 300 ml, more preferably from 180 to 260 ml.

- 30 Typically the container body, lid and venting assembly are each formed from plastics materials. Preferably the container body, lid and venting assembly are each formed from moulded thermoplastic materials such as polyurethanes, polyamides, polyolefins (for example, polyethylene and polypropylene), polyesters, or combinations thereof.

- 6 -

The term "fluent product" in the context of this invention generally means a material other than a gas which is capable of flowing without retaining its physical shape and accordingly excludes firm solids which retain their physical shape when subjected to mild pressure.

5

The container of the invention is especially suitable for the packaging of viscous or semisolid products (such as gels, pastes, creams or lotions) which off-gas.

10 A preferred type of product for packaging in a container according to the invention is a viscous or semisolid product (such as a gel, paste, cream or lotion) which incorporates an oxidizing agent.

Specific examples of such products include creams or gels which are used in the cosmetic field on hair and skin.

15

Preferred examples of such products include creams or gels for the bleaching or colouring of hair.

20 Particularly preferred examples of such products include cream or gel colour developers for use in permanent hair colorants. The term "permanent hair colorant" generally refers to hair colouring agents in which oxidative dye precursors diffuse into the hair through the cuticle and into the cortex, where they can then undergo oxidative coupling reactions in the presence of suitable oxidizing agents to form the end dye molecules which produce colour inside the hair.

25

30 Permanent hair colorants are typically formulated in two parts: one part containing the hair colorant, which incorporates oxidative dye precursors; and the other part containing the colour developer, which incorporates the oxidizing agent. In order to colour the hair, the hair colorant and colour developer are mixed together, usually shortly before use. On the hair, the mixture forms a stable formulation with enough consistency and body to remain on the hair without dripping or running during the colouring period. The oxidative dye precursors diffuse into the hair together with the oxidizing agent from the colour developer. The dyes form within the hair fibre. Being large molecules, they remain in the

- 7 -

hair and do not readily wash out with ordinary shampoos. At the end of the colouring period, (generally about 5 to 45 minutes and preferably about 10 to 30 minutes), the formulation is washed from the hair with a plain water rinse. If necessary, the hair is washed with a shampoo and rinsed, for example with water or a weakly acidic solution, such as a citric acid or tartaric acid solution, and dried. Optionally, a separate conditioning product may also be applied. Preferably, such a separate conditioning product is applied after rinsing

A cream or gel colour developer as described above will generally comprise an oxidizing agent in an amount sufficient to cause formation of dye chromophores from the oxidative dye precursors. Typically, the amount of oxidizing agent ranges from about 1 to about 20wt%, preferably from about 3 to about 15wt%, more preferably from about 6 to about 12wt%, by weight based on the total weight of the composition. Preferred oxidizing agents in this context are peroxygen materials capable of yielding hydrogen peroxide in an aqueous medium such as: hydrogen peroxide; inorganic alkali metal peroxides (e.g. sodium periodate and sodium peroxide); organic peroxides (e.g. urea peroxide, melamine peroxide); inorganic perhydrate salt bleaching compounds (e.g. alkali metal, preferably sodium, salts of perborates, percarbonates, perphosphates, persilicates, and persulphates, which may be incorporated as monohydrates, tetrahydrates or the like); alkali metal bromates; enzymes; and mixtures thereof. Preferred is hydrogen peroxide.

A cream or gel colour developer as described above will also typically comprise one or more thickeners in an amount sufficient to provide the composition with a viscosity of from about 1 Pa.s to 40 Pa.s at 25°C. Suitable thickeners for use in this context may be chosen, for example, from associative thickeners comprising both hydrophilic units and hydrophobic units (e.g. at least one C₈ to C₃₀ fatty chain); crosslinked acrylic acid homopolymers; crosslinked copolymers of (meth)acrylic acid and of (C₁ to C₆) alkyl acrylate; nonionic homopolymers and copolymers containing ethylenically unsaturated monomers of ester and amide type; ammonium acrylate homopolymers and copolymers of ammonium acrylate and of acrylamide; polysaccharides; and C₁₀ to C₂₄ fatty alcohols.

Preferred thickeners in this context are C₁₀ to C₂₄ fatty alcohols. Preferred fatty alcohols have the formula R-OH, in which R is selected from branched or unbranched alkyl or

- 8 -

alkenyl groups having from about 16 to 18 carbon atoms. Examples of such materials include cetyl alcohol, stearyl alcohol and mixtures thereof.

The total quantity of C₁₀ to C₂₄ fatty alcohols in the colour developer generally ranges
5 from about 0.5 to about 10wt%, preferably from about 1 to about 7wt%, more preferably from about 3 to about 5wt% by total weight C₁₀ to C₂₄ fatty alcohol(s), based on the total weight of the colour developer

Most preferably the colour developer comprises from 3 to 5wt% C₁₀ to C₂₄ fatty alcohol(s)
10 selected from cetyl alcohol, stearyl alcohol and mixtures thereof, by weight based on the total weight of the composition.

A preferred ingredient for inclusion in the colour developer is a conditioning polymer containing cationic monomer units. Suitable conditioning polymers in this context include
15 synthetic copolymers containing cationic monomer units. The cationic monomers for use in these copolymers can include dialkylaminoalkyl(meth)acrylamides, trialkylaminoalkyl(meth)acrylamides, dialkylaminoalkyl(meth)acrylates, trialkylaminoalkyl(meth)acrylates, dialkyldiallyl ammonium halides and the like.

20 Examples of suitable conditioning polymers containing cationic monomer units for use in the invention include copolymers of acrylic acid or methacrylic acid with di (C₁-C₄ alkyl) diallyl ammonium halides such as in particular dimethyldiallyl ammonium chloride (DMDAAC). The copolymers may also incorporate other polymerisable nonionic monomers such as acrylic acid esters (preferably C₁-C₄ esters such as methyl acrylate),
25 acrylamide and the like.

Preferred conditioning polymers containing cationic monomer units for use in the invention are copolymers of DMDAAC and acrylic acid. Particularly preferred are copolymers of DMDAAC and acrylic acid in which the DMDAAC:acrylic acid weight ratio
30 ranges from about 95:5 to about 50:50, ideally from about 95:5 to 65:35, based on total polymer weight.

The conditioning polymers containing cationic monomer units for use in the invention may have a weight average molecular weight (as determined by gel permeation chromatography) ranging from about 5,000 to about 6,000,000, with the preferred molecular weight ranging from about 100,000 to about 5,000,000. A commercially available example of a conditioning polymer containing cationic monomer units for use in the invention is MERQUAT® 280 (ex Lubrizol Corporation). MERQUAT® 280 contains 80:20 (w/w) DMDAAC:acrylic acid and has a molecular weight of approximately 1,000,000.

10 The total quantity of conditioning polymer containing cationic monomer units in the colour developer suitably ranges from 0 to about 5wt%, preferably from about 0.1 to about 1wt%, more preferably from about 0.2 to about 0.5wt% by weight based on the total weight of the colour developer.

15 Most preferably the colour developer comprises from 0.2 to 0.5wt% of a copolymer of DMDAAC and acrylic acid, by weight based on the total weight of the composition.

Another preferred ingredient for inclusion in the colour developer is a hydrocarbon emollient. Particularly preferred are petroleum-derived hydrocarbon emollients, which may be characterised as purified hydrocarbons or mixtures of hydrocarbons obtained from petroleum and having chain lengths of from about C10 to about C100. Petroleum-derived hydrocarbon emollients within this chain length range include mineral oil and petrolatum. Mineral oils are clear oily liquids obtained from petroleum oil, from which waxes have been removed, and the more volatile fractions removed by distillation. The fraction distilling between 250°C to 300°C is termed mineral oil, and it consists of a mixture of saturated hydrocarbons, in which the number of carbon atoms per hydrocarbon molecule generally ranges from about 10 to about 40. Petrolatum is the most preferred hydrocarbon emollient for inclusion in the second composition of the kit. Also known as petroleum jelly or mineral jelly, petrolatum may be generally characterised as a white to yellow homogeneous colloidal mixture of solid and high-boiling liquid hydrocarbons obtained from petroleum, with melting points typically ranging from about 35° to about 60°C and molecular masses ranging from about 450 to about 1000. Its chief constituents

- 10 -

are alicyclic hydrocarbons and straight or branched chain aliphatic hydrocarbons having from about 16 to about 40 carbon atoms.

The total quantity of hydrocarbon emollient in the colour developer suitably ranges from
5 0.1 to about 10wt%, preferably from about 0.5 to about 7wt%, more preferably from about 1 to about 4wt% by weight based on the total weight of the colour developer.

Most preferably the colour developer comprises from 1 to 4wt% petrolatum, by weight
10 based on the total weight of the colour developer.

The pH of the colour developer is typically acidic, and generally the pH is from 2.5 to 6.5,
preferably from 3 to 5. The pH of the colour developer may be adjusted using a pH
modifier.

15 Other conventionally used adjuvants which may be usefully incorporated into the colour developer for enhancing performance and/or consumer acceptability include peroxide stabilisers; fragrances or perfume oils; chelating agents; opacifying agents; buffers; dispersing agents; sequestering agents; humectants; and antimicrobials.

20 The hair colorant part suitably comprises one or more oxidative dye precursors that are operable, when combined with an aqueous oxidizing agent, to impart colour to the hair. Generally such oxidative dye precursors include primary intermediates and optionally couplers for the formation of oxidative dyes. Primary intermediates yield colour on oxidation. Couplers do not form dyes on oxidation but do produce colour changes when
25 used with primary intermediates.

Primary intermediates mainly belong to three classes of aromatic compounds: diamines, aminophenols and phenols. Examples include *ortho*- or *para*- substituted aminophenols or phenylenediamines and cosmetically acceptable salts thereof. Particularly preferred
30 primary intermediates include: *p*-phenylenediamine; *p*-toluenediamine; *p*-aminophenol; 3-methyl-*p*-aminophenol; N,N-bis(2-hydroxyethyl)-*p*-phenylenediamine; 2-hydroxyethyl-*p*-phenylenediamine; 1-hydroxyethyl-4,5-diaminopyrazole; and cosmetically acceptable salts thereof and combinations thereof. Primary intermediates are generally used in

approximately equimolar quantities with respect to couplers, for example at a molar ratio of primary intermediate to coupler from 0.95 to 1.05, although the relative quantities may vary depending upon the formulation and the desired colour, intensity or effect.

- 5 Couplers are generally *meta*-derivatives such as phenol, resorcinol and naphthol derivatives, *m*-aminophenols and *m*-phenylenediamines; which may be unsubstituted, or substituted on the amino group or benzene ring with alkyl, hydroxyalkyl or alkylamino groups. Particularly preferred couplers include: resorcinol; 4-chlororesorcinol; *m*-aminophenol; 1-naphthol; 4-amino-2-hydroxytoluene; 2-methyl-5-
- 10 hydroxyethylaminophenol; 2,4-diaminophenoxyethanol; 2-methylresorcinol; bis(2,4-diaminophenoxy)-1,3-propane; 2-amino-4-hydroxyethylaminoanisole; 2-amino-3-hydroxypyridine; 1-acetoxy-2-methylnaphthalene; and cosmetically acceptable salts thereof and combinations thereof.
- 15 The total quantity of oxidative dye precursor(s) generally ranges from about 0.01 to about 15wt%, by total weight primary intermediate(s) and optionally coupler(s), based on the total weight of the hair colorant part.

The hair colorant part will usually be formulated into a cosmetic preparation such as a

20 solution, cream, lotion, gel or emulsion, and so will generally contain other components commonly associated with the formulation of such products.

For example, surfactants may be used to help dissolve the primary intermediates and couplers, to assist in spreading the dye evenly over the hair, and to thicken the product.

25 Suitable surfactants include anionic or nonionic surfactants, such as sulfates of fatty alcohols, alkanolamides of fatty alcohols, alkyl sulfonates, alkylbenzene sulfonates, oxyethylated fatty alcohols, oxyethylated nonylphenols and mixtures thereof.

If formulated as a lotion, the hair colorant part may contain organic solvents to assist in

30 dissolving the primary intermediates and couplers. The organic solvent content of such a lotion may be up to about 20wt%, and preferably ranges from about 1 to about 15wt%, by weight based on the total weight of the composition. Examples of suitable organic solvents in this context include alcohols containing up to three carbon atoms such as

- 12 -

ethanol and isopropanol, polyhydroxy alcohols such as propylene or hexylene glycol and their lower (C₁-C₄) alkyl ethers, such as ethoxy ethers.

Depending on the final formulated preparation, the hair colorant part may be weakly
5 acidic, neutral or alkaline. Preferred is a pH range of about 8 to 11. Any of a wide variety
of alkaline reagents can be used to adjust the pH of the hair colorant part. Such alkaline
reagents include ammonium hydroxide, sodium, potassium or calcium hydroxide, sodium
or potassium carbonate, sodium phosphate, sodium silicate, guanidine hydroxide, or any
10 one of the alkylamines or alkanolamines, for example, ethylamine, triethylamine,
trihoxymethylamine, ethanolamine, diethanolamine, aminomethyl propanol,
aminomethyl propanediol and the like.

Other conventionally used adjuvants which may be usefully incorporated into the hair
colorant part for enhancing performance and/or consumer acceptability include
15 antioxidants to inhibit premature oxidation of oxidative colorant by air (e.g. ascorbic acid,
erythorbic acid, or sodium sulfite); fragrances or perfume oils; chelating agents;
opacifying agents; buffers; dispersing agents; sequestering agents; humectants; and
antimicrobials.

20 One or a mixture of any of the above adjuvants may be incorporated in the hair colorant
part, in concentrations suitably ranging from about 0.001 to about 7.5wt%, by weight of
the individual adjuvant based on the total weight of the hair colorant part.

Preferably the hair colorant part is packaged in a pliable tube made of an air-impermeable
25 material such as aluminium.

In order to colour the hair, the colour developer and the hair colorant part are mixed
together, usually shortly before use. Preferably the container according to the invention
also serves as the mixing receptacle for the colour developer and the hair colorant part.

30 Preferably the colour developer and the hair colorant part are mixed at a weight ratio
ranging from 1:2 to 2:1, more preferably at a weight ratio ranging from 3:2 to 2:3, ideally
around 1:1.

- 13 -

Preferably when the colour developer and the hair colorant part are mixed at the weight ratio defined above (more preferably at a weight ratio ranging from 1:2 to 2:1 and most preferably at a weight ratio ranging from 3:2 to 2:3, ideally around 1:1) the resulting mix
5 has a yield stress from 85 to 125 and more preferably from 90 to 110 Pa; and a viscosity from 0.15 to 0.4 Pa.s and more preferably from 0.2 to 0.35 Pa.s at 25°C.

Brief Description of the Drawings

10

A specific embodiment of a container according to the invention will now be illustrated with reference to the accompanying drawings, in which:

Figure 1a represents a schematic cross-sectional view of a container according to the
15 invention in the closed position, and

Figure 1b represents a schematic cross-sectional view of the same container in the venting position.

20 Detailed Description of the Preferred Embodiment

Referring to Figure 1a, generally cylindrical container **10** comprises a plastic container body **11** and a removable plastic lid **12** for closing the container body **11**.

25 The container body **11** comprises a container base **13** with a slightly concave surface and a container wall **14** extending from the container base **13** and surrounding and enclosing an interior volume of the container body **11**. The interior volume of the container body **11** has a geometric centre that is generally equidistant from opposite points of the container wall **14**. The container wall **14** has an annular upper portion **15** defining the mouth of the
30 container body **11** and bearing a threaded surface **16**.

- 14 -

The removable lid **12** comprises a top portion **17** and a depending skirt portion **18** bearing a threaded surface **19** configured for engagement with corresponding threaded surface **16** on the mouth of the container body **11**.

- 5 The top portion **17** of removable lid **12** has an inner surface **19** provided with a hollow venting tube **20**. The hollow venting tube **20** has an upper end **21** in sealed contact with inner surface **19** and a lower end **22** bearing vent slots **23a, 23b**. Hollow venting tube **20** is disposed centrally in three dimensions within the interior volume of container body **11**.
- 10 Hollow venting tube **20** is shrouded by resilient flexible plastic liner **24**. Liner **24** has a disc shaped portion **25** with a circumferential edge **26** adapted for engagement with inner surface **19** and a tubular portion **27** extending from disc shaped portion **25**.
- 15 In the closed position as shown in Figure 1a, tubular portion **27** of venting tube liner **24** covers vent slots **23a, 23b** in hollow venting tube **20**.

In the venting position as shown in Figure 1b, tubular portion **27** of venting tube liner **24** exposes vent slots **23a, 23b** in hollow venting tube **20**.

20

In use, the interior volume of the container body **11** is partially filled with a fluent product **P** which off-gases, with vent slots **23a, 23b** of hollow venting tube **20** positioned in the head space **H** of the product **P**.

- 25 As pressure from accumulated gas builds in the head space **H**, liner **24** flexes into the venting position. Eventually, exposure of vent slots **23a, 23b** enables accumulated gas to exit container body **11** via a passageway between threaded surfaces **16** and **19**. Liner **24** reverts to the closed position upon release of the excessive pressure, thus effecting periodic venting of the container body.

30

CLAIMS

1. A container for the packaging of a fluent product which off-gases, the container
5 comprising:
- a container body for receiving and storing product and a removable lid for closing
the container body;
- 10 in which the lid is provided with a venting assembly extending into the container
body;
- in which the venting assembly has a closed position which is effective to close the
container body and a venting position permitting the venting of gas from the
15 container body;
- whereby, when the container body is partially filled with a fluent product which off-
gases, the venting assembly moves to the venting position in response to
excessive pressure from accumulated gas, and reverts to the closed position upon
20 release of the excessive pressure, thus effecting periodic venting of the container
body;
- and whereby the spatial arrangement of the venting assembly within the container
body provides for venting of the container body independently of the orientation of
25 the container, whilst retaining the product within the container body.

- 16 -

2. A container according to claim 1, in which:

5 the container body comprises a container base and a container wall extending from the base, the wall having an upper portion defining the mouth of the container body and bearing a threaded surface;

10 the removable lid comprises a top portion and a depending skirt portion; the depending skirt portion bearing a threaded surface configured for engagement with a corresponding threaded surface of the mouth of the container body, and

15 the venting assembly comprises a hollow venting tube provided on an inner surface of the top portion of the lid and configured such that it extends into the interior of the container body when then lid is engaged with the body; the hollow venting tube having an upper end in sealed contact with the inner surface of the top portion of the lid and a lower end bearing one or more apertures for the intake of accumulated gas; and a venting tube liner of resilient flexible material having an disc shaped portion with a circumferential edge adapted for engagement with an inner surface of the lid and at least one tubular portion extending from the disc shaped portion and configured such that it shrouds
20 the hollow venting tube when the venting tube liner is engaged with the lid;

25 in which the venting tube liner is movable from a closed position, covering the one or more apertures in the hollow venting tube and effective to close the container body, to a venting position exposing the one or more apertures in the hollow venting tube; and permitting venting of gas from the container body;

30 whereby when the container body is partially filled with a fluent product which off-gases, the venting tube liner moves to the venting position in response to excessive pressure from accumulated gas, and reverts to the closed position upon release of the excessive pressure, thus effecting periodic venting of the container body; and whereby the spatial arrangement of the hollow venting tube within the container body provides for venting of the container body independently of the orientation of the container, whilst retaining the product within the container body.

3. A container according to claim 2, in which the container wall surrounds and encloses an interior volume of the container body, and includes a peripheral section disposed at least a minimum radius r from a first axis within the interior volume and a pair of end sections disposed generally transverse to the first axis and joined peripherally to the peripheral sections; and the venting assembly extends along the first axis; the end sections of the container wall each being separated from the one or more apertures of the hollow venting tube along the first axis by a distance h ; such that when the interior volume is partially filled with product, the product has a depth of less than h when the first axis is disposed vertically and less than r when the first axis is disposed horizontally.
- 5
- 10
4. A container according to claim 2, in which the container wall surrounds and encloses an interior volume of the container body having a geometric centre that is generally equidistant from opposite points of the container wall, and the venting assembly is disposed centrally in three dimensions within the interior volume; such that when the interior volume is partially filled with product, the one or more apertures of the hollow venting tube remain in the head space of the product regardless of the orientation of the container.
- 15

Fig. 1a


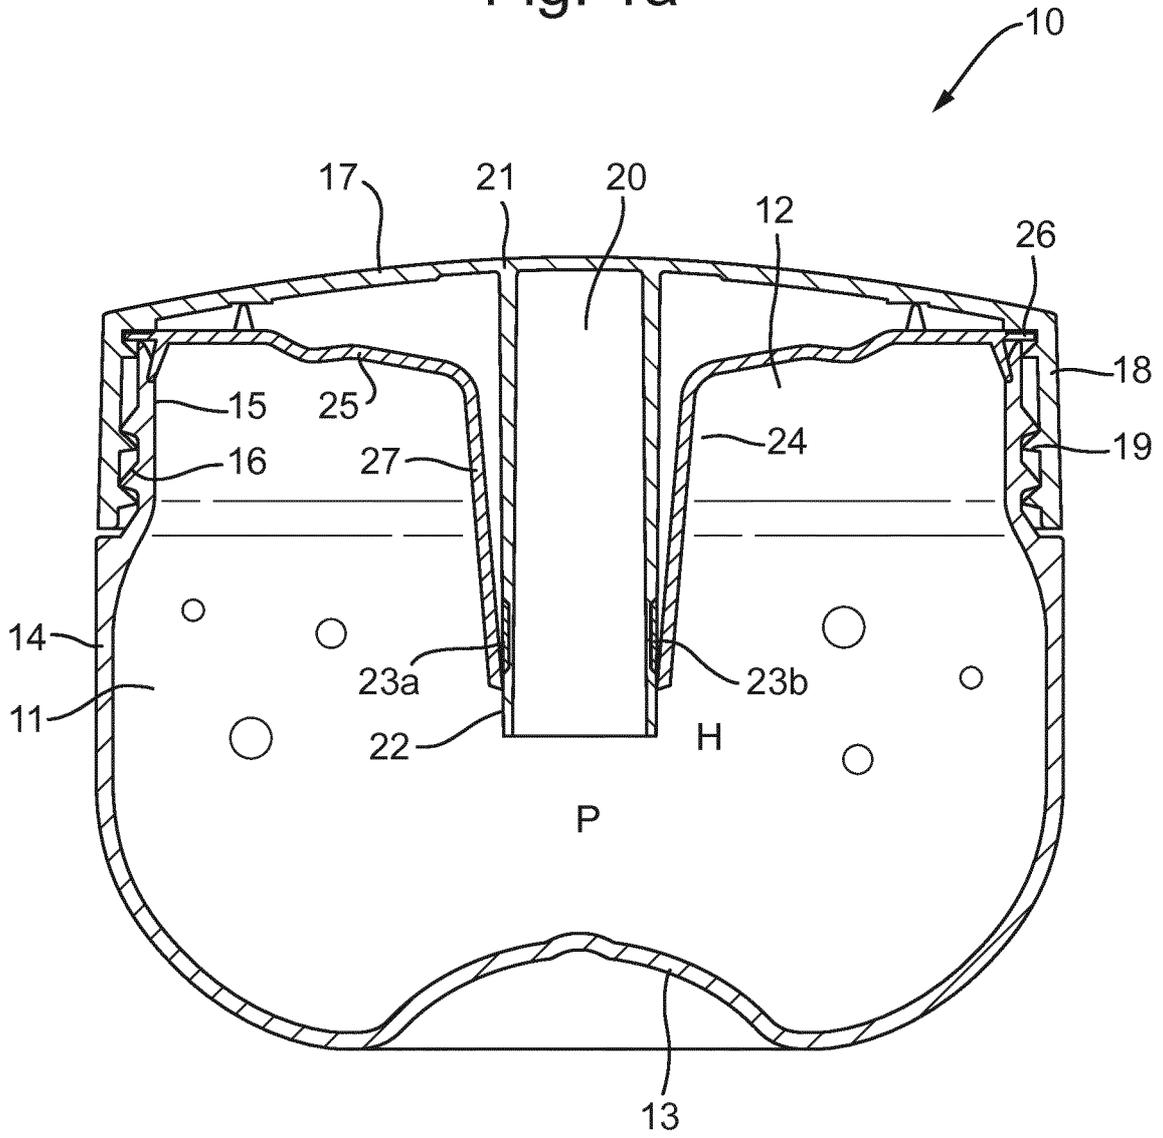


Fig. 1b

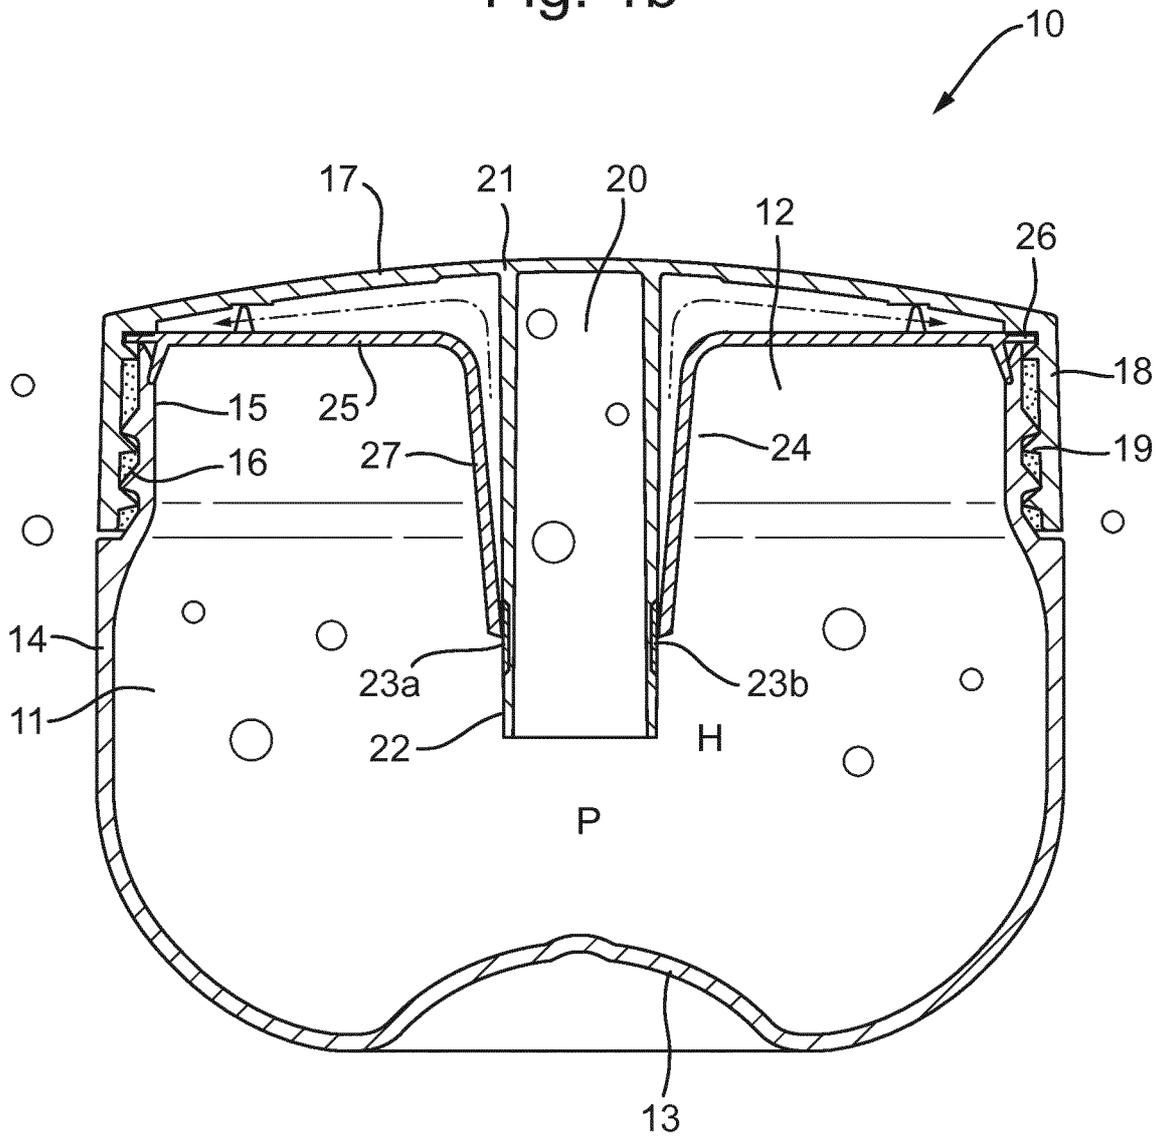

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/064598

A. CLASSIFICATION OF SUBJECT MATTER INV. B65D43/02 A45D34/00 B65D51/16 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) B65D A45D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 998 456 A1 (OREAL [FR]) 30 May 2014 (2014-05-30)	1
A	page 1, line 2 - page 2, line 34; figures 1-3	2-4
A	----- WO 2012/053734 A1 (IM SANG MAN [KR]) 26 April 2012 (2012-04-26) the whole document	1-4
A	----- DE 40 38 870 A1 (EFFEM GMBH [DE]) 4 June 1992 (1992-06-04) the whole document -----	1-4
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 31 August 2015	Date of mailing of the international search report 08/09/2015	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Mans-Kamerbeek, M	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/064598

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
FR 2998456	A1	30-05-2014	FR 2998456 A1	30-05-2014
			WO 2014082930 A1	05-06-2014

WO 2012053734	A1	26-04-2012	KR 200452037 Y1	26-01-2011
			WO 2012053734 A1	26-04-2012

DE 4038870	A1	04-06-1992	NONE	
