

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 17/50, 19/00	A1	(11) International Publication Number: WO 96/25716 (43) International Publication Date: 22 August 1996 (22.08.96)
(21) International Application Number: PCT/US96/02007 (22) International Filing Date: 14 February 1996 (14.02.96) (30) Priority Data: 08/388,580 14 February 1995 (14.02.95) US (71)(72) Applicant and Inventor: ST. VILLE, James, A. [US/US]; Suite 200, 2500 North 24th Street, Phoenix, AZ 85008 (US). (74) Agents: SHEA, Michael, J. et al.; Banner & Allegretti, Ltd., 11th floor, 1001 G Street, N.W., Washington, DC 20001 (US).		(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: METHOD AND APPARATUS FOR MANUFACTURING OBJECTS HAVING OPTIMIZED RESPONSE CHARACTERISTICS

(57) Abstract

A method for manufacturing an object having a potential {x} generated in response to a field {f} applied thereto is provided. The method includes the step of designing (801) a geometric model of the object. A computerized mathematical model of the object is generated (802) by discretizing the geometric model of the object into a plurality of finite elements and defining nodes at boundaries of the elements, wherein values of the field {f} and potential {x} are specified at the nodes. A material property matrix [k] is then calculated base on the relationship $\{f\} = [k] \{x\}$. Material property coefficients are then extracted from the material property matrix [k] for each finite element in the computerized mathematical model and the extracted material property coefficients are compared (804) to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials. Manufacturing parameters corresponding to the matched material property coefficients are then determined (805).

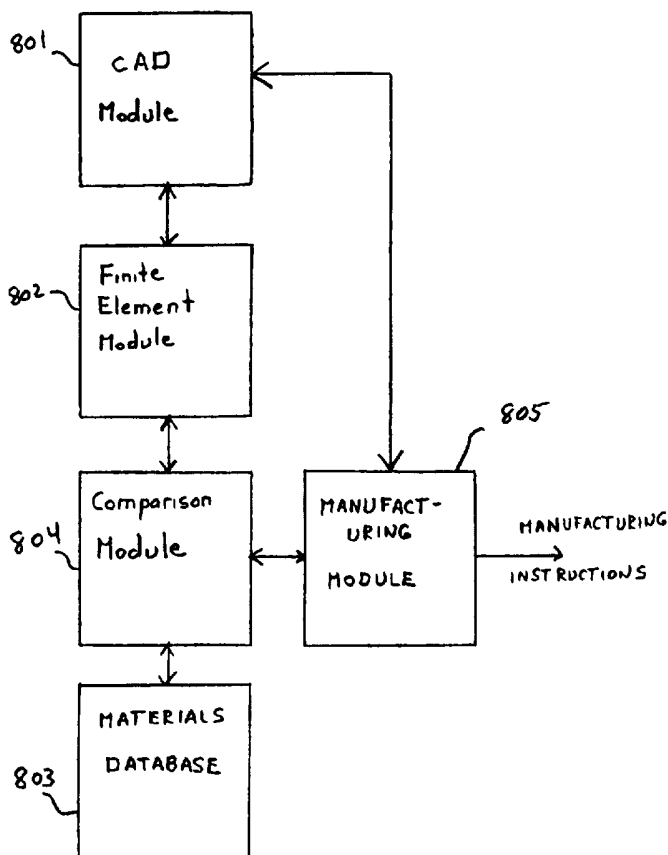

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

METHOD AND APPARATUS FOR MANUFACTURING OBJECTS HAVING OPTIMIZED RESPONSE CHARACTERISTICS

BACKGROUND OF THE INVENTION

1. Technical Field

The present invention generally relates to articles of manufacture and, more particularly, to a method and apparatus for manufacturing objects having response characteristics which are optimized for a desired application or use.

2. Description of Related Art

An object composed of one or more materials, which is engineered and manufactured for an intended application, must be able to withstand the stresses exerted on the object during use in the application. For example, a bridge, carrying a pathway or roadway over a depression or obstacle such as a body of water, must be designed to withstand the stresses created by traffic (either pedestrian or vehicle or both), temperature variations, wind, shifts in the surface of the earth which may be caused by earthquakes or other geological movements, etc. Similarly, aircraft components must have sufficient strength to withstand bending, sheer, torsion, and other forces placed on it. Accordingly, in a conventional engineering process, a stress analysis is

-2-

performed. The stress analysis requires a determination of the forces (or "stress-field") which will be applied to the object during use in the application. These stresses include, for example, thermal, mechanical, and electromagnetic forces. Knowing the stress-field enables a determination of whether a trial design and the selected material(s) are appropriate to withstand the stresses created during use of the object for its intended application. If a specific combination of design and material(s) is not suitable for an intended application, the object may be redesigned and/or new material(s) may be selected.

The above-described conventional engineering process will be discussed in greater detail with respect to Figure 1. The initial design geometry of the object and the material(s) of which the object is to be composed are defined at step 11. Geometry includes dimensions, tolerances, surface finish, definitions of surfaces and edges, and, in some cases, the fit between two mating parts. The initial design geometry may be created using computer-aided-design (CAD) techniques known in the art. Each force which will be applied to the object during intended use, and the points and direction of application of the respective forces, are identified at step 12.

Stress analysis is performed at step 13. One technique for carrying out such a stress analysis is to create a finite-element model of the object and utilize the finite element method to determine the suitability of the object for the intended application. The finite element method is a numerical analysis technique for obtaining approximate solutions to a wide variety of engineering problems in which a complex part or object is subdivided into the analyses of small simple subdivisions of the part or object. This method has been widely discussed and reference will be made in what follows to a discussion from Huebner et al, *The Finite Element Method for Engineers*, Third Edition, John Wiley and Sons, Inc. (1995). In a continuum problem, a field

variable such as pressure, temperature, displacement, or stress has infinitely many values because it is a function of each point in the body. The finite element method reduces the problem to one of a finite number of unknowns by dividing the solution region into elements and by expressing the unknown field variable in terms of assumed approximating functions within each element. The approximating functions are defined in terms of the values of the field variables at specified points called nodes. Nodes usually lie on the element boundaries where adjacent elements are connected. For the finite element representation of a problem, the nodal values of the field variable become the unknowns. Once these unknowns are found, the approximating functions define the field variable throughout the assembled elements. An important feature of the finite element method is the ability to formulate solutions for individual elements before putting them together to represent the entire problem. This means that the characteristics of each individual element may be found and then the elements may be assembled to find the characteristics of the whole structure. The finite element method may be summarized by the following steps.

First, the continuum is discretized into elements. A variety of element shapes may be used and different element shapes may be employed in the same solution region. The number and type of elements in a given problem are generally matters of engineering judgment. For example, three-dimensional elements work best if they are either tetrahedral or hexahedral in shape. In addition, the most accurate elements have a unity aspect ratio. The next step is to assign nodes to each element and then choose the interpolation function to represent the variation of the field variable over the element. Once the finite element model has been established, the matrix equations expressing the properties of the individual elements may be determined.

-4-

Several different approaches including a direct approach, a variational approach, or a weighted residual approach may be used. The element properties are then assembled to obtain the system equations. That is, the matrix equations expressing the behavior of the elements are combined to form the matrix equations expressing the behavior of the entire system. At this point, the system equations are modified to account for any boundary conditions of the problem. That is, known nodal values of the dependent variables or nodal loads are imposed. The resulting system of equations may then be solved to obtain the unknown nodal values of the problem. The solution of equations may be used to calculate other important parameters. For example, in a structural problem, the nodal unknowns are displacement components. From these displacements, the element strains and stresses may be calculated.

An example of the finite element method from the Huebner text will be discussed as an aid in understanding the terminology to be used in this specification. Figure 2 illustrates a linear spring system. For a typical spring element, the relations expressing its stiffness are

$$\begin{bmatrix} k_{11} & -k_{12} \\ -k_{21} & k_{22} \end{bmatrix} \begin{Bmatrix} \delta_1 \\ \delta_2 \end{Bmatrix} = \begin{Bmatrix} F_1 \\ F_2 \end{Bmatrix}$$

where $k_{11} = k_{12} = k_{21} = k_{22} = k$.

Under a given loading condition, each element as well as the system of elements, must be in equilibrium. If this equilibrium condition is imposed at a particular node i ,

$$\Sigma F_i^{(e)} = F_i^{(1)} + F_i^{(2)} + F_i^{(3)} + \dots = R_i \quad \dots (1)$$

which states that the sum of all the nodal forces in one direction at node i equals the resultant external load applied at node i . In accordance with conventional tensor notation, each coefficient in a stiffness matrix is assigned a double subscript, e.g., ij ; the number i is the subscript designating the force F_i produced by a unit value of the displacement whose subscript is j . The

-5-

force F_i is that which exists when $\delta_i = 1$ and all the other displacements are fixed. A displacement and a resultant force in the direction of the displacement carry the same subscript. Thus, evaluating equation (1) at each node in the linear spring system of Figure 2, it can be shown that

at node 1,

$$k_{11}^{(1)} \delta_1 + k_{12}^{(1)} \delta_2 = R_1$$

at node 2,

$$k_{21}^{(1)} \delta_1 + (k_{22}^{(1)} + k_{22}^{(2)} + k_{22}^{(3)}) \delta_2 + (k_{23}^{(2)} + k_{23}^{(3)}) \delta_3 = 0$$

at node 3,

$$(k_{32}^{(2)} + k_{32}^{(3)}) \delta_2 + (k_{33}^{(2)} + k_{33}^{(3)} + k_{33}^{(4)}) \delta_3 + k_{34}^{(4)} \delta_4 = 0$$

and at node 4

$$k_{43}^{(4)} \delta_3 + k_{44}^{(4)} \delta_4 = F$$

Using matrix notation, these system equilibrium equations can be written as

$$\begin{bmatrix} k_{11}^{(1)} & k_{12}^{(1)} & 0 & 0 \\ k_{21}^{(1)} & (k_{22}^{(1)} + k_{22}^{(2)} + k_{22}^{(3)}) & (k_{23}^{(2)} + k_{23}^{(3)}) & 0 \\ 0 & (k_{32}^{(2)} + k_{32}^{(3)}) & (k_{33}^{(2)} + k_{33}^{(3)} + k_{33}^{(4)}) & k_{34}^{(4)} \\ 0 & 0 & k_{43}^{(4)} & k_{44}^{(4)} \end{bmatrix} \begin{Bmatrix} \delta_1 \\ \delta_2 \\ \delta_3 \\ \delta_4 \end{Bmatrix} = \begin{Bmatrix} R_1 \\ 0 \\ 0 \\ F \end{Bmatrix}$$

or

$$[k] \{\delta\} = \{F\}. \dots (2)$$

These equations are the assembled force-displacement characteristics for the complete system and $[k]$ is the assembled stiffness matrix. These equations cannot be solved for the nodal displacements until they have been modified to account for the boundary conditions.

It can be seen that the stiffness matrix $[k]$ is the sum of the following matrices, each

-6-

matrix representing the contribution from a corresponding one of the elements:

$$[\bar{K}]^{(1)} = \begin{bmatrix} k_{11}^{(1)} & k_{12}^{(1)} & 0 & 0 \\ k_{21}^{(1)} & k_{22}^{(1)} & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \quad [\bar{K}]^{(2)} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & k_{22}^{(2)} & k_{23}^{(2)} & 0 \\ 0 & k_{32}^{(2)} & k_{33}^{(2)} & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

$$[\bar{K}]^{(3)} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & k_{22}^{(3)} & k_{23}^{(3)} & 0 \\ 0 & k_{32}^{(3)} & k_{33}^{(3)} & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix} \quad [\bar{K}]^{(4)} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & k_{33}^{(4)} & k_{34}^{(4)} \\ 0 & 0 & k_{43}^{(4)} & k_{44}^{(4)} \end{bmatrix}$$

Thus, it can be seen that the assembled or global stiffness matrix can be obtained simply by adding the contribution of each element. Similarly, using boolean locating functions or other locating functions, the contribution of each element may be determined from the assembled or global stiffness matrix.

Thus, to perform stress analysis, the material(s) of which the object is composed as determined by the initial design, the forces which are applied to the object as identified at step 12, and any constraints or boundary conditions are input into the finite element model. Since the forces $\{f\}$ and the material property matrix $[k]$ are known, the finite element method is used

-7-

to determine the corresponding displacements $\{\delta\}$ using equation (2). For example, assume the forces determined at step 12 are loads applied to the object. Then, since the material property matrix is determined by the initial choice of material(s), the displacement resulting from application of the loads may be determined. As noted above, these displacements may then be used to calculate the stresses and strains. The calculations for solving the matrix equations generated by the finite element method are generally performed using a suitable finite element software package.

Post-processing, indicated at step 14, is carried out to determine if the design will perform satisfactorily. Such post-processing may include, for example, a comparison of the stresses in the material to the maximum allowable stresses dictated by the material used. If the stresses are too high, the process returns to step 11 where the part may be made stronger by adding material, the material may be changed to one with higher allowable stress, or a new design geometry may be utilized. If the post-processing at step 14 indicates the results are acceptable, the process proceeds to step 15 where the object is manufactured in accordance with the design geometry and the choice of material(s) determined at step 11.

A known problem with the conventional manufacturing technique described above is that it uses known materials and pre-set manufacturing parameters, thereby creating a structure with fixed intrinsic (constitutive) properties. This results in over designing and inefficiency of the structure. While manufacturing processes exist that enable the adjustment of manufacturing parameters, no method exists of precisely determining what the manufacturing parameters should be or the sequence in which they should be implemented so as to optimize the constitutive properties of a particular object design. In essence, no method exists for determining an

optimized constitutive matrix for a particular object or for manufacturing the object in accordance with this optimized constitutive matrix.

SUMMARY OF THE INVENTION

In accordance with the present invention, a method for manufacturing an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto includes the step of designing a geometric model of the object. A computerized mathematical model of the object is generated by discretizing the geometric model of the object into a plurality of finite elements and defining nodes at boundaries of the elements, wherein values of the field $\{f\}$ and potential $\{x\}$ are specified at the nodes. A material property matrix $[k]$ is then calculated based on the relationship $\{f\} = [k] \{x\}$. Material property coefficients are then extracted from the material property matrix $[k]$ for each finite element in the computerized mathematical model and the extracted material property coefficients are compared to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials. Manufacturing parameters corresponding to the matched material property coefficients are then determined. The object is then manufactured in accordance with the determined manufacturing parameters.

In accordance with another aspect of the present invention, a method for determining manufacturing parameters for manufacturing an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto includes the step of designing a geometric model of the object. A computerized mathematical model of the object is generated by discretizing the geometric model of the object into a plurality of finite elements and defining nodes at boundaries of the elements, wherein values of the field $\{f\}$ and potential $\{x\}$ are specified at the nodes. A

material property matrix $[k]$ is calculated based on the relationship $\{f\} = [k] \{x\}$. Material property coefficients are extracted from the material property matrix $[k]$ for each finite element in the computerized mathematical model and the extracted material property coefficients are compared to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials. Manufacturing parameters corresponding to the matched material property coefficients are then determined.

In accordance with yet another aspect of the present invention, a method for determining the material properties of an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto includes the step of designing a geometric model of the object. A computerized mathematical model of the object is generated by discretizing the geometric model of the object into a plurality of finite elements and defining nodes at boundaries of the elements, wherein values of the field $\{f\}$ and potential $\{x\}$ are specified at the nodes. A material property matrix $[k]$ is calculated based the relationship $\{f\} = [k] \{x\}$. Material property coefficients are extracted from the material property matrix $[k]$ for each finite element in the computerized mathematical model and the extracted material property coefficients are compared to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials.

In accordance with yet another aspect of the present invention, a machine for determining the manufacturing parameters of an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto includes a designing element for designing a geometric model of the object. A generating element generates a computerized mathematical model of the object by discretizing the geometric model of the object into a plurality of finite elements and defining

nodes at boundaries of the elements, wherein values of the field $\{f\}$ and the potential $\{x\}$ are specified at the nodes. A calculating element calculates a material property matrix $[k]$ based the relationship $\{f\} = [k] \{x\}$. An extracting element extracts material property coefficients from the material property matrix $[k]$ for each finite element in the computerized mathematical model. A comparing element compares the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials and a determining means determines manufacturing parameters corresponding to the matched material property coefficients.

In accordance with yet another aspect of the present invention, a machine for determining the material properties of an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto includes a designing element for designing a geometric model of the object. A generating element generates a computerized mathematical model of the object by discretizing the geometric model of the object into a plurality of finite elements and defining nodes at boundaries of the elements, wherein values of the field $\{f\}$ and the potential $\{x\}$ are specified at the nodes. A calculating element calculates a material property matrix $[k]$ based the relationship $\{f\} = [k] \{x\}$. An extracting element extracts material property coefficients from the material property matrix $[k]$ for each finite element in the computerized mathematical model. A comparing element compares the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials.

These and other features and advantages of the present invention will be better understood from a reading of the following detailed description in conjunction with the accompanying

drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates the prior art methodology for manufacturing an object.

Figure 2 illustrates a simple mechanical spring system for defining terminology used in this application.

Figure 3 illustrates the methodology for manufacturing an object in accordance with the present invention.

Figures 4A and 4B illustrates forces applied to the femoral head of a hip during a one-leg stance and rising from a chair, respectively.

Figures 5A and 5B illustrate a force applied to an *in vivo* hip and the resultant stresses, respectively.

Figure 6 illustrates a finite element model of a prosthetic hip.

Figures 7A and 7B illustrate material properties data bases.

Figure 8 illustrates functional modules which may be used to implement the present invention.

Figure 9 is a block diagram of an environment which may be used to implement one or more of the functional modules of Figure 8.

Figure 10 is a schematic of a control computer for controlling a manufacturing machine.

DETAILED DESCRIPTION

Figure 3 will be used to describe a methodology for manufacturing an object or part in accordance with the present invention. As will become apparent from the description below, object or part (hereinafter "object") as used herein refers to any object which may be

-12-

manufactured by a process or technique in which manufacturing parameters may be controlled to vary constitutive or material properties within the object. The methodology for manufacturing an object in accordance with the instant invention is based on solutions of the equation

$$\{f\} = [k] \{x\}$$

where $\{f\}$ represents a field which will be applied to the object in its intended use, $\{x\}$ represents a potential corresponding to the applied field, and $[k]$ represents the material properties of the object.

The methodology of the instant invention may be utilized with any manufacturing technique in which the manufacturing parameters may be varied. For example, a braiding process using a braider may be used to manufacture fiber composite objects. Fiber composite materials are finding increasing use as the construction material for components such as body panels of automobiles, aircraft, prosthetic implants, golf club shafts, tennis rackets, bicycle frames, and fishing poles. These composite materials offer high strength equal to, or exceeding, that of metallic materials, for example, while at the same time are lighter in weight and have other improved functional properties. Parameters such as the speed of the braider bed and/or mandrel, the thickness of the fibers, and the tension applied to the fibers are controlled to vary the stiffness properties of the fiber composite material. An example of a braider bed designed for controlled braiding of composite materials is shown in United States Patent No. 4,909,127 to Skelton. Three-dimension woven fabrics are also discussed in U.S. Patent No. 4,975,262 to Suto.

Composite materials may also be constructed by laminating structural fibers in appropriate matrices compatible with these fibers as described in U.S. Patent No. 5,023,800 to

Carver et al. Fiberglass is a widely used composite system which incorporates glass fibers within an epoxy resin matrix. For formation of aircraft components, more exotic composite systems having improved properties are desirable. Currently available for use are exotic inorganic materials such as carbon fibers, boron fibers, improved glass fibers, aluminum oxide fibers, inorganic whiskers of different materials and certain organic fibers such as aramides and extended chain polyethylenes. These fibers or whiskers are incorporated as threads, fabrics, mats, or the like in appropriate resins, as for instance thermosetting epoxies, polyesters, polyethers, polyimides, and bismaleimides or thermoplastic polyamideimines, polyether sulfones, polyether ketones, polyphenylene sulfides and other similar polymeric materials. Composite objects may be formed utilizing molding techniques - using either external molds which are of a complementary shape to an object or an internal mandrel type mold on which the composite object is built. A mold utilized for the formation and curing of a composite object is called a bonding tool and the curing is carried out under precisely controlled temperatures and pressures.

A contouring process using a contouring system on a lathe or a milling machine may be used to manufacture metal objects. Contouring refers to the continuous removal of material in an application such as turbine-blade machining. Parameters such as the part surface, the drive surface, and the check surface may be controlled to vary the milling tool path and thus the contouring. Part surface refers to the surface on which the end of the milling tool is riding; drive surface refers to the surface against which the edge of the milling tool rides; and check surface refers to a surface at which the current milling tool motion is to stop. Details of a contouring system are shown in Bedworth et al., *Computer-Integrated Design and Manufacturing*, McGraw-Hill Inc. (1991).

Of course, the instant invention is not limited to objects formed using braiding, molding, or contouring and the above discussions are merely examples of manufacturing techniques which may be utilized in the inventive methodology. Other processes and techniques include by way of example, but not by way of limitation, polymer manufacturing processes, crystallization techniques, ceramic manufacturing techniques, and the like.

At step 21, the field(s) $\{f\}$ which will be applied to the object in its intended use, as well as the desired potential(s) or response(s) $\{x\}$ to these field(s), are defined. For example, an object may be applied with a mechanical force field, an electric current field, a magnetic field, a thermal flux field, and/or a fluid velocity field. Other fields $\{f\}$ may be derived using these primary fields. For example, an acoustic field may be derived by combining the mechanical force field and the fluid velocity field. A magnetohydrodynamics field may be derived by combining the fluid velocity field and the magnetic field. Each of the above-identified fields has a corresponding potential. These potentials are displacement, corresponding to the mechanical force field; voltage, corresponding to the electric field; magnetic vector potential, corresponding to the magnetic field; temperature, corresponding to the thermal flux field; and fluid potential, corresponding to the fluid velocity field.

As noted, the fields defined at step 21 represent one or more fields which will be applied to the object in its intended use. For example, in the case of a prosthetic hip, the field may be the mechanical forces which will be applied to the prosthetic hip after implant in the human body. For example, the arrows in Figures 4A and 4B represent the forces (direction and magnitude) applied to the femoral head during a one-leg stance (during walking, for example) and rising from a chair, respectively. The force distributions and orientations are based on *in*

vivo studies reported at, for example, Hodge et al., "Contact Pressures in the Human Hip Joint Measured *In Vivo*," *Proc. Natl. Acad. Sci. USA*, 83, 2879-2883 (1986). The resultant force of each of these forces was approximately 2000 Newtons (N), with an orientation change from one-leg stance to midrise loading. As another example, in the case of a heat conduction element, the field may be the thermal flux which will be applied to the object in its intended use. Of course, an object may be applied with more than one field and each of these fields may be defined at step 21. For example, an electrical conductor may be applied with an electric field, a magnetic field, and a mechanical force field in its intended use.

The potential(s) {x} defined at step 21 define the manner in which the manufacturer desires the object to respond when the defined field or fields {f} are applied thereto. In the case of the prosthetic hip, the defined potentials are the desired displacements (which correlate mathematically to the stresses) in the prosthetic hip when the prosthetic hip is subjected to the mechanical forces shown in Figures 4A and 4B during walking and rising from a chair. If the manufacturer desires the prosthetic hip to respond to forces in the same manner as an *in vivo* hip, the "desired displacements" in the prosthetic hip may, for example, correspond to the displacements generated in an *in vivo* hip during walking and rising from a chair. Figure 5A illustrates an *in vivo* hip applied with a force of 2000 N as indicated and Figure 5B is a table setting forth measures of the displacements generated at the points labeled A, B, C, D, E, and F in Figure 5A in response to this applied force. Thus, a manufacturer desiring to manufacture a prosthetic hip which responds to the force indicated in Figure 5A in the same manner as an *in vivo* hip would define the force {f} to be the force indicated in Figure 5A and would define the displacements {x} to be the displacements set forth in the table of Figure 5B. Similarly, in

the case of the heat conduction element which is applied with a thermal flux field, the defined responses correspond to desired temperatures at various portions of the heat conduction element when the defined thermal flux field is applied. In the case of an electrical conductor which is applied with an electric field, a magnetic field, and a mechanical force field, the defined responses correspond to desired displacements at various portions of the conductor when the defined mechanical force field is applied, to desired magnetic vector potentials at various portions of the conductor when the defined magnetic field is applied, and to desired voltages at various portions of the conductor when the defined electric field is applied, respectively.

At step 22, computer aided design is used to geometrically model the object to be manufactured. Geometric modeling is a technique of using computational geometry to define geometric objects. The purposes of geometric modeling are object representation, which mandates a complete definition of the object for manufacturing and other applications such as finite element analysis; design, which allows the user to input and manipulate a geometric specification of the object; and rendering, which uses the geometry to paint a realistic picture of the object on a computer graphics output device. The initial geometric model of the object or part may, for example, be based on the experience of the design engineer or be dictated by the intended use of the object or part. For example, the initial geometric model of a prosthetic hip is based on an *in vivo* hip. Of course, this initial geometric model may be subsequently modified for adaptation to an individual of a particular height and/or weight. The initial design geometry of a golf club shaft is again known, i.e., a cylinder of predetermined length and diameter. Again, this initial design geometry may be modified to provide a shaft for a golfer of a particular height or to provide a shaft having a diameter which varies, e.g., a narrower

diameter near the club head. Suitable CAD software packages for carrying out this geometric modeling include I-DEAS (available from SDRC, Inc. of Milford, Ohio), CATIA (available from IBM of Armonk, New York), and ANVIL-5000 (available from Manufacturing Consulting Services). These software packages may be run, for example, on UNIX-based work stations such as those available from Sun Microsystems or Silicon Graphics. Of course, the choice of computer will be determined by the computational power required and the invention is not limited in this respect. The use of such computer aided design software packages permits a geometric model of an object or part to be defined by a user and modified quickly and results in generation of geometry data which can be converted to formats useful in a computer aided manufacturing step and/or to formats useful a finite element method step, which steps are discussed in greater detail below. It is noted that the initial geometric model can be image data generated by scanning an object having the desired geometry. For example, the initial geometric model in the case of a prosthetic hip can be generated by X-raying a cadaveric hip using, for example, a Siemens Somatom DR3 or a GE 9800 CT scanner. This image data may be converted to a format usable by the CAD software package or may be directly converted to a format usable by a finite element software package (for example, a PDA-PATRAN (available from PDA Engineering) format) to be described below.

At step 23, a finite element model of the object is generated using the finite element method. The finite element method is based on the theory that an irregularly shaped object can be divided into smaller regular finite elements. Each element can then be treated separately and the aggregate effect is the sum of the effects of all of the finite elements in the object. The finite element model is created by a user using an appropriate software package which operates on the

geometric model developed in step 22. Thus, the finite element software package generally accesses a data file which contains the geometry of the object developed in step 21. Some integrated software packages, such as I-DEAS from SDRC, Inc., link modules for geometric modeling and finite element analysis so that the user does not have to redefine the geometry specifically for finite element analysis. Other suitable software packages for generating the finite element model include MSC/NASTRAN (available from MacNeal-Schwendler Corporation), ABAQUS (available from MacNeal-Schwendler Corporation), and ANSYS (available from Swanson Manufacturing).

Thus, the finite element model is generated by dividing the geometric model of the object into a plurality of elements and then defining nodes at the boundaries of the elements. An exemplary finite element model for a prosthetic hip is shown in Figure 6. A variety of element shapes may be used in the finite element model of the object. The number and types of elements selected are generally based on the type of field and the geometry of the object. The various finite element software packages identified above generally include libraries of elements and element clusters to enable modeling of areas having particular geometries with a user-specified degree of accuracy. Thus, an element having a element size of a predetermined value or an element cluster of variable elements having a cluster size of the predetermined value may be utilized. If element clusters are utilized, the cluster may be repeated throughout the finite element model. A cluster may include elements which have different shapes. For example, if the object to be manufactured will be subject to shear forces, elements having shapes which are best suited for modeling shear forces may be utilized and oriented as appropriate. When these elements are grouped together, they may define a cluster which may be repeated, for example,

-19-

in areas having similar geometries and/or which are applied with similar forces. In addition, different size elements may be used to model object portions of critical tolerance. So-called super-elements may be used where tolerance is not critical. Since the methodology of the invention is typically an iterative process as will be discussed below, if, for example, it is determined in a first iteration that there are one or more portions of the object where the nodal values do not change much, for computational purposes, a second later iteration may generate a finite element model of the object which includes one or more super-elements in these areas in order to simplify subsequent calculations.

The finite element model is completed by specifying the values and/or directions of the above-described fields $\{f\}$ and potentials $\{x\}$ at the nodes of the discretized object. In addition, any appropriate boundary conditions are imposed.

At step 24, the finite element software package is programmed to solve for the material property matrix $[k]$ using the relationship $\{f\} = [k] \{x\}$. That is,

$$[k] \{x\} = \{f\}$$

$$[k] \{x\} \{x\}^{-1} = \{x\}^{-1} \{f\}$$

$$[k] = \{x\}^{-1} \{f\}$$

Since the field $\{f\}$ and the potential $\{x\}$ have been defined at step 21, the material property matrix $[k]$ may be calculated. When $\{f\}$ is the mechanical force field and $\{x\}$ is the displacement, $[k]$ is the stiffness matrix. When $\{f\}$ is the thermal flux field and $\{x\}$ is the temperature, $[k]$ is the thermal conductivity. When $\{f\}$ is the magnetic field and $\{x\}$ is the magnetic vector potential, $[k]$ is the magnetic reluctivity. When $\{f\}$ is an electric current field and $\{x\}$ is the voltage, $[k]$ is electrical conductivity. The calculation of the matrix $[k]$ at step

24 when the fields and potentials have been defined as described at steps 21 determines the optimum or near-optimum material property matrix for permitting a manufacturer to manufacture an object having desired responses for a specific application, i.e., for a specific application of forces.

At step 25, the finite element software package is used to extract the material property coefficients for each of the elements in the finite element model from the material property matrix [k]. Specifically, the material property matrix [k] which is calculated at step 24 is the global or assembled material property matrix [k]. As previously discussed, the material property coefficients for a particular element of the finite element model may be extracted from such a global or assembled matrix using a boolean locating function or some other locating function. For example, with reference to Figure 6, the material property coefficients for element 601 are extracted, followed by the material property coefficients for element 602, etc. This procedure is repeated for each element in the model in order to generate a data sequence representing the material properties of the prosthetic hip at small volume increments.

At step 26, the extracted material property coefficients are compared with known material property coefficients in a material property data base or data bases. Figure 7A illustrates one organization of a material property data base 700. Material property data base 700 characterizes a plurality of materials M1-1, M1-2, ..., M1-n by the values of stiffness properties such as Young's modulus (E) and Poisson's ratio (σ). For example, material M1-1 may be aluminum having a Young's modulus of 7.2×10^{10} Pa and a Poisson's ratio of 0.32. Material M1-2 may be aluminum having a Young's modulus of 6.9×10^{10} Pa and a Poisson's ratio of 0.35. Material M1-n may be cast iron having a Young's modulus of 8.8×10^{10} Pa and a Poisson's ratio of 0.30.

Of course, the invention is not limited to these specific materials. Respectively associated with each of these materials M1-1, M1-2, ..., M1-n are a manufacturing process and the specific parameters of that process (such as temperature, pressure, etc.) which will produce the material with the corresponding stiffness properties. Similarly, as shown with reference to Figure 7B, a material property data base 701 may characterize a plurality of materials M2-1, M2-2, ..., M2-n by the values of electrical conductivity (σ'). Again, respectively associated with each of these materials M2-1, ..., M2-n are a manufacturing process and the specific parameters of that process which will produce the material with the corresponding electrical conductivity. Similar material data bases may be used to characterize materials by their thermal conductivity or magnetic reluctivity and to identify the manufacturing method and manufacturing parameters associated with each material.

Thus, the material property data bases are archives of material property coefficients with their corresponding manufacturing process and manufacturing-process control parameters. Such data bases are created and maintained by industrial manufacturers, government agencies, and research institutes. For example, when a material such as a metal, a plastic, or a composite is created using a particular manufacturing process, its properties may be determined through standard testing methods such as ASTM testing methods. When these properties have been determined, the set of manufacturing parameters such as temperature, pressure, etc. which was used to create the material having these properties is correlated to the material in order that the material may be reproduced in the future.

The comparison at step 26 between the extracted material property coefficients and the material properties data base is used to determine which material in the data base has material

properties which match or most closely match the properties corresponding to the extracted material property coefficients. Thus, referring to Figure 6, the comparison will result in the identification of a first set of manufacturing parameters which will produce the portion of the prosthetic hip corresponding to element 601 with the desired stiffness properties; the identification of a second set of manufacturing parameters which will produce the portion of the prosthetic hip corresponding to element 602; etc. The above-described comparisons may be carried out, for example, using a knowledge base having a fact base for storing the extracted material property coefficient data for each of the elements (e.g., elements 601, 602, etc. of Figure 6) and the material property data from the material data base, and a rule base containing rules for comparing and matching the extracted material property data for each of the elements and the material property data from the material data base. The level of matching (e.g., a perfect match, a close match) is application specific and is related, *inter alia*, to how much tolerance is permitted. If the object to be manufactured is a critical component, a very close or perfect match is desirable. If the object to be manufactured is a non-critical component, the matching criteria may be relaxed. Other criteria such as cost and the available manufacturing equipment may also determine the level of matching. Thus, by performing step 26, the sets of manufacturing-process control parameters for each and every portion of object are determined.

At step 27, the determined sets of manufacturing-process control parameters are ordered or sequenced to define the manufacturing-process controls which are necessary to manufacture the object. The manufacturing control parameters may be used to implement numerical control of the manufacturing equipment used to manufacture the object. Numerical control refers to the use of coded numerical information in the automatic control of manufacturing equipment. For

machine tools, this might refer to the motion of the cutting tool or the movement of the part being formed against a rotating tool. The process of laying composite material to form lightweight alternatives to machined metal parts may also be implemented using numerical control. The necessary geometry and motion statements for manufacturing the object may then be programmed using a general purpose numerical control language to develop manufacturing control data. One such language is APT-AC Numerical Control Processor Program (available from IBM Corporation, Armonk, New York). The APT-AC processor is a computer application program that accepts as input user-oriented language statements that describe the numerical control operations to be performed. A postprocessor may further process the manufacturing control data to tailor the information to a specific manufacturing process. At step 28, the postprocessed data is supplied to a computerized manufacturing device which uses the supplied data to control the manufacturing of the object. The data supplied to the computerized manufacturing device controls the manufacturing device to synthesize the object, which object has the desired specifically calculated material properties. For example, assume the manufacturing is carried out using a braider for manufacturing a composite material. During the weaving of the composite, by allowing the computer to control the speed of various machine parts, the tightness of the weave is controlled. The tighter the weave, the higher the stiffness (low flexibility). For example, in the case of the prosthetic hip, regions of both high and low stiffness are required. Using the geometric model and the extracted material property coefficients, the manufacturing process and specifically, the tightness of the weave, can be controlled to provide a region of high stiffness (e.g., the region defined by element 601 in Figure 6) and a region of low stiffness (e.g., the region defined by element 603 in Figure 6).

By appropriately controlling the manufacturing process in accordance the inventive methodology, a prosthetic hip may be produced which responds to applied loads in a manner which is substantially identical to manner in which the human hip would respond to the same applied load. Such a prosthesis can be developed with specific response characteristics for a particular individual.

The above-described methodology is typically carried out as an iterative process. For example, the results of an initial iteration may generally indicate that a fiber composite manufactured using a braider provides the best match to the extracted material property coefficients in the intended application. Thus, in a second subsequent iteration, the finite element model may be modified to take into account the smallest incremental volume that can be controllably braided using a computer-controlled braider. Preferably, each of the elements in the finite element model corresponds to no less than the smallest incremental volume that can be controllably manufactured using the manufacturing technique by which the object is to be manufactured. For example, for a braiding process using a braider, the smallest volume that can be controllably braided is approximately one cubic millimeter. In other words, it is possible to controllably vary a braid pattern to produce an object having material or constitutive properties which vary on the order of a cubic millimeter. This smallest incremental volume will of course vary in accordance with the manufacturing process or technique selected and may, in addition, be dependent on available manufacturing equipment. Thus, although the smallest incremental volume that can be braided by a state-of-the-art braider is one cubic millimeter, it is not necessarily true that all braiders will be capable of such operation. Accordingly, in such cases, the smallest incremental volume is determined by the capabilities of an available braider.

-25-

It will be appreciated that as manufacturing techniques improve and smaller incremental volumes can be controllably manufactured, the methodology of the instant invention may be utilized with resized or different shaped elements.

The mathematics of the inventive method are valid for other types of manufacturing processes other than composites such as the manufacturing of metals, plastics, and ceramics. The inventive method is also valid for manufacturing objects based on their desired responses to heat and electric currents. In short, the inventive method can be used for any computer controlled manufacturing process, where precision volumetrically controlled manufacturing is desired.

The method of the present invention is particularly useful when increased efficiency of an object is desired. In traditional manufacturing, the emphasis is on precision manufacturing of an object's geometry, without much, if any, control over the internal structural makeup of this geometry. In accordance with inventive methodology, the material matrix is the unknown and an iterative process may be carried out to optimize the material property matrix while keeping the geometry fixed.

Thus, in accordance with the present invention, the input parameters of any process may be precisely varied to create an object with a precisely defined material property matrix. As manufacturing continues to improve, the above-described methodology is applicable even though the smallest incremental volume that can be controllably manufactured may continue to decrease in size.

Figure 8 illustrates various functional modules which may be used to implement the methodology of the instant invention. A computer-aided-design (CAD) module 801 is a three-

dimensional graphics software program for generating an geometrical model definition. Such a geometrical model definition includes coordinate points precisely locating the object design in a three-dimensional coordinate system. This may be provided by a graphics software package using, for example, X, Y, and Z coordinate points and appropriate locating vectors where necessary. The three-dimensional graphics software package utilizes appropriate data structures for defining particular points in the data base of the graphics program. By utilizing algorithms in the graphics program, other points in the object can be defined and generated. The graphics program preferably utilizes appropriate vector and matrix routines whereby an object can be rotated or otherwise moved in computer memory and can be dimensioned whereby the coordinates for any one point are known with respect to other points. As noted above, suitable CAD software packages include I-DEAS (available from SDRC, Inc. of Milford, Ohio), CATIA (available from IBM), and ANVIL-5000 (available from Manufacturing Consulting Services).

A finite element module 802 is used to generate the finite element model of the object from data stored in the graphics program data base. Finite element module 802 is a software package for dividing the object designed using computer-aided-design module 801 into a plurality of elements and expressing one or more unknown field variables in terms of assumed approximating functions within each element. Finite element module 802 is programmed to calculate the optimum material properties for each element as discussed above. Suitable software packages for finite element module 802 include MSC/NASTRAN (available from MacNeal-Schwendler Corporation), ABAQUS (available from MacNeal-Schwendler Corporation), and ANSYS (available from Swanson Manufacturing).

A materials data base module 803 is an archive or archives of material property

coefficients with their corresponding manufacturing process and manufacturing-process control parameters. The archives thus correlate the properties of materials to the manufacturing process and manufacturing process parameters used to create the materials.

A comparison module 804 compares the material properties determined using finite element module 802 to the material data in material data base module 803 in order to determine (1) which material has material properties which match or most closely match the material properties determined using finite element module 802 and (2) the manufacturing process and manufacturing process parameters associated with this matched material. Comparison module 804 may be implemented, for example, by a knowledge base having a fact base for storing material property data from finite element module 802 and material property data from material data base module 803 and a rule base containing rules for comparing and matching the material property data from finite element module 802 and the material property data from material data base module 803.

A manufacturing module 805 translates and sequences the manufacturing parameters derived from comparison module 804 to provide manufacturing instructions to a manufacturing machine for manufacturing an object in having the geometry defined using computer-aided-design module 801. The manufacturing of the object may be carried out by a machine suitable for the particular material. For example, metals may be manufactured by reproducing surface geometry (surface points in space), composites may be manufactured by controlling weave configuration and fiber choice, and polymers may be manufactured by chemical choice, temperature, and pressure. Computer assistance in manufacturing allows machines to be quickly adjusted to vary the manufacturing process from one object to the next or within various regions

of a single object.

Figure 9 is a block diagram of the configuration of an environment 900 which may be used to implement the various functional modules described above. Examples of this environment include (but are not limited to) IBM-PC compatible personal computers and UNIX-based workstations such as those available from Sun Microsystems or Silicon Graphics. It should be understood that the environment of the instant invention is not limited to any type or brand of computer, and thus contemplates microcomputers to supercomputers. In addition, while Figure 9 illustrates the details of a single environment, the modules of Figure 8 may be implemented on more than one environment. For example, a first environment may be used to implement CAD module 801 while a second different environment may be used to implement finite element module 802. Information may be exchanged between environments using floppy disks or using standard communication packages. Alternatively, a single environment may be used to implement both CAD module 801 and finite element module 802. Environment 900 includes a central processing unit (CPU) 901 such as a RISC-based or an IBM PC-compatible CPU which is plugged into bus 903. One or more of the modules of Figure 8 are loaded in memory 905 during operation. Input is received via an I/O device 907, after which the input passes through a buffer 909 and then to memory 905 via bus 903. It should be understood that the I/O device can be any standard input device, such as a disk, tape, keyboard, mouse, touch screen, or any compatible or equivalent means for manually or automatically entering information or commands. In order for a user to observe the results as information is entered into the present invention and as progress is made, a preferred embodiment also contemplates the use of a visual display device 911 as an example of an output devices. Other output devices

could include printers, magnetic or optical disks, tape, etc. A ROM 913 may store programs for the overall control of environment 900.

Figure 10 is a control computer schematic for a generalized control computer using a control computer 950. The control computer is downloaded with the manufacturing instructions generated by manufacturing module 805 of Figure 8. Information such as braider bed speed, fiber tension, temperature, pressure, etc. is obtained from sensors 952 of a manufacturing machine in digital format (on/off, open/closed) or analog format (voltage). Analog inputs are converted to a digital representation by analog-to-digital converter 953 of control computer 950. Control computer 950 includes a processor 960 for analyzing the information from sensors 952 and generating signals which are supplied to actuators 954 for adjusting the settings of the manufacturing machine in accordance with the downloaded manufacturing instructions. In addition to analog and digital outputs, pulse outputs may be provided to drive stepping motors, frequently used with machine tools and other equipment. Of course, the specifics of control computer 950 will depend on the manufacturing machine which is utilized. Details of control computers useful in specific manufacturing processes may be found, for example, in the above-identified Bedworth text.

The following examples are provided to illustrate applications of the methodology of the instant invention.

EXAMPLE I

The manufacturing of a composite fiber golf club shaft in accordance with the present invention will be described. In the case of the golf club shaft, the governing equation is

$$\{f\} = [k] \{x\}$$

A finite element model of the golf club shaft is created. Golf club manufacturers maintain data bases which specify the forces $\{f\}$ a shaft is subjected to (torsion, compression, tension, etc.) for different club head speeds. These forces are used to define the forces at the nodes of the finite element model.

A golfer generally desires a golf club shaft to respond in a particular way to these various forces. For example, a golf professional generally wants the shafts for a pitching wedge, nine-iron, and eight-iron to have a flex point (i.e., a point of relatively low stiffness) near the club head; the shafts for a seven-iron, a six-iron, and a five-iron to have a flex point near midshaft; the shafts for a four-iron, a three-iron, and a two-iron to have a flex point just above midshaft; and the shaft for a driver to have a flex point just below the grip. In each of these four cases, the shaft thus has a unique set of desired deflections $\{x\}$. These desired deflections $\{x\}$ thus define the displacements at the nodes of the finite element model. Accordingly, four different finite element analyses are carried out.

Since the forces and the displacements of the finite element model have been defined, the global stiffness matrices for each of the four cases may be calculated. Using boolean locating functions, the stiffness coefficients for the individual elements are determined. These determined stiffness coefficients are matched with stiffness coefficients from industrial databases. The manufacturing parameters corresponding to the matched coefficients are appropriately translated and sequenced to generate manufacturing instructions. These manufacturing instructions are then supplied to a composite weaving machine and the braider bed speed and the fiber tension are appropriately controlled to produce the golf shafts. For example, if it is determined that a carbon fiber provides the best match to the determined stiffness coefficients, a carbon fiber is

placed on an appropriate weaving machine. As the weaving is performed, the speed of the braider bed and the tension on the fibers is varied in accordance with the generated manufacturing instructions so that certain portions of the golf club shaft will have a tight weave and other portions will have a looser weave. Portions of the shaft having the tighter weave will be stiffer than portions with the loose weave.

EXAMPLE II

The manufacturing of a carbon fiber filled composite hip replacement in accordance with the present invention will be described. In the case of a composite hip replacement, the governing equation is once again

$$\{f\} = [k] \{x\}$$

First, a finite element model of the normal bone geometry (both cortical and cancellous layers) is created. The stiffness properties of each layer are then defined. These stiffness properties are a function of Young's modulus and Poisson's ratio. These stiffness properties are used to define the stiffness at the nodes of the finite element model. Next, the loads of walking, rising from a chair, climbing stairs, etc. are defined. These loads are used to define the forces at the nodes of the finite element model. These stiffness properties and loads are known quantities which have been published in numerous journals, e.g., Hodge et al., *Contact Pressures in the Human Hip Joint Measured In Vivo*, Proc. Natl. Acad. Sci. USA, 83 2879-2883 (1986); Fung, *Biomechanics, Mechanical Properties of Human Tissue*, Springer-Verlag, NY (1981).

Since the forces $\{f\}$ and the stiffness $[k]$ of the finite element model have been defined, the displacements $\{x\}$ (which are mathematically related to the stress) may be determined. Using boolean locating functions, the resulting matrix data is analyzed to determine the stress

at the elements of the finite element model.

Since the stress $\{x\}$ at the elements of the finite element model has been determined, it may now be treated as a known quantity and represents the ideal stress distribution that it is desired to achieve in the composite hip replacement. Thus, the material stiffness matrix $[k]$ may now be treated as an unknown.

A finite element model is again created, but now includes another layer, namely, the artificial hip embedded in the cancellous bone area. For example, as discussed in St. Ville et al., *"The Anatomy of Midthigh Pain After Total Hip Arthroplasty"*, a finite element analysis may be performed using the fine mesh model of Figure 6 which includes 5207 nodes and 5040 isoparametric solid elements. Both hexahedronal and pentahedronal elements are used in the mesh of Figure 6 to ensure accurate shape adherence. The previously calculated displacement data $\{x\}$ defines the displacement at each node of the finite element model.

The loads it is desired to subject the composite hip replacement to are defined. Thus, loads such as walking, one leg stance, etc. are used. The choice of loads depends on the nature of the composite hip replacement being designed. These loads are generally known quantities as noted above, for example, with respect to Hodge et al., *"Contact Pressures in the Human Hip Joint Measured In Vivo," Proc. Natl. Acad. Sci. USA*, 83, 2879-2883 (1986). These loads define the forces $\{f\}$ at the nodes of the finite element model.

Since the displacement $\{x\}$ and forces $\{f\}$ at the nodes of the finite element model have been defined, the global stiffness matrix $[k]$ may be calculated. Using boolean locating functions or other types of locating functions, the stiffness coefficients at each of the nodes are determined. Iterative optimization techniques may be used to calculate the ideal stiffness

properties at the elements of the finite element model.

These determined stiffness coefficients are matched with stiffness coefficients from a material property data base. The manufacturing parameters corresponding to the matched coefficients are appropriately translated and sequenced to generate manufacturing instructions. These manufacturing instructions are then supplied to a composite weaving machine and the braider speed and the fiber tension are appropriately controlled to produce the composite hip replacement.

Of course, it should be understood that the present invention contemplates other configurations of modules, and it is not limited to the specific implementation noted above.

Any application, patent, technical document, textbook, or other publication cited herein should be construed to be incorporated by reference as to any subject matter deemed essential to the present disclosure.

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. Thus, the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

I claim:

1. A method for manufacturing an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto, the method comprising the steps of:

designing a geometric model of said object;

generating a computerized mathematical model of said object by discretizing said geometric model of said object into a plurality of finite elements and defining nodes at boundaries of said elements, wherein values of the field $\{f\}$ and potential $\{x\}$ are specified at said nodes;

calculating a material property matrix $[k]$ based on the relationship $\{f\} = [k] \{x\}$;

extracting material property coefficients from said material property matrix $[k]$ for each finite element in said computerized mathematical model;

comparing the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials;

determining manufacturing parameters corresponding to the matched material property coefficients; and

manufacturing the object in accordance with the determined manufacturing parameters.

2. The method according to claim 1, wherein the step of creating a computerized mathematical model of the object further includes determining the smallest volume increment which can be manufactured using a computer assisted manufacturing method.

3. The method according to claim 1, wherein the field $\{f\}$ is a mechanical force field and the potential $\{x\}$ is a displacement.

4. The method according to claim 1, wherein the field {f} is an electric current field and the potential {x} is a voltage.

5. The method according to claim 1, wherein the field {f} is a magnetic field and the potential {x} is a magnetic vector potential.

6. The method according to claim 1, wherein the field {f} is a thermal flux field and the potential {x} is a temperature.

7. The method according to claim 1, wherein the field {f} is a fluid velocity field and the potential {x} is a fluid potential.

8. An object made in accordance with the method of any one of claims 1-7.

9. A method for determining manufacturing parameters for manufacturing an object having a potential {x} which is generated in response to a field {f} applied thereto, the method comprising the steps of:

designing a geometric model of said object;

generating a computerized mathematical model of said object by discretizing said geometric model of said object into a plurality of finite elements and defining nodes at boundaries of said elements, wherein values of the field {f} and potential {x} are specified at said nodes;

calculating a material property matrix [k] based on the relationship $\{f\} = [k] \{x\}$;

extracting material property coefficients from said material property matrix [k] for each finite element in said computerized mathematical model;

comparing the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property

coefficients for known materials; and

determining manufacturing parameters corresponding to the matched material property coefficients.

10. A method for determining the material properties of an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto, the method comprising the steps of:

designing a geometric model of said object;

generating a computerized mathematical model of said object by discretizing said geometric model of said object into a plurality of finite elements and defining nodes at boundaries of said elements, wherein values of the field $\{f\}$ and potential $\{x\}$ are specified at said nodes;

calculating a material property matrix $[k]$ based the relationship $\{f\} = [k] \{x\}$;

extracting material property coefficients from said material property matrix $[k]$ for each finite element in said computerized mathematical model; and

comparing the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials.

11. A machine for determining the manufacturing parameters of an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto, comprising:

designing means for designing a geometric model of said object;

generating means for generating a computerized mathematical model of said object by discretizing said geometric model of said object into a plurality of finite elements and defining

nodes at boundaries of said elements, wherein values of the field $\{f\}$ and the potential $\{x\}$ are specified at said nodes;

calculating means for calculating a material property matrix $[k]$ based the relationship $\{f\} = [k] \{x\}$;

extracting means for extracting material property coefficients from said material property matrix $[k]$ for each finite element in said computerized mathematical model;

comparing means for comparing the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials; and

determining means for determining manufacturing parameters corresponding to the matched material property coefficients.

12. A machine for determining the material properties of an object having a potential $\{x\}$ which is generated in response to a field $\{f\}$ applied thereto, comprising:

designing means for designing a geometric model of said object;

generating means for generating a computerized mathematical model of said object by discretizing said geometric model of said object into a plurality of finite elements and defining nodes at boundaries of said elements, wherein values of the field $\{f\}$ and potential $\{x\}$ are specified at said nodes;

calculating means for calculating a material property matrix $[k]$ based the relationship $\{f\} = [k] \{x\}$;


comparing means for extracting material property coefficients from said material property matrix $[k]$ for each finite element in said computerized mathematical model; and


-38-

comparing means for comparing the extracted material property coefficients to material property coefficients for known materials to match the extracted material property coefficients to the material property coefficients for known materials.

1/11

FIGURE 1

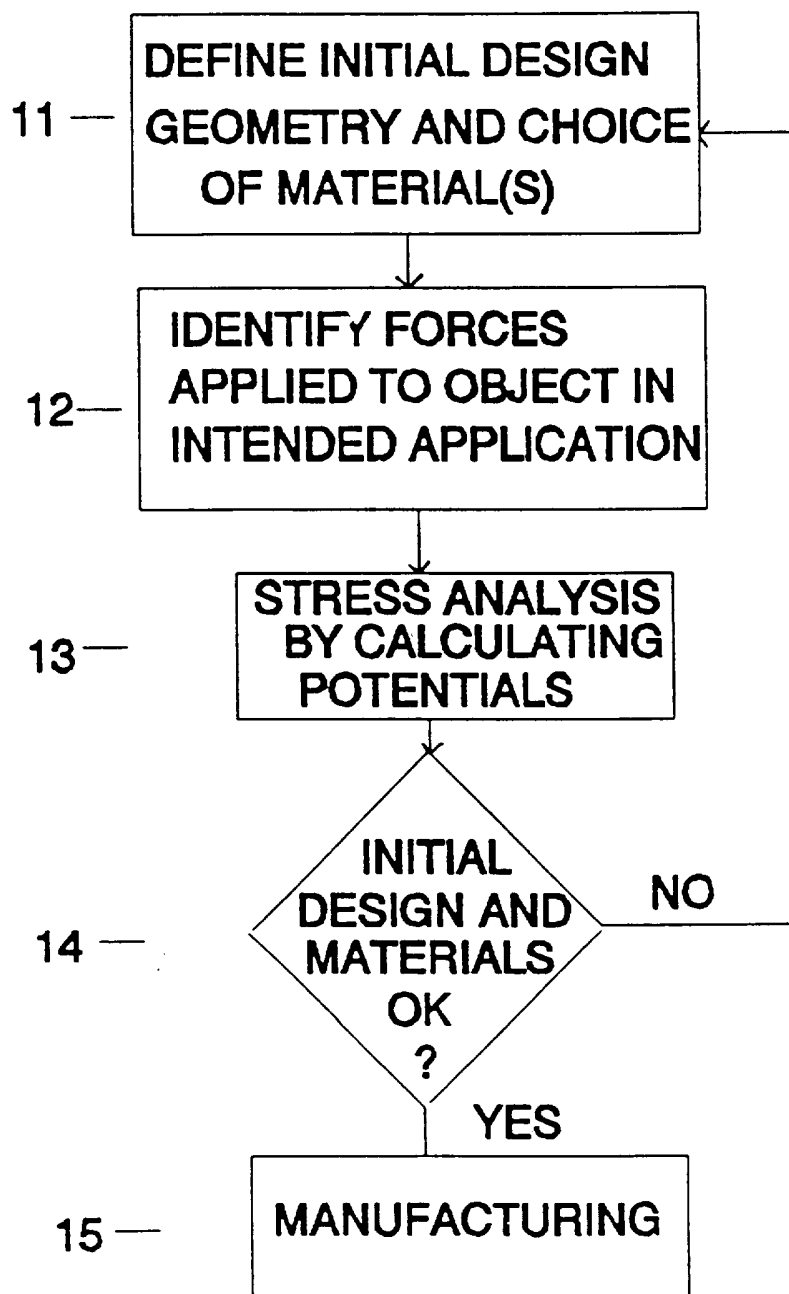

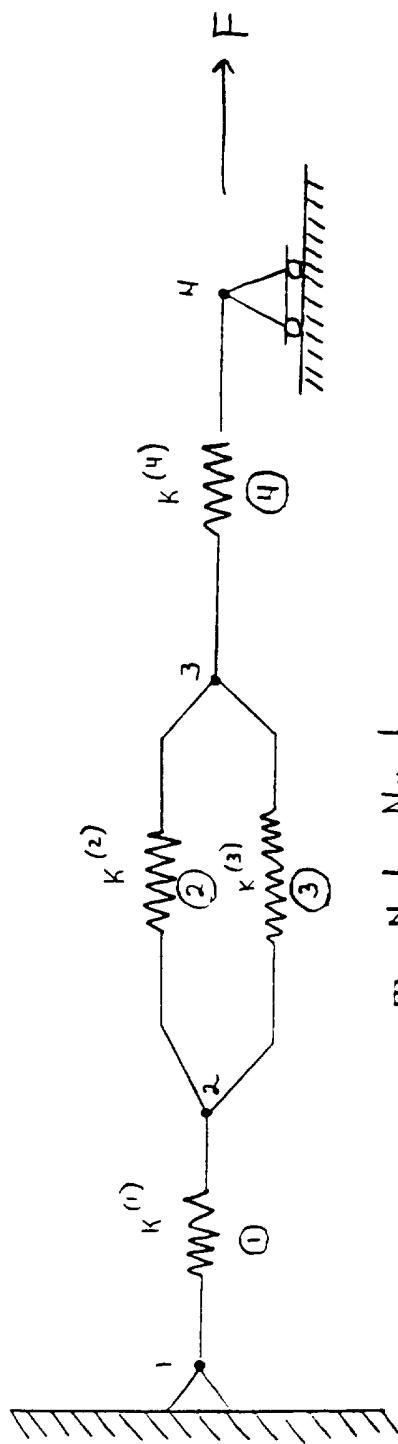

m = Node Number

(m) = element number

$K^{(m)}$ = spring stiffness of Element (m)

FIGURE 2

3/11

New Method

Fig. 2

Form Factor Diagram — 21

Assumptions: 1) Governing Equations: $\{F\} = [K]\{X\}$

- 2) Forces $\{F\}$ are known
- 3) Material properties $[E]$ are unknown
- 4) Potentials $\{X\}$ are known or defined
- 5) Model Geometry is known

Pre-Processing — 22

- Design model geometry
- Node & Element generation
- Input Boundary Conditions, including forces & potentials

Finite Element Analysis — 23

- Solve for Material Properties Matrix $[K]$

Post-Processing — 25

- Conversion of Material Properties Matrix $[K]$ to Formants, having a specific order, of small volume increments, with representative material property coefficients.

Industrial Experimental Process Research Facilities

Material Manufacturing

- By varying manufacturing-process control parameters (e.g., speed, temp., pressure, etc.), numerous new materials are developed, from a single process

Material Testing

- Definition of Material Properties of a material; needed for material classifications

Material Property Databases

- Archives of Material Property Coefficients with their corresponding manufacturing-process control parameters

Volumetric Controlled Manufacturing

- 26 → - Matching calculated Material Property Coefficients to industrial Material Property Coefficients

- 27 → - Creation of order (sequence) of manufacturing-process control parameters to recreate the calculated Material Property Matrix

- 28 → - Conversion of manufacturing-process control parameters sequence to Formants to control the actual manufacturing process machinery (similar to a transducer).

FIG. 4A


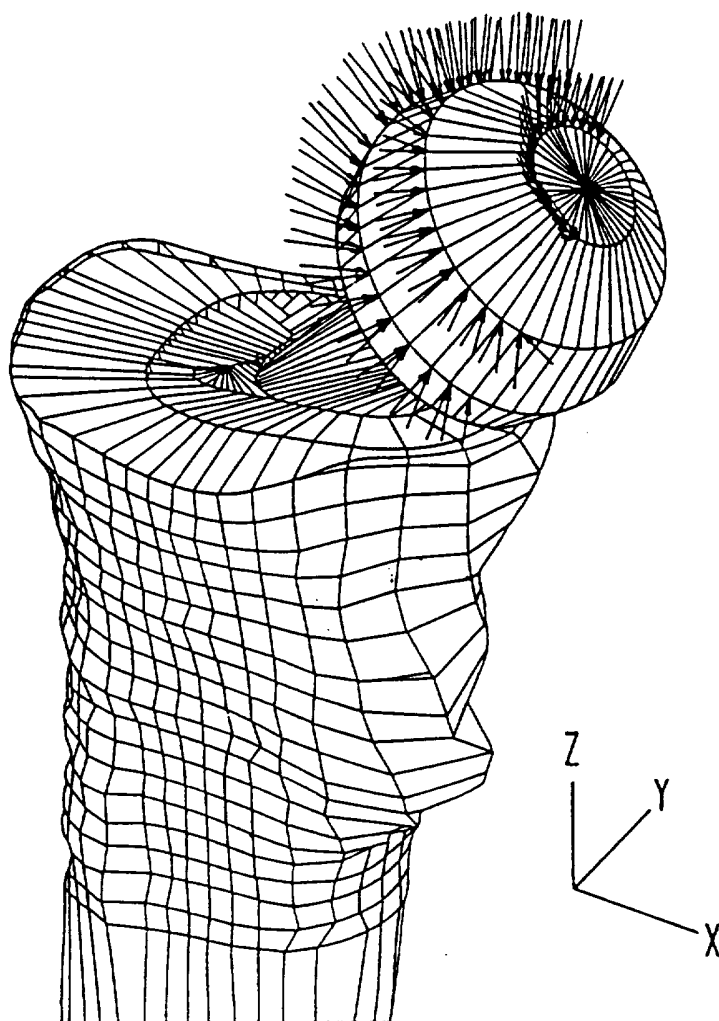


FIG. 4B

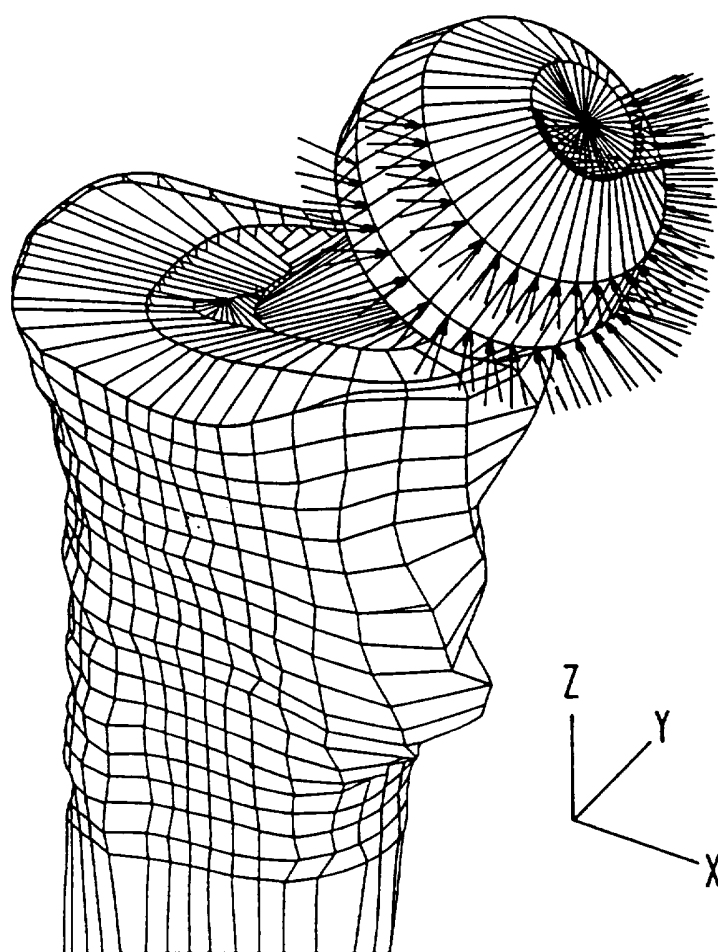

6/11

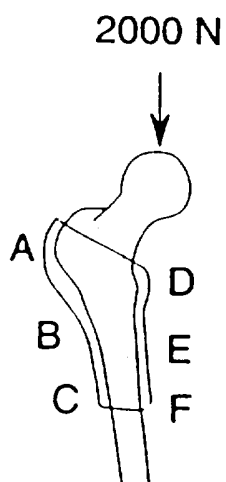



FIGURE 5A

	Intact femur
A	0.221 ± 0.057
B	0.875 ± 0.119
C	0.698 ± 0.122
D	1.217 ± 0.150
E	1.315 ± 0.131
F	1.208 ± 0.131

FIGURE 5B

7/11

FIG. 6

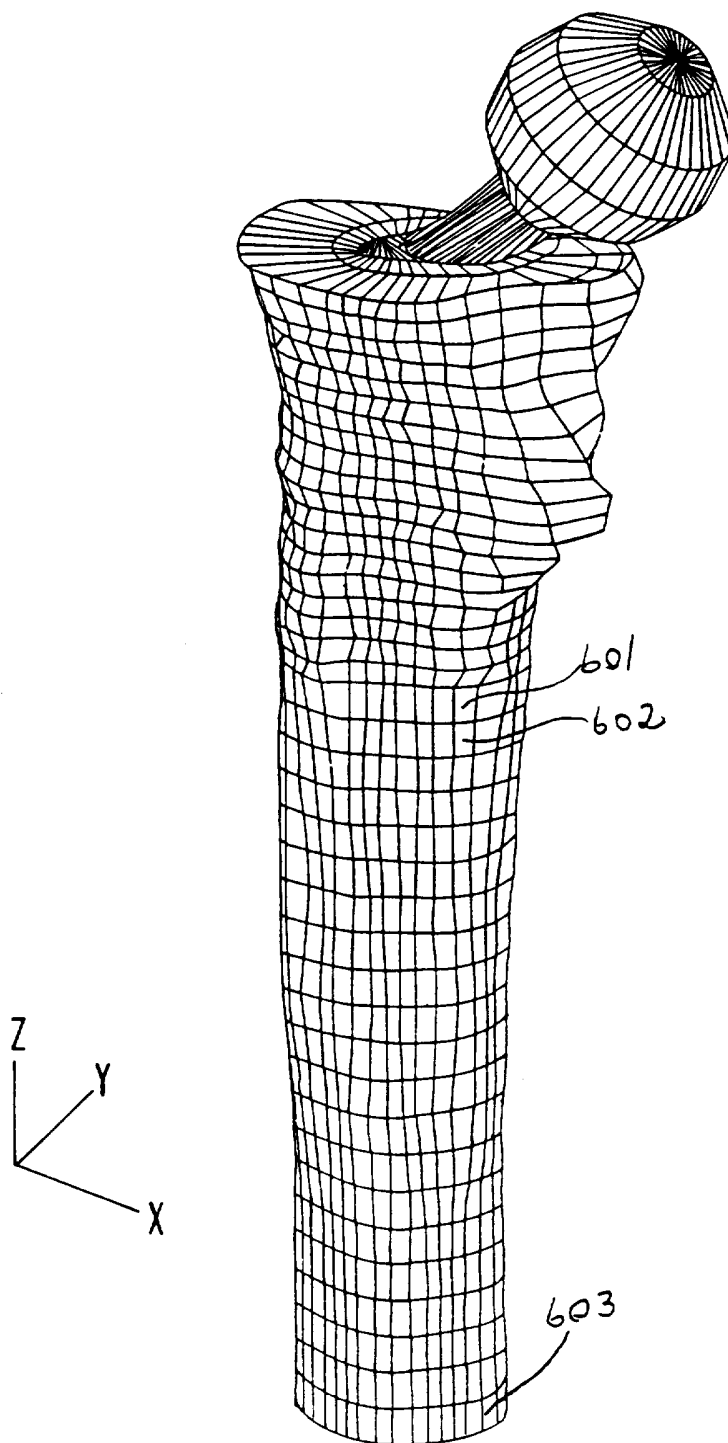

8/11

M1-1	E1-1	$\sigma 1-1$	Process	Process Parameters
M1-2	E1-2	$\sigma 1-2$	Process	Process Parameters
\vdots	\vdots	\vdots	\vdots	\vdots
M1-n	E1-n	$\sigma 1-n$	Process	Process Parameters



700

FIGURE 7A

M2-1	$\sigma' 2-1$	Process	Process Parameters
M2-2	$\sigma' 2-2$	Process	Process Parameters
\vdots	\vdots	\vdots	\vdots
M2-n	$\sigma' 2-n$	Process	Process Parameters



701

FIGURE 7B

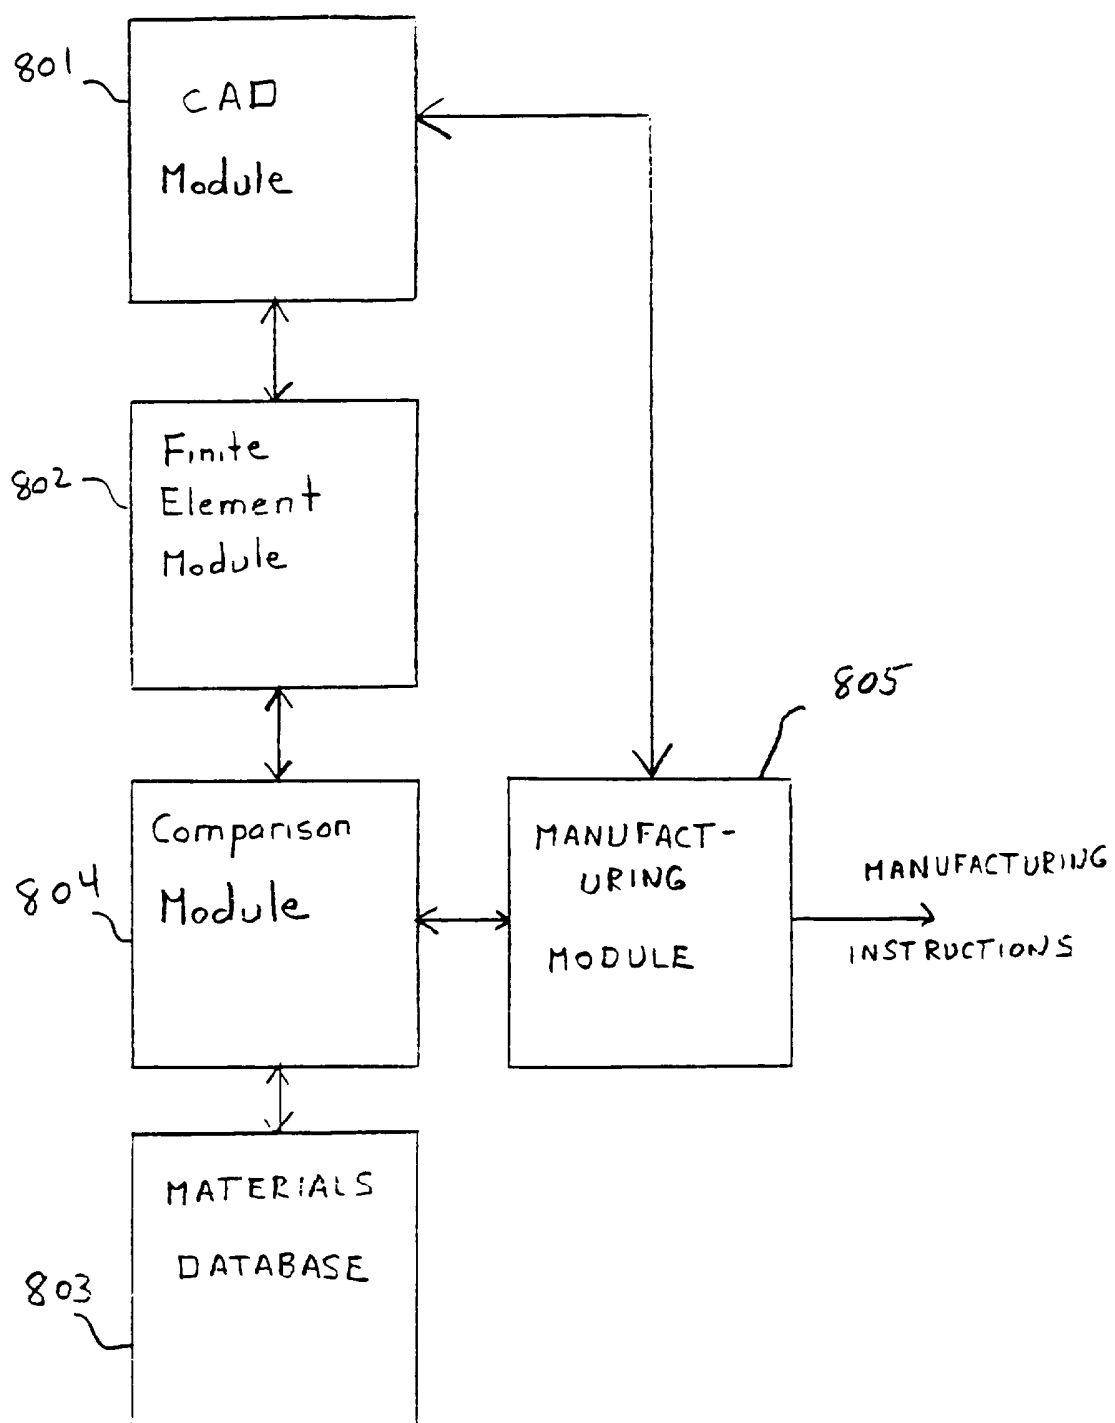


FIGURE 8

10/11

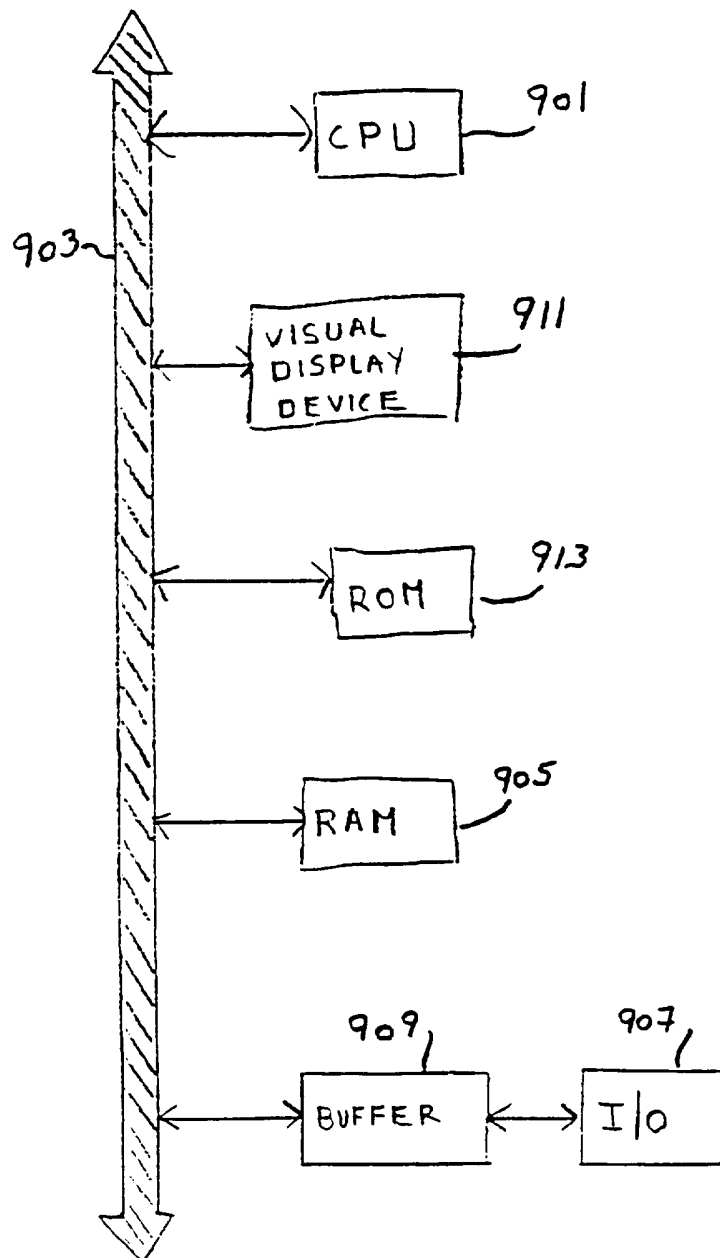
900
↓

FIGURE 9

11/11

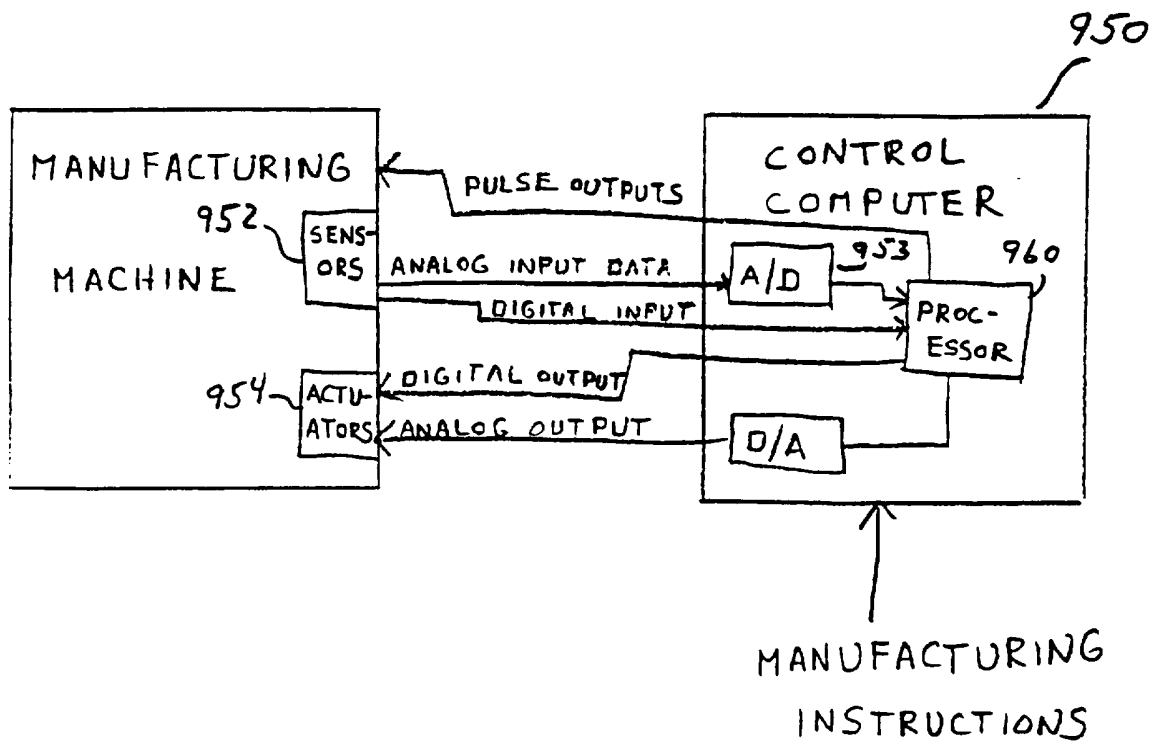


FIGURE 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/02007

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G06F 17/50, 19/00
US CL : 364/468, 474.05; 395/161
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 364/468, 474.05, 474.24, 401-403, 512, 191; 395/161, 118-120

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS search terms: material property, finite element, matrix, coefficients, manufacturing

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,936,862 (WALKER ET AL) 26 June 1990, see the entire document.	1-12
A	US, A, 5,351,196 (SOWAR ET AL) 27 September 1994, see the entire document.	1-12
A,P	US, A 5,487,012 (TOPHOLM ET AL) 23 January 1996, see the entire document.	1-12

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
08 APRIL 1996

Date of mailing of the international search report
23 APR 1996

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOSEPH F. RUGGIERO

Telephone No. (703) 305-9600