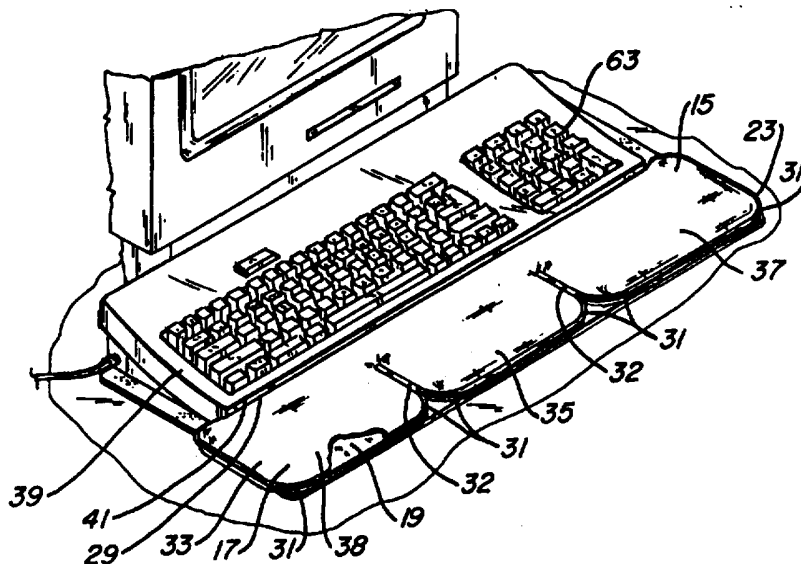


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: B68G 5/00	A1	(11) International Publication Number: WO 96/31433 (43) International Publication Date: 10 October 1996 (10.10.96)
(21) International Application Number: PCT/US96/04636 (22) International Filing Date: 4 April 1996 (04.04.96) (30) Priority Data: 08/418,017 6 April 1995 (06.04.95) US (71) Applicant: ALDEN LABORATORIES, INC. [US/US]; 5455 Spine Road, Boulder, CO 80301-9012 (US). (72) Inventors: HANSON, Alden, B.; 7046 Indian Peaks Trail, Boulder, CO 80301 (US). CLAUS, David, W.; 1060 Townley Circle, Longmont, CO 80501 (US). CORBETT, Philip, C.; 3401 B West 98 Drive, Westminster, CO 80030 (US). (74) Agent: BURDICK, Harold, A.; Suite B-East, 5305 Spine Road, Boulder, CO 80301 (US).		(81) Designated States: CA, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: HAND, WRIST AND/OR LOWER ARM SUPPORT PAD AND ASSEMBLIES**(57) Abstract**

A hand, wrist and/or lower arm support pad (15) and related assemblies are disclosed for use by operators of typewriter or computer keyboards, ten key pads and/or various computer peripherals such as a trackball or computer mouse. The support pad (15) includes an enclosure (17) defining a containment area (27) having a flowable material therein and structure to assure retention of the enclosure (17) at a selected location. The retention structure (43, 45, 47) may be integral to the enclosure (17) and/or may be associated with related assemblies. The flowable material preferably exhibits fluid-like characteristics, and, more preferably, is characterized by a non-constant shear rate to shear stress ratio. In some embodiments, it is preferred that the material will not flow under its own weight (i.e., no, or substantially reduced, cold flow characteristics).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

HAND, WRIST AND/OR LOWER ARM SUPPORT PAD AND ASSEMBLIES

Field of the Invention

This invention relates to pads and rests, and, more particularly, relates to support pads for hands, wrists,
5 and/or lower arms used by an operator of a keyboard, ten key pad, computer mouse, trackball or the like.

Background of the Invention

Operators of various keyboard and/or computer peripheral devices are known to experience discomfort and fatigue of the fingers, wrist and/or lower arm after
10 extended periods of use of such devices. At the extreme, conditions such as various carpal tunnel irritations and repetitive motion disorders have been reported.

A variety of rests and pads have been devised in response to these occurrences. The most typical examples
15 of such pads and rests are fabric covered foam articles. Such foam rests, however, have not proven altogether successful, since the foam typically exhibits only limited ability to conform to pressures exerted by the
20 user on the pad. These articles thus may actually apply pressure to locations on the hand, wrist and/or lower arm during use, or induce unnatural or uncomfortable hand to forearm alignment.

Other examples of devices to alleviate the above-described conditions are known which include cradles
25 movable on rollers or the like. These devices, however, are unduly complex, may be expensive to produce, and, in some cases, may limit the range of motion desired by the operator of a device such as a computer mouse. Further
30 improvements to support pads of these types could thus still be utilized.

Summary of the Invention

This invention provides an improved hand, wrist and/or lower arm support pad and related assemblies for
35 use by operators of devices such as keyboards of various types and/or autolocating mechanisms employed in computer

processing (for example, a trackball or a computer mouse). The pad not only provides greater comfort and improved, more neutral, positioning of the user's hands and wrists, but also provides conformable wrist, hand
5 and/or lower arm location substantially without pressure points which may be felt by the user (thus providing a reduction of wrist, finger and/or forearm fatigue and soreness), as well as a tactile cue for proper hand location relative to the device.

10 The support pad includes an enclosure defining a containment area, the containment area having a flowable material therein. Position retention structure is associated with the enclosure to enable retention of the enclosure at a selected location relative to either the
15 operator or the device.

Position retention structure could take a variety of forms, including an edge portion configured to nestle against a side of the device, a friction material such as hook and loop or non-slip plastic or rubber material,
20 and/or retention trays or pad bases.

The enclosure preferably is configured with at least a first arcuate edge portion. In its embodiment for use with a computer mouse, the outer edge of the enclosure may be substantially circular.

25 The flowable material held in the containment area of the enclosure is preferably a pressure compensating material having fluid-like characteristics. More particularly, the material is preferably characterized by a non-constant shear rate to shear stress ratio, flowing
30 more readily when higher shear stress is applied than when lower shear stress is applied. For some embodiments of the invention, the material has a viscosity selected to avoid cold flow of the material so that the material will not flow to its own weight.

35 The improved support pad of this invention for use by operators of a computer mouse provides more precise hand movement for finer mouse manipulations due to

greatly reduced friction and the fluidic movement of the support pad.

It is therefore an object of this invention to provide an improved hand, wrist and/or lower arm support pad and assemblies for use by operators of manually
5 manipulable devices maintained at a utilization area.

It is another object of this invention to provide an improved support pad for use by an operator of a keyboard, trackball, computer mouse or the like which
10 secures greater comfort, better positioning, freer movement, and less fatigue of the hand, wrist and/or lower arm of the operator.

It is still another object of this invention to provide a hand, wrist or lower arm support pad for use by
15 an operator of a manually manipulable device maintained at a utilization surface, the support pad including an enclosure defining a containment area, position retention structure associated with the enclosure to enable retention of the enclosure at a selected location
20 relative to one of the operator and the device, and a flowable material in the containment area of the enclosure.

It is yet another object of this invention to provide a hand, wrist or lower arm support pad for use by
25 an operator of a manually manipulable device maintained at a utilization surface, the support pad including an enclosure having upper and lower surface portions joined together at outer edges to define a containment area, the joined edges defining at least a first arcuate edge
30 portion of the enclosure, and flowable pressure compensating material in the containment area of the enclosure, the material having fluid-like characteristics.

It is still another object of this invention to
35 provide a hand, wrist or lower arm support pad for use by an operator of a computer mouse, the support pad including an enclosure defining a containment area and having an overall arcuate outer edge defining an

interface between upper and lower surfaces of the enclosure, position retention structure associated with the enclosure to enable retention of the enclosure at a selected position relative to one of the operator and the computer mouse, and flowable material in the containment area of the enclosure.

It is yet another object of this invention to provide a hand, wrist or lower arm support pad for use by an operator of a manually manipulable device maintained at a utilization surface, the support pad including an enclosure defining a containment area with a flowable material therein, the flowable material being characterized by a non-constant shear rate to shear stress ratio.

It is yet another object of this invention to provide a hand, wrist or lower arm support pad for use by an operator of a manually manipulable device maintained at a utilization surface, the support pad including an enclosure defining a containment area with a flowable material therein, the flowable material being characterized by being resistant to cold flow.

With these and other objects in view, which will become apparent to one skilled in the art as the description proceeds, this invention resides in the novel construction, combination, and arrangement of parts substantially as hereinafter described, and more particularly defined by the appended claims, it being understood that changes in the precise embodiment of the herein disclosed invention are meant to be included as come within the scope of the claims.

Brief Description of the Drawings

The accompanying drawings illustrate a complete embodiment of the invention according to the best mode so far devised for the practical application of the principles thereof, and in which:

FIGURE 1 is a perspective view of a first embodiment of a support pad assembly of this invention;

FIGURE 2 is a perspective view of the support pad assembly of FIGURE 1 with a pad of this invention raised from its base;

5 FIGURE 3 is a perspective view of an alternative embodiment of the pad of this invention;

FIGURE 4 is a perspective view of a second embodiment of a support pad assembly of this invention;

FIGURE 5 is a perspective view of the support pad assembly of FIGURE 4 with the pad raised from its base;

10 FIGURE 6 is a perspective view of a third embodiment of a support pad assembly of this invention;

FIGURE 7 is a perspective view of the support pad of FIGURE 6 with the pad raised from its base;

15 FIGURE 8 is a sectional view taken along section lines 8-8 of FIGURE 5 but which is illustrative of the pads illustrated in FIGURES 1 through 7;

FIGURE 9 is a perspective view of a fourth embodiment of a support pad assembly of this invention;

20 FIGURE 10 is a perspective view of the pad of FIGURE 9 on a different base;

FIGURE 11 is a perspective view of the pad of FIGURE 9 on yet another base;

FIGURE 12 is a perspective view of the support pad assembly of FIGURE 11 with the pad raised from its base;

25 FIGURE 13 is a perspective view of the pad of FIGURE 9 but utilizing a different position retaining structure thereon; and

30 FIGURE 14 is a sectional view taken through section lines 14-14 of FIGURE 13 but which is illustrative of the pads of FIGURES 9 through 13.

Description of the Invention

Various embodiments of the support pad and related assemblies of this invention are illustrated in the FIGURES. Illustrated in FIGURES 1 and 2 is a pad arrangement suitable for a full computer keyboard. In 35 FIGURE 3 another pad for computer and/or typewriter keyboards is shown. FIGURES 4 and 5 show a pad

arrangement adapted for the alphanumeric portion of a computer keyboard or a typewriter, while in FIGURES 6 and 7 a pad arrangement adapted for ten key machines (or related keyboard section or a computer keyboard) or computer trackballs is illustrated. FIGURES 9 through 13 show a pad arrangement for a computer mouse (an autolocating peripheral used to locate a cursor on a computer monitor).

Support pad 15 of FIGURES 1 and 2 includes enclosure 17 formed by upper and lower surface sheets 19 and 21 joined (by heat sealing or the like) at their outer edges 23 and 25 thus defining a containment area 27 (see FIGURE 8). Sheets 19 and 21, and thus enclosure 17, include a straight edge portion 29 and a plurality of arcuate edge portions 31, some of which, together with closed seams 32, define segments 33, 35, and 37 of enclosure 17. Containment area 27 is filled with a conformable, pressure compensating flowable material (which will be discussed in greater detail hereinafter). Upper surface 19 may be covered by fabric 38 (for example stretch nylon Lycra or brushed nylon tricot) joined at outer edge 23 (by heat sealing or the like).

Provision of straight edge portion 29 assures (even without further securement) a degree of position retention of pad 15 relative to keyboard 39 when nestled against keyboard edge 41. The various arcuate corners 31 provide better flow and pad movement characteristics responsive to user applied pressures. Improved position retention of the support pad may be accomplished utilizing friction material 43, which may be any of separate attached pads of low- or non-slip material such as neoprene rubber or the like, hook and loop material, such as Velcro pads (thus requiring mating pad or pads 45 on the utilization surface or, as shown, on a separate assembly base 47), spray on material applied directly to lower enclosure surface sheet 21, or lower surface sheet 21 itself made of a low- or non-slip material.

FIGURE 3 illustrates a greatly simplified keyboard pad 49 without segments defined therein but otherwise of similar construction to that shown in FIGURE 1. In such case, however, desired flow characteristics are provided in some cases by increasing the viscosity of flowable material held in the containment area of enclosure 51 of pad 49. Support pad 49 is primarily retained at a position adjacent to a keyboard by provision of straight edge 53 (for abutment against the keyboard), though any of the various other position retention techniques above-described could be utilized.

Where desired, for example for use with a typewriter or where space or other considerations might require, support pad 55 shown in FIGURES 4 and 5 can be utilized. Similar in construction to the pad shown in FIGURE 1, support pad 55 includes only two segments 57 and 59 similar in size to or smaller than segments 33 and 35 of support pad 15. Multiple pads 55 may be used in combination to span an entire computer keyboard. Again the various position retention techniques heretofore set forth apply.

Support pad 61 shown in FIGURES 6 and 7 is adapted for use with smaller keyboards (ten key machines, calculators or the like), keyboard segments (such as numeric key section 63 of computer keyboard 39), a trackball, or in side-by-side arrangement with other pads 61 to span any keyboard length, but is otherwise similar in construction and operation to the support pads of this invention previously described herein. However, support pad 61 is formed of a single enclosure segment 65 similar in size to or smaller than segment 37 of support pad 15. Support pad 61 in some cases may be used in combination with support pad 55 or with other ones of pad 61 (the arrangement of multiple pads 61 along a keyboard may in fact be the best mode yet devised for achieving the advantages of this invention as applied to computer or typewriter keyboards).

Figure 8 is a sectional illustration (taken from FIGURE 5, it being understood that the illustration represents a section of any of the support pads 15, 49, 55 or 61) showing containment of the flowable material within enclosure 17 of the support pads of this invention. As illustrated, sheets 19 and 21 are joined to form an envelope of selected thickness, the amount and viscosity of flowable material, and volume, size and seam 32 placement and length (where present) of enclosure 17 being selected to provide desired flow characteristics, pad movement, pressure responsiveness and pad rebound (or, in the alternative, pad memory).

FIGURES 9 through 14 illustrate an embodiment of the support pad and related assemblies of this invention for utilization by operators of a computer mouse. Support pad 67 is shown in FIGURES 9, 10 and 11 with differently configured bases 69, 71 and 73, respectively. Bases 69 and 71 include pad positioning area 75 and operating surface 77 for mouse manipulation thereat. Base 73 includes only positioning area 75, mouse manipulation occurring on any adjacent surface.

Alternatively, position retention techniques requiring no related base or matable attachment, as heretofore discussed (i.e., integrated or separate low- or non-slip materials, spray on materials, and the like), could be utilized with mouse manipulation occurring on the adjacent surface. Moreover, support pad 67 could be applied directly to the wrist of a user (by straps, matable Velcro attachments at the pad and wrist, or the like), position retention relative to the utilization surface in such case being relatively less important.

Support pad 67 includes enclosure 79 formed by substantially circular upper and lower surface sheets 81 and 83, respectively. Sheets 81 and 83 are joined (by heat sealing, for example) at outer edge 85 thus defining containment area 87 having a conformable, pressure compensating flowable material sealed therein. Fabric

cover 88 over upper surface sheet 81 is joined at outer edge 85 as heretofore disclosed.

As shown in FIGURE 12, position retention may be secured by velcro pad 89 centrally affixed (for example, by gluing or the like) to lower surface sheet 83 and matable with Velcro pad 91 at base 73. As shown in FIGURE 13, for a free standing pad (i.e., one utilizing no separate base in a pad assembly), a neoprene rubber or other non-slip material 93 may be centrally affixed to sheet 83.

By utilizing position retention materials only at the center of lower sheet 83 of pad 67 a type of sliding parallelogram movement is achieved. That is to say, starting with the user's wrist centered at rest on support pad 67, the pad will accommodate movement of the wrist away from the original center with increasing resistance the further the movement of the wrist from the original center. Friction between the appendage being supported and the top surface of the support pad allows lateral movement to cause the upper surface sheet of the pad to move, thereby deforming the leading edge of the pad (in the lateral direction of the force) and pulling the trailing edge of the pad up. When lateral forces applied by the user are relaxed, the weight of the wrist (i.e., downward force) causes the pad to return to its original position and shape with the wrist centered on the pad.

Thus, pad 67 tends to behave as a self centering support, movement of the entire arm or forearm being used to manipulate the mouse instead of articulation of the wrist in a horizontal plane. Pad 67, utilizing the conformable, flowable material therein, allows the user's wrist to be supported in a neutral, natural position without regard to the position of the user's arm relative to the utilization surface over which the mouse is manipulated.

Upper and lower surface sheets of the various embodiments of the invention herein set forth may be made

of various materials including any flexible light weight, preferably pliable material having a certain degree of elasticity and resistance to puncturing. Materials having a thickness of between about 0.1 and 0.8 millimeters, depending on the material are typical. Polyurethane, polyvinyl, acetal, acrylic, cellulosic, chlorinated polyether, flouorocarbon (TFE, CTEE, or FEP), nylon (polyamide), polycarbonate, polyetheylene, polystyrene, polyester, and polysulfone materials could all be utilized (preferably 0.2 millimeter polyurethane). If desired, convexity may be introduced into the upper and lower surface sheets, for example by vacuum forming (see U.S. Patent No. 5,159,717, the contents of which are incorporated hereinto by this reference).

Bases 47, 69, 71 and 73 may be made of any desired material, including rigid plastics materials (particularly useful for known bases of the type used under keyboards such as base 47) or more cushioned bases made of foamed plastic or rubber material such as polyethylene, ethafoam, EVA or neoprene foam rubber (particularly useful as bases 69, 71 or 73).

Regarding the method of constructing the various embodiments of the present invention, after cutting into the desired shape, upper and lower surface sheets are affixed to each other at their outer edges, for example by heat sealing or other methods known to those skilled in the art. The seal between the sheets is a substantially flat surface. A small opening is left in the enclosure seal for insertion of a filling apparatus into the thus formed enclosure. The filling apparatus is inserted into the opening and a predetermined volume of the flowable material is placed into the enclosure of the support pad. The filling apparatus is then removed and the opening in the enclosure is sealed. Cover fabrics are then cut and secured as heretofore discussed (alternatively, they may be applied in a single heat sealing step when the upper and lower sheets are affixed and the opening sealed). It is to be realized, that the

cutting of the material into the final shape of the pads may occur at any time during the process.

While it is typically unnecessary to remove air from the enclosure prior to sealing (because air will also act
5 as a shock absorbing medium, and, in fact, could be utilized as the sole flowable material in the enclosure), air removal can be performed if desired (i.e., where a pad having no "bounce" is required) prior to sealing of the opening so that only flowable material will occupy
10 the containment area of the enclosure.

Shape and size of the enclosure are application specific. The size of the enclosure is typically slightly larger (approximately 10%) than the surface area of the portion of the appendage being supported. The shape of
15 the upper and lower surface sheets (and thus the enclosure) determines the range of lateral movement of the pad which occurs pursuant to user applied forces. A circular enclosure allows equal range of movement in all lateral directions. An oval shaped enclosure would allow
20 the range of motion to be modified so there is less range of motion in the direction of the longer axis of the oval (primarily due to greater required deformation of the longer edges of the enclosure). A square shaped enclosure would allow a greater range of motion in directions
25 perpendicular to the sides (though non-simultaneously). A rectangularly shaped enclosure would allow a greater range of motion in the shorter axis than in the longer axis.

The volume of fluid contained in the enclosure of
30 the support pads of this invention would typically be about 25% to 75% of the maximum volume capacity of the enclosure (achievable without significant deformation of the enclosure material). As the fill volume approaches the upper part of this range, stability of the pad
35 decreases. In other words, the force required to laterally move the pad decreases. However, increased viscosity of the material tends to increase stability of the pad because of the greater applied forces required to

cause pad movement. The variation of fill volume to fill material viscosity is thus utilizable to achieve a variety of pad characteristics. Other variables utilized to vary pad characteristics include higher durometer and thicker upper and lower surface sheet materials, and size and type of position retention material utilized,

Pad 15 preferably measures about 4.25 inches by 19.375 inches, with a thickness of about 0.812 inches when filled. The various segments 33, 35 and 37 are each of about equal size. Seams 32 extend into the pad about 2.75 inches (leaving an unobstructed passage between the end of the seams and straight edge 29 of about 1.5 inches).

Pad 49 preferably measures about 3 inches by 19.375 inches, with a thickness of about 0.625 inches when filled. Support pad 55 preferably has a length of about 12.625 inches (other measurements being about the same as set forth above for pad 15), with segments 57 and 59 being of about equal size. Pad 61 preferably measures about 4.75 inches square with two adjacent corners having about a 0.5 inch radius and the opposite two adjacent corners having about a 2 inch radius. Pad 61 has a thickness of about 0.7 inches (preferably about 0.72 inches) when filled. Pad 67 preferably has a diameter of about 4.5 inches and a thickness of about 0.625 inches when filled.

Where a non-slip retention pad (for example of neoprene rubber) such as pad 93 in FIGURE 13 is to be utilized for position retention of support pads 61 or 67, the material is preferably about 3 inches in diameter and about one-eighth to one-sixteenth of an inch thick. The retention pad is attached substantially at the center of the lower surface sheet of the support pad (by gluing or the like). Where hook and loop material is to be utilized, three-quarter inch to 3 inch hook and loop material pads may be utilized.

The flowable material utilized to occupy the containment area of the enclosures of the various

embodiments of the invention herein disclosed may be any flowable material which reacts to an applied force by migrating to other regions of the support pad to more effectively distribute forces over a larger area of the pad. Thus the material must exhibit fluid-like characteristics. Materials such as wax, glycerin, water, salt water, grease, fats, oils, propylene glycol, syrup and even air or some particle materials either alone or in mixture with a fluid material may thus be used. Other appropriate flowable materials are HB Fuller 1454 Hot Melt (a flowable microcrystalline wax) and glycerine and the various materials produced by Alden Laboratories, Inc. under the trademark Flolite (either of which are preferred for their nontoxicity). The preferred Flolite materials are compositions including wax, oil and glass micro-spheres. For more detailed disclosure of some such materials that may be appropriate for use with this invention see U.S. Patent Nos. 5,204,154, 5,100,712, 5,093,138, 4,255,202 and 3,635,849, the contents of which are incorporated hereinto by this reference.

The preferred materials for use with this invention, such as the above-mentioned Flolite materials, are flowable while not having total memory. In other words once deformed, the material will not always return to its original shape (thus providing a tactile cue for the user when returning to use of a keyboard having such a support pad adjacent thereto). However, some materials appropriate for use in this invention do exhibit a degree of gel strength, the gel structure being broken merely by applying a small but sufficient force to the pad, and these materials are preferred for support pads of this invention in many keyboard application.

Many of the above mentioned Flolite materials, and the flowable material preferably utilized in this invention, behave in a non-Newtonian manner, because their viscosities change when the shear rate changes. In other words, the ratio of shear rate (flow) to shear stress (force) is not constant. These materials are

typically either pseudoplastic or thixotropic. A pseudoplastic material is one which appears to have a yield stress beyond which flow commences and increases sharply with an increase in stress. In practice, the materials exhibit flow at all shear stresses, although the ratio of flow to force increases negligibly until the force exceeds the apparent yield stress. The flow rate of a thixotropic material increases with increasing duration of agitation as well as with increased shear stress. In other words, the flow rate is time dependent. When agitation is stopped, internal shear stress can exhibit hysteresis. Upon re-agitation, less force is generally required to create a given flow than is required for the first agitation. The fact that the materials preferably used in this invention flow more readily when higher shear stress is applied is advantageous.

The flowable materials used in the present invention have a viscosity in a range of between about 50 and 250,000 centipoise, and are selected to provide good pressure distribution throughout the entire area of the hand, wrist and/or lower arm in contact with the pad. For example, the preferred viscosity of the flowable material used in support pads 15, 49, 55 and 61 is between about 10,000 and 250,000 centipoise. For applications where no or reduced cold flow (i.e. the tendency to flow to its own weight) is desired, for example to achieve a pad having memory, and thus providing a tactile cue, of hand, wrist or lower arm placement, the viscosity of the material should be in the 150,000 to 250,000 centipoise range (for example Alden Laboratories Inc. Flolite formula no. 2005).

Mouse support pad 67, preferably allowing a greater degree of pad movement and responsiveness to user arm movement, would require a less viscous material (between about 50 and 100,000 centipoise, and preferably between about 5,000 and 10,000 centipoise). Alden Laboratories Inc. Flolite formula no. 3020 has been found to be a

material having a viscosity achieving the desired characteristics.

As discussed hereinabove, the amount of fill and the volume of the pad also affect the range of parallelogram type pad motion achieved. For a round pad 67, 25% to 75% of the volume of the enclosure could be filled for useful embodiments of this invention. For example, a pad 67 having a diameter of about 4.5 inches and a volume of about 12 cubic inches, about 6.8 cubic inches of material is preferably placed into the containment area of enclosure 79.

As may be appreciated, this invention provides an improved hand, wrist and/or lower arm support pad and related assemblies for use by an operator of a device such as a keyboard, trackball or computer mouse, the pad providing for greater comfort, improved positioning of the user's hands and wrists, conformable wrist, hand and/or lower arm location substantially without pressure points, and a tactile cue for proper hand relocation relative to the device. The improved support pad of this invention for use by operators of a computer mouse provides more precise hand movement for finer mouse manipulations due to greatly reduced friction and the fluidic movement and resistance of the support pad.

WHAT IS CLAIMED IS:

1. A hand, wrist or lower arm support pad for use by an operator of a manually manipulable device maintained at a utilization surface, said support pad
5 comprising:

an enclosure defining a containment area;
position retention structure associated with said enclosure to enable retention of said enclosure at a selected location relative to one of the operator and the
10 device; and
flowable material in said containment area of said enclosure.

2. The support pad of claim 1 wherein said position retention structure includes an edge portion of
15 said enclosure configured to nestle against a side of the device.

3. The support pad of claim 1 wherein said position retention structure includes a friction material at one part of said enclosure normally contacting the
20 utilization surface.

4. The support pad of claim 3 wherein said friction material includes a first engageable material.

5. The support pad of claim 4 wherein said position retention structure further comprises a base
25 having a second engageable material positioned thereat to engage said first material at said one part of said enclosure.

6. The support pad of claim 1 wherein said enclosure includes an arcuate outer edge portion.

7. The support pad of claim 1 wherein said
30 flowable material is a pressure compensating composition exhibiting a non-constant shear rate to shear stress ratio.

8. The support pad of claim 1 wherein said
35 enclosure includes a plurality of segments each having arcuate outer edge portions.

9. The support pad of claim 1 wherein said enclosure includes upper and lower surface portions, said

position retention structure being centrally located at said lower surface portion.

10. A hand, wrist or lower arm support pad for use by an operator of a manually manipulable device maintained at a utilization surface, said support pad comprising:

- 5 an enclosure having upper and lower surface portions joined together at outer edges to define a containment area, said joined edges defining at least a first arcuate edge portion of said enclosure; and
- 10 flowable pressure compensating material in said containment area of said enclosure, said material having fluid-like characteristics.

11. The support pad of claim 10 wherein said material is characterized by a by a non-constant shear rate to shear stress ratio.

- 15 12. The support pad of claim 10 wherein said material is a mixture of liquid and particles, said mixture flowing more readily when higher shear stress is applied than when lower shear stress is applied.

- 20 13. The support pad of claim 11 wherein said material has a viscosity in a range of between about 50 and 250,000 centipoise.

14. The support pad of claim 10 further comprising a layer of fabric over said upper surface portion of said enclosure.

- 25 15. The support pad of claim 10 wherein said flowable material is characterized by resistance to cold flow of the material.

16. A hand, wrist or lower arm support pad for use by an operator of a computer mouse, said support pad comprising:

5 an enclosure defining a containment area and having an overall arcuate outer edge defining an interface between upper and lower surfaces of said enclosure;

position retention structure associated with said enclosure to enable retention of said enclosure at a selected position relative to one of the operator and the
10 computer mouse; and

flowable material in said containment area of said enclosure.




17. The support pad of claim 16 wherein said enclosure surfaces are substantially circular.

15 18. The support pad of claim 16 wherein said position retention structure is located centrally at said lower surface of said enclosure.



19. The support pad of claim 16 further comprising a base having an area for positioning of said enclosure and a surface for operation of the computer mouse.
20



20. The support pad of claim of claim 16 wherein said flowable material has fluid-like characteristics and is characterized by a non-constant shear rate to shear stress ratio.

1/5


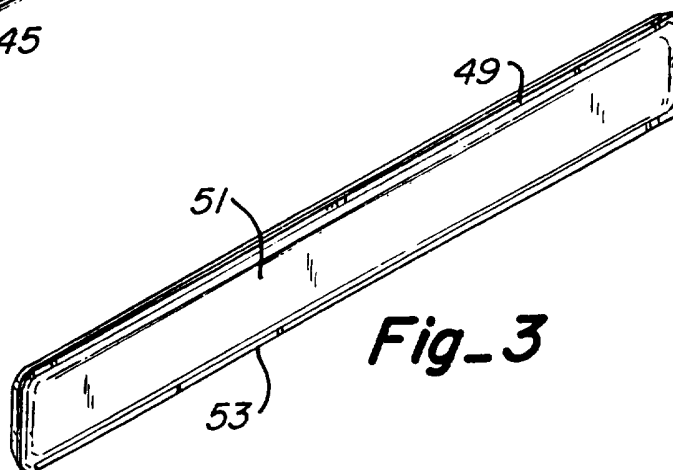
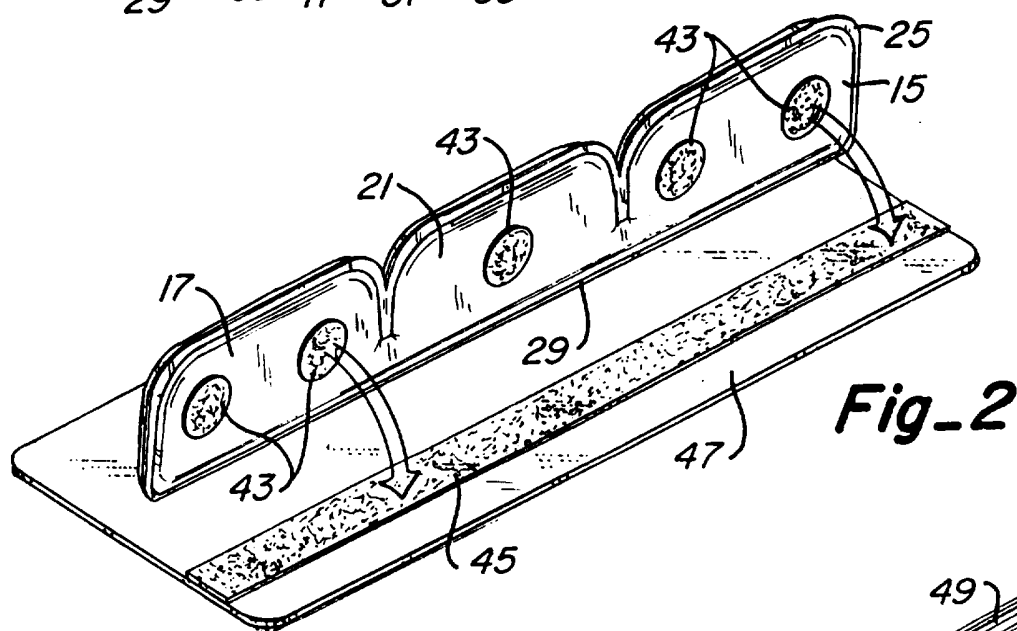
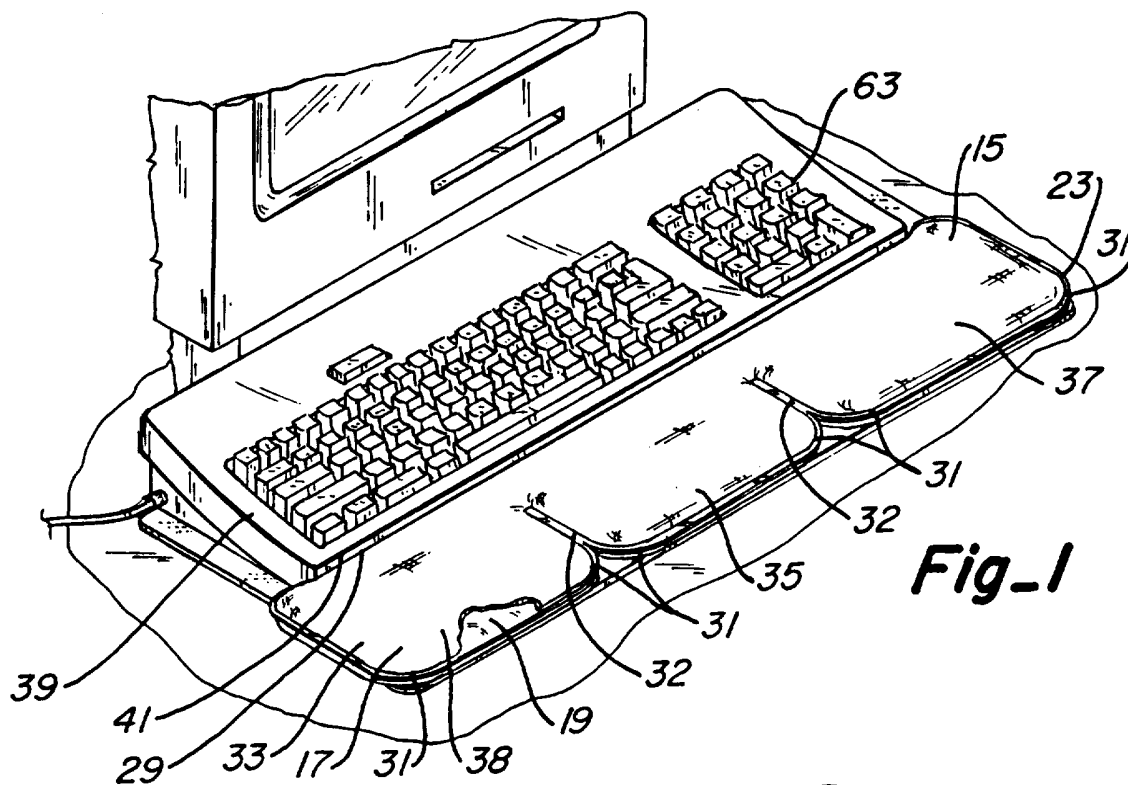


2/5

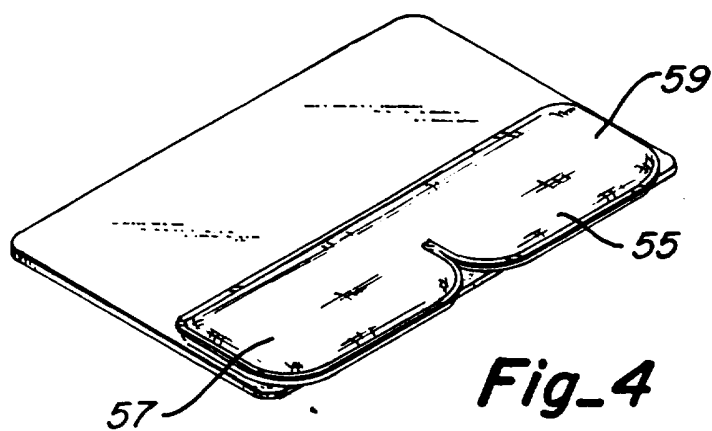
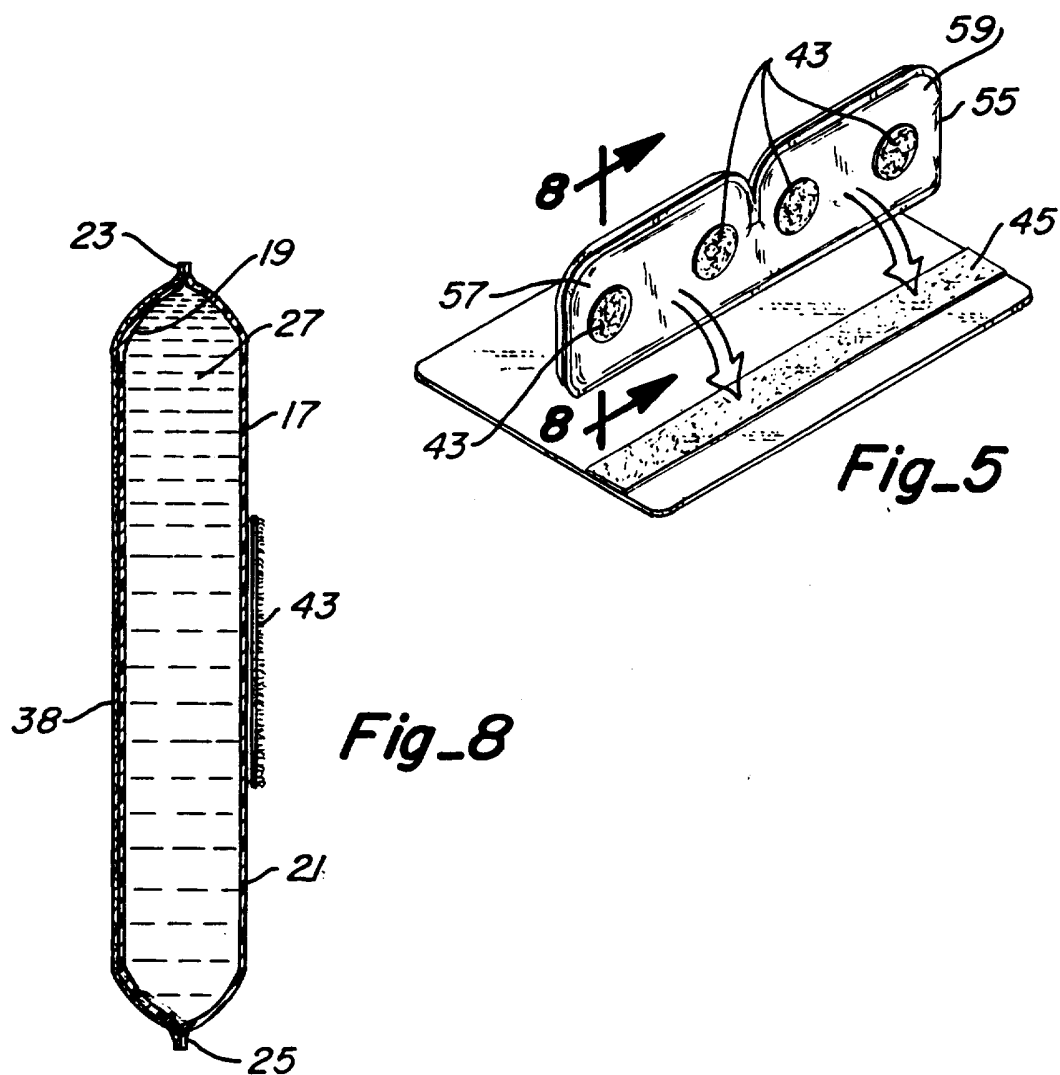
**Fig_4****Fig_5****Fig_8**

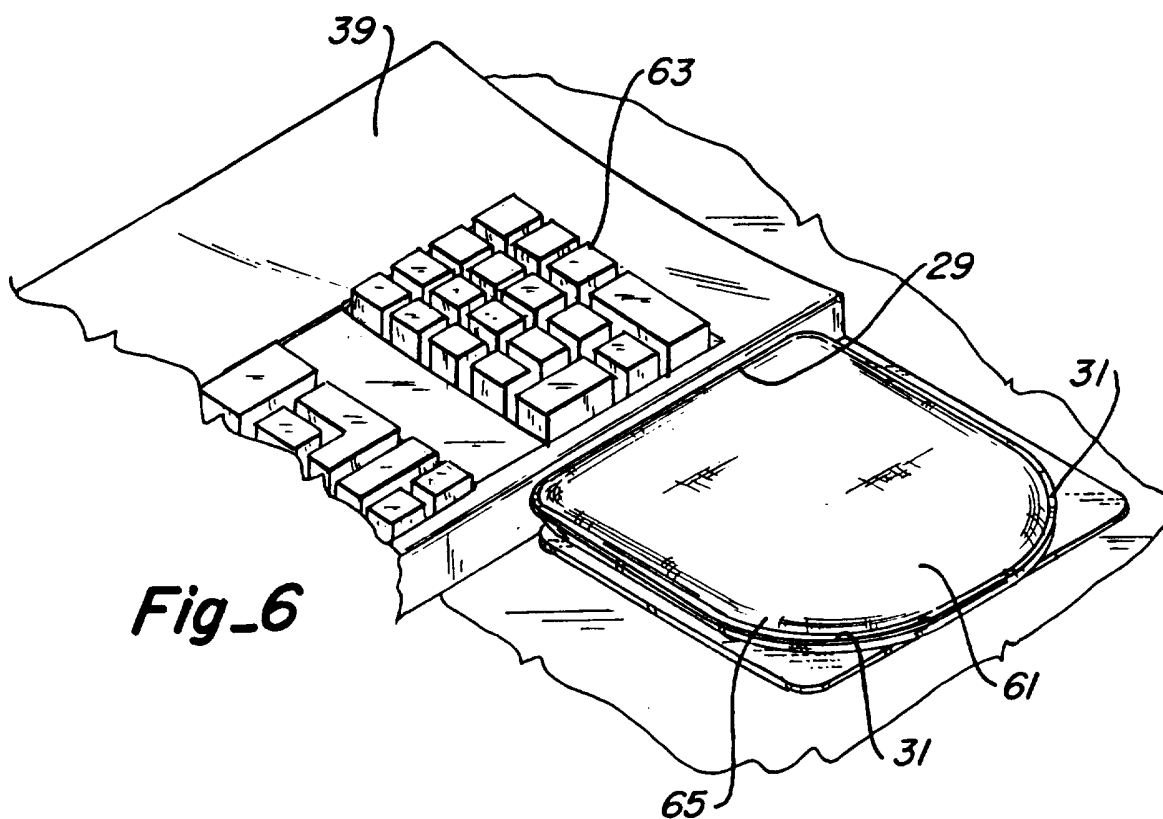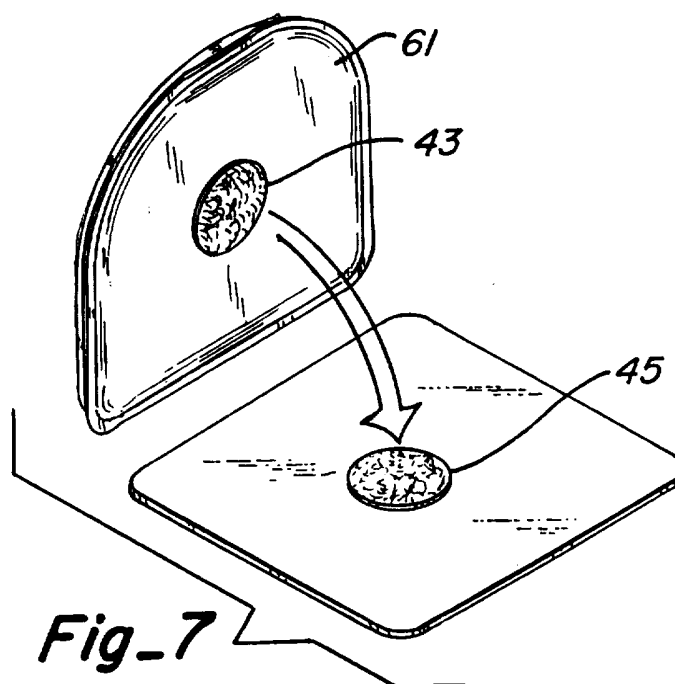**Fig_6****Fig_7**

4/5

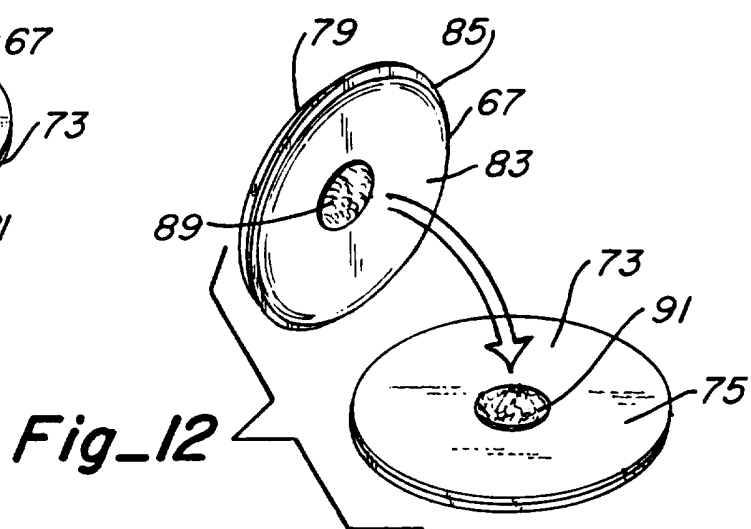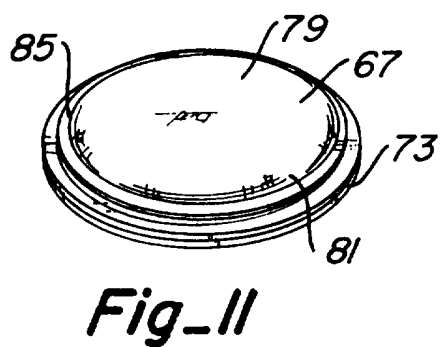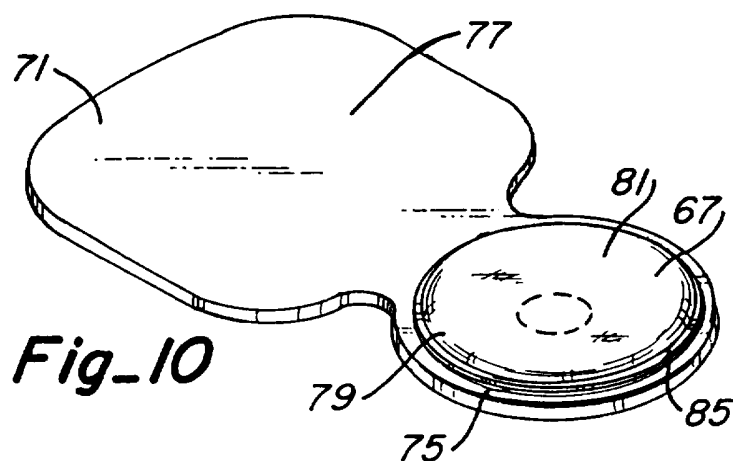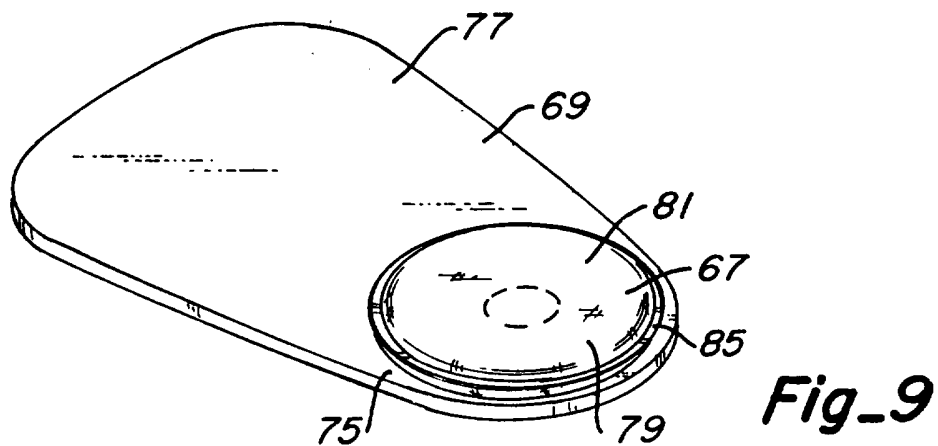

5/5

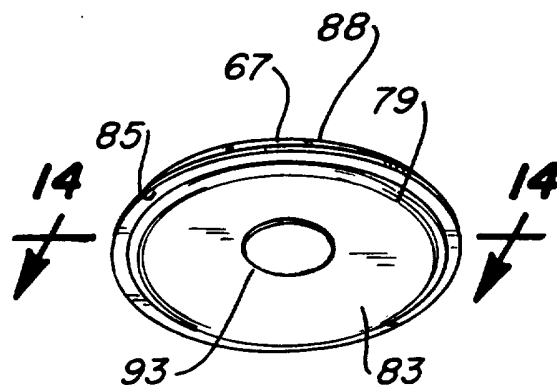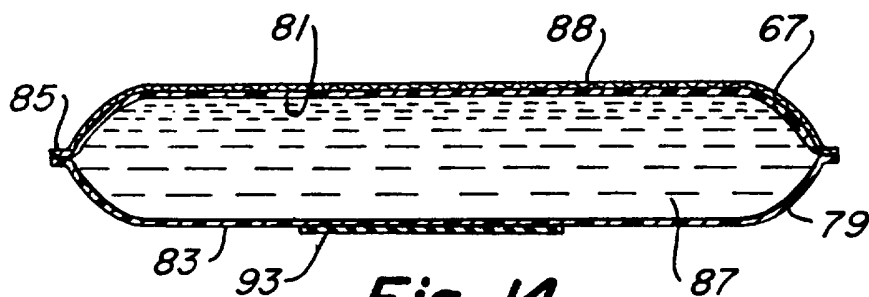**Fig-13****Fig-14**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/04636**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :B68G 5/00

US CL :248/118, 118.1, 918; 400/715

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 248/118, 118.1, 918; 400/715

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5,356,099 (Sereboff) 18 October 1994, see entire document.	1-6, 8-10, 14-19
----- Y		----- 7, 11-13, 15, 20
Y	US, A, 5,093,138 (Drew et al.) 03 March 1992, see entire document.	7, 11-13, 15, 20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 JUNE 1996

Date of mailing of the international search report

07 AUG 1996

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

DEREK J. BERGER

Facsimile No. (703) 305-3230

Telephone No. (703) 308-2954