

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 May 2008 (22.05.2008)

PCT

(10) International Publication Number  
**WO 2008/058312 A1**

(51) International Patent Classification:  
*E04G 15/02* (2006.01) *B28B 7/22* (2006.01)  
*B28B 7/16* (2006.01)

(74) Agent: **F B RICE & CO**; Level 23, 44 Market Street,  
Sydney, NSW 2000 (AU).

(21) International Application Number:  
PCT/AU2007/001654

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 31 October 2007 (31.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2006906335 14 November 2006 (14.11.2006) AU

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (*for all designated States except US*): **SRB CONSTRUCTION TECHNOLOGIES PTY LTD** [AU/AU]; A.C.N. 103 021 736, 4/168 Main Road, Blackwood, S.A. 5051 (AU).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **SLADOJEVIC, Robert** [AU/AU]; SRB Construction Technologies Pty Ltd, 4/168 Main Road, Blackwood, S.A. 5051 (AU).

Published:  
— with international search report

(54) Title: FALSE FORMWORK FOR MOULDING CONCRETE PANELS

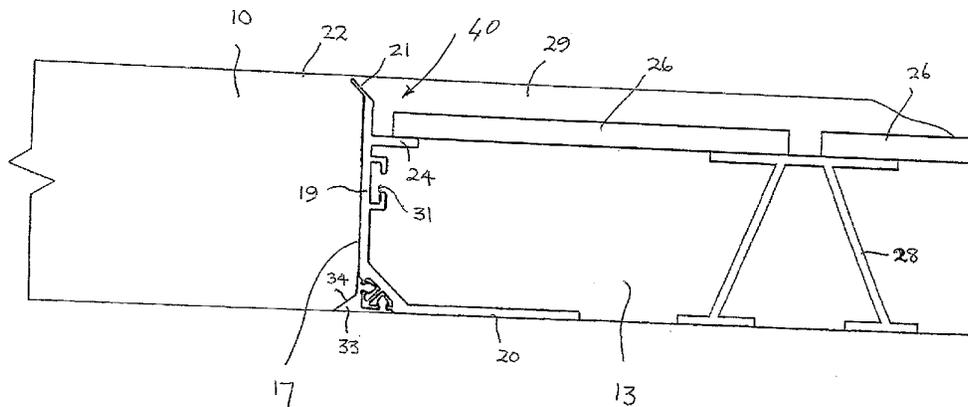

WO 2008/058312 A1

(57) Abstract: A false formwork system (40) includes a plurality of sideforms (17) which are able to be interconnected to define a perimeter of an opening in a panel to be cast. A support structure (24) is carried by the sideforms (17) for supporting components (26) used to mould a false skim coat overlying the opening when the panel is cast. An opening demarcation portion (21) is carried by each of at least some of the sideforms (17). Each opening demarcation portion (21) defines a zone of weakness to demarcate the skim coat of the cast panel from a remainder of the panel and to facilitate removal of the skim coat from the remainder of the panel by breakage along the zone of weakness.

## "False formwork for moulding concrete panels"

### Cross-Reference to Related Applications

The present application claims priority from Australian Provisional Patent  
5 Application No 2006906335 filed on 14 November 2006, the contents of which are  
incorporated herein by reference.

### Field of the Invention

This invention relates to formwork for use in the construction of concrete  
10 panels, in particular tilt-up wall panels, where the panels are cast in a stack one on top  
of the other. More specifically, the invention relates to false formwork for producing  
tilt-up concrete wall panels in which window or door openings are formed and to a  
method of casting a concrete panel.

### 15 Background to the Invention

In traditional formwork methods in the moulding of a concrete wall panel, in  
situations where a window or door opening is required to be formed in the panel, it is  
common practice for false formwork, normally constructed of timber, to be installed  
within the panel mould so that the false formwork defines the opening to be formed.  
20 The false timber formwork is nailed together and plastic fillet forming strips are  
attached to the timber formwork around parts of the formwork defining upper and  
lower perimetral parts of the opening. With the false formwork in place, the void or  
cavity defined by the false formwork is filled with either dirt/rubble or polystyrene  
foam, following which the concrete is poured into the mould to form the panel.

25 Such a procedure would not be suitable for casting concrete panels which are to  
have window/door openings formed therein, one on top of the other, mainly due to  
formwork imprints being left on the cast face of the upper panel. This necessitates  
carrying out rectification work following erection of the wall panel. Another  
disadvantage with known timber false formwork is that all of its components become  
30 waste product due to the fact that they cannot be re-used for moulding another concrete  
panel. Still further the installation of the timber false formwork must generally be  
carried out by a skilled person, e.g. a carpenter, which adds to the overall cost of  
moulding the panels.

### Summary of the Invention

According to a first aspect of the invention, there is provided a false formwork system which includes

5 a plurality of sideforms which are able to be interconnected to define a perimeter of an opening in a panel to be cast;

a support structure carried by the sideforms for supporting components used to mould a false skim coat overlying the opening when the panel is cast; and

10 an opening demarcation portion carried by each of at least some of the sideforms, each opening demarcation portion defining a zone of weakness to demarcate the skim coat of the cast panel from a remainder of the panel and to facilitate removal of the skim coat from the remainder of the panel by breakage along the zone of weakness.

Each sideform may be connected to an adjoining sideform by a corner form. Thus, each sideform may have a receiving formation in which a mating formation of 15 the corner form is receivable.

Each sideform may be an angle section having a foot portion and an element extending substantially orthogonally from the element, the element defining the opening demarcation portion. The foot portion may be of sufficient length to support the panel to be cast on an underlying structure, such as a cast panel or bed, in a load 20 distributing manner. Each foot portion may be secured, in use, to the underlying structure by an adhesive material such as double-sided tape. Instead, each foot portion may be secured to the underlying structure by fasteners such as, for example, bolts, screws, nails, or the like.

The opening demarcation portion of each sideform may be a bevel surface 25 defining portion projecting at an angle from the element in a direction away from the foot portion of the element to form a bevel on one perimetral edge of the opening in the panel. Desirably the free edge of the opening demarcation portion on each of the sideforms members terminates approximately 2 mm below the finished upper surface of the panel to be cast, while the thickness of the skim coat is in the order of 30 mm.

30 The support structure of each sideform may be a ledge arranged on the element intermediate the opening demarcation portion and the foot portion, the ledge extending substantially parallel to, and in the same direction as, the foot portion.

Each sideform may include an attachment formation for attaching a bevel surface defining member of an elastomeric material for imparting a bevel to an opposed 35 perimetral edge of the opening in the panel.

Preferably, the system includes the bevel surface defining member for each sideform, each member being removably attachable to its associated sideform to enable the member to be removed from its sideform to facilitate removal of the sideform from the opening in the panel.

5 The system may include an intermediate support member for supporting the components to form the false skim coat, the intermediate support member being of a dimension to support the components at a position less than a thickness of the panel to be cast. The intermediate support member may be a support frame. The components may be sheets of plywood.

10 The sideforms and/or the corner forms may be of a plastics material or an aluminium material.

According to a second aspect of the invention, there is provided a method of casting a concrete panel, the method including

erecting a plurality of sideforms on a base to define an outer periphery of a panel  
15 to be cast;

erecting false formwork within the sideforms to define an opening in the panel to be cast;

demarcating at least a portion of a periphery of the opening;

mounting infill in the false formwork so that the infill lies at a level lower than a  
20 surface of the panel to be cast;

pouring concrete into the sideforms so that the concrete overlies the infill to define a false skim coat over the opening; and

allowing the concrete to set to provide an uninterrupted upper surface of the panel.

25 The method may include demarcating the at least portion of the periphery of the opening by forming a line of weakness in the cast concrete from below the upper surface of the panel.

The method may include casting a further panel on the panel previously cast in substantially the same manner as the panel previously cast and using the previously cast  
30 panel as the base for the further panel to be cast, the uninterrupted upper surface of the panel previously cast facilitating a lack of an imprint in a lower surface of the further panel.

Further, the method may include, once the concrete has been finished and allowed to set, removing the sideforms, raising the panel and removing the infill. After  
35 removal of the infill, the method may include breaking away the false skim coat along the demarcated periphery of the opening.

The method may include removing the false formwork for re-use.

### **Brief Description of the Drawings**

An embodiment of the invention is now described by way of example with  
5 reference to the accompanying drawings in which:-

Fig. 1 is a fragmentary, partly sectioned, perspective view of a panel casting system for moulding a concrete panel on a base and which has a window opening formed therein using an embodiment of a false formwork system;

Fig. 2 is a fragmentary, part sectional view of a cast panel and the false  
10 formwork system which is used to form the window opening; and

Fig. 3 is a fragmentary, exploded perspective view of part of the false formwork system used to form the opening in the cast panel.

### **Detailed Description of Exemplary Embodiments**

15 Referring initially to Fig. 1 of the drawings, reference numeral 10 generally designates a cast concrete panel. The panel 10 is formed by pouring concrete into a mould formed by a plurality of interconnected orthogonally arranged main sideforms 11 which are affixed by any suitable means to a base or bed 12. The bed 12 could be a base concrete panel in situations where concrete panels are cast one on top of the other.

20 A square or rectangular window opening is formed in the cast panel 10 using an embodiment of a false formwork system 40 of the invention. It will be appreciated that the false formwork system 40 of the invention could also be used for forming a door opening in the panel 10.

Each of the sideforms 11 is formed from an aluminium extrusion of angle  
25 section. A vertical flange 14 of the sideform 11 has fillets extending along the top and bottom edges of a face 15 of the vertical flange 14 of the sideform 11, so as to provide bevelled edge surfaces extending around upper and lower perimeters of the cast panel 10. In this specification, where reference is made to a direction such as "upper" or "lower", it is with reference to the panel being in its position in which it is cast, i.e.  
30 lying horizontally.

As indicated above, the opening 13 is formed in the cast panel 10 by means of the false formwork system 40 in accordance with an embodiment of the invention. With reference to Figs. 2 & 3 of the drawings, the false formwork system 40 is described in greater detail. The false formwork system 40 comprises a plurality of  
35 elongate sideforms 17 interconnected by corner forms 18, the sideforms 17 and the corner forms 18 together defining a perimeter of the opening 13.

In this embodiment, each sideform 17 is formed from a plastics extrusion of angle section having an operatively vertically extending element 19 and a laterally projecting foot portion, or foot, 20. The foot 20 is directly supported on the base 12, in use, and is affixed to the base 12 by means of an adhesive such as, for example, a  
5 doubled-sided adhesive tape (not shown) or fasteners such as bolts, screws, nails, or the like. The foot 20 is also of a sufficient length to distribute a load imparted to the bed or base 12.

The element 19 terminates at its operatively upper end in an opening demarcation portion in the form of an angled lip or flange 21 which extends from the  
10 element 19 in a direction away from the foot 20. A height dimension of the element 19 is such that an upper free edge of the flange 21 lies just below a top of a surface 22 (Fig. 2) of the cast panel 10. The flange 21 is used to form an upper perimetral edge of the opening 13.

An operatively inner surface of the element 19 is provided with a support  
15 structure in the form of an inwardly projecting ledge 24 which extends substantially parallel to, and in the same direction as, the foot 20 of the sideform 17. The ledge 24 is arranged below the flange 24. The ledges 24 of the sideforms 17 support one or more infill plywood sheets 26 (shown in Fig. 2). The infill sheets 26 occlude the opening 13 and form a recessed casting bed which is filled with concrete when the panel 10 is  
20 poured to form a false skim coat 29. Typically the casting bed is about 30mm in height. In cases where two or more sheets 26 are used, an intermediate support member in the form of a central support frame 28 is used to support inner edges of the sheets 26.

The false skim concrete coat 29 is finished uniformly with the cast panel 10 to  
25 provide a uniform surface 22 to the panel 10 so that there will be no imprints or variants to the finish of a mating cast face of a further panel (not shown) which is cast on the surface 22 of the panel 10. For each cast panel 10, the false skim coat 29 can easily be broken away from the panel 10 due to the narrow break lines created by the upper edges of the flanges 21 terminating just below the surface 22 of the panel 10.  
30 Each break line generally will be in the order of 2mm thick. With the skim coat 29 broken away, the upper perimetral edges of the opening 13 will only require a light stone to smooth them off.

A channel shaped keyway 31 is arranged on the element 19 below, and on the same side of the element 19 as, the ledge 24. As shown in Fig. 3 of the drawings, each  
35 corner piece form 18 is attached to adjoining sideforms 17 by means of projecting tongues 30 which slidably locate in the keyways 31 of the sideforms 17.

As is clearly shown in Fig. 2 of the drawings, each sideform 17 is provided with a detachable longitudinal insert 33 along its bottom edge at the junction of the element 19 and the foot 20. The insert 33 has a bevel surface 34 so as to form a bevel about the lower perimetral edge of the opening 13. In this embodiment, the insert 33 is formed  
5 from an elastomeric material such as a rubber extrusion.

The shape of the upper flange 21 as well as the bevel surface 34 on the insert 33 can be made to various shapes in order to provide a decorative edge finish for the edges of the window opening 13.

After casting of the panel 10, the inserts 33 are removed from the sideforms 17.  
10 Being of an elastomeric material, the inserts 33 can easily be detached from the sideforms 17. The sideforms 17 and corner forms 18 can then be pushed out of the opening 13 for re-use.

It is an advantage of the present invention that an improved false formwork system is provided which enables concrete panels, having window/door openings  
15 formed therein, to be cast one on top of the other in an extremely simple and cost effective manner and with minimal, if any, formwork imprints being left on the cast face of the upper panel. It is another advantage of the invention that an improved false formwork system for use in casting a concrete panel, having a window/door opening formed therein, is provided which can be installed easily without requiring skilled  
20 labour and which is re-useable thereby improving the cost effectiveness of the false formwork system.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly  
25 described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

## CLAIMS:

1. A false formwork system which includes  
a plurality of sideforms which are able to be interconnected to define a perimeter  
of an opening in a panel to be cast;
- 5 a support structure carried by the sideforms for supporting components used to  
mould a false skim coat overlying the opening when the panel is cast; and  
an opening demarcation portion carried by each of at least some of the  
sideforms, each opening demarcation portion defining a zone of weakness to demarcate  
the skim coat of the cast panel from a remainder of the panel and to facilitate removal  
10 of the skim coat from the remainder of the panel by breakage along the zone of  
weakness.
2. The system of claim 1 in which each sideform is connected to an adjoining  
sideform by a corner form.
- 15 3. The system of claim 2 in which each sideform has a receiving formation in  
which a mating formation of the corner form is receivable.
4. The system of any one of the preceding claims in which each sideform is an  
20 angle section having a foot portion and an element extending substantially orthogonally  
from the element, the element defining the opening demarcation portion.
5. The system of claim 4 in which the opening demarcation portion of each  
sideform is a bevel surface defining portion projecting at an angle from the element in a  
25 direction away from the foot portion of the element to form a bevel on one perimetral  
edge of the opening in the panel.
6. The system of claim 5 in which the support structure of each sideform is a ledge  
arranged on the element intermediate the opening demarcation portion and the foot  
30 portion, the ledge extending substantially parallel to, and in the same direction as, the  
foot portion.
7. The system of claim 5 or claim 6 in which each sideform includes an attachment  
formation for attaching a bevel surface defining member of an elastomeric material for  
35 imparting a bevel to an opposed perimetral edge of the opening in the panel.

8. The system of claim 7 which includes the bevel surface defining member for each sideform, each member being removably attachable to its associated sideform to enable the member to be removed from its sideform to facilitate removal of the sideform from the opening in the panel.

5

9. The system of any one of the preceding claims which includes an intermediate support member for supporting the components to form the false skim coat, the intermediate support member being of a dimension to support the components at a position less than a thickness of the panel to be cast.

10

10. A method of casting a concrete panel, the method including erecting a plurality of sideforms on a base to define an outer periphery of a panel to be cast;

erecting false formwork within the sideforms to define an opening in the panel

15 to be cast;

demarcating at least a portion of a periphery of the opening;

mounting infill in the false formwork so that the infill lies at a level lower than a surface of the panel to be cast;

pouring concrete into the sideforms so that the concrete overlies the infill to

20 define a false skim coat over the opening; and

allowing the concrete to set to provide an uninterrupted upper surface of the panel.

11. The method of claim 10 which includes demarcating the at least portion of the periphery of the opening by forming a line of weakness in the cast concrete from below the upper surface of the panel.

12. The method of claim 10 or claim 11 which includes casting a further panel on the panel previously cast in substantially the same manner as the panel previously cast and using the previously cast panel as the base for the further panel to be cast.

30

13. The method of any one of claims 10 to 12 which includes, once the concrete has been finished and allowed to set, removing the sideforms, raising the panel and removing the infill.

35

14. The method of claim 13 which includes breaking away the false skim coat along the demarcated periphery of the opening.

15. The method of claim 14 which includes removing the false formwork for re-use.

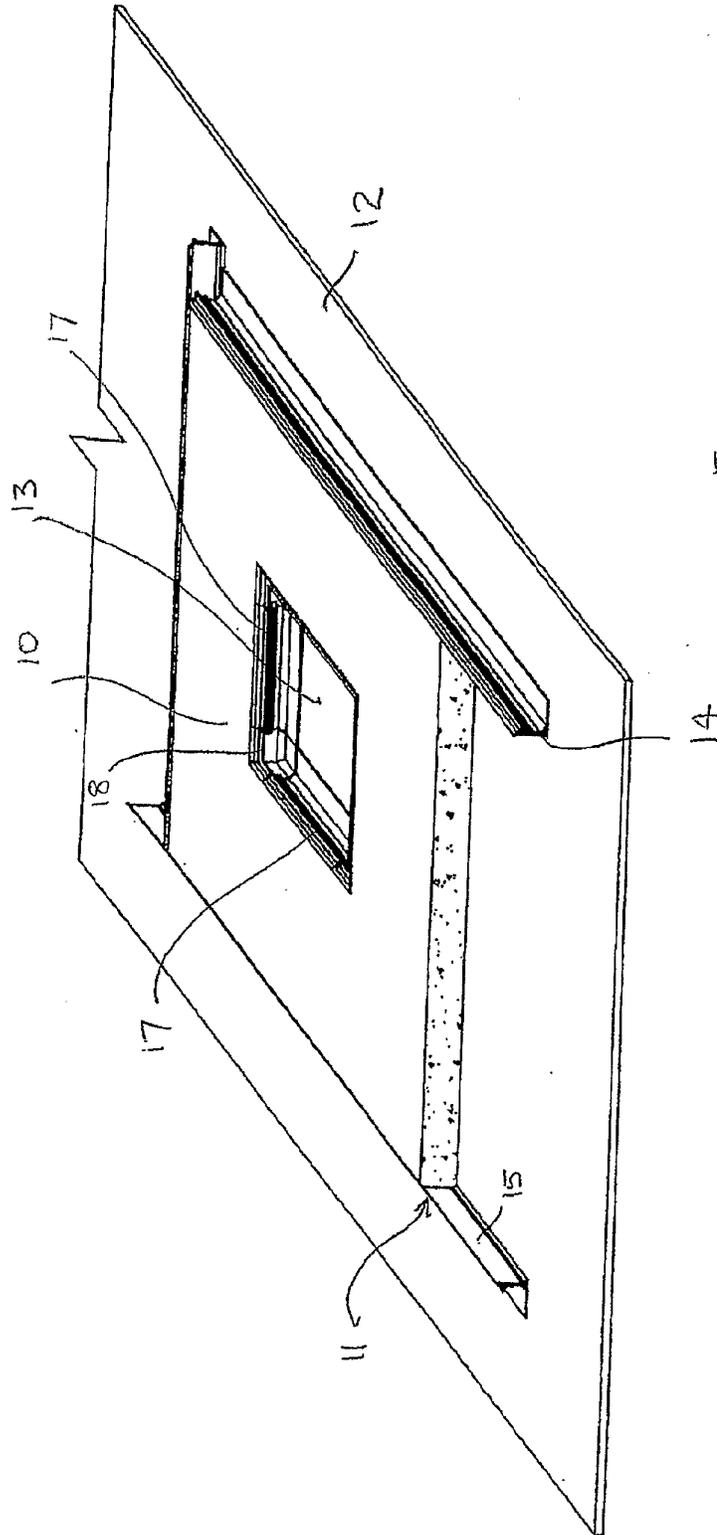
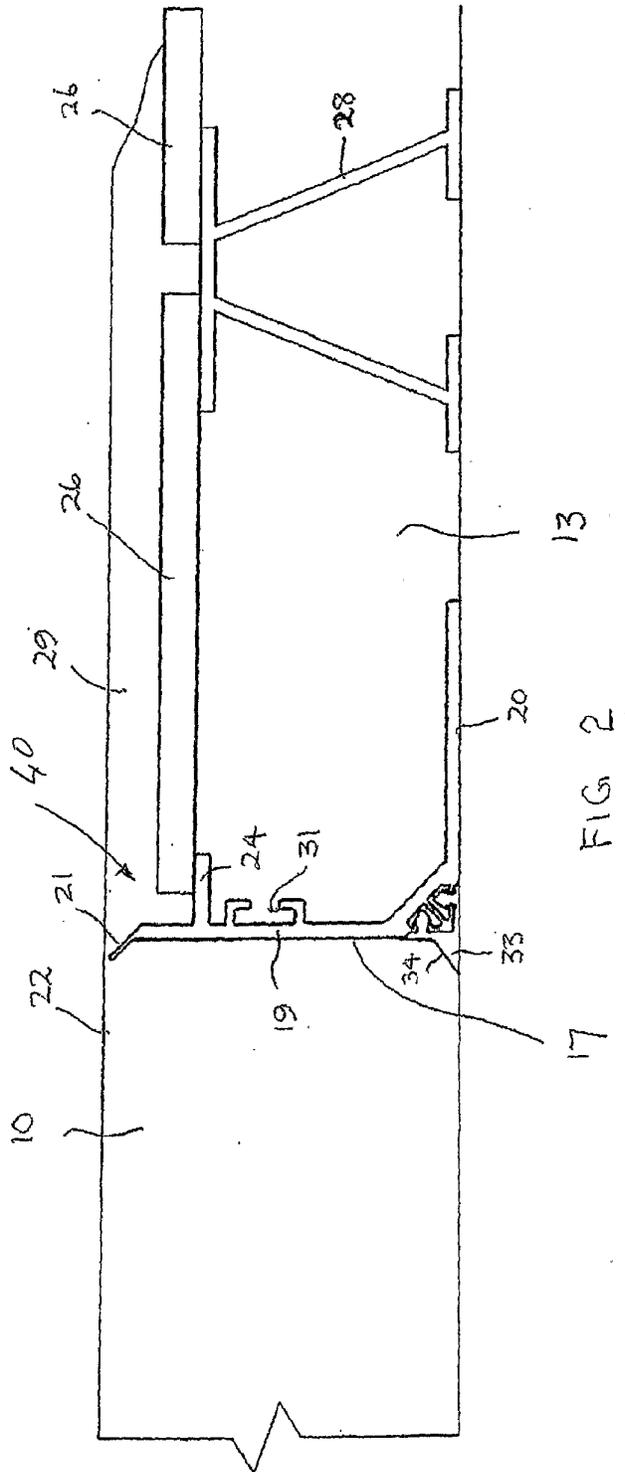


FIG. 1



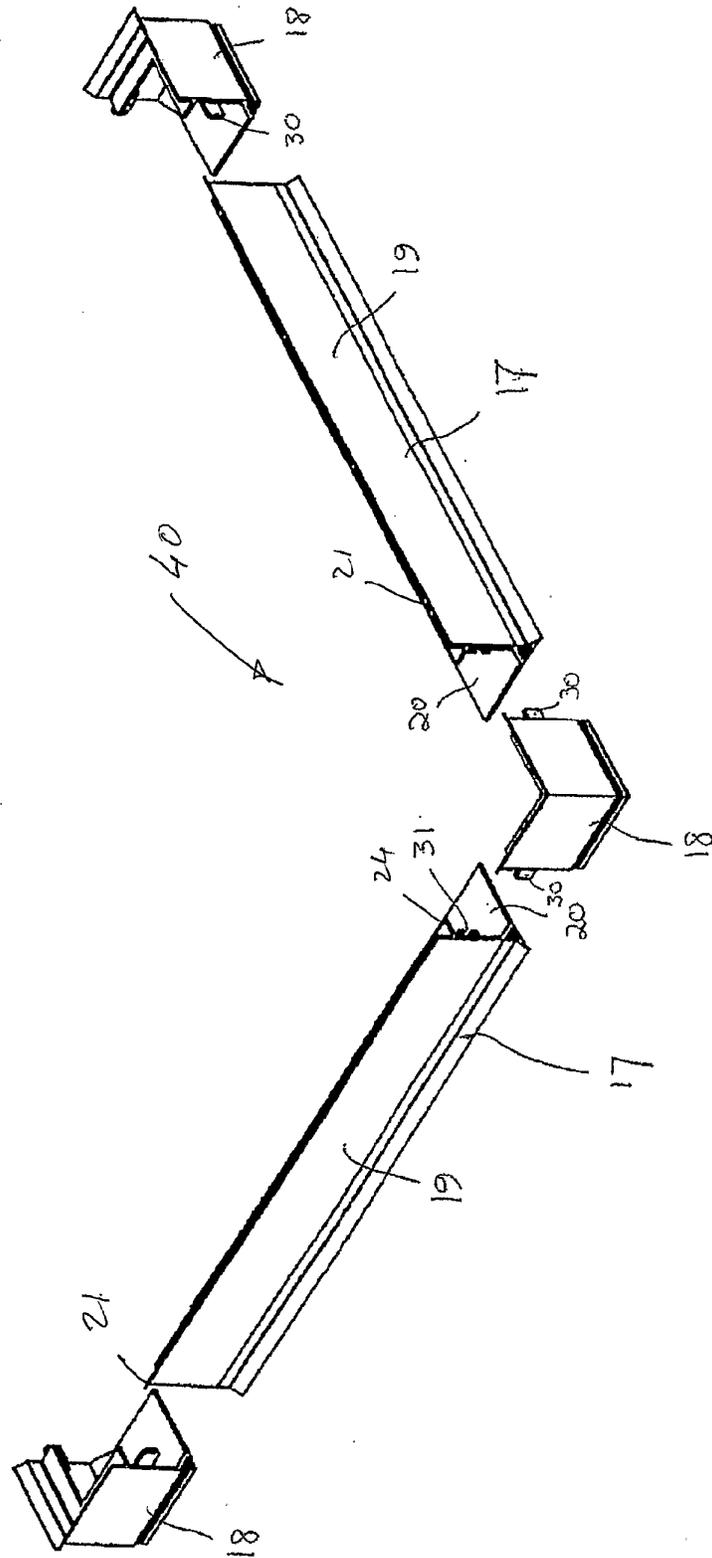


FIG 3