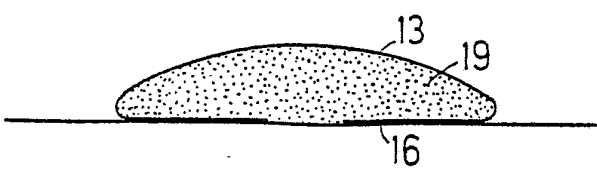


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau**EP 0054554**

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ³: E02B 3/00; E02D 3/00, 17/00	A1	(11) International Publication Number: WO 81/03189 (43) International Publication Date: 12 November 1981 (12.11.81)
(21) International Application Number: PCT/DK81/00054 (22) International Filing Date: 11 May 1981 (11.05.81) (31) Priority Application Numbers: 8015539 8019836 8022565 8103842 8111438 (32) Priority Dates: 10 May 1980 (10.05.80) 18 June 1980 (18.06.80) 10 July 1980 (10.07.80) 9 February 1981 (09.02.81) 10 April 1981 (10.04.81) (33) Priority Country: GB (71) Applicant; and (72) Inventor: LARSEN, Ole, Fjord [DK/DK]; FasanvÜnget 62, DK-6700 Esbjerg (DK).		(81) Designated States: AU, BR, CF (OAPI patent), CG (OAPI patent), CM (OAPI patent), DE (European patent), DK, FI, FR (European patent), GA (OAPI patent), GB (European patent), JP, KP, MG, NL (European patent), NO, RO, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent), US. Published <i>With international search report</i>
(54) Title: BARRIER STRUCTURE AND METHOD OF PRODUCING AND LAYING IT  (57) Abstract A barrier structure for depositing drifting sediment above or under water. It consists of a thin material (1 or 13) forming at least one hollow, which is filled with sedimentary ballast material (19). In a preferred embodiment for underwater use the structure consists of a sheet (13) bent around by a submarine sled (40), to form an almost closed tube with a longitudinal opening on the underside, through which the ballast material (19) is pumped continuously into the barrier, as the sled (40) moves forward. A preferred material (13) is filter cloth allowing for suction of the superfluous water out through the filter cloth. The barrier (65-69) allows for a new method of coastal protection and prevention of siltation in waterways. As the barrier is very inexpensive, protection on a large scale is hereby made feasible.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KP	Democratic People's Republic of Korea
AU	Australia	LI	Liechtenstein
BR	Brazil	LU	Luxembourg
CF	Central African Republic	MC	Monaco
CG	Congo	MG	Madagascar
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America

BARRIER STRUCTURE AND METHOD OF PRODUCING AND LAYING IT

1. Technical Field

The invention relates to a barrier for control of erosion on land due to wind, or erosion in a body of water due to waves and currents.

On land the barrier may be used for instance for dune, bank or beach stabilization, in water for example for coastal protection, prevention of siltation in a waterway, prevention of erosion along a submarine installation such as a pipeline, and the like.

2. Background Art

Various gravity types of prefabricated groins and breakwaters exist. Made of concrete, stones or other heavy materials, they have either solid cross-section or are formed as shell-like ridge-structures.

As these heavy structures are kept in place by their own weight, costly anchoring in the seabed is avoided.

The drawback of these heavy barriers is the expensive transportation of them from factory to installation site.

Other prefabricated systems consist of light materials, such as plastic, and therefore have to be anchored. For example, British Patent No.

1383011 presents a system consisting of a sheet which, in use, forms a ridge-like barrier anchored in the seabed.

Danish Patent No. 121080 presents a special method of filling a closed, circular hose of flexible material with sediment pumped into the interior of the hose.

Such circular cross-section of the structure, however, is inappropriate for fulfillment of most of the above objective of the present invention.



A circular-cylindrical body is unstable, as it is undermined by waves and currents.

3. Disclosure of Invention

The present structure has little weight and thereby avoids expensive transportation. One or more hollows occupies the whole interior of the structure, which, when laid, is filled with natural sedimentary ballast, preferably taken from the area adjacent to the installation site, so that anchoring is avoided.

The structure has a wide base and thereby avoids undermining by waves and currents.

The barrier comprises an inexpensive, hollow, elongate structure with any suitable cross-section with a height/base width ratio less than 1. The ballast material is placed artificially and/or naturally in at least part of the hollows of the barrier, preferably during or immediately after laying of the barrier.

4. Brief Description of the Drawings

While the fields of application of the present invention cover uses above as well as under water, a full and complete understanding of the invention may be had by reference to the description of preferred embodiments relating to underwater uses as set forth hereinafter and as may be seen in the accompanying drawings in which:

Fig. 1 is a cross-section of a completed barrier,

Fig. 2 is a plan view of an underwater sled for producing and laying the barrier shown in Fig. 1,

Fig. 3 is a section along the line I-I in Fig. 2,

Fig. 4 is a section along the line II-II of Fig. 2,

Fig. 5 is a perspective view of a barrier-shaping device of the sled shown in Figs. 2-4,

Fig. 6 is a section through a preferred type of pump,

Fig. 7 is cross-section of an alternative grab-type device for filling and shaping the barrier,

Figs. 8-12 are cross-sections of alternative shapes and materials of the barrier,

Fig. 13 is a plan view of a coast protected by barriers placed at intervals along the coast,

Fig. 14 is a cross-section of three parallel barriers,

Fig. 15 is a plan view of a coast protected by assemblies of barriers with different layouts.

The construction material of the barrier may be rigid or flexible, or a combination of rigid and flexible materials. The structure may consist of a sheet 13, Figs. 1, 8, 9, enclosing the ballast material 19, or a thicker, porous material 1, Figs. 11-12, in which at least part of the pores are filled with ballast material, or a combination hereof, Fig. 10.

In the first case the sheet 13 may be pre-shaped, Figs. 8-10, and rigid enough to assume and/or maintain its final shape when it is laid on the floor. The sufficient rigidity may be obtained by corrugating the sheet 13, and/or by means of ribs in its transverse and/or longitudinal directions.

The spaces to be filled with ballast material 19 are formed by the edge portions 14, 15 or 16, which are bent 180° around. The edges may be rounded, Figs. 1, 9, or sharp.

Alternatively, the sheet material may not be pre-shaped, and the desired shape of the cross-section of the barrier obtained by bending the edge portions of the sheet around, during the installation operation, Figs. 1-6. The edge portions 16, Fig. 1, and thereby the whole barrier, are kept in place by the weight of the ballast material 19.

To prevent the fill material 19 from being washed out through the ends of the barrier, these should be closed, for instance by joining the lower portions 16 to the upper portion 13, e.g. by stapling them together.

In stead of bending the edge portions of the sheet 13 downwards, they may be bent upwards and interconnected, so that a closed tube is formed, Fig. 8.

Fig. 9 is a cross-section of a barrier where the center portion of the pre-shaped sheet 13 is upwardly arched and the edge portions 14 are bent upwardly around to meet the arched center portion and thereby enclose two longitudinal hollows.

The connections in Figs. 8-9 may be obtained by connecting means attached to the edges, or by interlocking configurations of these.

If the sheet 13 is rigid enough and/or the dimensions of the barrier are small, the elasticity of the sheet 13 by itself may be sufficient to keep the tubes closed, after they have been filled with sediment 19, Figs. 8-9.



Fig. 10 is a cross-section of a barrier consisting of a pre-shaped sheet 13, combined with porous material 1.

Examples of barriers consisting of porous material 1 are shown in Figs. 11-12. To minimize the resistance of the barrier against being flattened out and wound up, the cross-section of the barrier may be arched, Fig. 11. The barrier may contain cavities 17 to save material, Fig. 12.

The sheet 13, 16, Fig. 1, may be made of water-impermeable, elastic material, e.g. polypropylene, polyethylene, aluminium or steel. The thickness of the sheet may vary over the cross-section of the barrier. For example, the edge portions 16 may be thinner than the center portion.

Relief of pressure differences between the two sides of the sheet may be achieved by means of holes 38 placed at appropriate locations of the surface. And at least part of the water of the water/sediment mixture may escape through such holes. To prevent the sediment 19 from being washed out through the holes 38, these may be supplied with filter cloth. Or the edges of the holes may be bent outwards or inwards, so that each hole forms a funnel preventing the current from drawing the sediment 19 out through the hole.

Alternatively, all of the sheet 13 may consist of a water-permeable, flexible filter cloth, e.g. consisting of non-woven polypropylene and/or polyester fibres welded together by a heating process. To strengthen the cloth, for instance against vandalism, it may be reinforced with resistable threads, made for example of metal.

The pores of the filter material should be so small, that only an insignificant part of the smallest particles of the sediment 19 can pass through. Such filter material also has the advantage that a part of the water of the water/sediment mixture can pass through the sheet, although the major part may have to escape underneath the sheet 13 at the front end of the sled 40. Another advantage of filter material is the fact that the tendency of the wave action to cause flapping of the sheet 13 and thereby deformation of the barrier is much less than for an impermeable and/or more rigid sheet.

The voids of a barrier consisting of porous material 1, Figs. 10-12, may be open hollows. Preferably the cells are parallel, narrow and extend vertically throughout the height of the barrier, the upper end of each cell being open, so that the ballast material can deposit in the cell, and the lower end being closed, so that the ballast material is retained

in the cell. The cross-section of the individual cell may be hexagonal, quadrangular, circular, or shaped otherwise.

Alternatively, or in combination with such kind of cellular structure, the barrier may consist of a tangle of crisscross threads that are straight, crooked, wavy and/or looped, and twisted or welded together to form a very open and permeable structure 1.

Generally, the spacing of the threads in the tangle of threads only has to be tight enough to reduce the velocity of the wind or the current and orbital motion of the waves to such level that the fill material in the hollows of the barrier will not be removed. In some areas of the barrier, however, the surface appropriately is tighter: 1) To prevent the fill 19 from slipping through, at least the lower periphery of the compartments intended for containing the fill should be tight enough. Examples are shown in Figs. 11-12, where the lower surface 3 of either side of the barrier is tight. 2) To strengthen the surface of the crest 2, which always will remain uncovered by drift material, even when the slopes 5 on both sides are covered, this surface also may be at least comparatively tight and smooth.

To prevent the fill material 19 in the upper part of the cells or the tangle from being washed out, some kind of means allowing for downward, but hindering upward passage of the fill 19, may be supplied to the upper surface. For example, a membrane provided with rows of short slits may be attached to the surface. The thickness of the membrane should be adjusted so that the slits open up, when a certain height of fill 19 is placed on top of the membrane, but keeps closed when exposed to wave action.

Appropriate materials for fabrication of the porous structure 1 may be synthetic, e.g. polypropylene or polyethylene, chips of metal or other waste material, or natural fibres such as coco fibres coated with synthetic or natural rubber or plastic.

The best manner of installing the barrier structure depends on the local conditions and the type of material used for fabrication of the barrier.

A more or less rigid structure may be floated to the installation site, where it is sunk and filled with ballast material.

A more advantageous method normally is to fabricate the barrier from flexible material that can be wound around a reel 32, so that it can be

rolled off from a surface vessel, or even better, from an underwater sled 40, Figs. 2-6, or vehicle supplied with wheels, caterpillars or longitudinal, rotating cylinders with screw thread, fore and/or aft, and which may be pulled along via a rope 46 by a winch on shore or by a surface vessel, or may be self-propelled and/or remotely controlled. In the last-mentioned cases the highest degree of independence of weather conditions is obtained.

On land the barrier material may be rolled off from a vehicle.

When a barrier structure as the one shown in Fig. 9 is to be flattened

out before winding up on a reel, the edge portions 14 are to be turned about 180 degrees away from the barrier, so that the barrier structure becomes nearly plane, whereas sharply edged portions are to be pressed directly against the adjacent portion 13, so that they become nearly plane and level with 13.

The sled 40, Figs. 2-6, may have several functions:

A sheet that is not pre-shaped, may be gradually shaped into the desired cross-section of the barrier, e.g. the one shown in Fig. 1, by means of guiding members 33, Fig. 5. As the sheet 13 rolls off the roll 32, which may be provided with brake means, and passes through the sled 40, the system of longitudinal and crosswise guiding members 33 with successively differing cross-sections gradually bends the edge portions of the sheet 13 around to form the lower ballasted horizontal portions 16, and successively transforms the sheet from its plane shape at the roll 32 to the desired almost closed cross-section, Fig. 1, where the sheet passes the rear end of 33. The shaping members 33 may contain hinges 47, so that the resulting shape of the barrier is adjustable.

The rear end of the sled 40, Fig. 4, prevents deformation of the barrier during the filling of this with ballast material.

Furthermore, the sled may include the pumping or plowing means used for filling the barrier.

The sled may also include sonars and/or underwater television cameras to monitor the filling process. Such devices for instance may be mounted on the sled 88, Fig. 2.

The shaping members appropriately are assembled to form one unit 33, which may be hanging in chains 76 from the sled 40. If the sheet material 13 is very flexible, supplementary guiding members 34 underneath 33 may be

required to steer the sheet during the laying process. At least part of the assembly of separate members 33 or 34 may be replaced by continuous plate. To allow for initial manual feeding of the sheet 13 through the narrow slit 78 between the upper (33) and lower (34) sets of guiding members, hinges 47 may be required.

The upper part 35 of the framework 33 may be extended toward the rear end of the sled 40 where it maintains the outer shape of the sheet 13 during the filling of this. Alternatively, such shaping members

may be in fixed connection with the sled 40. To eliminate friction, the members and/or the guiding members 33, 34, 35 may be supplied with rollers.

As the filling process may not be completed before the sled 40 has passed the section that is being filled, an extra sled may be pulled along some distance behind the sled 40, in order to shape the desired configuration of the barrier.

The ballast material 19 may be supplied through a hose from a surface vessel or, preferably, be taken from the adjacent seabed area.

In the latter case the sediment may be plowed from this area into the hollow in, respectively up upon the upper surface of, the barrier, by means of at least one pair of long plow shares which form a suitable angle with the sled 40. The material 19 thereby can be lead into the space under the sheet 13, Fig. 1, or up on top of the sheet, Figs. 8-12.

Wherever possible, pumping of the sediment 19, however, is preferable.

The pumping equipment 80 may be installed on the surface vessel or, preferably, on the sled 40, Figs. 2-3.

An appropriate type of pump is shown in Fig. 6. The pump 80 produces a high speed jet of water through the nozzle 83 and thereby draws big volumes of water/sediment mixture with lesser velocity through the pipes 36.

The percentage content of water in the water/sediment mixture may be controlled by valved side openings somewhere in the system of mouth-pieces 45, hoses and/or pipes 36 and pump.

If the sediment 19 is taken from the adjacent seafloor, it should, generally, be picked up as far away from the barrier as possible. The hoses or pipes 36 through which the sediment is drawn from the seafloor,



therefore may be mounted on extended frames 81. These may be in hinged connection with the sled 40, so that they can yield in case they hit obstacles on the seabed.


To minimize the depth of the excavations caused by the removal of sediment, each hose or pipe 36 may split up and end with a plurality of parallel hoses or pipes 36, and/or end in wide, flat mouthpieces 45, so that the sediment is taken from a wide area.

Depending on the rigidity of the sheet 13, it may in some cases be desirable or necessary to draw part of the sediment 82, Fig. 4, through hoses or pipes 85 from the seabed along the edges of the barrier, so that the edges consequently will sink, and the desired streamlined cross-section of the barrier and/or the necessary strain in the sheet 13 is obtained.

Filling with sediment 19 of barrier structures as shown in Figs. 8-12 may be achieved by jetting the water/sediment mixture directly from the adjacent seabed up upon the upper surface of the barrier structure. Structures with normally inaccessible spaces for ballast material 19 as shown in Figs. 8 and 9 may be filled by means of hoses and/or pipes 86 which force the elastic upper portion 14 or 15 away from the barrier during their passage and lead the water/sediment mixture into the spaces to be filled. Then the elasticity of the sheet 13, 14, 15 will make the portions 14 or 15 bend back to the original position, so that the space is closed and prevents the sediment 19 from becoming washed out.

A barrier structure as shown in Fig. 1 has to be filled with sediment 19 through the front end of the sled 40, accordingly as the sled moves forward, and the filling hose and/or pipe 22 being carried or dragged along underneath the sheet 13 and between the two portions 16. All or most of the water of the sediment/water mixture may have to escape in forward direction through the same opening between the two portions 16. Hereby a fraction of the sediment of the mixture will deposit in front of the sled 40, so that the lower portions 16 of the sheet will be slanting downwardly toward the edges of the barrier, Fig. 4.

A rigid pipe 22 may be mounted in fixed connection with the sled 40 at a certain distance above the floor. A hose or flexible pipe 22 may be dragged along on the floor. In both cases a proper filling and tight packing of the full cross-section of the barrier may require that the flow of water/sediment mixture is distributed over the cross-section by means of



a plurality of hoses or pipes, which may end in diffusers, preferably so that the total cross-section area of the hoses or pipes gradually increase toward the downstream end.

The assembly of hoses or flexible pipes 22 may be mounted on members 87 hinged to a sled 88 dragged along on top of the lower portions 16, which thereby will be kept in place, even if they have a positive buoyancy. The pivotal connection of the members 87 allow the sled 88 to be put through the opening between the two portions 16, even if these are made of rather rigid material.

For decrease of the velocity of the flow of sediment/water mixture when it leaves the hoses or pipes 22, so that the sediment can deposit, the directions of the downstream ends of these hoses or pipes should be adjustable.

These directions may for instance be upwards and more or less backwards toward the rear end of the sled 40, to ensure filling of the top of the barrier.


Another principle which may be combined with the first one, is arrangement of the downstream ends of the hoses or pipes 22 two and two opposite each other, so that the outflows meet and neutralize each other.

If the sheet 13 consists of filter cloth or of perforated material in which the perforated holes are covered with filter cloth, e.g. in the form of a continuous cloth underneath the perforated material, a compact filling of the top of the barrier can be achieved by drawing the superfluous water out through the filter cloth. This excessive water may be sucked out for instance by a pipe 97, Figs. 1, 2, 5, with a longitudinal profile identical with the upper surface of the desired cross-section of the barrier. Its underside is perforated with holes, and may be provided with one continuous or several separate mouthpieces like those of a vacuumcleaner. Besides removing the superfluous water, such pipe at the same time shapes the barrier.

Preferably the superfluous water is drawn by the pump 80 through the hose or pipe 98, so that the water is recycled by the same pump in an almost closed flow system.

This system should be closed as completely as possible, so that a minimum of the surrounding water outside the system becomes involved, and the required pumping capacity for suction through the sheet 13 thereby is minimized.

The hoses or pipes 36 and/or 85 therefore may be connected to the pipes 97, e.g. by ending 36 and/or 85 as connections to 97, and by sucking the



sediment from the seafloor through side openings on the underside of 36 and/or 85, so that to some extent it is the water sucked out through 97 that carries the sediment to fill the barrier.

Additionally, the outlets of the pipes or hoses 50 may be very close to the pipes 97 and point directly in direction of these. The outlets may match the sucking members 97 completely. If these are formed as pipes 97 as shown, the outlets of 50 may also be interconnected by perforated pipes of the same shape as 97 and move close to the sheet just below 97. The outlets of 50 or such interconnecting pipe may even be provided with flexible diffuser heads made for instance of rubber, which move in tight-fitting contact with the underside of the sheet 13 and exactly opposite the sucking members 97 on the other side of the sheet 13. The flexibility of the diffusers on their rear side allows for escape of the supplied sediment.

Suction through the filter cloth not only allows for compact, but also for fast filling of the barrier, because high velocity of the outflow is no hindrance for settling of the sediment particles in such case. To maximize the velocity, additional pumping capacity for suction of the superfluous water may be required.

Holes 38 through the sheet 13 may for example be produced continuously by means of a pair of rollers 39 mounted on the sled 40. One of the rollers is supplied with short spikes punching through the sheet 13 when it passes between the two rollers, the other roller being supplied with holes matching the spikes.

The sled 40 may consist of valved pipe members, which may be emptied of water, so that the sled becomes buoyant and able to float on the surface, when the sled is to be moved from one installation site to the next.

The cost of the sheet material 13 constituting an essential part of the total cost, re-use of the sheet may be worthwhile when more layers of deposited sediment on top of each other are required.

For reversing the process, i.e. for loosening and collecting the sheet material 13 already installed, a backwardly moving sled 40 of principally the same design as the one described above, may be appropriate. By moving the sled backwards on top of the deposited sediment 42, Fig. 14, and by lowering the system of guiding members 33, 34, which should be supplied with plow shares 89, Fig. 5, through the deposition 42 to the lower side of the lower portions 16 of the structure 13, the plow shares and the

members 33, 34 will raise and unfold the sheet 13. If necessary, the loosening of the sheet may be facilitated by means of water jets removing the deposits 42 along the sides of the barrier. The jet means may be mounted on either side of the sled 40.

When a sheet 13 is to be re-used on top of the deposition 42, two sleds 40 in succession may be used. The front sled moves backwards, so that it loosens, raises and unfolds the sheet. The next sled moving forwards takes over, folds, lays and fills up the sheet with sediment 19, on top of the deposition 42. Alternatively, the front sled only loosens and raises the sheet, without unfolding it, and the second sled only lays and fills it with sediment. To level off the seabed after the passage of the front sled, a scraper may be moved along between the two sleds. The two sleds may be joined together to form one apparatus.

In particular for smaller structures, grabbing of the fill material may be an alternative to filling the structure 13 with sediment by pumping. The sheet 13 may be laid flat on the ground. The sled 40 may be supplied with a row of grabs 92, Fig. 7. Each grab being provided with one or more hinges, the edge portions 95 of such grab are pressed down into the ground material on either side of the sheet 13, when the center portion of the grab is lifted. The grab in this way clutching the sheet 13 and a portion of the ground material will gradually assume and fill the desired profile, e.g. the one shown in Fig. 1.

To prevent the water waves from flapping the sheet 13, and/or from undermining the barrier, at least sections of the barrier may be covered by a wide ballasted mat, e.g. of the type disclosed in PCT Application No. DK/80/00068.

6. Industrial Applicability

Used as a submarine barrier, the above structure among other aspects opens up for a new method of protecting coasts against erosion. And the inexpensiveness of the structure allows for protection of long continuous coast sections on a large scale.

Perpendicular or possibly parallel to the coastline long submarine barriers 65 may be placed at long intervals, Fig. 13.

The landward end of each barrier may be placed some distance from the shoreline 95. The littoral drift will deposit sediment 56 along both sides of the barrier. Consequently, the waves will be refracted and

cause the area 57 between the landward end and the shoreline to shoal. And deposition will take place in the areas 58 on both sides of the barrier. A partly submerged headland 57, 58 thereby is created, the littoral drift is minimized, and the coast between the headlands created this way is stabilized.

Depending on the dimensions of the barrier, the depths of water, the wave climate and current conditions on the site, one barrier may not be sufficient to hold the individual coast-section. And two or more parallel barriers 59, Fig. 14, with suitable mutual spacing may be required.

With time the height of the deposition, if necessary, may be increased by raising the barriers, or by placing a third barrier 60 on top of the deposition of sediment caused by the first two barriers 59 between these.

The number of parallel barriers 66, Fig. 15, may vary from the landward to the seaward end of the headland. Depending on the local conditions, the number may increase in the seaward direction, Fig. 15, or in the landward direction.

Furthermore, such assembly of adjacent barriers may not be parallel, but converge in either the seaward or the landward direction. Fig. 15 shows an example where two barriers 67 converging in the landward direction together with a third barrier 68 form a Y. Fig. 15 also shows an example where two barriers 69 converge in the seaward direction.

For prevention of siltation in a waterway, the barrier is placed along both sides of the channel.

If there is any tidal range in the channel, the channel may be maintained by the tidal current, and even deepened, by means of barriers placed parallel with, oblique to or perpendicular to the channel on its both sides. Due to the shallowing of the sides of the channel, the tidal current will deepen and maintain the middle part of the channel.

C L A I M S :

1. An elongate barrier structure for deposition of drifting sediment, wherein the height is smaller than the width of the base of the structure, characterized by said structure consisting of a thin material (1, 13, 14, 15) which, in use, embraces at least one hollow with a lower limitation (3, 16) retaining a sedimentary ballast material (19) filled artificially into said hollow at the time of installation of said barrier.
2. An elongate barrier structure according to Claim 1, characterized by said thin material (13) being a continuous elongate sheet, the longitudinal edge portions (16) of which are bent downwardly around, so that the sheet forms an almost closed tube, in which said edge portions (16) are spaced a little apart and form the base of the structure.
3. An elongate barrier structure according to Claim 2, characterized by said sheet (13) being made of elastic material pre-shaped to assume said tube-like configuration, when the structure is placed on the ground.
4. An elongate barrier structure according to Claim 2, characterized by said sheet (13) being made of a flexible material which is shaped to form said tube-like configuration during the installation of the structure.
5. An elongate barrier structure according to Claim 4, characterized by said sheet consisting of filter cloth.
6. An elongate barrier structure according to Claim 1, characterized by said thin material being a continuous, longitudinal sheet, the longitudinal edge portions (15) of which are bent upwardly around, so that the sheet forms a closed tube, in which said edge portions (15) are in tight contact with each other at the top of the structure.
7. An elongate barrier structure according to Claim 6, characterized by said sheet (13) being made of elastic material which is pre-shaped to assume said tube-like configuration.
8. An elongate barrier structure according to Claim 1, characterized by said thin material being a pre-shaped, continuous, elongate sheet (13) in which the longitudinal center portion forms an upwardly convex arch, and wherein the longitudinal edge portions (14) are bent upwardly around to meet in tight contact with said upwardly arched center portion, so that two longitudinal hollows are enclosed.

9. An elongate barrier structure according to Claim 6, 7 or 8, characterized by said tight contact being established by seaming the edge portions (14 or 15) during the installation of the barrier structure.
10. An elongate barrier structure according to Claim 6, 7 or 8, characterized by said tight contact being established by the edge portions (14 or 15) being supplied with interlocking means or configurations.
11. An elongate barrier structure according to any of the preceding Claims 2-10, characterized by at least part of said sheet (13) being perforated with holes (38).
12. An elongate barrier structure according to Claim 11, characterized by said holes (38) being covered with filter cloth.
13. An elongate barrier structure according to Claim 1, characterized by said thin material forming a cellular structure (1) consisting of parallel, vertical, narrow cells that are open at the top, but closed at the lower end (3).
14. An elongate barrier structure according to Claim 1, characterized by said thin material forming an open tangle of crisscross threads (1) that are straight, crooked, wavy and/or looped, and twisted or welded together, the lower periphery (3) of the tangle being impermeable for said ballast material (19).
15. An elongate barrier structure according to Claim 13 or 14, characterized by the upper surface of said structure (1) being supplied with valve means allowing for ballast material to pass downwardly through the valve, but preventing ballast material (19) from being drawn out of the structure by waves and currents.
16. An elongate barrier structure according to Claim 15, characterized by said valve means consisting of a membrane provided with slits.
17. An elongate barrier structure according to Claim 1, characterized by said structure consisting of a combination of the structures disclosed in Claims 2 and 13 or 14.
18. A method of shaping and installing on the floor of a body of water an elongate barrier structure as claimed in Claim 2, characterized by said sheet (13) in its longitudinal direction being rolled off from a roll (32) placed on a submarine vehicle or sled (40),

in pace with the speed of the vehicle or sled (40), and being shaped by a shape (33, 34, 35) which continuously transforms the rectilinear cross-section of the sheet (13) to and/or supports the desired cross-section of the barrier, and continuously filling the tube-like structure with ballast material (19) by pumping sedimentary material from the adjacent floor area into the hollow through the opening between the lower sheet portions (16) at the front end of the sled (40).

19. A method according to Claim 18, characterized by part of the sedimentary material (19) being taken from said floor close to the edges of said barrier structure.

20. A method according to Claim 19 or 20, characterized by the outflow of sediment/water mixture within the tube-like hollow of said structure being divided into at least one pair of opposite outflows directed against each other.

21. A method according to Claim 18, 19 or 20, wherein said sheet (13) consists of filter cloth or a perforated material in which the perforated holes are covered with filter material, characterized by the superfluous water of the sediment/water mixture pumped into said tube-like hollow being sucked out through said filter cloth or perforated material (13).

22. A method of raising an already installed elongate barrier structure as claimed in any preceding claim, characterized by a shape (33, 34) being supplied with plow shares (89) and lowered through the deposited sediment (42) to the underside of said barrier structure, and the sled (40) with said shape (33, 34) and plow shares (89) being moved backwards.

23. A method of shaping and filling with sediment (19) an elongate barrier structure (13, 16) as claimed in Claim 2, characterized by said sheet (13) being embraced by a grab-like device (92) which is placed in open position on the ground and subsequently clutched, thereby scraping the surface layer of the ground into the hollow formed by the embraced sheet (13, 16), and at the same time shaping the cross-section of the barrier.

24. A method of protecting a coast by means of the elongate barrier structure as claimed in any preceding claim, characterized by long singular (65) or assemblies (59, 60, 66, 67, 69) of barriers being placed perpendicular to and at long intervals along

the coast (95).

25. A method according to Claim 24, characterized by the landward ends of said barriers (65, 66, 68, 69) being spaced from the shoreline (95).

26. A method according to Claim 24 or 25, characterized by each of said assemblies of barriers comprising parallel barriers (66), the number of barriers increasing in the seaward or landward direction.

27. A method according to Claim 24, characterized by each of said assemblies of barriers comprising converging barriers (67, 69).

28. A method of deepening and/or preventing siltation in a tidal inlet by means of the elongate barrier structure claimed in any preceding claim, characterized by such barriers being placed parallel with, oblique to, and/or perpendicular to the inlet in at least one of the sides of the inlet.

29. A method according to Claim 21, characterized by the sucking hoses and/or pipes (36, 85) together with the pump (80) and the pressure hoses and/or pipes (22, 50) form an almost closed flow system.

30. A method according to Claim 29, characterized by said sucking hoses and/or pipes (36, 85) suck directly on the outward side of the filter cloth or perforated material (13).

31. A method according to Claim 30, characterized by said sucking hoses and/or pipes (36, 85) on their undersides are supplied with side openings and possibly mouthpieces through which the sediment (19) is carried away by the water sucked through the filter cloth or perforated material (13).

Fig.1

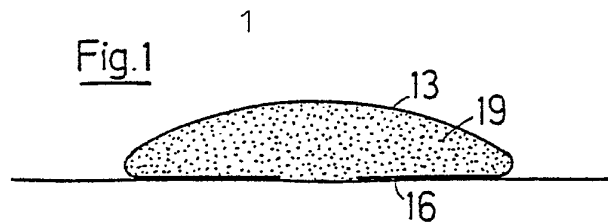


Fig. 2


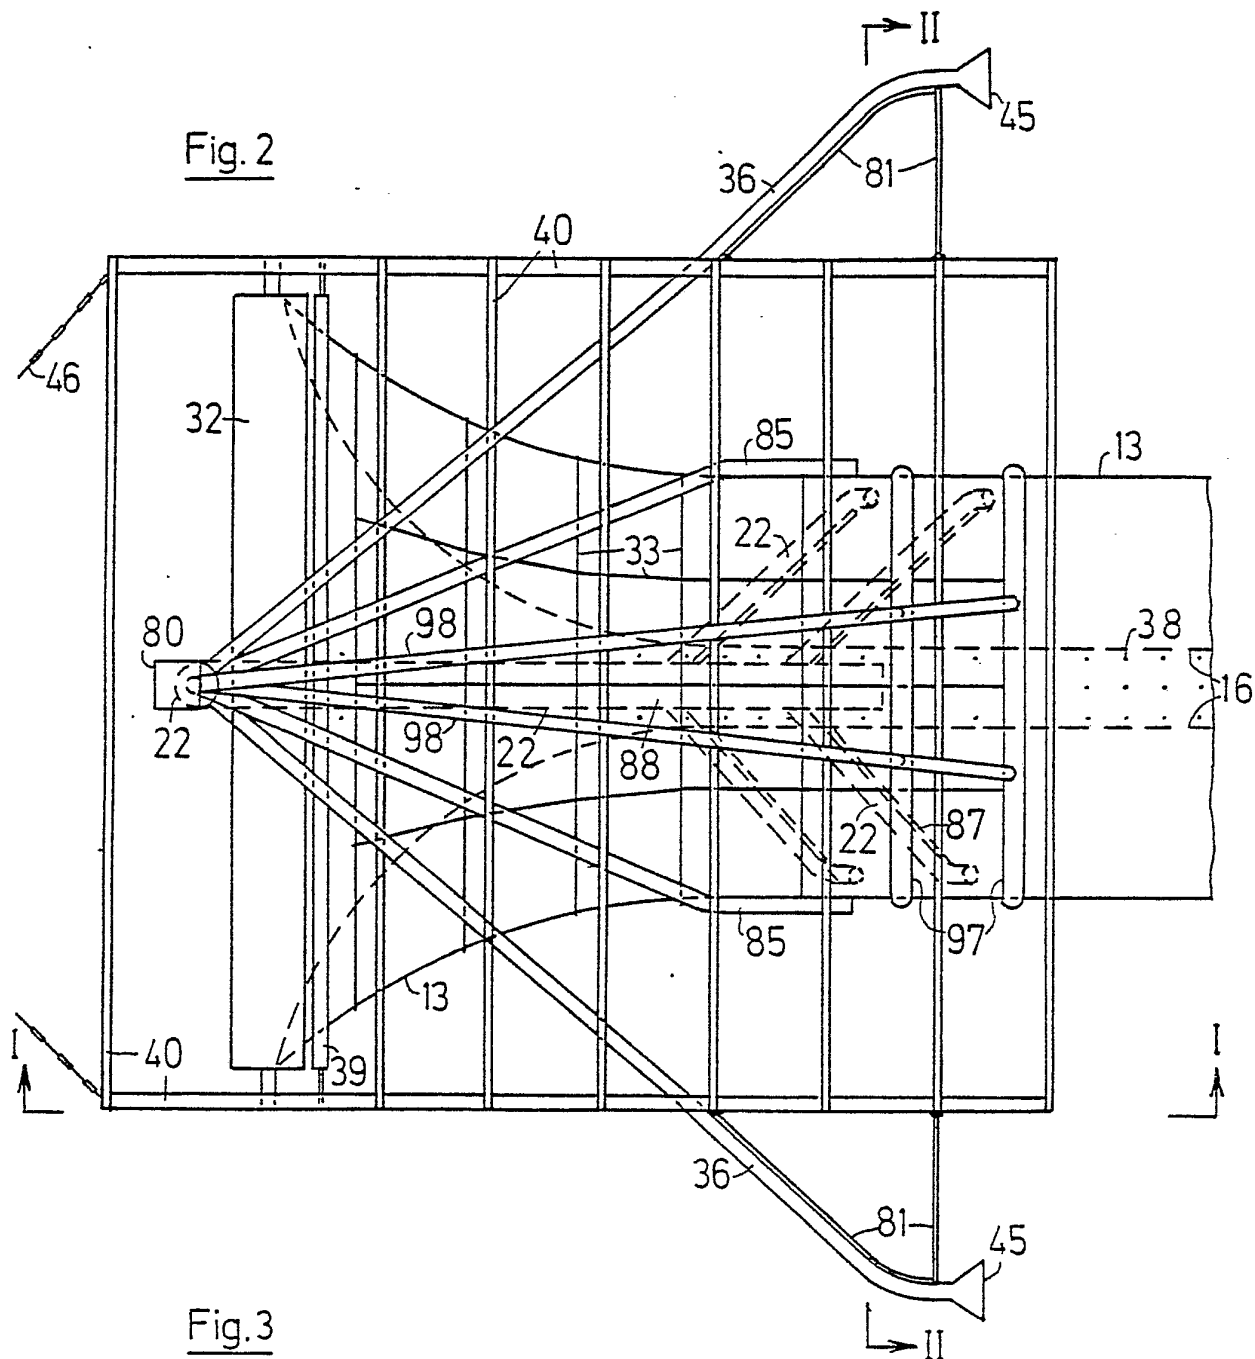


Fig.3

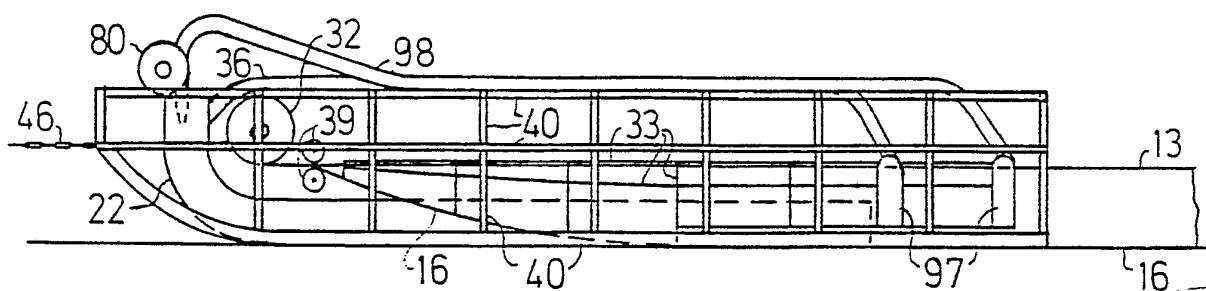

2

Fig. 4

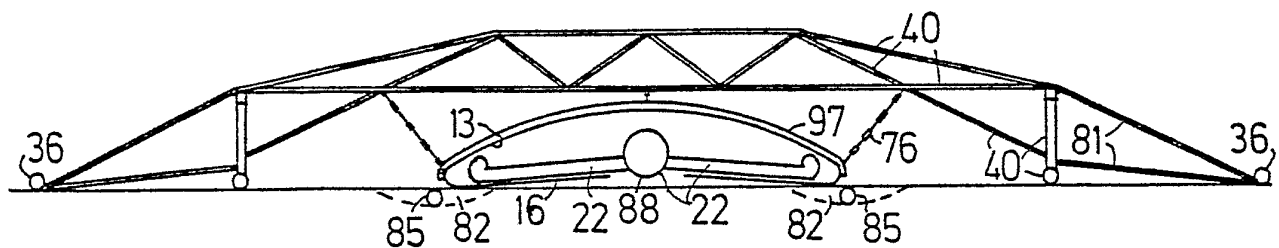


Fig. 5

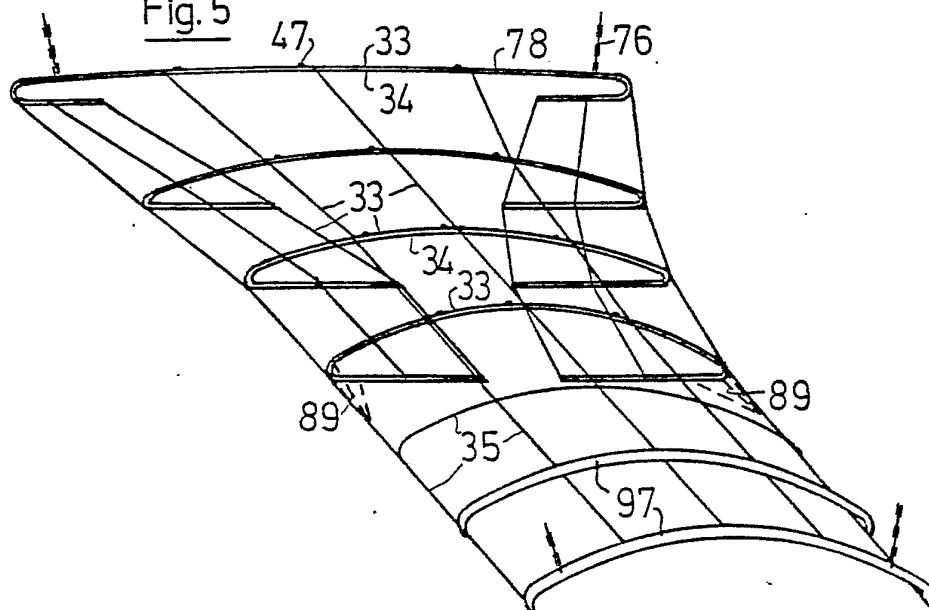


Fig. 6

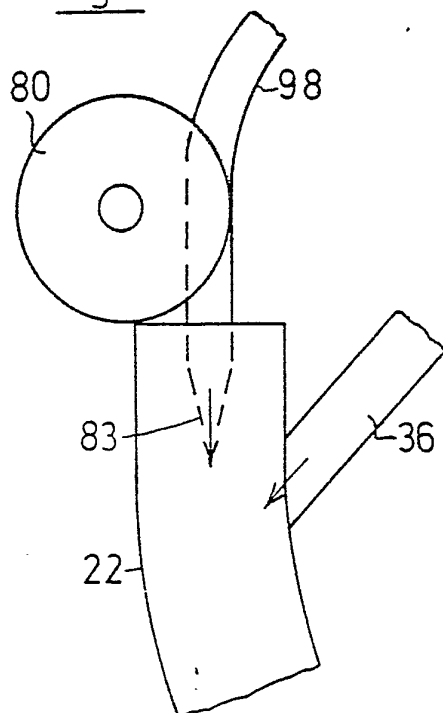


Fig. 7

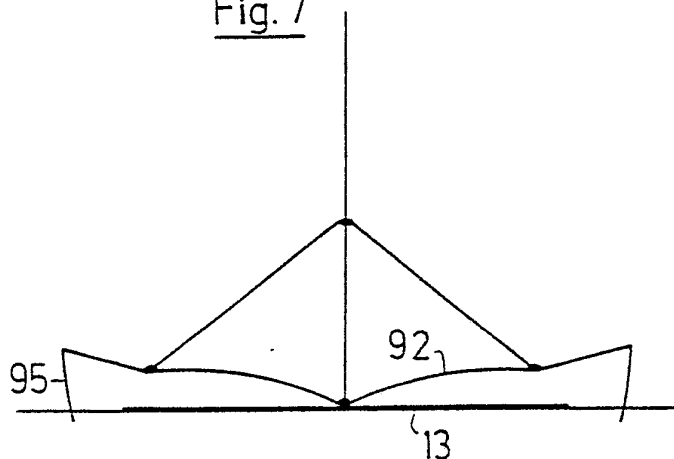


Fig. 8

3

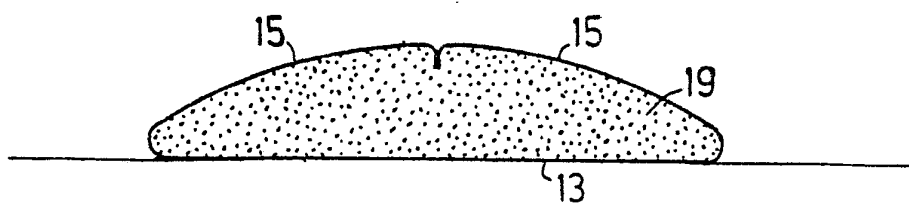


Fig. 9

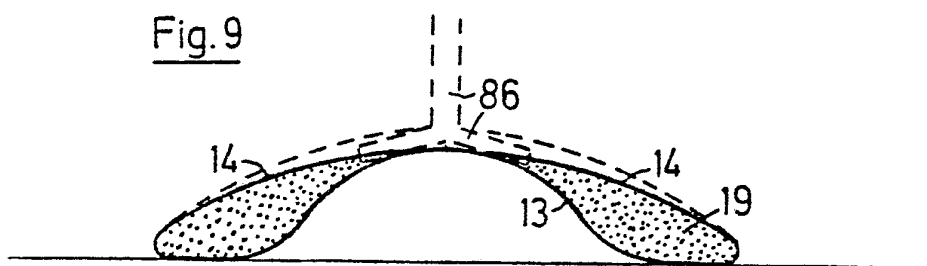


Fig. 10

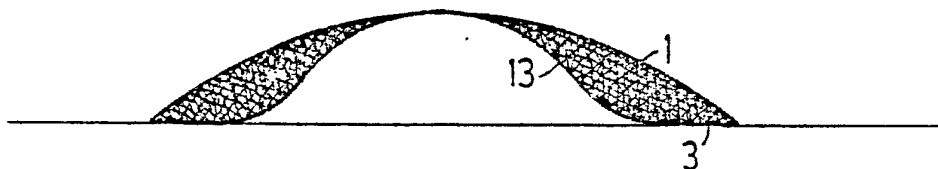


Fig. 11

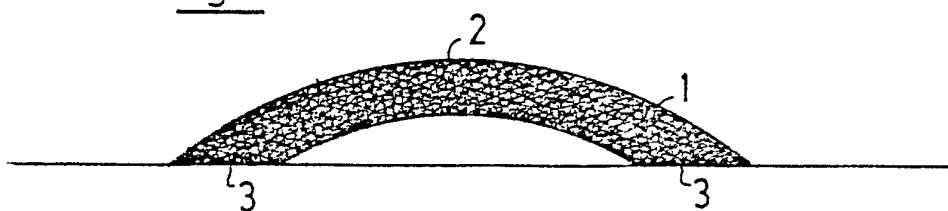


Fig. 12

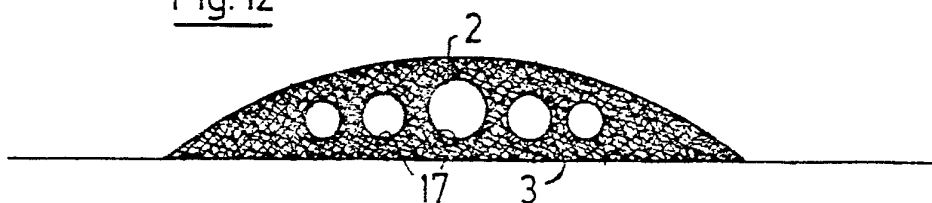


Fig.13

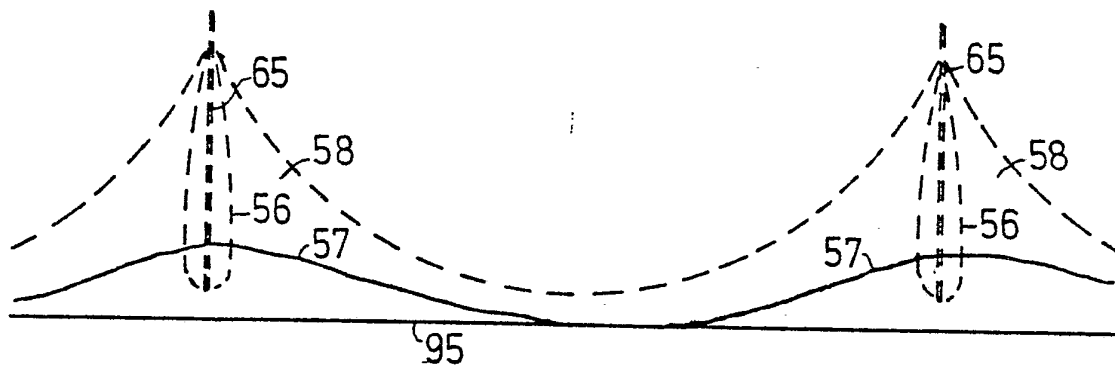


Fig.14


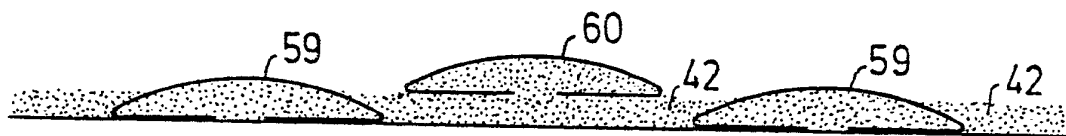


Fig.15

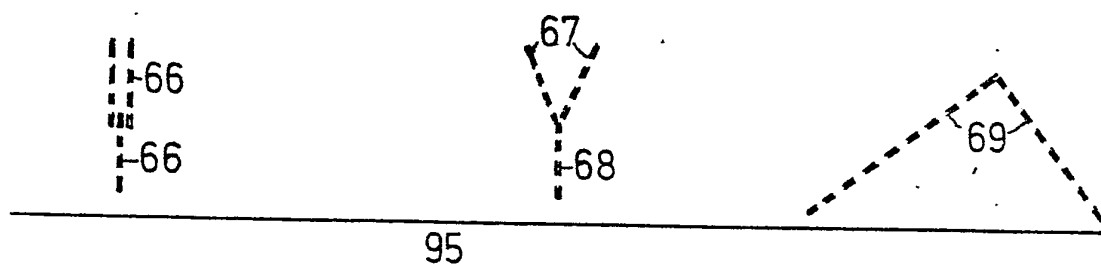

INTERNATIONAL SEARCH REPORT

International Application No PCT/DK81/00054

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC 3 E 02 B 3/00, E 02 D 3/00, E 02 D 17/00								
II. FIELDS SEARCHED <div style="text-align: center; font-size: small;">Minimum Documentation Searched *</div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; font-size: small;">Classification System</th> <th style="font-size: small;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px;">IPC 3</td> <td style="padding: 5px;">E 02 B 3/00-3/14, E 02 D 3/00, 3/08, 17/00, 17/18, 17/20, 29/00</td> </tr> <tr> <td style="padding: 5px;">US C1</td> <td style="padding: 5px;">61:2, 3, 4, 35, 36, 37, 38</td> </tr> </table> <div style="text-align: center; font-size: x-small;">Documentation Searched other than Minimum Documentation to the extent that such Documents are Included in the Fields Searched *</div> <p style="padding: 10px 5px;">SE, NO, DK, FI classes as above</p>			Classification System	Classification Symbols	IPC 3	E 02 B 3/00-3/14, E 02 D 3/00, 3/08, 17/00, 17/18, 17/20, 29/00	US C1	61:2, 3, 4, 35, 36, 37, 38
Classification System	Classification Symbols							
IPC 3	E 02 B 3/00-3/14, E 02 D 3/00, 3/08, 17/00, 17/18, 17/20, 29/00							
US C1	61:2, 3, 4, 35, 36, 37, 38							
III. DOCUMENTS CONSIDERED TO BE RELEVANT 14								
Category *	Citation of Document, 16 with indication, where appropriate, of the relevant passages 17	Relevant to Claim No. 18						
A	US, A, 3 561 219 published 1971, February 9, Masazumi Nishizawa							
A	GB, A, 1 208 205 published 1970, October 7, Tovay Industries							
A	DK, B, 121 080 published 1971, August 30, Fyens Saekkekompagni							
E	WO, A1, 81/01432 published 1981, May 28, Larsen Ole Fjord							
<div style="font-size: x-small;"> * Special categories of cited documents: 15 "A" document defining the general state of the art "E" earlier document but published on or after the international filing date "L" document cited for special reason other than those referred to in the other categories "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but on or after the priority date claimed "T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention "X" document of particular relevance </div>								
IV. CERTIFICATION								
Date of the Actual Completion of the International Search * 1981-08-14	Date of Mailing of this International Search Report * 1981-08-19							
International Searching Authority 1 Swedish Patent Office	Signature of Authorized Officer Jan Thorstensson							