

(19)



(11)

EP 3 165 673 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
27.06.2018 Bulletin 2018/26

(51) Int Cl.:
D21F 5/18^(2006.01) D21F 9/00^(2006.01)

(21) Application number: **15193630.9**

(22) Date of filing: **09.11.2015**

(54) PRODUCTION LINE FOR PRODUCING FIBER WEBS

FERTIGUNGSSTRASSE ZUR FERTIGUNG VON FASERBAHNEN

LIGNE DE FABRICATION DE BANDES DE FIBRES

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

- **OIKARINEN, Jarmo**
40500 JYVÄSKYLÄ (FI)
- **KOSKI, Tapio**
40950 MUURAME (FI)
- **MIKKILÄ, Harri**
40420 JYVÄSKYLÄ (FI)

(43) Date of publication of application:
10.05.2017 Bulletin 2017/19

(74) Representative: **Berggren Oy, Helsinki & Oulu**
P.O. Box 16
Eteläinen Rautatiekatu 10A
00101 Helsinki (FI)

(73) Proprietor: **Valmet Technologies Oy**
02150 Espoo (FI)

(72) Inventors:
• **VALKAMA, Timo**
40630 JYVÄSKYLÄ (FI)
• **KIVIMAA, Juha**
40950 MUURAME (FI)

(56) References cited:
WO-A1-81/02704 WO-A1-99/23298
DE-A1-102014 205 381 US-A- 3 079 700

EP 3 165 673 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates generally to producing fiber webs. Particularly the invention relates to a production line for producing special fiber web grades, especially machine glazed fiber web grades, according to the preamble of claim 1.

[0002] As known from the prior art in fiber web machines, especially in paper and board machines, the fiber web is produced and treated in an assembly formed by a number of apparatuses arranged consecutively in a process line. A typical production and treatment line comprises a forming section comprising a head box and a forming unit and a press section as well as a subsequent drying section and a reel-up. The production and treatment line can further comprise other devices and sections for finishing the fiber web, for example, a size press, a calender, a coating section. The production and treatment line also comprises typically at least one winder for forming customer rolls as well as a roll packaging apparatus. In this description and the following claims by fiber webs are meant for example paper and board webs.

[0003] Fiber webs, especially paper and board are available in a wide variety of types and can be divided according to basis weight in two grades: papers with a single ply and a basis weight of 25-300 g/m² and boards manufactured in multiply technology and having a basis weight of 150-600 m/m². It should be noted that the borderline between paper and board is flexible since board grades with lightest basis weights are lighter than the heaviest paper grades. Generally speaking, paper is used for printing and board for packaging. The present invention relates especially to production of fiber webs for special paper grades, which are typically paper grades with a specific feature. It is also typically only a minor component in the final product. Typical special fiber web grades are: Electrical papers (cable paper, capacitor tissue, transformer board, conductive paper, creped papers), Absorbent lamination papers, furniture papers (absorbent kraft, décor paper, overlay, pre-impregnated foils, laminating kraft), Filter papers (engine protection, laboratory and diagnostics, food and beverage, coffee filters, tea bags, vacuum cleaner dust bag), Special strong papers (abrasive base, spinning kraft, hunting cartridge paper), Release papers (pressure-sensitive labels, posters, signs and manual labels, vinyl casting, cover strips, masking tape), Copy and imaging papers (photographic paper, blueprint diazo paper, carbonless copy, thermal printing paper), Packaging grades (sack kraft, flexible packaging, label papers), Specialty printing grades, Special fine papers (security papers, artists' papers, tracing paper, plotting paper, luxury stationery), Building papers (wallpaper, barrier papers), Cigarette papers and Functional papers. In particular the present invention relates to MG (machine glazed)-grades, in production of which Yankee dryer is used typically for improved top side smoothness. The Yankee dryer gives a smooth surface and also closes the surface structure of

the fiber web very efficiently. The MG grades are used as specialty papers or boards, for example as wrapping papers and wraps for foodstuffs.

[0004] In publication FI20135150 is disclosed a fiber web machine for producing paper grades, which have one smooth surface comprising a head box, a forming unit of fourdrinier type, a press section comprising at least one press nip in a line press, a drying section comprising at least one normal Yankee dryer having at least one nip against the Yankee cylinder and a reel-up. The fiber web is guided directly from the press section to the Yankee cylinder. This fiber web machine is a so called MG machine.

[0005] In publication US 3 079 700 is disclosed a production line, in which bottom surface of a fiber web is first dried by a first Yankee cylinder to about 80% dry solids content, after which the fiber web is guided onto a second Yankee cylinder, on which top surface of the fiber web is against the surface of the Yankee cylinder and the fiber web is dried to about 92-96 % dry solids content.

[0006] In publication WO 99/232298 is disclosed a production line, in which water is removed from the tissue web before the Yankee cylinder by a so called air-press and after this the top surface of the tissue web is guided against the surface of the Yankee cylinder.

[0007] The MG machines are typically used as multi-grades machines i.e. different grades of fiber webs are produced in the machine. One object of the present invention is to create a production line for producing fiber webs of the MG machine type, in which capacity is not limiting the variety of grades to be produced.

[0008] An object of the invention is to create a production line for producing special fiber web grades, especially machine glazed fiber web grades in which the disadvantages and problems of prior art are eliminated or at least minimized.

[0009] In particular an object of the invention is to provide a new type of production line for producing machine glazed fiber web grades.

[0010] In order to achieve the above mentioned objects the production line according to the invention is mainly characterized by the features of the characterizing clause of claim 1. Advantageous embodiments and features are disclosed in the dependent claims.

[0011] In this description and in the claims by term top surface of the fiber web is meant the side of the fiber web that in the final product will be towards the contents of the wrap or the package. And thus the bottom surface of the fiber web is the other side of the web.

[0012] According to the invention the production line for producing special fiber web grades, especially machine glazed fiber web grades, comprises a forming section comprising a head box and a forming unit, a press section, a drying section comprising a Yankee dryer, a calender and a reel-up, wherein the Yankee dryer comprises a reversed Yankee cylinder and the top surface of the fiber web is against the surface of the Yankee cylinder.

[0013] According to the invention the drying section of the production line comprises a wire drying part comprising at least one single wire drying group and the wire drying part is in the production line before the Yankee dryer.

[0014] According to an advantageous feature of the invention the drying section of the production line comprises a wire drying part comprising at least one single wire drying group and the wire drying part is in the production line after the Yankee dryer.

[0015] According to an advantageous feature of the invention the wire drying part located after the Yankee dryer is descending such that a center line of a drying cylinder in respect of a center line of its successive drying cylinder is at higher location.

[0016] According to an advantageous feature of the invention the forming section contains only one forming unit and one head box and the forming unit is a fourdrinier forming unit or a hybrid forming unit. Thus a single-ply forming is advantageously applied in the production line according to the invention.

[0017] According to an advantageous feature of the invention the Yankee dryer comprises at least one roll, which forms a nip against the Yankee cylinder. Advantageously the Yankee dryer comprises two rolls, each of which form a nip against the Yankee cylinder and one of the rolls is a smooth roll and one of the rolls is a grooved roll.

[0018] According to an advantageous feature of the invention the press section is a center roll press section and in the press section a smooth roll is against the bottom surface of the fiber web. According to an advantageous feature of the invention in the production line dry solids content of the fiber web is 45 - 55%, when the fiber web reaches the surface of the Yankee cylinder.

[0019] Thus according to the invention in the production line for producing fiber webs a Yankee dryer comprising a Yankee cylinder and around its outer surface located Yankee hoods is used for closing the surface structure of the fiber web and to improve top side smoothness of the fiber web and advantageously before and after the Yankee dryer at least one drying cylinder group with advantageously single wire draw is located for providing further drying possibility of the fiber web. In the possible wire drying part before the Yankee dryer the bottom side of the fiber web is against the drying cylinders and in the possible wire drying part after the Yankee dryer the bottom side of the fiber web is against the drying cylinders, respectively. The Yankee dryer provides for the machine glazed surface of the fiber web and in the Yankee dryer the top surface of the fiber web is against the Yankee cylinder. In the Yankee dryer the Yankee cylinder is a reversed Yankee cylinder, in which the fiber web is first guided downwards along the cylinder surface and the rotating direction of the Yankee cylinder is counter-clockwise, when fiber web running direction is from left to right. By this the height of the production line is decreased, which f. ex. saves building costs of the ma-

chine hall for the production line. The fiber web is pressed against the cylinder surface of the Yankee cylinder by a drying fabric, advantageously by a drying felt.

[0020] Advantageously at least one nip is located at the Yankee cylinder formed by a roll pressing against the Yankee cylinder surface. Advantageously two pressing nips are formed against the Yankee cylinder by rolls, one of which is a smoot roll or a grooved roll or a perforated roll and the other is advantageously a grooved roll. In the first nip the fiber web is thus attached to the cylinder surface and in the other nip, which is advantageously the nip with the grooved roll, properties of the fiber web are improved, in case the grooved roll is used it is applied for marking the fiber web.

[0021] According to an advantageous feature of the invention the dry solids content of the fiber web is 45 - 55%, when the fiber web reached the surface of the Yankee cylinder. By this good attachment for the fiber web to the Yankee cylinder surface is achieved and good adherence during the run of the fiber web on the Yankee cylinder surface is achieved and the fiber web is unfastened only at the end run on the Yankee cylinder surface.

[0022] The fiber web is advantageously guided to and from the Yankee cylinder as a supported run, i.e. the fiber web is supported by a fabric during its run. The fiber web may have a free run from the press section to the wire drying part located before the Yankee dryer.

[0023] Advantageously from the Yankee cylinder of the Yankee dryer the fiber web is guided to the wire drying part with single wire draw, in which the wire drying part is descending i.e. center line of a first drying cylinder in respect the center line of its successive drying cylinder is at higher position. The advantageous, additional wire drying parts provide drying variation needed in multi-grade production and also provide for flexibility for dry capacity content variation as the drying capacity of a single wire drying part is effectively variable by adjusting the drying capacity of the drying cylinders. Single wire drying groups provide good runnability of the fiber web.

[0024] The forming unit in the forming section is advantageously a fourdrinier forming unit or a hybrid forming unit, in which the fine substances in the fiber web concentrate on the side of the top surface of the fiber web and do not drain away with the white waters. Also the desired formation of the fiber web is achievable. Typically the forming section contains only one head box and one forming unit and the single-ply forming is applied.

[0025] The press section comprises advantageously a center roll with two press nip in which a smooth roll is against the bottom surface of the fiber web. Against the top surface of the fiber web advantageously a shoe press nip is located. In connection with each nip a felt is advantageously used as press fabric. In the press section good density of the fiber web is provided.

[0026] In the production line for producing fiber webs the production begins from a head box, type of which is advantageously a dilution head box but other types of head boxes can be used as well. Typically a one layer

head box is used.

[0027] After drying in the production line for producing fiber webs the fiber web is calendered in a calender comprising at least one calender nip and at the end the full width fiber web is reeled to a parent roll in a reel-up. In the calender advantageously a thermo roll of the calendaring nip will be against the top side of the fiber web. Depending on the final use of the fiber web further treatments can be provided and the full width web is typically before sending to customers formed to customer rolls in a slitter-winder and packed in roll packaging apparatus.

[0028] As is clear from the above by the production line according to the invention many advantages are achieved and for example in the forming section a fine substance rich top side of the fiber web is created and in the press section the top surface receives good density and in the Yankee cylinder the by the forming section created fine substance rich top side of the fiber web is against the cylinder and additionally the reversed Yankee cylinder also provides for cost savings due to the decreased height of the production line.

[0029] In the following the invention is explained in detail with reference to the accompanying drawing to which the invention is not to be narrowly limited.

[0030] In figure 1 is shown schematically an advantageous example of a production line for producing fiber webs according to the invention.

[0031] In figure 2 is shown schematically another advantageous example of a production line for producing fiber webs according to the invention.

[0032] During the course of the following description like numbers and signs will be used to identify like elements according to the different views which illustrate the invention and its advantageous examples. In the figures some repetitive reference signs have been omitted for clarity reasons. In the figures rolls and cylinders provided with a drive are denoted by a black center circle.

[0033] In the examples of figures 1 and 2 the production line for producing fiber webs comprises a forming section comprising a head box 100 and a forming unit 200 and a press section 300 as well as a subsequent drying section comprising a drying cylinder part 400, a Yankee dryer 500 and another wire drying part 600 followed by a calender 700 and a reel-up 800. The examples of figures 1 and 2 differ only in respect of the forming unit type and thus in figure 2 only the beginning of the production line is shown.

[0034] The head box 100 in the examples of the figures is a dilution head box but other types of head boxes are applicable in the production line. From the head box mass is fed on to a wire 20 of the forming unit 200.

[0035] The forming unit 200 in the example of figure 1 is a fourdrinier type former and in the example of figure 2 is a hybrid type former.

[0036] The forming unit 200 in the example of figure 1 comprises the wire 20, which runs as a continuous loop guided by guide rolls 21 located inside the wire loop, some rolls 23 are provided with a drive. Tension of the

wire 20 is adjusted by outside the loop located tension roll 22. The wire 20 forms a continuous planar surface onto which the mass is fed from the head box 100 and below the planar run are located suction boxes 25 for removing water.

[0037] In the example of figure 2 the forming unit 200 is a hybrid type former and comprises the wire 20, which runs as a continuous loop guided by guide rolls 21 located inside the wire loop, some rolls 23 are provided with a drive. Tension of the wire 20 is adjusted by outside the loop located tension roll 22. The wire 20 forms a continuous planar surface onto which the mass is fed from the head box 100 and below the planar run are located suction boxes 25 for removing water. The hybrid forming unit 200 of the example of figure 2 also comprises above the planar section located suction box 28 with a wire loop 21 with inside the loop located guide rolls 23. In this example water can also be removed upwards and thus the fine contents on the top layer can be further adjusted by the suction box 28.

[0038] The forming unit 200 as the fourdrinier former (fig. 1) or the hybrid former (fig. 2) provides for the fine substances in the fiber web W concentrate on the side of the top surface of the fiber web W and the desired formation of the fiber web W is achieved. The forming unit 200 may also comprise a breast roll 26 shaker known as such from prior art. The forming unit 200 can also be provided with adjustable or loadable foils. From the forming unit 200 the fiber web W is guided to the press section 300.

[0039] The press section 300 is a center roll press section, in which press nips are formed by rolls 31, 32 located to create the press nip against the common center roll 30. For pick-up of the fiber web from the forming section the roll 31 is advantageously a suction roll. Each roll 31, 32 are provided with a press fabric 34 guided by guide rolls 35 located inside the loop formed by the press fabric. The tension of the fabrics 34 is adjusted by outside the loops located tension roll 36. The press section 300 thus comprises a center roll 30 with two press nips in which the center roll 30 has a smooth surface and it is against the bottom surface of the fiber web W. Against the top surface of the fiber web W advantageously at least one shoe press nip is formed by the press roll 32. In connection with each nip a felt is advantageously used as press fabric 34. In the press section 300 good surface smoothness on to the bottom side of the fiber web W and good density of the fiber web W is provided. From the press section 300 the fiber web W is guided to the a subsequent drying section comprising a wire drying part 400, a Yankee dryer 500 and another wire drying part 600. The fiber web W may have a free run from the press section 400 to the wire drying part 400 located before the Yankee dryer 500 or the fiber web W may be transferred from the press section to the wire drying part by closed transfer.

[0040] In the first wire drying part 400 before the Yankee dryer 500 the fiber web W is dried in two drying groups of single wire draw. Each group comprises a drying wire

40, heated drying cylinders 41 in the top row and reversing cylinders 42 in the bottom row. The fiber web W that is being dried runs on support of the drying wire 40 such that the drying wire 40 presses the fiber web W on a drying cylinders 41 against heated cylinder surfaces, and the fiber web W remains at the side of the outside curve of reversing cylinders 42 located between drying cylinders 41. The drying wires 40 run as continuous loops guided by guide rolls 48 located inside the loop and tension of the wires 40 can be adjusted by outside the loop located tension roll 49. In the wire drying part 400 before the Yankee dryer 500 the bottom side of the fiber web W is in contact with the surface of the drying cylinders 41. From the first wire drying section the fiber web W is guided as a supported run to the Yankee dryer. Advantageously the first wire drying part 400 contains only single wire draw drying group / groups and the wire drying part 400 is in the production line before the Yankee dryer 500. The fiber web W is supported by the support fabric 45 forming a continuous loop guided by guide rolls 46 located inside the loop and tensions of which can be adjusted by the outside the loop located tension roll 47. Also for smooth transfer of the fiber web W from the wire drying part to the Yankee dryer runnability devices 43, 44 are provided. In the wire drying part before the Yankee dryer the fiber web W is dried to the dry solids content of the fiber web is 45 - 55% and thus the fiber web reaches the surface of the Yankee cylinder in this dry solid content. By this good attachment for the fiber web W to the Yankee cylinder surface is achieved and good adherence during the run of the fiber web W on the Yankee cylinder surface is achieved.

[0041] The Yankee dryer 500 comprises a heated Yankee cylinder 50 and around its outer surface located Yankee hoods 51. The Yankee dryer 500 closes the surface structure of the fiber web W and improves top side smoothness of the fiber web W. The Yankee dryer 500 also provides for the machine glazed surface of the fiber web W. In the Yankee dryer the top surface of the fiber web W is dried against the Yankee cylinder 50. In the Yankee dryer 500 the Yankee cylinder is a reversed Yankee cylinder, in which the fiber web W is first guided downwards along the cylinder surface and the rotating direction of the Yankee cylinder is counter-clockwise, when the running direction of the fiber web W is from left to right. The fiber web W is pressed against the cylinder surface of the Yankee cylinder 50 by a drying fabric, advantageously by a drying felt. At least one nip is located at the Yankee cylinder formed by a roll 52, 53 pressing against the Yankee cylinder surface. Advantageously two pressing nips are formed against the Yankee cylinder by rolls 52, 53, first one 52 of which is a smooth roll or a grooved roll or a perforated roll and the other 53 is advantageously a grooved roll. In the first nip the fiber web W is attached to the cylinder surface and in the other nip, which is advantageously the nip with the grooved roll 53, properties of the fiber web W are improved, in case the grooved roll 53 is used it is applied for marking the fiber

web. In connection with the Yankee cylinder 50 a web tray 54 is located for collecting the fiber web W in case of a web break. The Yankee hoods 51 blow hot air towards the fiber web W on the area of Yankee cylinder 50.

[0042] After the Yankee dryer 500 the fiber web W is guided by a support fabric 55, guided by guide rolls 57 and tension roll 58 and aided by runnability devices 56 to a wire drying section 600 of single wire draw having one drying cylinder group with drying cylinders 62, reversing cylinders 62 and a drying wire 60 and its guide rolls 68 and tension roll 69 for providing further drying possibility of the fiber web W and in which the bottom side of the fiber web W is in contact with the surface of the drying cylinders 41. This wire drying part 600 is descending i.e. center line of a first drying cylinder 61 in respect of center line of its successive the drying cylinder is at higher position. After the wire drying part 600 the fiber web W is guided in a free run to the calender 700. Advantageously the wire drying part 600 contains only single wire draw drying group / groups and the wire drying part 600 is in the production line after the Yankee dryer 500. By this arrangement fiber web W is supported at least from the beginning of first wire drying part 400 until the end of wire drying part 600. In the calender 700 the fiber web W is calendered in a calender nip formed between two calender rolls 71, 72 on which one is a thermo roll 71 that is against the top side of the fiber web W. From the calender 700 the fiber web W is guided to the reel-up 800.

[0043] In the reel-up 800 the full width fiber web W is reeled to a parent roll 80.

[0044] Above only some advantageous examples of the inventions has been described to which examples the invention is not to be narrowly limited and many modifications and alterations are possible within the invention.

Claims

1. Production line for producing special fiber web grades, especially machine glazed fiber web grades, which production line comprises a forming section comprising a head box (100) and a forming unit (200), a press section (300), a drying section comprising a Yankee dryer (500), a calender (700) and a reel-up (800), which Yankee dryer 500 comprises a reversed Yankee cylinder (50) and in which the top surface of the fiber web (W) is against the surface of the Yankee cylinder (50), **characterized in that** the drying section of the production line comprises a first wire drying part (400) comprising at least one single wire drying group and that the first wire drying part (400) is in the production line before the Yankee dryer (500).
2. Production line according to claim 1, **characterized in that** the drying section of the production line com-

prises a second wire drying part (600) comprising at least one single wire drying group and that the second wire drying part (600) is in the production line after the Yankee dryer (500).

3. Production line according to claim 2, **characterized in that** the wire drying part (600) located after the Yankee dryer (500) is descending such that a center line of a drying cylinder (61) in respect of a center line of its successive drying cylinder (61) is at higher position.
4. Production line according to any of claims 1 - 3, **characterized in that** the forming section contains only one forming unit (200) and one head box (100) and that the forming unit (200) is a fourdrinier forming unit or a hybrid forming unit.
5. Production line according to any of claims 1 - 4, **characterized in that** the Yankee dryer (500) comprises at least one roll (52, 53), which forms a nip against the Yankee cylinder (50).
6. Production line according to claim 5, **characterized in that**, the Yankee dryer (500) comprises two rolls (52, 53), each of which form a nip against the Yankee cylinder (50) and that one of the rolls (52,53) is a smooth roll and one of the rolls (52,53) is a grooved roll.
7. Production line according to any of claims 1 - 6, **characterized in that**, the press section (300) is a center roll press section and that in the press section a smooth roll (30) is against the bottom surface of the fiber web (W).
8. Production line according to any of claims 1 - 7, **characterized in that**, in the production line dry solids content of the fiber web (W) is 45 - 55%, when the fiber web (W) reaches the surface of the Yankee cylinder (50).

Patentansprüche

1. Fertigungslinie zur Herstellung spezieller Faserbahnqualitäten, insbesondere maschinengeglätteter Faserbahnqualitäten, wobei die Fertigungslinie eine Formierpartie mit einem Stoffauflauf (100) und einer Formiereinheit (200), eine Pressenpartie (300), eine Trockenpartie mit einem Yankee-Trockner (500), einen Kalander (700) und einen Aufwickler (800) aufweist, wobei der Yankee-Trockner (500) einen umgekehrten Yankee-Zylinder (50) aufweist und in dem die obere Fläche der Faserbahn (W) gegen die Fläche des Yankee-Zylinders (50) anliegt, **dadurch gekennzeichnet, dass** die Trockenpartie der Fertigungslinie einen ersten

Siebtrocknungsteil (400) aufweist, der wenigstens eine einzelne Siebtrocknungsgruppe aufweist, und dass der erste Siebtrocknungsteil (400) in der Fertigungslinie vor dem Yankee-Trockner (500) angeordnet ist.

5

2. Fertigungslinie nach Anspruch 1, **dadurch gekennzeichnet, dass** die Trockenpartie der Fertigungslinie einen zweiten Siebtrocknungsteil (600) aufweist, der wenigstens eine einzelne Siebtrocknungsgruppe aufweist, und dass der zweite Siebtrocknungsteil (600) in der Fertigungslinie nach dem Yankee-Trockner (500) angeordnet ist.

10

3. Fertigungslinie nach Anspruch 2, **dadurch gekennzeichnet, dass** der Siebtrocknungsteil (600), der nach dem Yankee-Trockner (500) angeordnet ist, derart nach unten verläuft, dass eine Mittellinie eines Trocknungszyinders (61) bezüglich einer Mittellinie seines nachfolgenden Trocknungszyinders (61) sich in einer höheren Position befindet.

15

20

4. Fertigungslinie nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die Formierpartie nur eine Formiereinheit (200) und einen Stoffauflauf (100) aufweist, und dass die Formiereinheit (200) eine Fourdrinier-Formiereinheit oder eine Hybridformiereinheit ist.

25

30

5. Fertigungslinie nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** der Yankee-Trockner (500) wenigstens eine Walze (52,53) aufweist, die einen Nip gegen den Yankee-Zylinder (50) bildet.

35

6. Fertigungslinie nach Anspruch 5, **dadurch gekennzeichnet, dass** der Yankee-Trockner (500) zwei Walzen (52,53) aufweist, die jede einen Nip gegen den Yankee-Zylinder (50) bilden, und dass eine der Walzen (52,53) eine glatte Walze und eine der Walzen (52,53) eine gerillte Walze ist.

40

45

7. Fertigungslinie nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** die Pressenpartie (300) eine Zentrums-Walzen-Pressenpartie ist, und dass in der Pressenpartie eine glatte Walze (30) gegen die untere Fläche der Faserbahn (W) anliegt.

50

8. Fertigungslinie nach einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass** in der Fertigungslinie der Trockenfeststoffgehalt der Faserbahn (W) 45 - 55 % beträgt, wenn die Faserbahn (W) die Oberfläche des Yankee-Zylinders (50) erreicht.

55

Revendications

1. Ligne de production pour la production de classes de bandes de fibres spéciales, en particulier des classes de bandes de fibres machine glacées, ladite ligne de production comprenant une section de formation comprenant une caisse de tête (100) et une unité de formation (200), une section de presse (300), une section de séchage comprenant un séchoir Yankee (500), une calandre (700) et un enrouleur (800), ledit séchoir Yankee (500) comprenant un cylindre Yankee inversé (50), et dans lequel la surface supérieure de la bande de fibres (W) se trouve contre la surface du cylindre Yankee (50), **caractérisée en ce que** la section de séchage de la ligne de production comprend une première partie de séchage de fil (400) comprenant au moins un groupe de séchage de fil unique et **en ce que** la première partie de séchage de fil (400) se trouve dans la ligne de production en amont du séchoir Yankee (50). 5

2. Ligne de production selon la revendication 1, **caractérisée en ce que** la section de séchage de la ligne de production comprend une deuxième partie de séchage de fil (600) comprenant au moins un groupe de séchage de fil unique et **en ce que** la deuxième partie de séchage de fil (600) se trouve dans la ligne de production en aval du séchoir Yankee (500). 10

3. Ligne de production selon la revendication 2, **caractérisée en ce que** la partie de séchage de fil (600) située en aval du séchoir Yankee (500) est descendante, de sorte qu'une ligne centrale d'un cylindre de séchage (61) se trouve à une position plus haute par rapport à une ligne centrale de son cylindre de séchage (61) suivant. 15

4. Ligne de production selon l'une quelconque des revendications 1 à 3, **caractérisée en ce que** la section de formation contient seulement une unité de formation (200) et une caisse de tête (100) et **en ce que** l'unité de formation (200) est une unité de formation de fourdrinier ou une unité de formation hybride. 20

5. Ligne de production selon l'une quelconque des revendications 1 à 4, **caractérisée en ce que** le séchoir Yankee (500) comprend au moins un rouleau (52, 53) formant un pincement contre le cylindre Yankee (50). 25

6. Ligne de production selon la revendication 5, **caractérisée en ce que** le séchoir Yankee (500) comprend deux rouleaux (52, 53), chacun d'entre eux formant un pincement contre le cylindre Yankee (50) et **en ce que** l'un des rouleaux (52, 53) est un rouleau lisse et l'un des rouleaux (52, 53) est un rouleau cannelé. 30

7. Ligne de production selon l'une quelconque des revendications 1 à 6, **caractérisée en ce que** la section de presse (300) est une section de presse à rouleau central et **en ce que** dans la section de presse, un rouleau lisse (30) est placé contre la surface inférieure de la bande de fibres (W). 35

8. Ligne de production selon l'une quelconque des revendications 1 à 7, **caractérisée en ce que** dans la ligne de production, la teneur en matières solides sèches de la bande de fibres (W) est comprise entre 45 et 55 %, lorsque la bande de fibres (W) atteint la surface du cylindre Yankee (50). 40

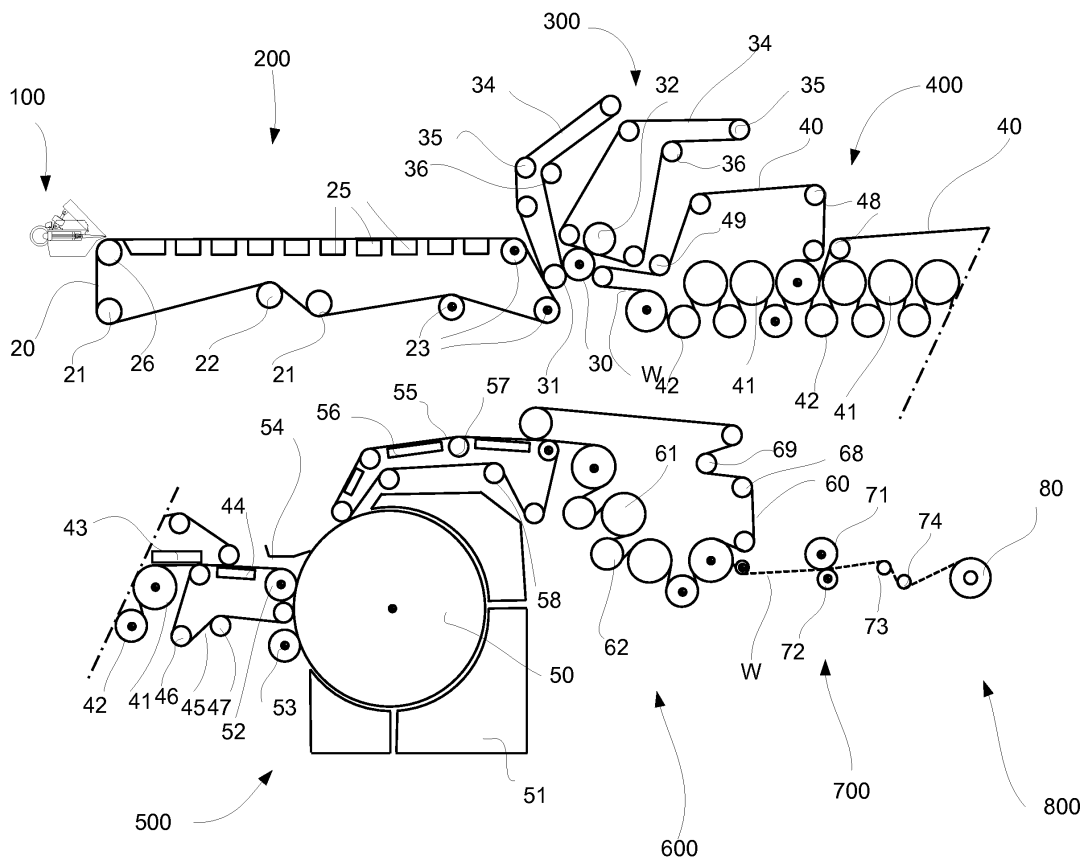


Fig. 1

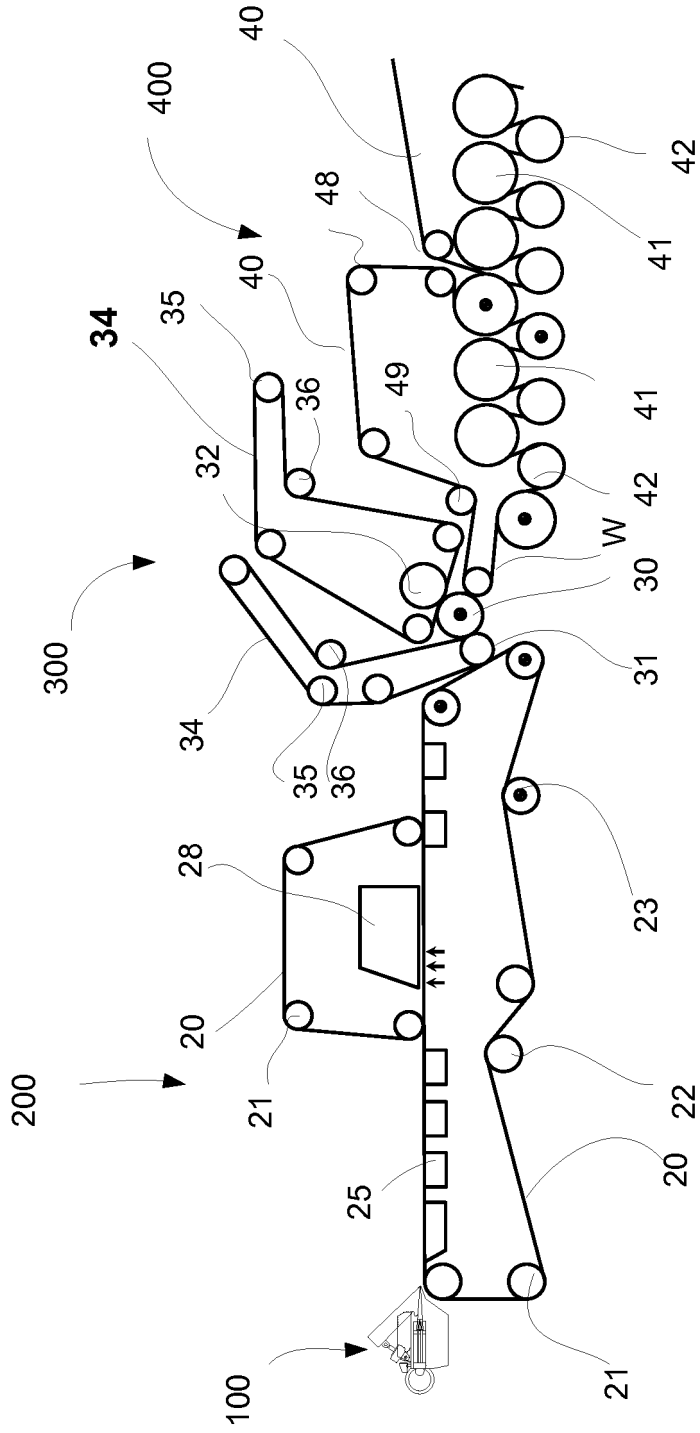


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- FI 20135150 [0004]
- US 3079700 A [0005]
- WO 99232298 A [0006]