

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2012247390 B2**

(54) Title
Elastic absorbent sanitary article for absorbing bodily fluids

(51) International Patent Classification(s)
B32B 5/00 (2006.01) **B32B 7/10** (2006.01)
A61F 13/00 (2006.01) **B32B 27/00** (2006.01)
B32B 5/04 (2006.01) **B32B 27/02** (2006.01)
B32B 5/12 (2006.01) **B32B 27/12** (2006.01)
B32B 5/22 (2006.01) **B32B 27/24** (2006.01)
B32B 5/26 (2006.01) **B32B 27/28** (2006.01)
B32B 7/02 (2006.01)

(21) Application No: **2012247390** (22) Date of Filing: **2012.04.27**

(87) WIPO No: **WO12/146748**

(30) Priority Data

(31)	Number	(32)	Date	(33)	Country
	10 2011 018 985.8		2011.04.28		DE

(43) Publication Date: **2012.11.01**

(44) Accepted Journal Date: **2016.03.03**

(71) Applicant(s)
Evonik Degussa GmbH

(72) Inventor(s)
Fenske, Wilfried

(74) Agent / Attorney
Spruson & Ferguson, L 35 St Martins Tower 31 Market St, Sydney, NSW, 2000

(56) Related Art
WO 2003/106162 A1
WO 2001/034082 A1
WO 1999/049826 A1
US 2003/0082966 A1
GB 2181036 A

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges

Eigentum

Internationales Büro

(43) Internationales

Veröffentlichungsdatum

1. November 2012 (01.11.2012)



(10) Internationale Veröffentlichungsnummer

WO 2012/146748 A1

(51) Internationale Patentklassifikation:

B32B 5/00 (2006.01) B32B 27/00 (2006.01)
B32B 5/04 (2006.01) B32B 27/02 (2006.01)
B32B 5/12 (2006.01) B32B 27/12 (2006.01)
B32B 5/22 (2006.01) B32B 27/24 (2006.01)
B32B 5/26 (2006.01) B32B 27/28 (2006.01)
B32B 7/02 (2006.01) A61F 13/00 (2006.01)
B32B 7/10 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2012/057833

(22) Internationales Anmeldedatum:
27. April 2012 (27.04.2012)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
10 2011 018 985.8
28. April 2011 (28.04.2011) DE

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme
von US): EVONIK INDUSTRIES AG [DE/DE];
Rellinghauser Straße 1-11, 45128 Essen (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): FENSKE, Wilfried
[DE/DE]; Odenwaldstraße 22, 64683 Einhausen (DE).

(74) Anwälte: HABERMANN, Jan et al.; Katscher
Habermann Patentanwälte, Dolivostraße 15 A, 64293
Darmstadt (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,
AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.


(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ,
TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ,
RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY,
CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,
LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Fortsetzung auf der nächsten Seite]

(54) Title: ELASTIC ABSORBENT SANITARY ARTICLE FOR ABSORBING BODILY FLUIDS

(54) Bezeichnung : ELASTISCHER ABSORBIERENDER HYGIENEARTIKEL FÜR DIE AUFNAHME VON
KÖRPERFLÜSSIGKEITEN

Fig. 2:

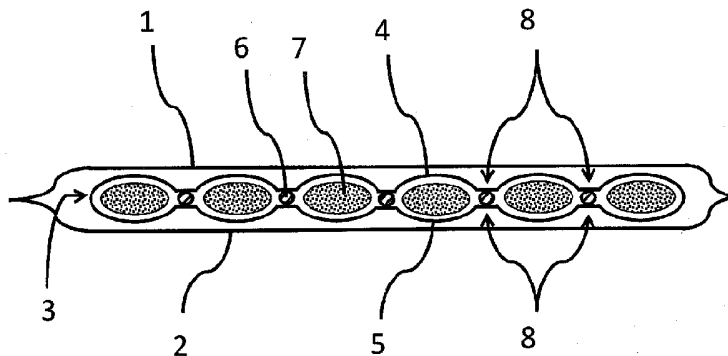

(57) Abstract: An absorbent sanitary product for absorbing fluids with a pliable top sheet (1) and a pliable back sheet (2) has an absorbent laminate (3) arranged therebetween, which laminate (3) has two pliable outer layers (4, 5), between which at least two diagonally crossing, prestressed layers of elastic threads (6) are arranged in an adhesive manner and a quantity of a superabsorbent polymer (7) is incorporated in the discrete sections which are formed as a result, wherein the outer layer (4) of the laminate (3) on the top-sheet side is made of a hydrophobic material and the outer layer (5) of the laminate (3) on the back-sheet side is made of a hydrophilic material.

(57) Zusammenfassung: Ein saugfähiges Hygieneprodukt zur

[Fortsetzung auf der nächsten Seite]

WO 2012/146748 A1



Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz 3)

Aufnahme von Flüssigkeiten mit einem biegeweichen Topsheet (1) und einem biegeweichen Backsheet (2) weist dazwischen angeordnet ein absorbierendes Laminat (3) auf, das seinerseits zwei biegeweiche äußere Lagen (4, 5) aufweist, zwischen denen mindestens zwei sich diagonal kreuzende, vorgespannte Lagen von elastischen Fäden (6) haftend angeordnet und in den dadurch gebildeten diskreten Sektionen jeweils eine Menge eines superabsorbierenden Polymers (7) eingelagert sind, wobei die topsheet-seitige äußere Lage (4) des Laminats (3) aus einem hydrophoben Material besteht und die backsheet-seitige äußere Lage (4) des Laminats (3) aus einem hydrophilen Material besteht.

Elastic absorbent sanitary article for absorbing bodily
5 fluids

The invention relates to an elastic, absorbent hygiene
article for acquiring body fluids, having a flexurally
10 yielding topsheet and a flexurally yielding backsheet,
inserted adheringly between which is an absorbent laminate,
the absorbent laminate consisting of two flexurally
yielding outer plies, incorporated adheringly between which
are at least two diagonally intersecting, pre-tensioned
15 plies of elastic filaments, with discrete sections of
superabsorbent polymer being incorporated in the laminate.

Modern hygiene articles for acquiring body fluids, such as
urine, perspiration, menstrual bleeding or secretions from
20 wounds, are based in principle on a layered sequence of a
plurality of plies of functional, flexurally yielding
materials which, in appropriate form, acquire the
discharged fluid from the emission site and distribute it,
store it and close it off with respect to the exterior.
25 Efforts are made additionally to minimize wetting back to
the skin of the wearer, and suitable elastic elements, such
as elastic closure systems and specific elastication of
individual regions, are used with the aim of optimum
conformity to the user's anatomy.

30

This procedure is encountered consistently in the
development of a very wide variety of hygiene and medical

articles, such as, for instance, infant nappies, sanitary towels, incontinence products, dressing materials, clinical absorption material, packaging material for foods, etc.

- 5 It is fundamentally desirable to optimize the number and quantity of the materials for fulfilling this function in order to achieve economic and environmental rationalization not only of the levels of material and energy employed in the production of these products but also of the volume of
10 the product and hence its storage, distribution and disposal requirement.

Products with the function described above consist in principle of a first outer ply (topsheet) facing the skin
15 of the wearer and intended to have skin-kindly qualities; an opposite, second outer ply (backsheet) intended to provide security against unwanted emergence of fluid into clothing or the surrounding area; and also, incorporated therein, an absorption core for the absorption and storage
20 of the body fluid. This absorption core is intended to fulfil the functions of rapid fluid acquisition, rapid transverse distribution in the product, and reliable storage of the fluid in the absorption core, with the ultimate aim of minimal wetting back by the fluid acquired
25 in the absorption core.

In the products known from the art, the function of fluid acquisition is achieved by plies of rapidly fluid-conducting materials, such as, for instance, lightweight,
30 bulky spunbonded nonwovens or needle-punched felts based on polyester, polypropylene or polyethylene; the function of distributing the fluid in the absorption core is achieved

by cellulosic fibres, cellulose or chemically modified cellulosic fibres ("Curly fibres"); and the function of fluid storage is achieved by superabsorbent polymers. It is in the nature of the matter that here, owing to the multiple effect of the individual materials, there is a partial overlap of functions. It is also obvious that materials which are able effectively to transport and conduct fluids fulfil this transport function, normally, equally in all directions. Effective transport and conduct of fluid away from the skin side in the direction of the absorption core therefore generally implies a comparably effective transport and conduct effect back in the direction of the skin side of the wearer, which promotes unwanted back-wetting.

There is a need to configure a hygiene article of the generic type specified at the outset in such a way that the properties of the hygiene article are improved with minimal cost and deployment of material and manufacture. Here, where possible, the storage of fluid is to be ensured very rapidly and reliably, and at the same time the risk of back-wetting is to be reduced.

It is an object of the present invention to at least substantially satisfy the above need or to at least provide a useful alternative.

An aspect of the present invention provides an absorbent hygiene product for acquiring fluids, formed at least of a flexurally yielding topsheet and a flexurally yielding backsheet, inserted adheringly between which is an absorbent laminate, consisting of two flexurally yielding outer plies, incorporated adheringly between which are at least two diagonally intersecting, pre-tensioned plies of elastic filaments, and into which discrete sections of superabsorbent polymer have been incorporated, wherein the topsheet-side outer ply of the laminate is a hydrophobic material which in the region of the adherence with the elastic filaments and the second outer ply has been locally or sectionally made fluid-pervious mechanically, chemically or thermally.

In contrast to the hygiene products known from the art, the outer ply of the laminate, which faces the topsheet and hence the skin side of the hygiene product, is not optimized for rapid liquid acquisition and distribution, but instead, entirely oppositely, is given a hydrophobic design, in order to counteract unwanted back-wetting that might be caused by the transport of the fluid initially acquired in the laminate back towards the skin side. This back-wetting is very largely prevented by the hydrophobic qualities of the outer ply of the laminate, facing the topsheet. The laminate of the invention supports improved fluid acquisition by the superabsorbent polymer material.

In accordance with an embodiment of the invention, the topsheet-side outer ply of the laminate has a high barrier effect for fluids.

The examples which follow serve for further illustration of the qualities of the hygiene products of the invention. The experiments performed for this purpose used and investigated the nonwoven materials below, which are identified below only using the abbreviated designation indicated in each case:

Abbreviated designation	Designation	Manufacturer	Grammage	Quality
Corovin	PC 5FF-111	Corovin GmbH; Peine, Germany	17 gsm	hydrophobic
Fibrella	Fibrella 30	Suominen Nonwovens Ltd.; Nakkila, Finland	30 gsm	hydrophilic
Novellin	Novellin 23	Suominen Nonwovens Ltd.; Nakkila, Finland	23 gsm	hydrophilic
Pegas	Pegatex 13	Pegas nonwovens s.r.o.; Znojmo, Czech Republic	13 gsm	hydrophobic

In each case, a number of specimens of these nonwoven
5 materials were investigated for those properties - such as,
for example, barrier effect and spreading - that are
relevant for the present invention.

Example 1: Determination of the barrier effect

10

In order to be able to determine the barrier effect of a
nonwoven material in a suitable way, the height of a column
of liquid over the nonwoven was determined for different
nonwovens.

15

The test apparatus used was a transparent liquid-rise
column having a length of 50 cm and an internal diameter of
1.2 cm (external diameter 1.6 cm), which carried a
continuous scale in 0.1 cm steps. Each of the test

specimens used was a square nonwoven specimen with an edge length of 6 cm. The test liquid used was a 0.9% strength NaCl solution. Using a tube clamp or a rubber ring, the nonwoven specimen is fixed at the bottom end of the liquid-rise column, with an orientation such that the possibly rougher side of the nonwoven specimen faces in the direction of the liquid-rise column. The position to be selected here for the clamping ring or rubber ring is 1 cm above the bottom tube end of the liquid-rise column, and the nonwoven specimen must be fixed on the tube in such a way that there is no liquid egress above the clamping ring during the test procedure. A calibrated pump (e.g. Ismatec MCP ISM 404B) is used to add the test solution to the liquid-rise column with a feed rate of 60 g/min. The bottom end of the feed line of the pump should be set 20 cm above the nonwoven specimen. Simultaneously with the start of the pump, time measurement also begins. The height of the liquid that forms above the specimen in the liquid-rise column, or the height of the liquid level, is read off at the point of first drop breakthrough by test liquid and also after 1, 2, 3, 4, and 5 minutes in each case.

The overview below shows the average level heights after 5 minutes, or 300 seconds, the average values reported being averaged over 5 measurements in each case:

	Time [s]	Ø height [cm]
Fibrella	300	0.1
Novellin	300	0.2
Pegas	300	3.3
Corovin	300	11.5

It is apparent that hydrophobic nonwovens such as, for
5 example, Corovin or Pegas exhibit a significantly higher
liquid level height than other nonwovens (for example
Fibrella or Novellin). The barrier effect of the
hydrophobic nonwovens, accordingly, is much better than the
barrier effect of the hydrophilic nonwovens. This barrier
10 effect of the topsheet-side outer ply is authoritatively
responsible for the low back-wetting qualities of the
laminate of the invention. It has emerged, surprisingly,
that contrary to the prejudice among those in the art, in
spite of a good barrier effect on the part of the topsheet-
15 side outer ply, it is possible to enable rapid liquid
acquisition and large-area distribution within the
laminate, and the barrier effect of the topsheet-side outer
ply does not fundamentally rule out these additionally
required qualities.

20

For the present invention, a good barrier effect is assumed
when the measured average liquid level height is more than
2 cm.

25 A very good barrier effect is assumed when the measured
average liquid level height is more than 5 cm. In
accordance with one particularly advantageous embodiment of
the concept of the invention, therefore, the topsheet-side

outer ply of the laminate has a very good barrier effect,
i.e. a liquid column of more than 5 cm, preferably of more
than 8 cm and with more particular preference of more than
10 cm, when the determination of the liquid level heights
5 that is elucidated in more detail above is carried out.

In order to support the distribution and rapid acquisition
of a relatively large quantity of fluid within the
laminate, the invention further provides for the backsheetside
10 side outer ply of the laminate to be a hydrophilic material
with good fluid transport quality.

Advantageously here, the backsheetside outer ply of the
laminate is a hydrophilic material featuring high areal
15 distribution of a fluid drop applied virtually pointwise.

Example 2: Determination of the areal distribution
qualities

20 In order to characterize the areal distribution qualities
of a fluid applied to a nonwoven material, the spreading
was determined for various nonwovens in accordance with the
experimental procedure described below. The test apparatus
used was an inner plastic ring having an external diameter
25 of 9 cm (height 8 cm, internal diameter 8.2 cm) and also an
outer plastic ring having an internal diameter of 9.2 cm.
The test specimens used were square nonwoven specimens with
an edge length of 15 cm. The test fluid used was a 0.9%
strength NaCl solution coloured using Patent Blue (0.8 g
30 per 100 g of NaCl solution). The nonwoven specimen is
placed centrally onto the smaller plastic ring and is fixed
by inserting one of the two rings into the other. In this

arrangement, the possibly rougher side of the nonwoven specimen is oriented to the top (towards the application of fluid). Using an Eppendorf pipette, 1 ml of the test solution is cautiously applied centrally to the nonwoven specimen at an angle of about 30°. After a waiting time of 20 minutes, any of the test fluid that has remained on the nonwoven specimen is removed with a pipette. The nonwoven specimens are subsequently dried at 30°C for 4 hours. To determine the area wetted, the dried nonwoven specimen is photocopied and the wetted region (which appears dark on the photocopy) is determined by being cut out and weighed (basis weight of the paper 0.01 g/cm²).

The overview below indicates the average size of the area of the nonwoven specimen that is wetted by the quantity of fluid, averaged over 4 measurements in each case:

	Area wetted [cm ²]
Fibrella	57.0
Novellin	20.5
Corovin	2.1
Pegas	1.8

It was evident that certain hydrophilic nonwovens such as, for example, Fibrella or Novellin have a significantly better fluid distribution property than other nonwovens such as, for example, Corovin or Pegas.

In connection with the present invention, a high areal distribution of a fluid applied to the nonwoven material is assumed when the fluid quantity of 1 ml applied to the nonwoven material is distributed on average over a wetted area of more than 10 cm².

A very high areal distribution is assumed when the fluid quantity applied to the nonwoven material is distributed on average over a wetted area of more than 20 cm². In accordance with one particularly advantageous embodiment of the concept of the invention, therefore, provision is made for the fluid quantity applied to the nonwoven material to be distributed on average over a wetted area of more than 20 cm², preferably more than 40 cm² and more preferably more than 55 cm², when the determination of the liquid distribution as elucidated in more detail above is carried out.

For the purpose of determining a particularly advantageous inventive embodiment of the absorbent laminate, experiments were carried out, in each of which the fluid acquisition and back-wetting were determined and investigated for different combinations of hydrophilic and hydrophobic materials for the outer plies of the laminate.

20

Example 3: Determination of the characteristic qualities of different absorbent laminates

A relatively large number of substantially similar test specimens were produced for an absorbent hygiene product having the features relevant to the invention, using in each case identically coincident topsheets and backsheets. The absorbent laminates inserted and fixed therein differ only in terms of the particular materials used for the topsheet-side outer ply and for the backsheet-side outer ply. Otherwise, the constructions of the absorbent laminates, including their dimensions and the

superabsorbent polymer materials used, are identically coincident.

In order to produce the absorbent laminates, two pin rails
5 1200 mm long were arranged in a clamping frame at a
distance of 160 mm from one another. Arranged on each pin
rail is a row of 24 pins at a distance of 45 mm from one
another. An elastic yarn (615 dtex, 550 den, Dorlastan) was
passed, without pre-tension, beginning from a 1st pin on
10 one end of the first pin rail diagonally to the 10th pin of
the opposite pin rail, wound around the laterally adjacent
11th pin of this opposite pin rail, passed diagonally back
to the 2nd pin of the first pin rail and then passed to the
laterally adjacent 3rd pin of the first pin rail. In this
15 way, two diagonally extending parallel yarn sections were
produced between the two pin rails. Starting from the 3rd
pin of the first pin rail, this procedure was repeated up
to the penultimate pin of the opposite pin rail, thereby
producing 14 yarn sections extending parallel to one
20 another and diagonally between the two pin rails. Following
this, the elastic yarn was passed to the last pin of the
opposite pin rail and then to the last pin of the first pin
rail, in order to produce, starting from this pin, a
mirrored yarn profile back to the 1st pin of the opposite
25 pin rail. The yarn then forms two crossed plies between the
two pin rails, each consisting of yarn sections extending
parallel to one another and diagonally with the same
inclination between the pin rails.

30 The two pin rails are pulled apart to a distance of 390 mm
from one another, and the yarn sections, or the entire
yarn, are/is tensioned. The two crossed plies of the yarn

sections then form a honeycomb-like specimen, with the individual combs having a size of approximately 30 mm × 30 mm.

- 5 Using a glue gun (glue gun HB 700 from Bühnen, with a hotmelt nozzle from Bühnen, pressure about 2.5 bar, glue Bostik 2052 FUN from Bostik), a glue quantity of about 1.7 g is sprayed uniformly onto the tensioned yarn sections at a spraying angle of 45° within one minute. Glue strings
10 hanging down from the underside of the yarn sections are carefully removed by hand.

Placed on a marble plate is a first outer ply, of Corovin, for example, with dimensions of 300 mm × 500 mm, followed
15 by a perforated metal plate (250 mm × 500 mm with 72 drilled holes each with a distance of 45 mm from one another, or a 45/405 hole pattern). The holes of the perforated plate are adapted to the arrangement of the honeycombs of the crossed plies of the yarn sections, and
20 so each honeycomb is associated, approximately centrally, with a hole of the perforated plate.

12.5 g of a superabsorbent polymer material are weighed out on a laboratory balance and distributed uniformly, using a
25 doctor blade or a spatula, into the holes of the perforated plate. The excess superabsorbent polymer material is removed, and then the perforated plate is lifted up.

Following this, the tension frame with the crossed plies of
30 the elastic yarn sections is placed over the first outer ply with the portions of superabsorbent polymer material distributed thereon, it being important to ensure a central

arrangement of the superabsorbent polymer material within the individual combs, and a corresponding orientation of the tensioning frame.

- 5 A second outer ply, of Fibrella, for example, having the same dimensions as the first outer ply is placed carefully onto the crossed plies of the yarn sections and is rolled over or pressed on horizontally and diagonally using a commercial foam roller, causing the two outer plies to be
10 joined to one another and adhesively bonded by the crossed plies, located between them, of the yarn sections provided with glue. Formed between the individual yarn sections are closed cassettes, each containing an equal-size portion of the superabsorbent polymer material.

15

- A cutting template with dimensions of 220 mm × 500 mm is placed onto the absorbent laminate produced in this way, and the laminate is cut to this size, care being taken to ensure that there is no cutting into cassettes with
20 superabsorbent polymer material and no emergence of superabsorbent polymer material.

- In order to produce a test specimen of a nappy-like absorbent hygiene product with this absorbent laminate, two
25 metal rails are fastened on a first metal plate at a distance of 125 mm. Mounted on each of the two metal rails are six metal pins, around which an elastic yarn (615 dTex, 550 den, Dorlastan) is placed without tension, producing the following pattern of parallel threads of the yarn. A
30 first group of 3 parallel threads is formed, with a distance of 5 mm from one another, followed at a distance of 50 mm by a second group of 2 parallel threads, the

2 threads in this group also each having a distance of 5 mm from one another. Following at a distance of 65 mm is a third group, again formed of 2 parallel threads, each of which extends at a distance of 5 mm from the other. The thread pattern is completed by a fourth group of 3 parallel threads, at a distance of 5 mm from one another. The fourth group follows in turn, at a distance of 50 mm, from the third group. The distance from group 1 to group 4 here in total is 190 mm. The two metal rails are taken off and fixed on a second metal plate of 400 mm × 600 mm with a distance of 520 mm from one another, the threads being pre-tensioned as a result. Below thread groups 1 and 2 and also 3 and 4, in each case, a strip of Corovin (160 mm × 520 mm) is placed onto the metal plate in such a way that the longitudinal direction of the two strips of Corovin coincides with the orientation of the thread groups, and the centre in the longitudinal direction of each Corovin strip is oriented below the inner assigned thread group 2 or 3, respectively. The two Corovin strips overlap here between the inner thread groups. The yarn sections are sprayed with glue at those points relevant for the gluing of the yarn threads (glue gun HB 700 from Bühnen with a hotmelt nozzle from Bühnen, pressure about 2.5 bar, glue Bostik 2052 FUN from Bostik). Subsequently, one after another, each of the Corovin strips is likewise sprayed with glue, folded from inside to outside along the middle in longitudinal direction, so that the folded halves and the two longitudinal edges of each Corovin strip that are now located on the outside come to lie congruently one above another, and each folded Corovin strip surrounds the thread groups 1 and 2 or 3 and 4 assigned to it. The halves of the Corovin strips that lie one above another are

pressed against one another and adhesively bonded to one another.

The folded Corovin strips are sprayed with glue and pulled
5 apart to some extent, and so the longitudinal edges facing one another have a distance of 90 mm from one another.

Subsequently a topsheet (170 mm × 520 mm, Novellin) is placed on and is pressed onto the Corovin strips, and bonded adhesively to them, along the side edges.

10

The middle region of the topsheet is glued along the later marginal region of the absorbent laminate to be bonded adhesively to it, and is glued with misting within the marginal region. The outer ply of the absorbent laminate,
15 this ply later facing the topsheet, is likewise glued. In the middle region of the topsheet, the absorbent laminate is placed on, with the absorbent laminate being pulled apart at 400 mm × 120 mm and placed by the topsheet-facing outer ply onto the topsheet.

20

This is followed by gluing of the absorbent laminate, the end tabs, and a glued margin. Finally, the backsheet (RKW Hypor B 140 textile film, type 45755, white, with dimensions of 210 mm × 520 mm) is placed on and fixed, or
25 pressed on using a foam roller.

For the procedure of the experiments, a number of test specimens of absorbent hygiene products were produced, each differing only in the nonwoven material of the outer plies
30 of the absorbent laminate. 4 identical test specimens were produced for each investigated combination of nonwoven materials for the outer plies of the absorbent laminate.

For the determination of the penetration time, a quantity of 70 ml of a 0.9% strength sodium chloride solution was applied through a funnel within 10 seconds centrally to the
5 topsheet of each test specimen of the absorbent hygiene product, this process being carried out four times in succession with an interval. The funnel consists of a Makrolon sheet (400 mm × 300 mm × 10 mm) with a centrally disposed filling port (44 mm internal diameter, 80 mm high)
10 and a total weight of 940 g. The funnel was weighted on opposite end faces with two rectangular weights each weighing 3800 g.

The penetration time is defined as the time duration taken
15 for the fluid, following complete filling, to have penetrated completely in the test specimen, with no more fluid being present in the filling port.

If fluid emerges at any point of the absorbent hygiene
20 product during or after one of the four successive applications of fluid, the test is discontinued. In this case, the test specimen in question is considered unsuitable, since the fluid was not fully acquired and retained.

25

For the determination of the back-wetting, a multi-ply stack of filter papers with a total weight of at least 3.5 g was placed on both sides at a distance of 8 cm from the middle of the test specimen, 20 minutes in each case
30 after each application of fluid, and each of these stacks was weighted with a circular weight of 1200 g. The filter paper comprises circular Macherey-Nagel filter papers,

- MN 617, having a diameter of 90 mm. After 2 minutes, the weights and the filter paper stacks are removed. The back-wetting is determined as a sum total "total back-wetting" of the two differential weights, "back-wetting 1" and
- 5 "back-wetting 2" of the two filter-paper stacks after the weight-loaded application time of 2 minutes on the fluid-filled absorbent hygiene product, minus the dry weight of the filter-paper stack.
- 10 The experiments and measurements carried out in each case for at least 4 test specimens of the same kind produced on average the following results for the penetration time and the back-wetting after the fourth and last application of fluid:

15

Topsheet-side outer ply	Backsheet-side outer ply	Penetration time [s]	Back-wetting 1 [g]	Back-wetting 2 [g]	Back-wetting, total [g]	Liquid emergence
Fibrella	Fibrella	47.0	3.19	0.70	3.89	no
Novellin	Novellin	42.0	3.10	1.76	4.86	no
Corovin	Corovin	-	-	-	-	yes
Pegas	Pegas	-	-	-	-	yes
Fibrella	Corovin	38.0	2.15	4.31	6.28	no
Corovin	Fibrella	30.7	0.11	0.11	0.22	no

- These experiments show that, in accordance with expectations, a rapid acquisition of fluid (short penetration time, in the region of about 45 seconds) is
- 20 achieved when using a hydrophilic nonwoven material such as Fibrella or Novellin, for example, for the two outer plies of the laminate. However, the hydrophilic nonwoven materials do not offer convincing protection from back-wetting, which is why in each case about 3.9 g and,

respectively, 4.9 g were determined as differential weights for the total back-wetting.

The hydrophobic nonwoven materials investigated, such as
5 Corovin or Pegas, for example, led in each case to the emergence of fluid during or immediately after the application of fluid. An absorbent hygiene product with an absorbent laminate of this kind, or with two outer plies of these hydrophobic nonwoven materials, appears not to be
10 suitable and is unable, unlike other nonwoven materials, to prevent unwanted fluid emergence.

Nor does the combination of a topsheet-side outer ply made from a hydrophilic material (Fibrella, for example) and a
15 backsheet-side outer ply made from a hydrophobic material (Corovin, for example) provide convincing results. The penetration time, at 38 seconds, is comparatively short, and yet there is very high back-wetting, with about 6.3 g fluid acquisition in the filter paper.

20

Surprisingly, the experiments have shown that the combination of a topsheet-side outer ply made of a hydrophobic material (Corovin, for example) and a
backsheet-side outer ply made of a hydrophilic material
25 (Fibrella, for example) yields the best results. In spite of the hydrophobic nonwoven material used for the topsheet-side outer ply of the absorbent laminate, it is possible to achieve a very rapid penetration time of about 31 seconds. The rapid penetration is promoted by the structure of the
30 absorbent laminate, and/or by the transport channels formed between the individual cassettes or combs with superabsorbent polymer material, these channels being

formed in the course of the above-described production of the laminates. Moreover, the total back-wetting is only 0.22 g and is therefore better by more than one order of magnitude than all other back-wetting values for other combinations of nonwoven materials. The inventive combination and arrangement of the above-described selection of a hydrophobic nonwoven material towards the topsheet and the hydrophilic nonwoven material towards the backsheet produces, in comparison with all other combinations of materials, the shortest penetration time in conjunction with back-wetting which is lower by one order of magnitude.

An exemplary embodiment of the concept of the invention is illustrated in more detail by the figures, where:

Fig. 1 shows a diagrammatic plan view of an absorbent hygiene product of the invention, and

Fig. 2 shows a sectional view of the absorbent hygiene product shown in Fig. 1, along the line II-II in Fig. 1.

An absorbent hygiene product shown exemplarily in Figs. 1 and 2 has a first outer ply, a topsheet (1) which faces the skin side of a wearer and consists usually of a hydrophilic material. It also has a further outer ply, a backsheet (2), which faces opposite the clothing side of the wearer and usually consists of a hydrophobic material.

Inserted between the topsheet (1) and the backsheet (2) is an absorbent laminate (3). The laminate (3) may be adheringly joined to the topsheet (1) and/or to the

backsheet (2) of the product, this joining, like the joining of topsheet (1) and backsheet (2) as well, in a marginal region surrounding the laminate (3), taking place to one another, alternatively, in area, point or linear
5 form by means of pressure-sensitive adhesive, welding, needling or other suitable fixing techniques or fixing means.

For certain applications it may also be advantageous to
10 join and fasten only the topsheet (1) and the backsheet (2) to one another at least sectionally along one peripheral margin and to insert the absorbent laminate (3) loosely or merely attach it to the backsheet (2), in order not to hinder liquid acquisition through the topsheet (1) and to
15 allow maximum swelling of the laminate (3) in all directions. It is also conceivable for the absorbent laminate (3) towards the backsheet side to bear at least regionally loosely against the backsheet (2).

20 This absorbent laminate (3) consists of two flexurally yielding outer plies (4, 5), which are joined adheringly to one another with two diagonally intersecting plies, disposed between the plies (4 and 5), composed of pre-tensioned elastic filaments or tapes (6). The laminate (3)
25 has a quilt-like structure, with superabsorbent granules or filaments (7) being incorporated in the open cassettes of this structure and consisting customarily of a superabsorbent polymer.

30 Embodiments and manufacturing methods for this laminate (3) which forms the absorption core are described for example

in DE 10 2010 013 288.8, the content of which is incorporated in full into this description.

5 This absorption core may be attached with coinciding area to the topsheet (1) and/or backsheet (2) of the absorbent hygiene product, or else made narrower or broader in the transverse direction of the manufacture of the absorbent hygiene product, or applied in discrete individual sections in the longitudinal direction of manufacture ("Cut&Space").

10

Arranged and fixed on or in the absorbent hygiene product there may optionally be elastic closure systems, elasticized elements for optimizing the fit, additional components for improving handling, external barriers for
15 the control of body fluids, etc.

Inventive and characteristic of the construction of the absorbent hygiene product is the partial reversal of the conventional model of "acquisition-distribution-storage"
20 absorbent hygiene articles, and the displacement of a part of the fluid distribution function from the skin-side topsheet (1) to the clothing-side backsheet (2).

This is achieved by forming the outer ply (4) of the
25 laminate (3) facing the topsheet (1), from a flexurally yielding hydrophobic material which sectionally or locally is made pervious to fluids. This is accomplished preferably by means of heat, pressure, mechanical penetration, interaction with the pressure-sensitive adhesive, or by
30 other suitable techniques allowing the hydrophobic material to be made regionally pervious to fluid. One example of such is Corovin.

The outer ply (5) of the laminate (3), in contrast, facing the backsheet (2), is formed in accordance with the invention from a flexurally yielding material with a high transport capacity for fluids. Particularly suitable here are nonwovens, which are typically used as materials for wet wipes or as an acquisition/distribution layer (ADL) in infant nappies, examples being spunlace PET, PET viscose, viscose, PP nonwovens, carded, thermobonded hydrophilic polypropylene nonwovens, hygiene paper or comparable known materials. One example of such is Fibrella.

It is advantageous to generate this perviosity specifically in those sections in which the outer ply (4) facing the topsheet (1) and the outer ply (5) facing the backsheet (2) are joined adheringly to one another with the elastic threads (6), thus producing, in these sections subdivided by the elastic threads (6), a desired capillary effect by means on the one hand of a fine hole structure of the ply (4) facing the topsheet (1), and on the other hand of a wicking effect by the liquid transport qualities of the outer ply (5) of the laminate (3), facing the backsheet (2). Open cassettes of the laminate (3) that are formed as a result are additionally lined substantially hydrophobically on the skin side by the outer ply (4) that faces the topsheet (1), resulting here in a certain structural barrier to re-wetting on the skin side.

Another advantageous feature is that a multiplicity of open transport channels (8) are formed, as a result of the cassette form of the laminate (3), not only between the outer ply (4) facing the topsheet (1) and the topsheet (1)

itself, but also, specifically, between the outer ply (5) facing the backsheet (2) and the backsheet (2) itself, these transport channels (8) being responsible for rapid distribution of the fluid in longitudinal and transverse
5 direction of the absorbent hygiene product. Channel forming is also supported by the swelling of the laminate (3), and so, in contrast to commonplace absorbent hygiene products, the fluid distribution function of the absorbent hygiene product does not deteriorate, instead tending to improve,
10 with increasing amount of fluid absorbed.

The entry of the fluid into the superabsorbent of the laminate (3) is supported by the transport capacity of the clothing-side outer ply (5), facing the backsheet (2), of
15 the laminate (3), which supports the distribution of liquid in the backsheet-side transport channels (8) and passes on the fluid to the superabsorbent in the vertical direction.

CLAIMS:

1. Absorbent hygiene product for acquiring fluids, formed at least of a flexurally yielding topsheet and a flexurally yielding backsheet, inserted adheringly between which is an absorbent laminate, consisting of two flexurally yielding outer plies, incorporated adheringly between which are at least two diagonally intersecting, pre-tensioned plies of elastic filaments, and into which discrete sections of superabsorbent polymer have been incorporated, wherein the topsheet-side outer ply of the laminate is a hydrophobic material which in the region of the adherence with the elastic filaments and the second outer ply has been locally or sectionally made fluid-pervious mechanically, chemically or thermally.
2. Absorbent hygiene product according to Claim 1, wherein the topsheet-side outer ply of the laminate after 300 s fluid addition has a barrier effect of more than 2 cm for fluids.
3. Absorbent hygiene product according to Claim 2, wherein the topsheet-side outer ply of the laminate after 300 s fluid addition has a barrier effect of more than 5 cm for fluids.
4. Absorbent hygiene product according to Claim 3, wherein the topsheet-side outer ply of the laminate after 300 s fluid addition has a barrier effect of more than 10 cm for fluids.
5. Absorbent hygiene product according to any one of Claims 1 to 4, wherein the backsheet-side outer ply of the laminate is a hydrophilic material having good fluid transport quality.
6. Absorbent hygiene product according to Claim 5, wherein the backsheet-side outer ply of the laminate is a hydrophilic material having an areal distribution of more than 10 cm^2 wetted area by a fluid quantity of 1 ml applied pointwise.
7. Absorbent hygiene product according to Claim 6, wherein the backsheet-side outer ply of the laminate is a hydrophilic material having an areal distribution of more than 20 cm^2 , wetted area by a liquid quantity of 1 ml applied pointwise.
8. Absorbent hygiene product according to Claim 7, wherein the backsheet-side outer ply of the laminate is a hydrophilic material having an areal distribution of more than 55 cm^2 wetted area by a liquid quantity of 1 ml applied pointwise.

9. Absorbent hygiene product according to any one of Claims 1 to 4, wherein the laminate has cassette-like regions with superabsorbent polymer disposed therein.
10. Absorbent hygiene product according to Claim 9, wherein a multiplicity of open transport channels are formed between the cassette-like regions of the laminate.
11. Absorbent hygiene product according to any one of Claims 1 to 4, wherein the absorbent laminate towards the topsheet side bears at least regionally loosely against the topsheet.
12. Absorbent hygiene product according to any one of Claims 1 to 4, wherein the absorbent laminate towards the backsheet side bears at least regionally loosely against the backsheet.
13. Absorbent hygiene product according to any one of claims 5 to 7, wherein the laminate has cassette-like regions with superabsorbent polymer disposed therein.
14. Absorbent hygiene product according to any one of claims 5 to 7, wherein the absorbent laminate towards the topsheet side bears at least regionally loosely against the topsheet.
15. Absorbent hygiene product according to Claim 9 or 10, wherein the absorbent laminate towards the topsheet side bears at least regionally loosely against the topsheet.
16. Absorbent hygiene product according to any one of claims 5 to 7, wherein the absorbent laminate towards the backsheet side bears at least regionally loosely against the backsheet.
17. Absorbent hygiene product according to any one of claims 9 to 11, wherein the absorbent laminate towards the backsheet side bears at least regionally loosely against the backsheet.

Evonik Degussa GmbH

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

1 / 1

Fig. 1:

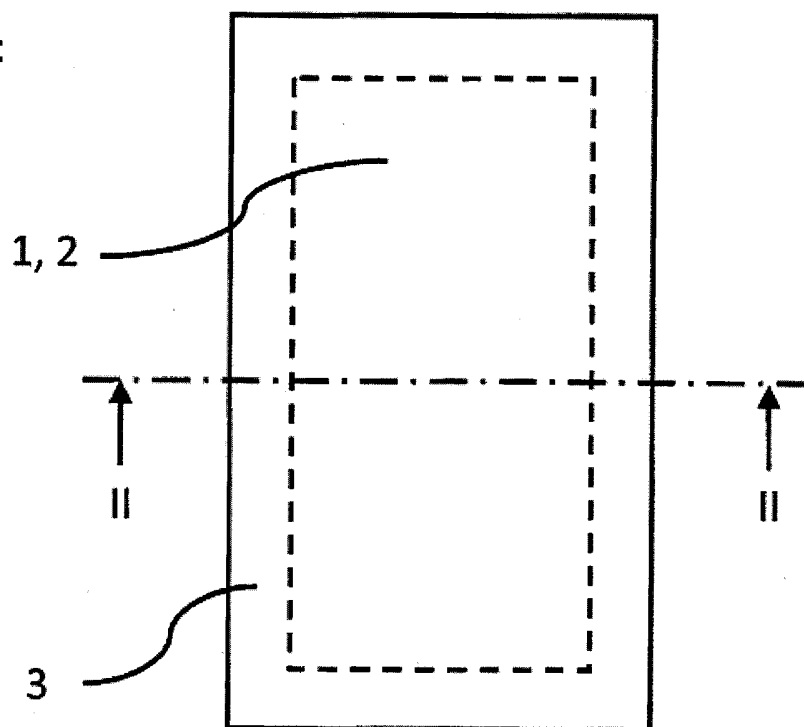


Fig. 2:

