




(22) Date de dépôt/Filing Date: 2007/01/10  
 (41) Mise à la disp. pub./Open to Public Insp.: 2007/07/13  
 (45) Date de délivrance/Issue Date: 2014/04/08  
 (30) Priorité/Priority: 2006/01/13 (US11/332,435)

(51) Cl.Int./Int.Cl. *G01V 15/00* (2006.01),  
*B65B 61/20* (2006.01), *B65C 7/00* (2006.01),  
*B65D 25/38* (2006.01)  
 (72) Inventeur/Inventor:  
 SETTY, THOMAS J., US  
 (73) Propriétaire/Owner:  
 SONOCO DEVELOPMENT, INC., US  
 (74) Agent: SIM & MCBURNEY

(54) Titre : DISPOSITIF DE PRELEVEMENT POUR RECIPIENT DOTE D'UN DISPOSITIF DE SURVEILLANCE  
 ELECTROMAGNETIQUE  
 (54) Title: SCOOPING DEVICE FOR CONTAINER HAVING AN ELECTROMAGNETIC SURVEILLANCE DEVICE

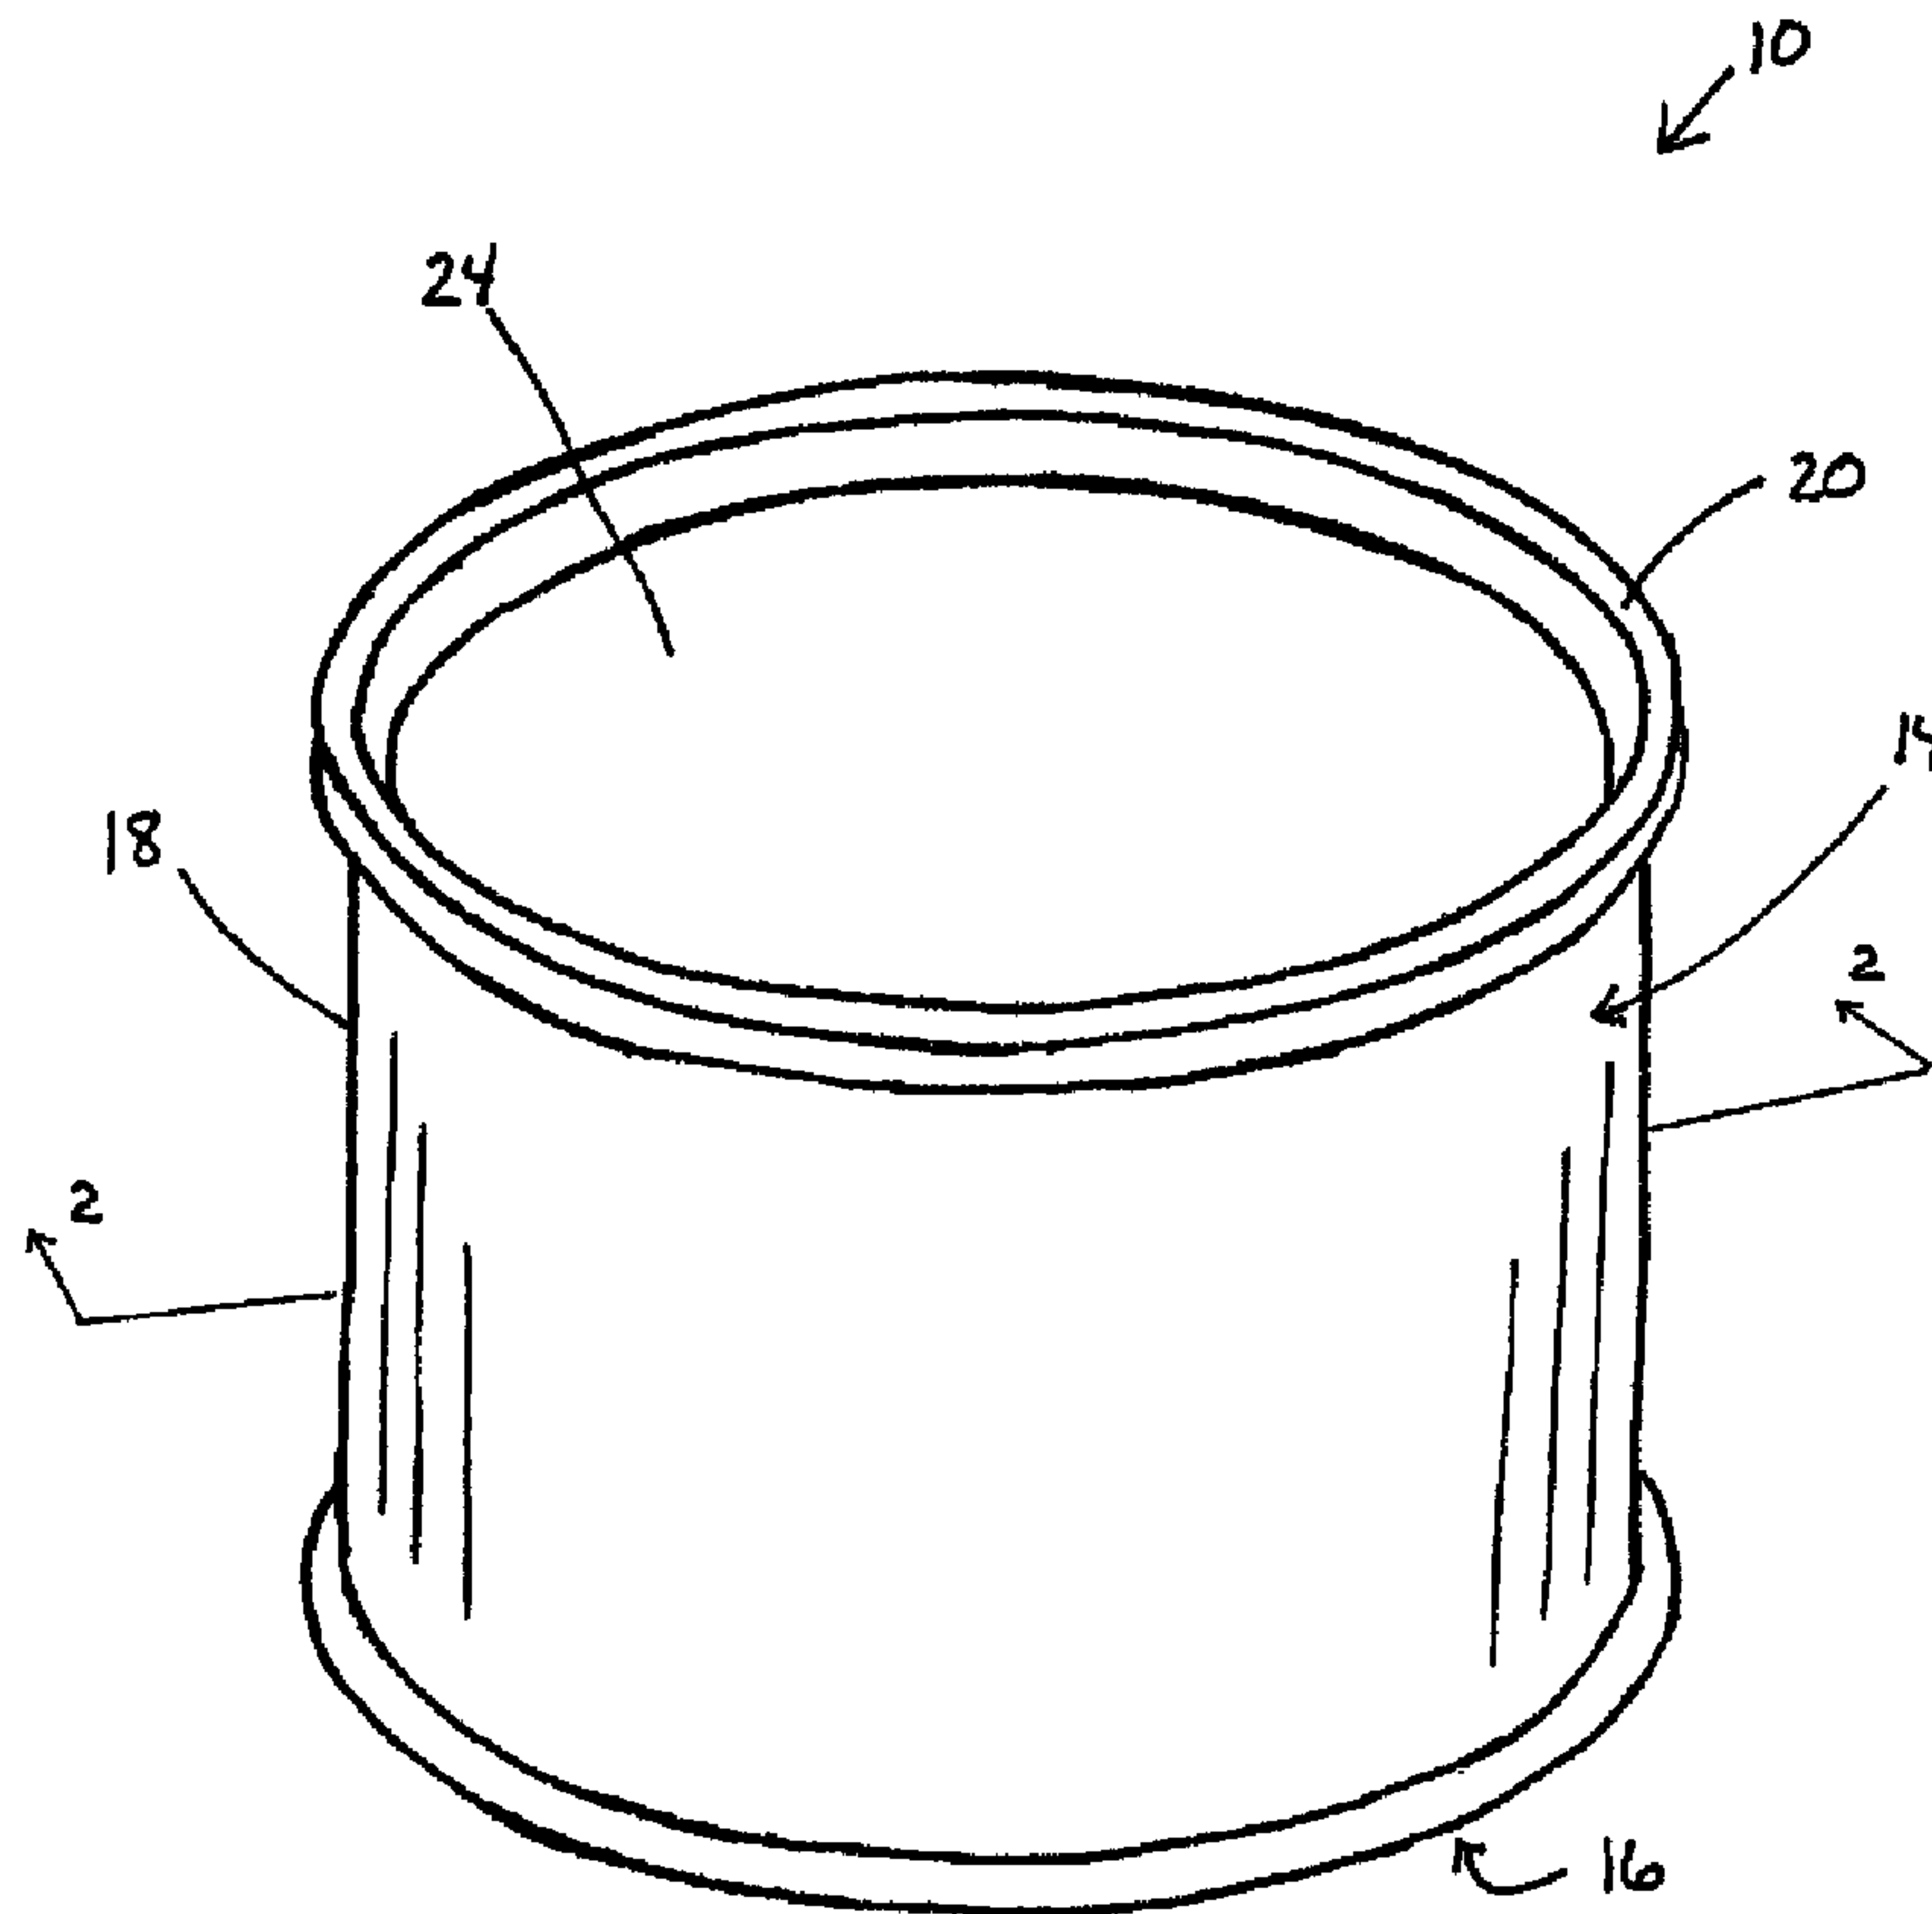

(57) Abrégé/Abstract:

A scooping device with an integrated electromagnetic (EM) surveillance device for a container. The container defines an interior for storing a product. The scooping device is configured for scooping or capturing the product. The electromagnetic surveillance



(57) **Abrégé(suite)/Abstract(continued):**

device is integrated with, embedded into or attach to the body of the scooping device. The electromagnetic surveillance device may be an EAS, Bistatix, RFID, or other electromagnetic surveillance tag or label that is configured to respond to an electromagnetic signal such that the presence of the electromagnetic surveillance device is detectable. The detectability of the electromagnetic surveillance device provides an anti-theft feature to the container without interfering with the construction of the container.

## ABSTRACT OF THE DISCLOSURE

A scooping device with an integrated electromagnetic (EM) surveillance device for a container. The container defines an interior for storing a product. The scooping device is configured for scooping or capturing the product. The  
5 electromagnetic surveillance device is integrated with, embedded into or attach to the body of the scooping device. The electromagnetic surveillance device may be an EAS, Bistatix, RFID, or other electromagnetic surveillance tag or label that is configured to respond to an electromagnetic signal such that the presence of the electromagnetic surveillance device is detectable. The detectability of the  
10 electromagnetic surveillance device provides an anti-theft feature to the container without interfering with the construction of the container.

**SCOOPING DEVICE FOR CONTAINER HAVING AN  
ELECTROMAGNETIC SURVEILLANCE DEVICE**

BACKGROUND OF THE INVENTION

The present invention relates to composite containers, and more particularly relates to composite containers that incorporate an electronic article surveillance (EAS) or radio frequency identification (RFID) device. These EAS and RFID devices, and other devices operating on similar principles, are generically referred to herein as electromagnetic (EM) surveillance devices.

It is becoming increasingly common for the operators of retail establishments to attach EM surveillance devices to products to deter and detect shoplifting. A number of different types of EAS tags and detector systems have been developed and are in use. Generally, all EAS systems include a detection zone formed by a transmitter and a receiver. The transmitter and receiver are positioned at the exit of the retail establishment such that consumers must pass through the detection zone in order to exit the establishment. The transmitter sends a magnetic or radio frequency signal (which are generically referred to herein as electromagnetic signals) at one or more predetermined frequencies to the receiver. When an active EAS tag enters the detection zone, the tag responds and creates a change or disturbance in the received signal, which is detected by the receiver.

One commonly used type of EAS system is the acousto-magnetic system, which utilizes a tag having a magnetostrictive metal strip that changes length in response to a changing magnetic field, and a bias magnet that biases the magnetic field so that it is never zero. The magnetostrictive metal strip is driven at its predetermined resonant frequency by a radio frequency signal generated by the transmitter at the resonant frequency (typically about 58 kHz), and in response to this driving magnetic field, the strip resonates at that frequency. The transmitter sends the RF signal in pulses, and the tag continues to resonate for a short time after the end of each pulse. The receiver detects the signals emitted by the tag in response to the RF pulses. A microcomputer in the receiver checks the tag signals to ensure they are at the correct frequency, are time-synchronized to the pulses, are at the proper level, and are at the correct repetition rate. If all these criteria are met, an alarm is sounded to alert store personnel that an article bearing a still-active EAS tag has passed in close

- 2 -

proximity to the transmitter and receiver. The tag can be deactivated by demagnetizing the bias magnet incorporated into the tag.

Another type of EAS system is the electromagnetic system, which employs an adhesive label incorporating a wire or ribbon of metal that has a high magnetic permeability in proximity to a piece of semi-hard magnetic material. The transmitter emits a low-frequency (typically less than 1 kHz) electromagnetic field that causes the metal ribbon to become magnetically saturated twice each cycle, and the metal ribbon emits an electromagnetic signal as a result. Saturation occurs abruptly and causes distinctive patterns in the signal emitted by the label, which are detected by the receiver. The label can be deactivated by magnetizing the semi-hard magnetic material, which saturates the metal ribbon and puts it in an inactive state. The label can also be reactivated by magnetizing the semi-hard magnetic material.

The tags used in EAS systems as described above generally are not “smart” in the sense that the tags do not store information; the tags simply emit a characteristic electromagnetic signal in response to a specific driving electromagnetic field so that the presence of the tags in the detection zone can be detected. In contrast, radio frequency identification (RFID) systems employ “smart” tags that can store information and that can be remotely “read” by a reader to extract that information. Radio frequency identification systems can be used for the tracking of items through manufacturing, in inventory, in shipment, and the like. Generally, an RFID device comprises a tag that includes an integrated circuit (IC) chip microprocessor and a resonant circuit formed by a coiled antenna and a capacitor. In a passive RFID system, a reader generates a magnetic field at a predetermined frequency. When an RFID device, which usually can be categorized as being either read-only or read/write, enters the magnetic field, a small electric current forms in the device's resonant circuit. This circuit provides power to the device, which then modulates the magnetic field in order to transmit information that is pre-programmed on the device back to the reader at a predetermined frequency, such as 125kHz (low frequency) or 13.56MHz (high frequency). The reader then receives, demodulates, and decodes the signal transmission, and then sends the data on to a host computer associated with the system for further processing.

An active RFID system operates in much the same way, but in an active system the RFID device includes its own battery, allowing the device to transmit data and information at the touch of a button. For example, a remote control garage door opener typically uses an active RFID device that transmits a predetermined code to the receiver in order to raise and lower the garage door at the user's discretion.

Another technology that is related to RFID is known as Bistatix, which operates much the same way as RFID devices except that the coiled antenna and capacitor of the RFID device are replaced by a printed, carbon-based material. As a result, a Bistatix device is extremely flat and relatively flexible, although currently these types of devices are limited to a frequency range of about 125KHz. In addition, the read range of a Bistatix device is dependent on size, and for long read ranges a very large device may be required.

In the present application, the term "EM surveillance device" is used to encompass all of the above-described technologies.

Because the detection zone is actually detecting the EM surveillance device and not the good itself, the EAS system can be circumvented by removing the EM surveillance device from the good. Therefore, it is important to attach the EM surveillance devices to the goods in a manner that prevents their unauthorized removal. Some known EM surveillance devices are configured to have a closed locked position in which the EM surveillance device can not be removed without specialized equipment. These EM surveillance devices are commonly found on clothing merchandise. Other known EM surveillance devices are relatively small and thin with an adhesive backing. These EM surveillance devices are affixed to a surface of the good or product, preferably in an area that masked its presence.

Certain goods have proven challenging in terms of EM surveillance device placement. For example, goods packaged within a composite container traditionally have been difficult for effectively placing the EM surveillance device onto. Although composite containers often store inexpensive goods that typically would not be a high theft item, some relatively high cost goods, such as powdered baby formula, are stored in composite containers making these containers a high theft item and would greatly benefit from the use of an EM surveillance device. Placing an adhesive-backed device on the outside of the container is problematic because the device would

be easily seen and removed. Placing the EM surveillance device into the container wall is disclosed in U.S. Patent Application Publication No. 2005/0255262 assigned to the same assignee as the present application. However incorporating the EM surveillance device into the wall requires a capital intensive process for precision placement of the device and prevention of interference between the device and other operations of the manufacturing process. Placing the electromagnetic surveillance device between the wall and a print layer closer to the end of the process may reduce the need for precision placement. But it would decrease the aesthetics of the container by causing a bulge from the device, increase the likelihood of unauthorized removal of the device, and likely interfere with the typical convoluted print labeling process for such containers.

Furthermore, until more recently placing an EM surveillance device within the container was problematic due to the foil-based liners used within the container wall. The interference from the foil-based liners would make communication via electromagnetic signals problematic. However, composite containers without a foil layer are becoming more available, making it more practical to place EM surveillance devices within these containers. Even without the foil-based liners, placing an EM surveillance device within the container is not problem-free. For example, the inclusion of a loose EM surveillance device alone would be perceived as an undesirable foreign article or containment.

In light of the foregoing, it would be advantageous to provide a container for storing goods where the container include an EM surveillance device. In particular, it would be advantageous if the placement of the electromagnetic surveillance device is cost effective and hard to detect.

#### BRIEF SUMMARY OF THE INVENTION

The present invention addresses the above needs and achieves other advantages by providing a scooping device with an integrated EM surveillance device for a container. The container defines an interior for storing a product. The scooping device is for removing the product from the container. The electromagnetic surveillance device is configured to respond to an electromagnetic (EM) signal such

that the electromagnetic surveillance device is detectable as part of an anti-theft system and is attached to the scooping device.

According to one aspect of the present invention there is provided a scooping device for a container configured to store a product, said scooping device comprising:

5 a body forming a handle portion and a main receptacle portion for scooping the product from the container; and

an electromagnetic surveillance device being configured to respond to an electromagnetic signal such that the presence of said electromagnetic surveillance device is detectable, said electromagnetic surveillance device being attached to said  
10 body by at least one of the following means:

(1) said electromagnetic surveillance device is substantially embedded into said body; and

(2) said body defines a cavity configured to hold said electromagnetic surveillance device.

15 The device may be attached to the body by adhering the device to the body with an adhesive. The electromagnetic surveillance device may be an EAS, Bistatix, RFID, or other electromagnetic surveillance tag or label that is configured to respond to an electromagnetic signal such that the presence of the electromagnetic surveillance device is detectable.

20 According to another aspect there is provided a container for storing a product, said container comprising:

a container body having a bottom wall and a side wall extending upwardly from the bottom wall and terminating at an upper edge;

a removable closure affixed to the upper edge; and

25 a scooping device for inclusion in the container along with the product, said scooping device having a body forming at least a main receptacle portion for scooping the product from the container and an electromagnetic surveillance device, said electromagnetic surveillance device being configured to respond to an electromagnetic signal such that the presence of said electromagnetic surveillance  
30 device is detectable, said electromagnetic surveillance device being attached to said body by at least one of the following means:

(1) said electromagnetic surveillance device is substantially embedded into said body; and

(2) said body defines a cavity configured to hold said electromagnetic surveillance device.

5           The container may however vary. For example, in an alterative embodiment, the container includes a tubular side wall and a bottom closure. The tubular side wall defines a bottom opening, a top opening, and an interior for storing the product and the bottom closure seals the bottom opening.

          According to another aspect there is provided a composite container for  
10 storing a product, said composite container comprising:

          a tubular side wall defining a bottom opening, a top opening and an interior for storing the product;

          a bottom closure for sealing the bottom opening; and

          a scooping device for scooping a predetermined amount of product from the  
15 interior, wherein an electromagnetic surveillance device is substantially embedded within said scooping device, said electromagnetic surveillance device being configured to respond to an RF signal such that the presence of said electromagnetic surveillance device is detectable.

          According to another aspect there is provided a method of packaging a product  
20 into a container having an anti-theft feature, the method comprising:

          providing a container having a body defining an interior for storing a product and defining an opening;

          attaching an electromagnetic surveillance device to a plastic insert, said  
electromagnetic surveillance device being attached to said plastic insert by at least one  
25 of the following means:

          (1) said electromagnetic surveillance device is substantially embedded into said plastic insert; and

          (2) said plastic insert defines a cavity configured to hold said  
electromagnetic surveillance device;

30           filling a predetermined amount of the product into the interior;

          after or concurrently with said step of filling a predetermined amount of

product, placing the plastic insert into the interior; and  
sealing the opening with a removable closure.

The present invention has several advantages. Integrating the EM surveillance device into the scooping device masks the presence of the surveillance device or at  
5 least makes it less visible or objectionable to the consumer. Furthermore, the placement of the EM surveillance device inside the container makes it difficult to circumvent the anti-theft system by unauthorized removal or deactivation of the surveillance device. Also, the process of preparing and packaging the container is cost effective and allows for the placement of the EM surveillance device to occur  
10 near the end of the process to avoid interference from other steps in the manufacturing process.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

Having thus described the invention in general terms, reference will now be  
15 made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

Figure 1 is a perspective view of a container for storing product according to an embodiment of the present invention;

- 7 -

Figure 2 is a view of the container shown in Figure 1 taken along line 2-2 illustrating a scooping device within the interior of the container along with the stored product;

Figure 3a is a perspective view of the scooping device shown in Figure 2, wherein electromagnetic surveillance device is embedded into the handle portion;

Figure 3b is a side view of the scooping device shown in Figure 3a;

Figure 4a is a perspective view of a scooping device according to another embodiment of the present invention, wherein the electromagnetic surveillance device is adhered to the handle portion; and

Figure 4b is a side view of the scooping device shown in Figure 4a.

#### DETAILED DESCRIPTION OF THE INVENTION

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, this invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

In general, the present invention provides a scooping device **30** with an integrated electromagnetic (EM) surveillance device **50** for a container **10**. Figures 1 and 2 show a container **10** according to one embodiment of the present invention. The container **10** is configured to store product or products **12**, for example dry baby formula. In particular, the container **10** includes a container body **14** having one or more walls or closures. For example and as illustrated, the container **10** has a tubular side wall **18** defining an interior **22** with a bottom opening and a top opening. A bottom wall, end or closure **16** seals the bottom opening. The side wall **18** extends from the bottom wall **16** to an upper edge **20**, which defines the top opening. The container **10** may also include a removable closure **24** affixed to the upper edge **20** in order to close the top opening. The container **10** may be formed by spirally winding one or more plies together.

One consideration that must be taken into account because of the use of the EM surveillance device **50** is that the presence of metal in the vicinity of the

- 8 -

surveillance device **50** may interfere with the proper operation of the surveillance device **50**. Therefore, although the container body **32** may be formed from a variety of materials including synthetic or biological polymers, the use of foil-based or other metallic layers should be limited. For example, according to the container **10** of  
5 Figures 1 and 2, the sidewall **18** excludes any foil-based or other metallic layers. However, it has be found that employing foil or metallic layers as part of the bottom end **16** and/or top closure **24** is acceptable, provided that the EM surveillance device **50** is positioned some distance, typically 3/8", from the foil or metal.

Although illustrated as a tubular structure, the overall shape of the container  
10 **10** may vary. For example, the container **10** may be generally rectangular in shape. Furthermore, instead of relying on a separate top closure **24** to seal the top opening, the side wall **18** of the container **10** may be configured to fold onto itself to close the opening, similar to a conventional milk carton.

One aspect of the present invention is the scooping device **30**. As seen in  
15 Figures 2-4b, the scooping device **30** includes a body **32** and the EM surveillance device **50**. In general, the body **32** forms a main receptacle portion **34** configured for scooping or capturing the product **12** from the interior **22**. According to one embodiment and as shown in Figures 2-3b, the main receptacle portion **34** includes a bottom surface **36** and a side surface **38** upstanding or extending from at least a  
20 portion of the outer periphery of the bottom surface **38** and forming a general basket structure. However the main receptacle portion **34** may vary. For example, Figures 4a-4b illustrates another embodiment where the main receptacle portion **34** forms a general shovel structure with a more tapered front end. The main receptacle portion **34** may also be configured to measure an amount of product **12** by having a  
25 measurement line or other indicia to indicate the amount.

The body **32** may also form a handle portion **40** for grasping and controlling the scooping device **30** by a consumer or operator. The handle portion **40** may be a flange around the main receptacle portion **34** or an elongated member as illustrated in the figures.

30 Attached to the body **32** is the EM surveillance device **50**. The EM surveillance device **50** may be an EAS, Bistatix, RFID, or other EM tag or label that is configured to respond to an electromagnetic signal such that the presence of the

- 9 -

electromagnetic surveillance device **50** is detectable. Preferably the EM surveillance device **50** is attached in a manner which masks the presence of the surveillance device **50** from the consumer or a potential shop lifter. For example and as shown in Figures 3a-3b, the EM surveillance device **50** may be embedded into the handle portion **40** such that it is not visible. Embedding the EM surveillance device **50** may be accomplished by molding the EM surveillance device **50** into the body **32** during construction of the scooping device **30**. Alternatively, a cavity **42** may be formed into the body **32** during construction of the scooping device **30** and afterward the EM surveillance device **50** may be placed into the cavity and held in place by a stop or an adhesive. In yet another embodiment, the EM surveillance device **50** may be adhered to the scooping device **30** by an adhesive, preferably in an area less visible, such as underneath the handle portion **40** as shown in Figure 4a-4b.

A main consideration of the placement of the EM surveillance device **50** within or to the scooping device **30** is to mask the presence of the surveillance device **50** to the consumer in order to minimize the objectionability of placing the surveillance device **50** in the container **10** and to enhance the anti-theft feature of the container **10**. Other considerations include the location of the scooping device **30** within the interior **22** of the container **10**. As mentioned above, the EM surveillance device **50** should not be near metal. Therefore, in an embodiment having metal ends or closures, the EM surveillance device **50** preferably should be in the portion furthest from either end **16, 24**. Typically, the furthest portion is the main receptacle portion **34** because it is more convenient for the consumer to have the handle portion **40** near the top opening.

Another aspect of the invention is a method of packaging the product **12** into the container **10** with the anti-theft feature. The method includes providing the container **10**, filling the container **10** with the product **12**, and either after filling the container **10** or at the same time as filling the container **10**, placing a plastic insert with the attached EM surveillance device **50** into the container **10**.

According to one preferred embodiment, the plastic insert is configured as the scooping device **30**. However, the plastic insert is not limited to a scooping device **50**. One of the aspects of the present invention is placing the EM surveillance device **50** into the container **10** such that it is unnoticeable, or at least unobjectionable to the

- 10 -

consumer. Preferably this is accomplished by integrating the surveillance device **50** into the scooping device **30** because the consumers are accustomed to having the scooping device **50** in the container **10**. However, depending on the product **12** and container **10**, other items are standard and could be used to mask the surveillance  
5 device **50**. For example, promotional items, such as plastic toys, could be used.

The present invention has several advantages. As mentioned above, integrating the EM surveillance device **50** into the scooping device **30** masks the presence of the surveillance device **50** or at least makes it less visible or objectionable to the consumer. Furthermore, the placement of the EM surveillance device **50** inside  
10 the container **10** makes it difficult to circumvent the anti-theft system by unauthorized removal or deactivation of the surveillance device **50**. Also, the process of preparing and packaging the container **10** is cost effective and allows for the placement of the EM surveillance device **50** to occur near the end of the process to avoid interference from other steps in the manufacturing process.

15 Many modifications and other embodiments of the invention set forth herein will come to mind to one skilled in the art to which this invention pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are  
20 intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

**What is claimed is:**

1. A scooping device for a container configured to store a product, said scooping device comprising:

a body forming a handle portion and a main receptacle portion for scooping the product from the container; and

an electromagnetic surveillance device being configured to respond to an electromagnetic signal such that the presence of said electromagnetic surveillance device is detectable, said electromagnetic surveillance device being attached to said body by at least one of the following means:

(1) said electromagnetic surveillance device is substantially embedded into said body; and

(2) said body defines a cavity configured to hold said electromagnetic surveillance device.

2. The scooping device according to claim 1, wherein said electromagnetic surveillance device is affixed to said body by an adhesive.

3. The scooping device according to claim 1 or 2, wherein the main receptacle portion comprises a bottom surface and a side surface upstanding from at least a portion of an outer periphery of the bottom surface.

4. The scooping device according to any one of claims 1 to 3, wherein said electromagnetic surveillance device is an electronic article surveillance tag.

5. The scooping device according to any one of claims 1 to 3, wherein said electromagnetic surveillance device is a radio frequency identification (RFID) tag.

6. A container for storing a product, said container comprising:

a container body having a bottom wall and a side wall extending upwardly from the bottom wall and terminating at an upper edge;

a removable closure affixed to the upper edge; and

a scooping device for inclusion in the container along with the product, said scooping device having a body forming at least a main receptacle portion for scooping the product from the container and an electromagnetic surveillance device, said electromagnetic surveillance device being configured to respond to an electromagnetic signal such that the presence of said electromagnetic surveillance device is detectable, said electromagnetic surveillance device being attached to said body by at least one of the following means:

(1) said electromagnetic surveillance device is substantially embedded into said body; and

(2) said body defines a cavity configured to hold said electromagnetic surveillance device.

7. The container according to claim 6, wherein said body further comprises a handle portion.

8. The container according to claim 6 or 7, wherein said electromagnetic surveillance device is affixed to said body by an adhesive.

9. The container according to any one of claims 6 to 8, wherein the main receptacle portion comprises a bottom surface, and a side surface upstanding from at least a portion of an outer periphery of the bottom surface.

10. The container according to claim 9, wherein the side surface extends from substantially the entire outer periphery of the bottom surface.

11. A composite container for storing a product, said composite container comprising:

a tubular side wall defining a bottom opening, a top opening and an interior for storing the product;

a bottom closure for sealing the bottom opening; and

a scooping device for scooping a predetermined amount of product from the interior, wherein an electromagnetic surveillance device is substantially embedded within said scooping device, said electromagnetic surveillance device being configured to respond to an RF signal such that the presence of said electromagnetic surveillance device is detectable.

12. The composite container according to claim 11, wherein the electromagnetic surveillance device is an electronic article surveillance tag.

13. The composite container according to claim 11, wherein the electromagnetic surveillance device is an RFID tag.

14. A method of packaging a product into a container having an anti-theft feature, the method comprising:

providing a container having a body defining an interior for storing a product and defining an opening;

attaching an electromagnetic surveillance device to a plastic insert, said electromagnetic surveillance device being attached to said plastic insert by at least one of the following means:

(1) said electromagnetic surveillance device is substantially embedded into said plastic insert; and

(2) said plastic insert defines a cavity configured to hold said electromagnetic surveillance device;

filling a predetermined amount of the product into the interior;

after or concurrently with said step of filling a predetermined amount of product, placing the plastic insert into the interior; and

sealing the opening with a removable closure.

15. The method according to claim 14, wherein the plastic insert is configured as a scooping device for scooping the product from the interior.

1/4

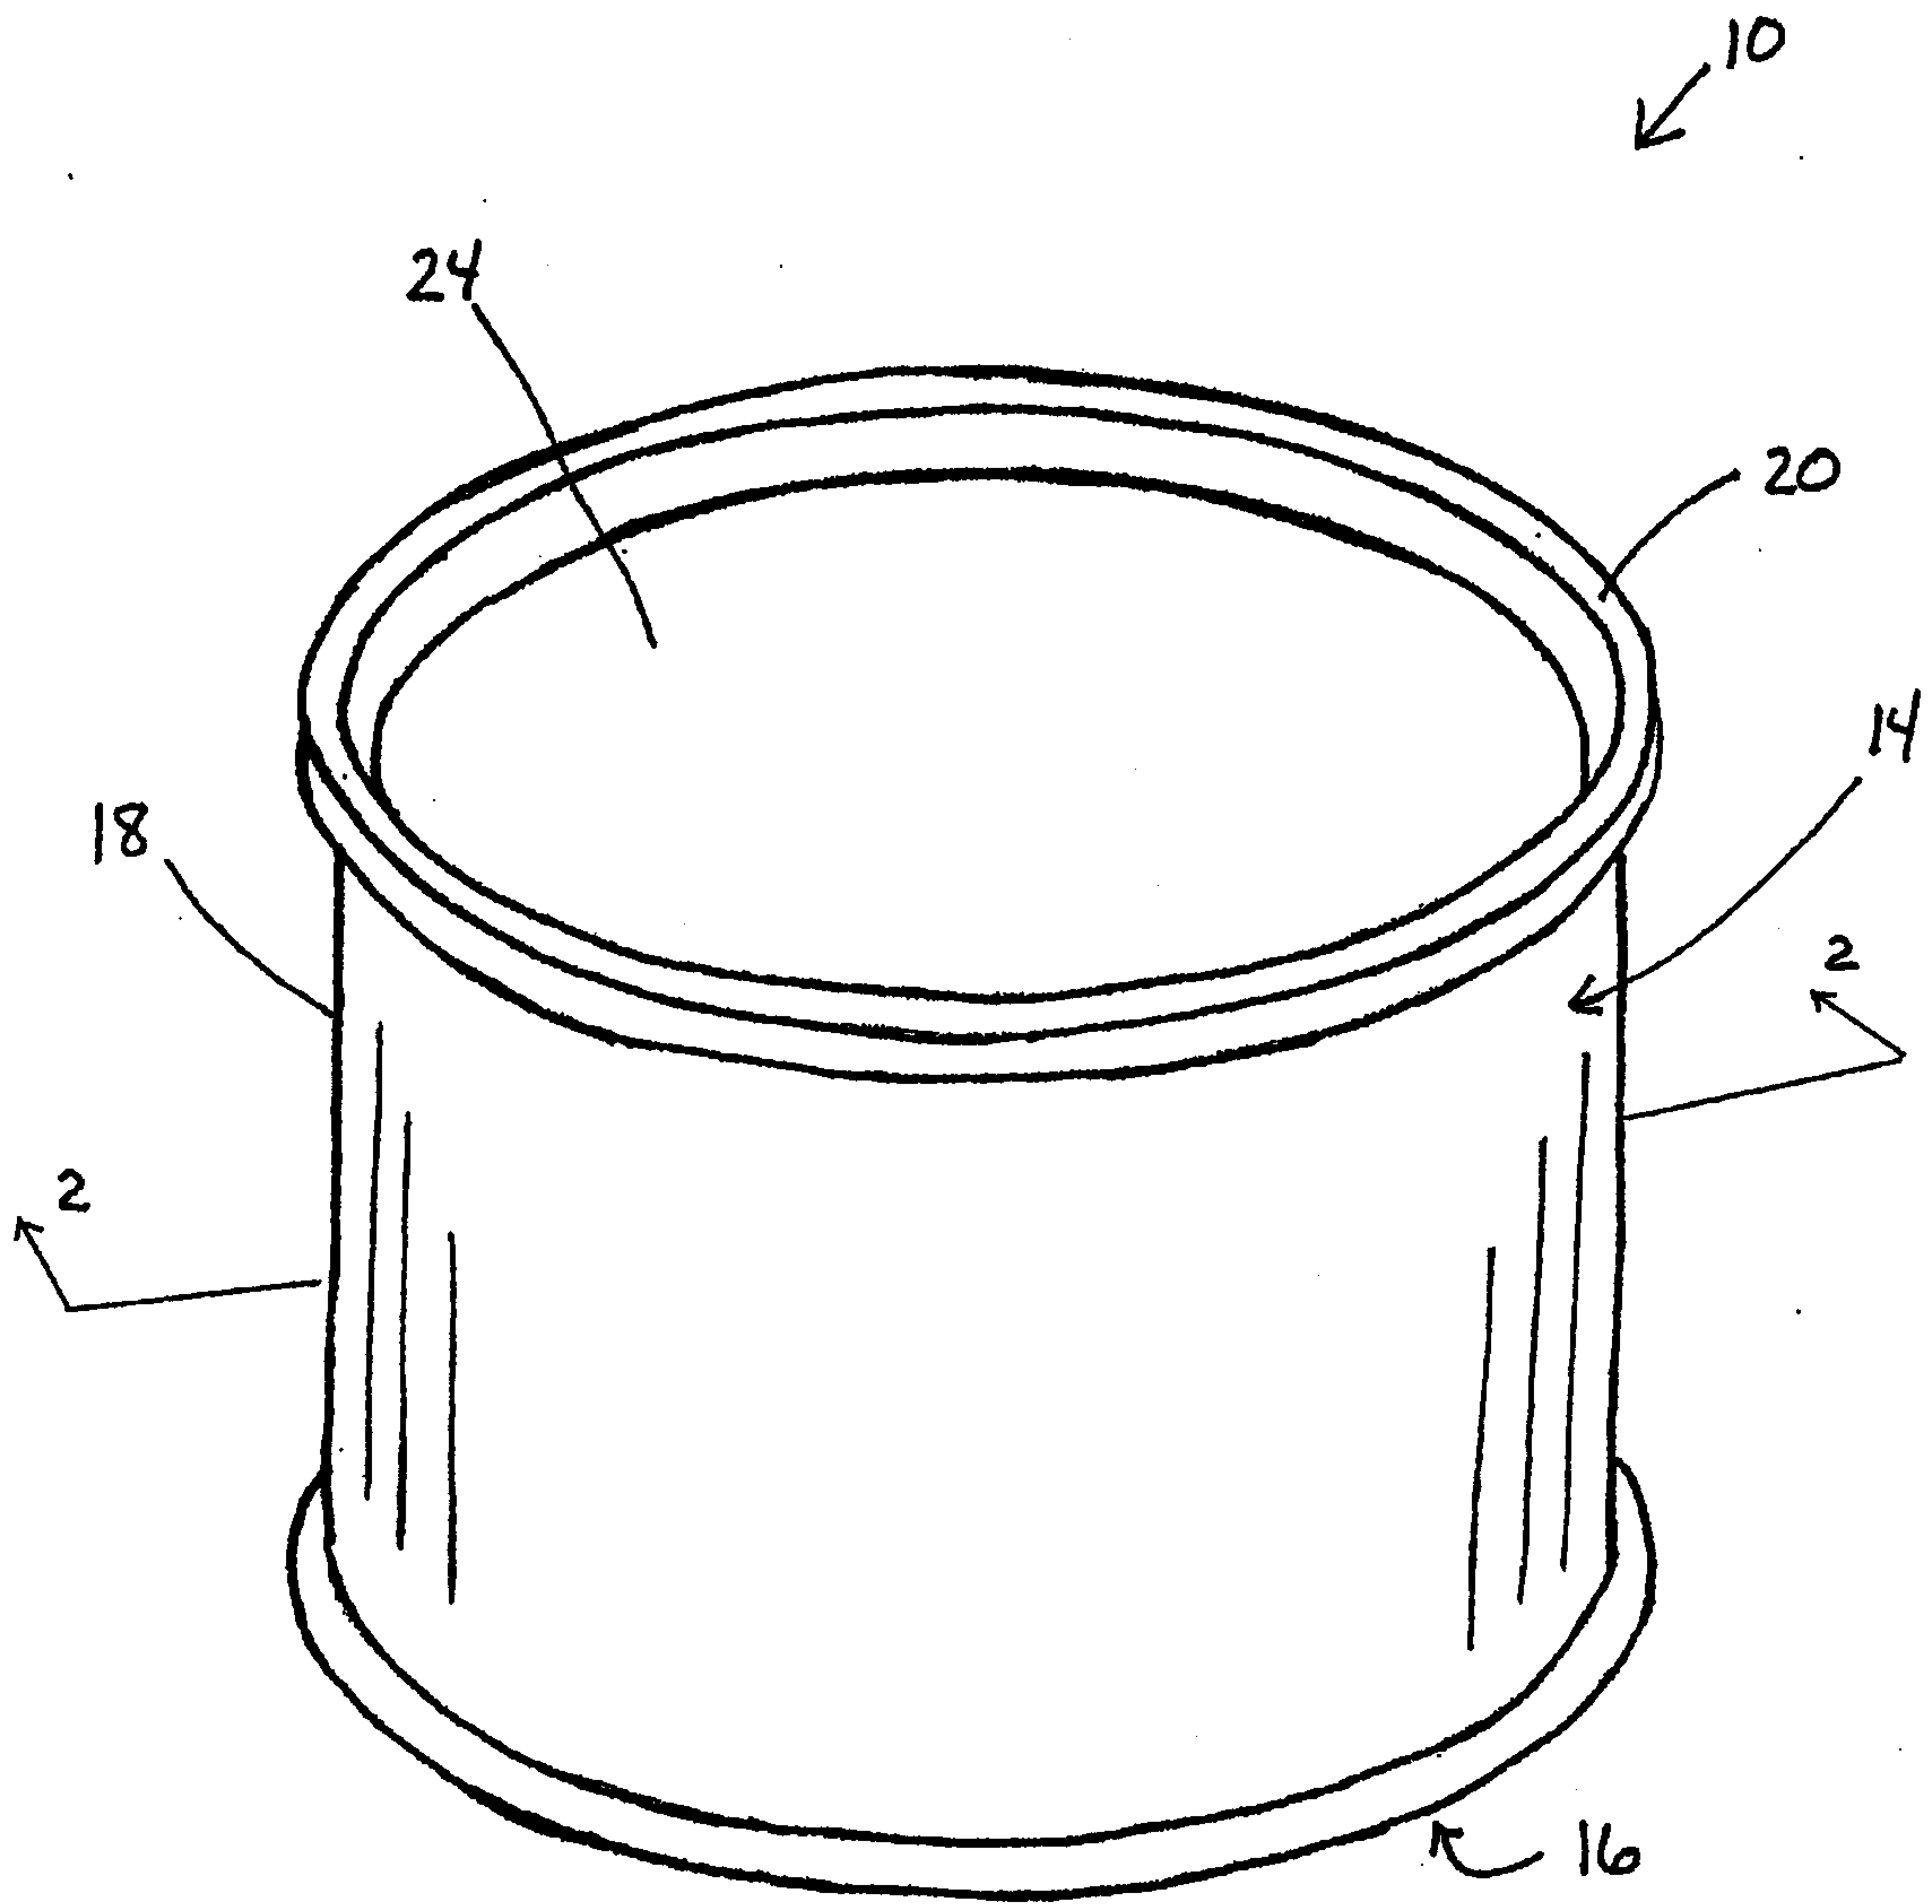


FIG 1

2/4

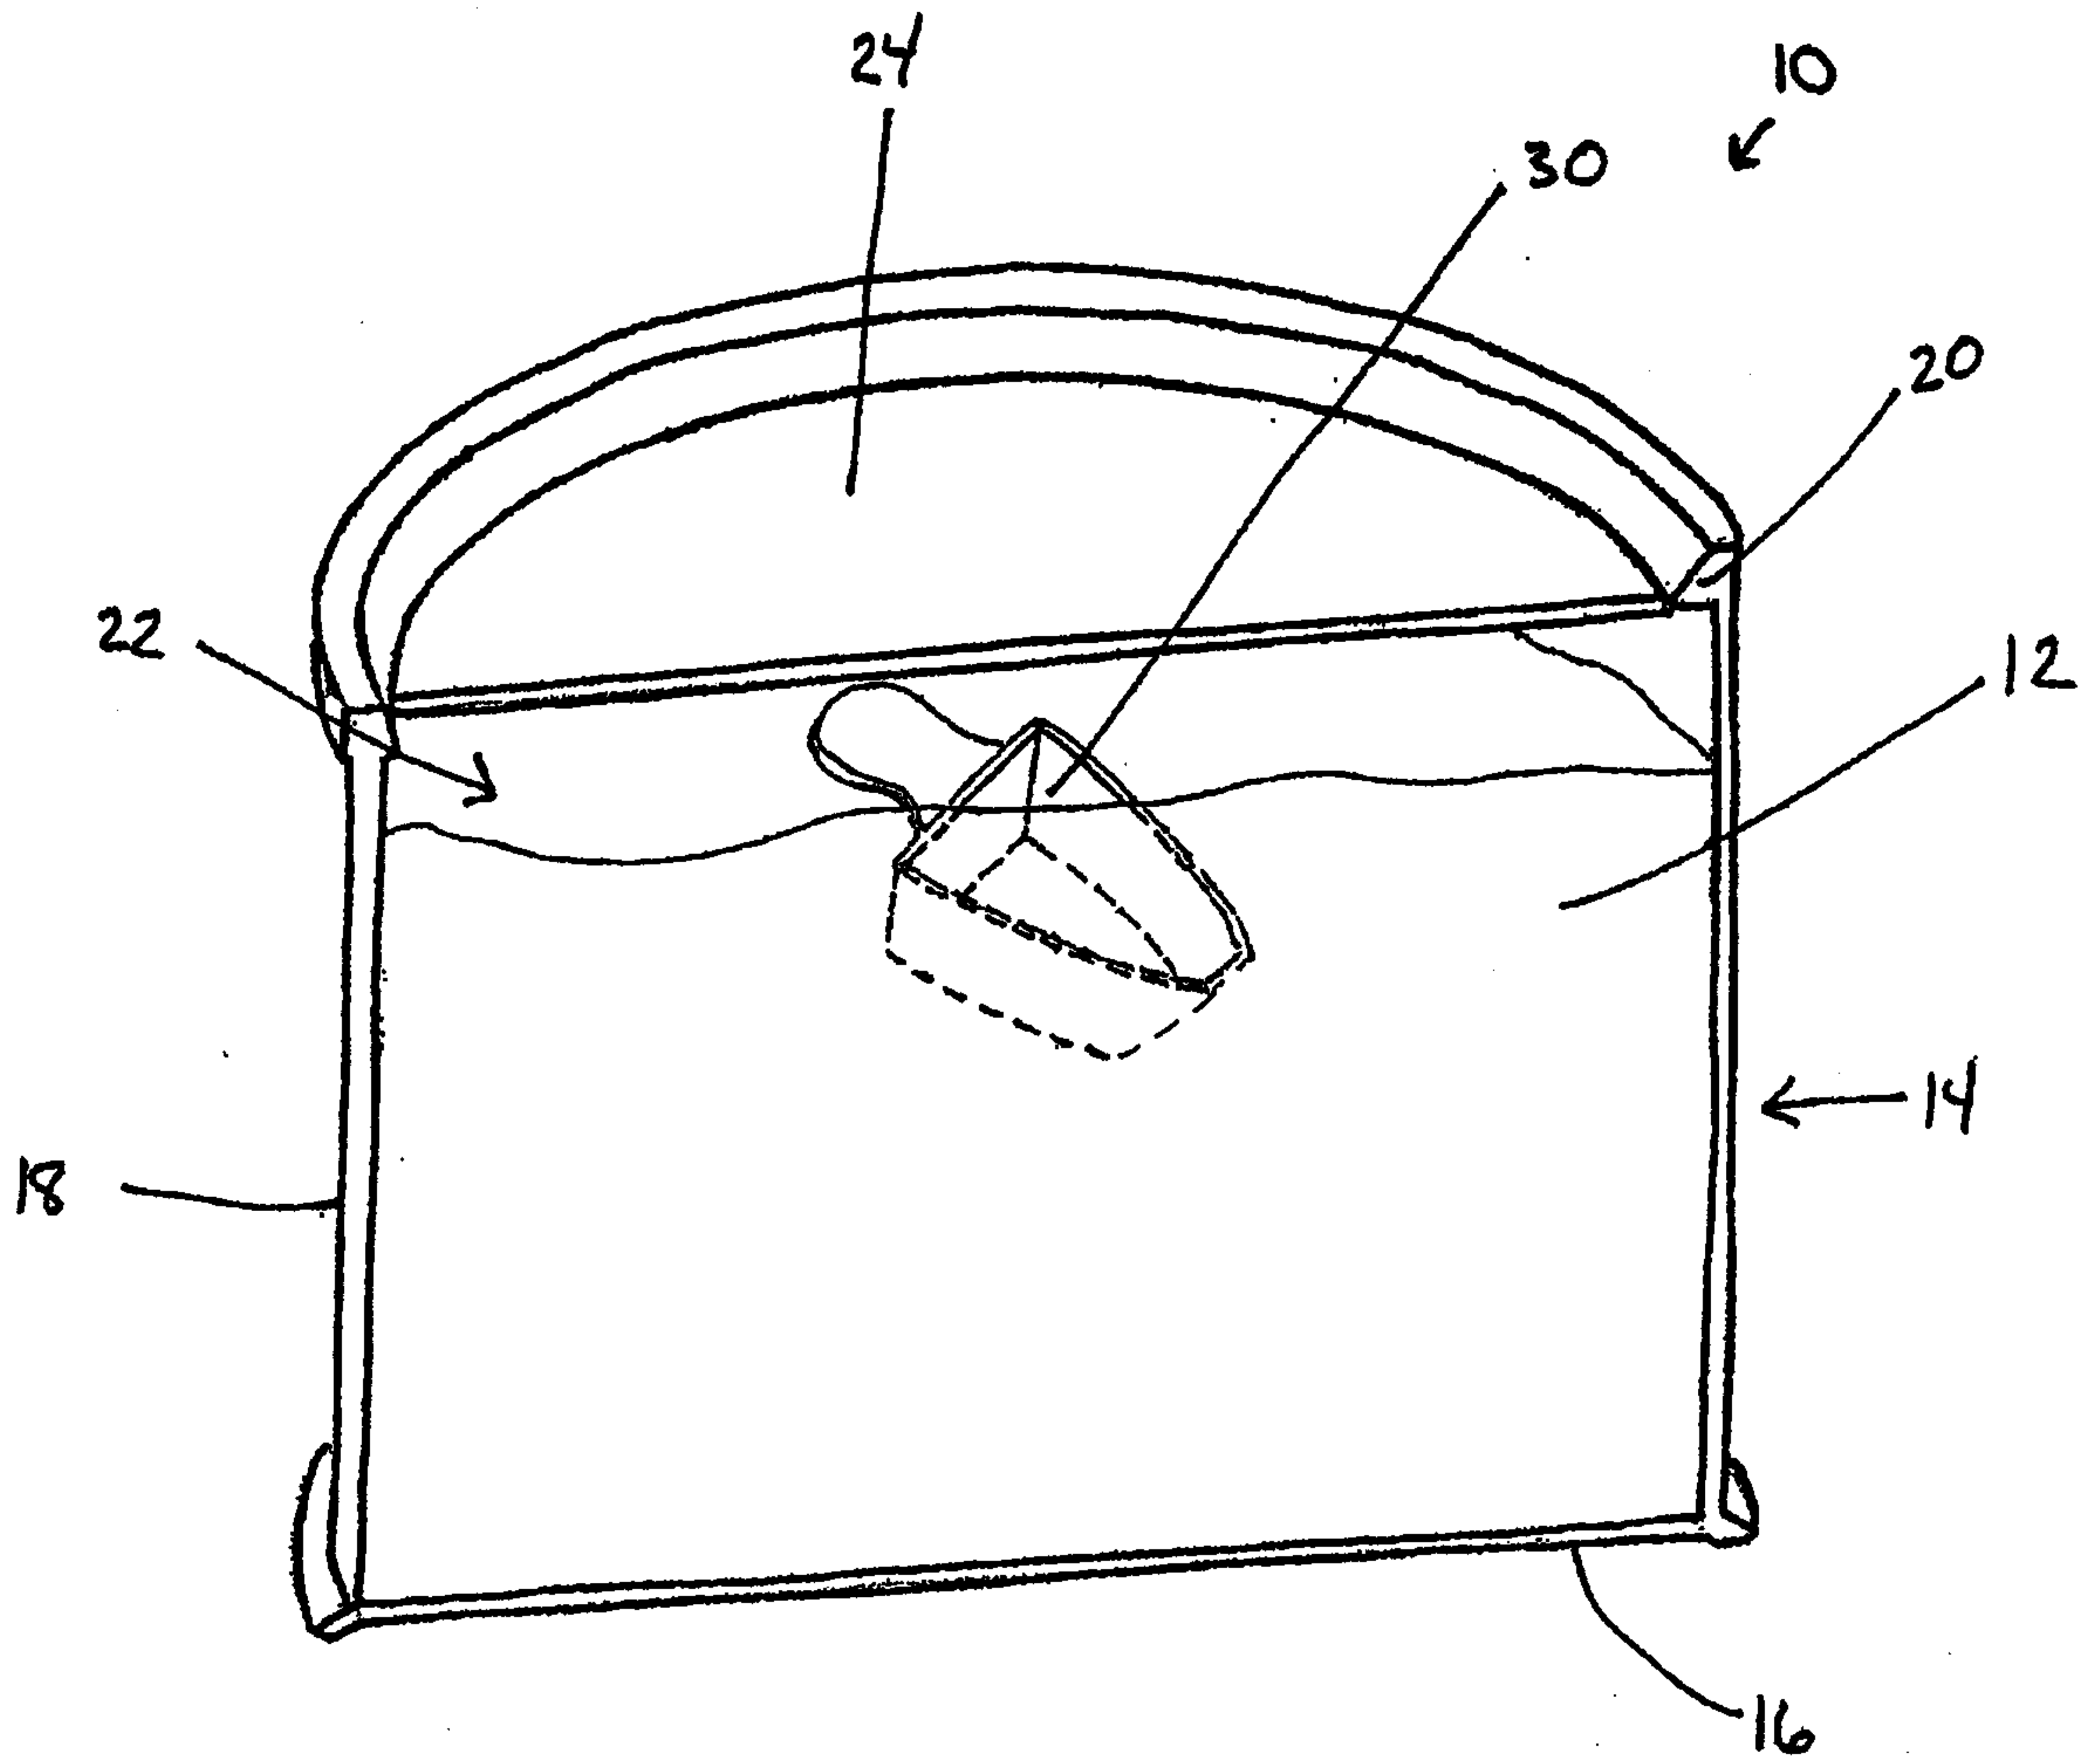
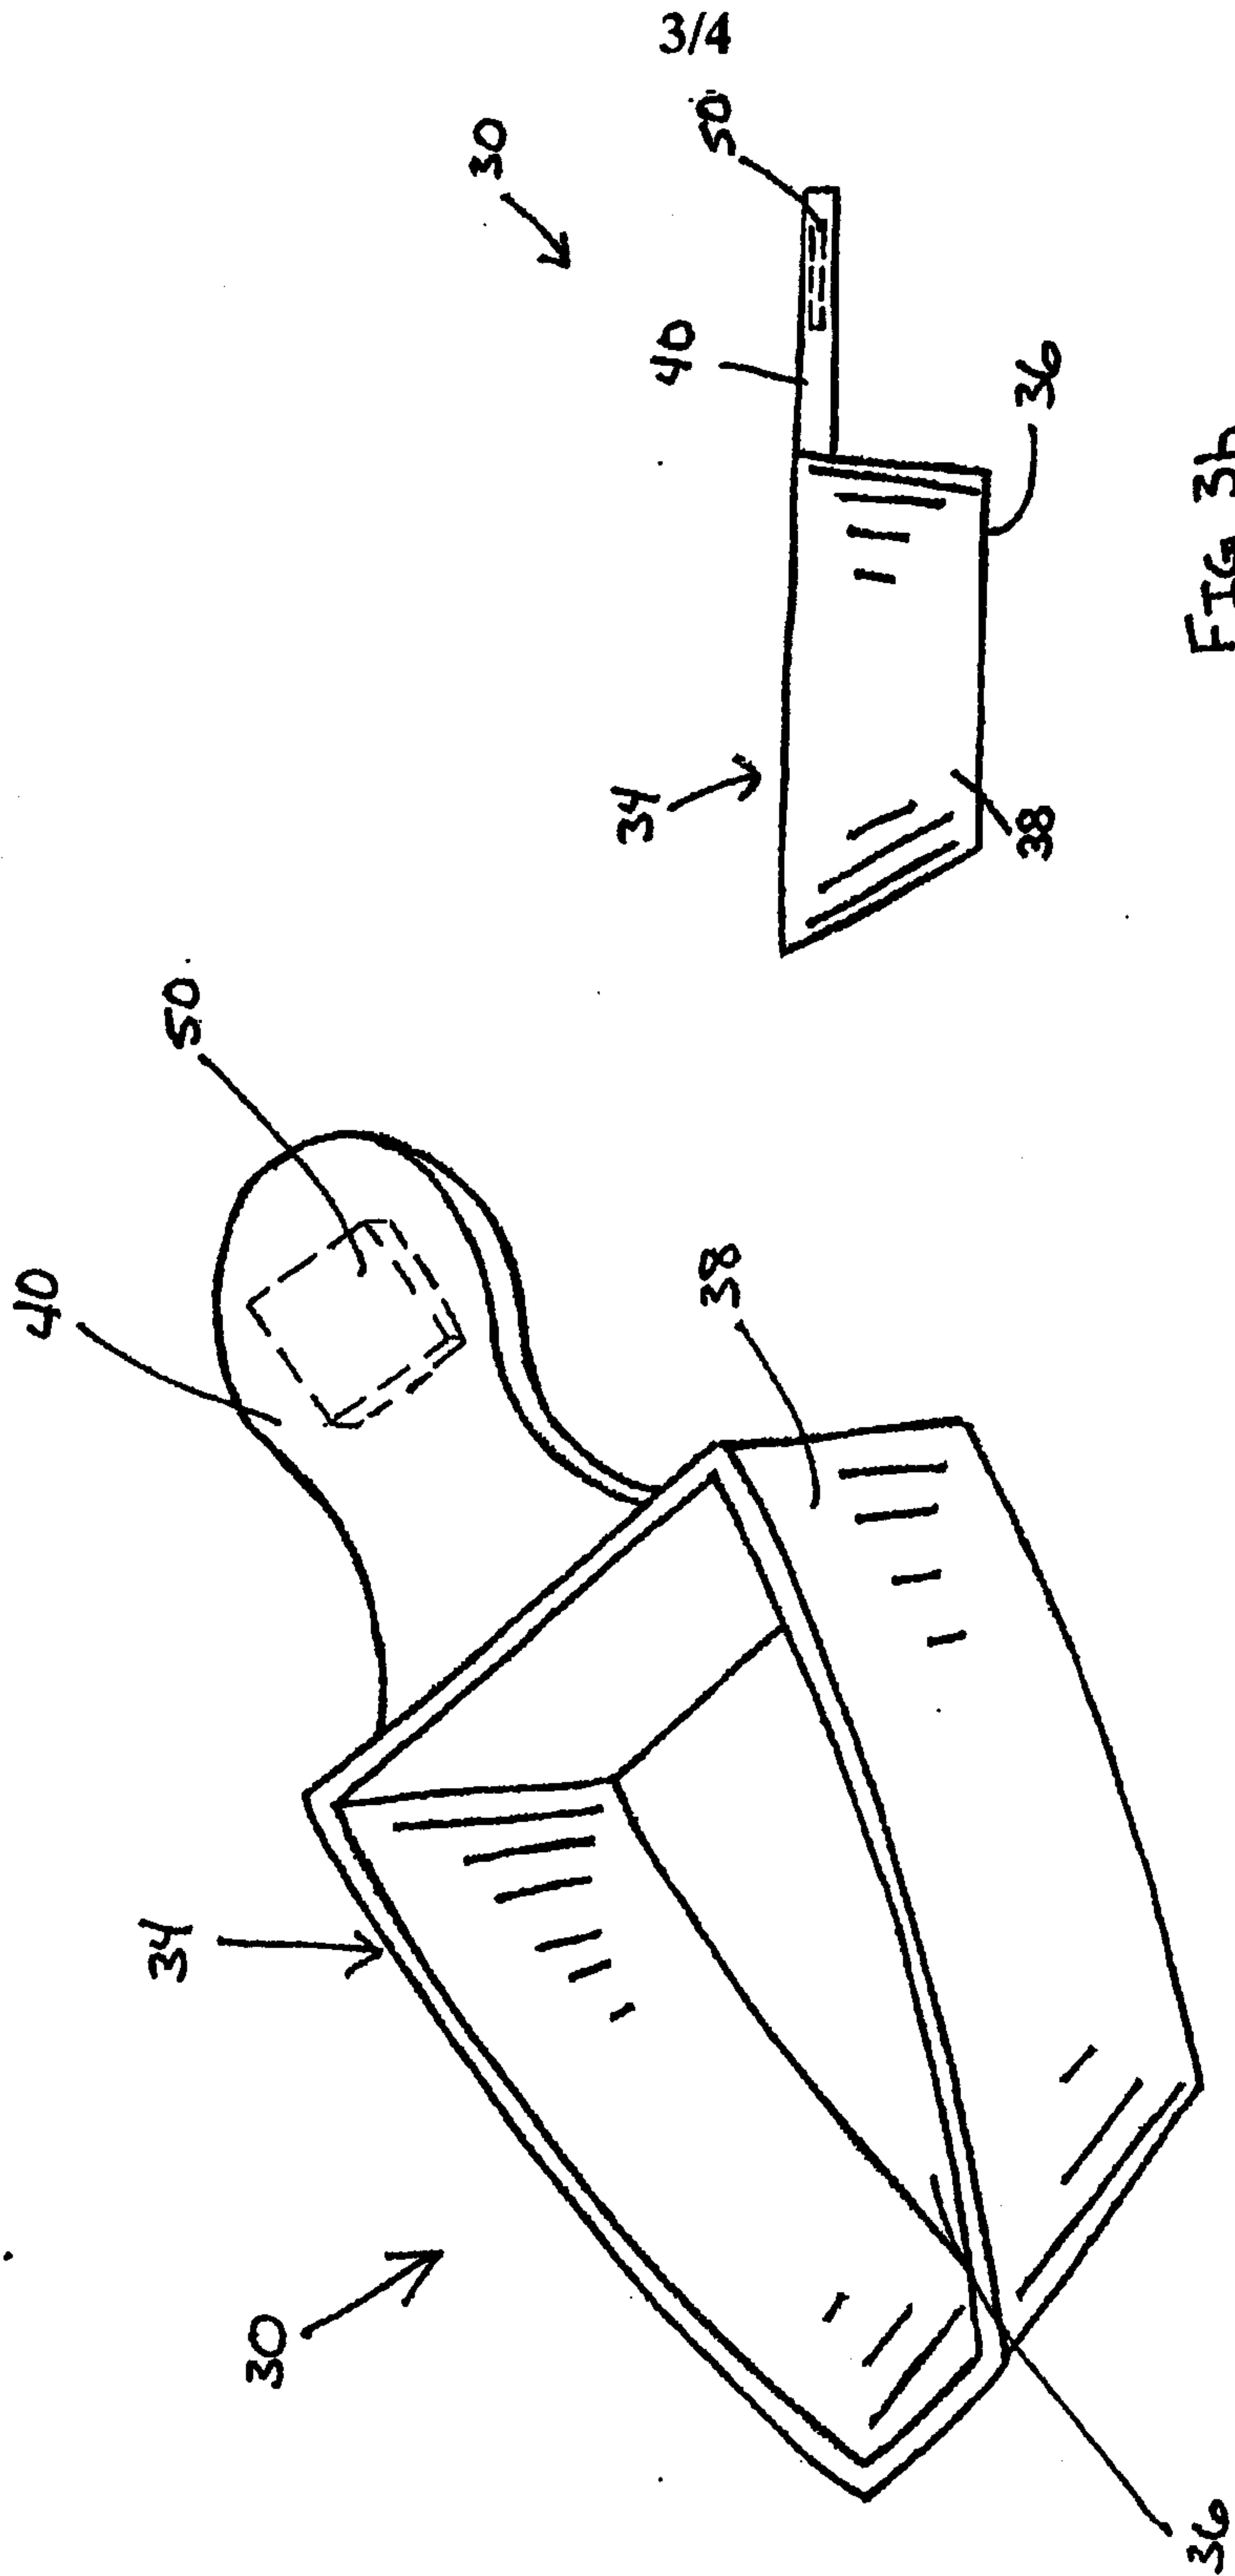


FIG 2



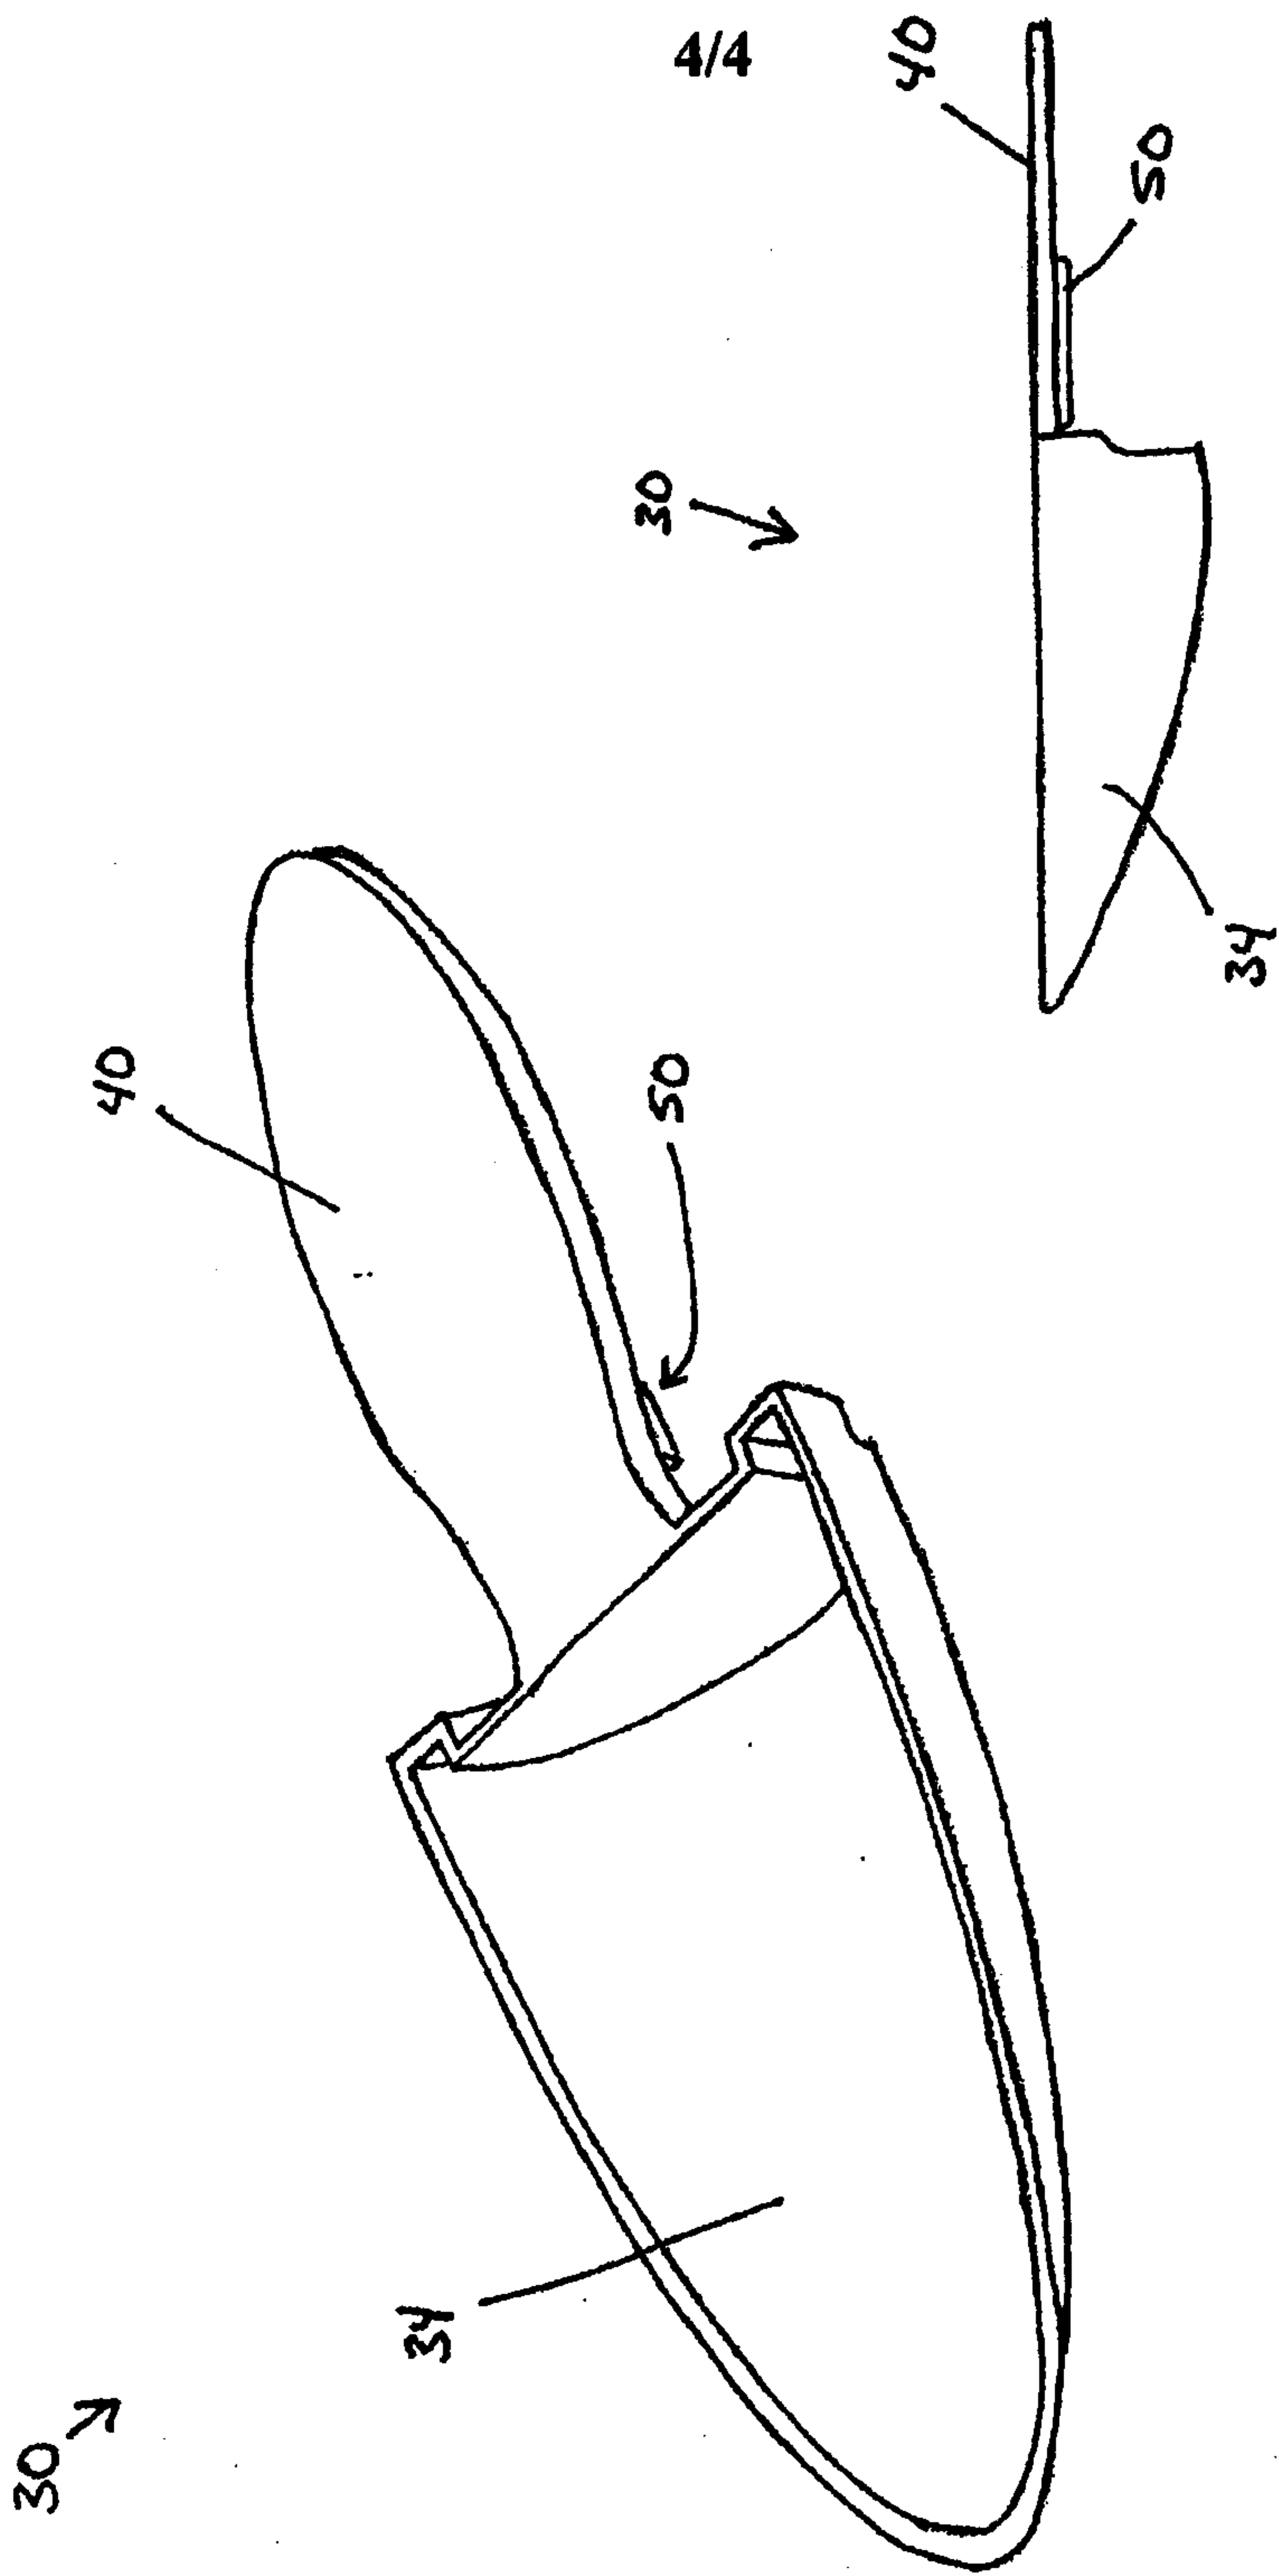


FIG 4a

FIG 4b

