

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)


PCT

(10) International Publication Number
WO 01/33031 A1

- (51) International Patent Classification⁷: E21B 10/44 (74) Agent: LYON, Richard, E., Jr.; Lyon & Lyon LLP, 633 West Fifth Street, Suite 4700, Los Angeles, CA 90071-2066 (US).
- (21) International Application Number: PCT/US00/30010
- (22) International Filing Date: 31 October 2000 (31.10.2000) (81) Designated States (*national*): CA, DE, MX.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (26) Publication Language: English
- (30) Priority Data:
60/163,296 3 November 1999 (03.11.1999) US
Published:
— With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- (71) Applicant: RELTON CORPORATION [US/US]; 317 Rolyne Place, Arcadia, CA 91007-2838 (US).
- (72) Inventor: NIEVES, Marcelo, Reyes; 3561 Mountain View, Pasadena, CA 91107 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTIPLE CUTTER ROTARY HAMMER BIT

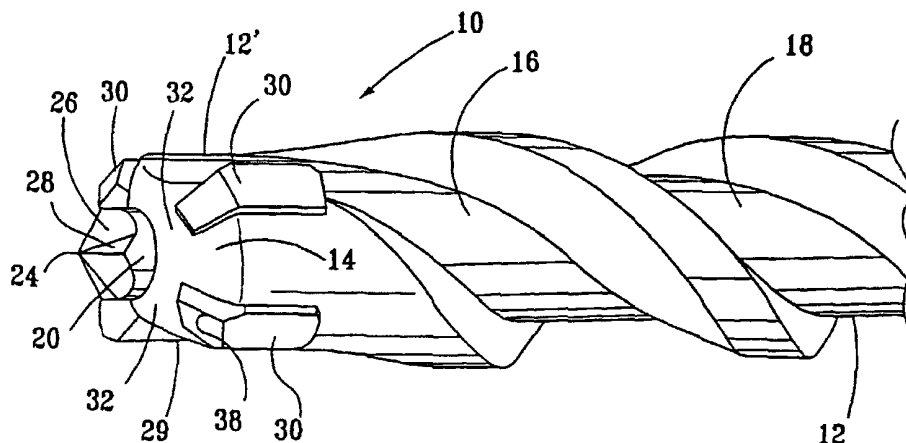

(57) Abstract: A drill bit (10) for use in rotary hammer drilling machines to drill holes in rock, masonry and concrete which includes an axially extending shank (12) having a plurality of helical discharge grooves (16, 18) therein and defining a convex end face (14). A cylindrical projection (20) is centrally disposed on the end face of the shank (12) and defines a pyramid-shaped cutting tip (24). A plurality of primary cutting members (30), generally rectangular in configuration, are embedded in the shank (12) such that the cutting members (30) are spaced from and extend radially from the cylindrical projection (20) so as to define gaps between the cutting members (30) and the projection (20). One of the cutting members is laterally adjacent an upper end portion of each of the discharge grooves (16, 18). The combination of the cylindrical projection (20) and surrounding primary cutting members (30) pulverize and pressurize drilled material and direct drilled material along the side wall of the cylindrical projection (20) and into the gaps between the projection and the primary cutting members where the material is compressed to assist in the drilling process and enhance drilling speed and is subsequently directed into the discharge grooves (16, 18) for removal.



WO 01/33031 A1

DESCRIPTION

MULTIPLE CUTTER ROTARY HAMMER BIT

5 This application claims the benefit of U.S. Provisional Patent Application
Serial No. 60/163,296, filed November 3, 1999.

BACKGROUND OF THE INVENTION

10 The present invention relates to a drill bit for use in rotary hammer drilling
machines to make holes in rock, masonry and concrete. Such bits are well known
and typically employ an axially extending shank having a pair of dust-removing
helical grooves therein and hard metal cutting edges positioned at the forward end
of the shank. The cutting edges generally extend over the entire diameter of the
drill head in a variety of configurations and exert a grinding type action on the
15 stone, masonry or concrete to cut into the material and form a borehole. In an
effort to enhance the durability and precision of the drilling operation and reduce
the wear on the cutting edges and jamming of the drill bit, different drill head cross
sections have been employed and a wide variety of cutting edge configurations
have been developed. Such edges are formed by a plurality of hard metal plates
20 and/or pins which are embedded in the face of the shank, extend across the face and
project axially therefrom. These cutting plates are frequently arranged in a variety
of cross-shaped forms wherein one of the plates extends across the diameter of the
shank to define the main cutting edges. This plate is often V or roof-shaped to
define a centering point. The auxiliary cutting edges are formed from smaller
25 plates projecting perpendicularly or at acute angles from the main plate. Examples
of such drills are shown and discussed in U.S. Patent Nos. 5,836,410; 5,482,124
and 3,960,223. While capable of forming boreholes in rock, masonry and concrete,
these drill bits have certain shortcomings. Centering of the borehole becomes
difficult as drilling progresses due to the overhang of the main cutting plate relative
30 to the cylindrical sides of the drill head. As a result, it is difficult to maintain a

straight and cylindrical borehole. Reinforcing steel ("rebar") also presents a problem as the roof-style points on the main cutting edge tend to slide off the rebar and allow the drills to progress against the sides of the reinforcing steel until the drill jams or breaks. The drill of the present invention overcomes the shortcomings
5 in the prior art bits and thereby provides a new and improved hammer bit.

SUMMARY OF THE INVENTION

Briefly, the present invention comprises a drill bit for use in rotary hammer drilling machines which includes an axially extending shank having a plurality of discharge
10 grooves therein, a centrally disposed cylindrical projection embedded in a convex end face of the shank, and terminating at its extended end in a pyramid-shaped point, and a plurality of primary cutters disposed about and spaced radially from the cylindrical projection. The pointed cylindrical projection permits precise location of the drill hole and minimizes wandering of the bit in creating a pilot hole. It also provides a chiseling effect to pulverize
15 the rock, masonry or concrete as opposed to the grinding-type action of roof-shaped bits. The inclined surface of the pyramid point is multi-faceted and the facets are oriented so as not only to define the pyramid point but also to channel the comminuted material down the straight cylindrical side wall of the central projection and into the gaps between the central projection and the outer primary cutters where the material is compressed against the rock
20 or other material being drilled and itself provides a grinding effect on the material being drilled to assist the primary cutters and pointed cylindrical projection in the drilling process and thus enhances the drilling speed. The configuration of the pyramid-shaped tip on the central projection also causes the drill to flare rebar upon contact and sit in the contact point so as to maintain a true drilling line and alert the driller to the presence of the
25 rebar to prevent damage to the drill bit.

Accordingly, it is the object of the present invention to provide a drill bit for use in rotary hammer drilling machines which exhibits improved accuracy and enhanced drilling speed and which is less likely to be damaged when encountering rebar.

These and other objects and advantages of the present invention will become
30 readily apparent from the following detailed description taken in conjunction with the accompanying drawings.

IN THE DRAWINGS

Figure 1 is a prospective view of a portion of the drill bit of the present invention showing the head and shank portions of the bit.

Figure 2 is a prospective view of the head portion of the drill bit of the present invention showing access to the helical portion of the shaft.

Figure 3 is a side view of the head portion of the drill bit of the present invention.

Figure 4 is an end view of the drill bit of the present invention showing the top of the head portion thereof.

Figure 5 is a sectional view taken along the line 5-5 in Figure 4.

Figure 6 is a side view of one of the primary cutters employed in the present invention.

Figure 7 is an end view of one of the primary cutters employed in the present invention.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now in detail to the drawings, the drill bit 10 of the present invention comprises an axially extending shank 12 terminating in a continuously convexly-shaped end face 14 and defining two material discharge helical grooves 16 and 18 therein. The end face 14 of shank 12 has a centrally disposed cylindrical projection 20 extending axially therefrom along the central axis of the shank 12. Projection 20 is formed of a hard, abrasion/percussion-resistant material such as carbide and preferably embedded in a center hole in the end face 14 and securely affixed by brazing or other suitable means. While the brazing may slightly interrupt the contour of the shank end face 14, the end face is otherwise generally convex over its entire surface. As used herein, the term "continuously convex" allows for such minor interruptions in contour. Projection 20 terminates at its extended end in a generally pyramid-shaped configuration defining a plurality of inclined facets terminating at their lower ends in the straight cylindrical side wall of projection 20 and at their upper ends in a centrally disposed pyramid point 24. In the preferred configuration of projection 20, point 24 is defined by four inclined larger or primary facets 26 and four smaller or secondary facets 28. As best seen in Figure 5, each secondary facet 28 extends at upward and rearward inclinations between the trailing edge 26' of one of the primary facets 26 and the leading edge 26" of an adjacent primary facet.

A plurality of primary cutters 30 are also embedded in the end face 14 of the shank 12 and, with central projection 20 and the extended end portion 12' of shank 12, define a drill head 29. While the number of primary cutters can vary, four such primary cutters 30 are preferably employed in the drill head and, like projection 20, cutters 30 are formed of a hard, abrasion/percussion resistant material such as carbide. As few as two such cutters could be employed, and in larger diameter drills six or more primary cutters could be employed. The primary cutters 30 are generally rectangular in configuration and are positioned in the periphery of the drill head 29 so as to surround the central projection 20 and provide radial spacings or gaps 32 between cutters 30 and projection 20. The primary cutters 30 are also positioned in the drill head such that one of said cutters is rearwardly adjacent the upper end portion of each of grooves 16 and 18 to facilitate access to grooves 16 and 18 for moving drilled material from the drilled hole.

While the primary cutters 30 can vary in configuration, the preferred configuration is illustrated in Figures 1-6. As seen therein, each cutter 30 has a rearwardly beveled side portion 31 and defines at its upper end a rearwardly and upwardly inclined facet 30' and a pair of adjacent rearwardly declining and radially converging facets 30" so as to define cutting edges 34, 36 and 38. If desired, serrations could be cut in edges 34, 36 and 38 to further increase drilling speed. Terms such as "rearwardly", "forwardly", "leading edge" and "trailing edge" are used herein with reference to the direction of rotation of the drill bit 10 during drilling, which would be clockwise as viewed by the person operating the drilling machine and counterclockwise as viewed from the orientations of Figures 2-4 in the drawings.

The primary cutters 30 also project in a radial direction a slight distance beyond the outer perimeter of the drill body. In the preferred embodiment of the present invention, this overhang or radial projection of the primary cutters beyond the perimeter of the drill body is only about 1/32 of an inch. This small overhang has been found to reduce friction and binding of the fluted drill body in the hole while minimizing any variation from true axial straightness in the drilling process. As a result, the drill bit 10 avoids cutting a somewhat elliptically shaped hole which would occur with excessive overhang and is common with drills employing roof-style carbide centering points or other conventional cutting ends.

In use, the sharp tip of the pyramid point 24 has been found to provide drill bit 10 with superior hole-centering for precise location of the drill hole. The pyramid point

continues to perform that function as drilling progresses as a result of its configuration and the straight cylindrical side wall of projection 20. The point centering capability of projection 20 in combination with the above-described small overhang of the primary cutters 30 beyond the perimeter of the shank creates extremely straight holes as contrasted with other drills with roof-style carbide centering points or conventional cutting ends. The primary and secondary facet configuration also provides the central projection 20 with an effective cutting or chiseling configuration to compliment the primary cutters 30 in the drilling process. In addition, the trailing secondary facets 28 defined by the pyramid-shaped cutting point 24 cooperate with the spacings 32 between projection 20 and cutters 30 by pulverizing, pressurizing, and channeling the comminuted material over and down the sides of the pyramid point and down the side wall of projection 20 into spacings 32 where the dust is compressed against the rock, masonry or concrete in the spacings and assists in the breaking or crushing of such rock, masonry or concrete into pulverized dust. As a result, the drilling speed is enhanced by obviating the need to otherwise cut or break up the material disposed between projection 20 and cutters 30.

Various changes and modifications may be made in carrying out the present invention without departing from the spirit and scope thereof. Insofar as the changes and modifications are within the purview of the appended claims, they are to be considered as part of the present invention.

I Claim:

1. A drill bit for use in rotary hammer drilling machines comprising an axially extending shank having a plurality of helical discharge grooves therein and terminating in a convex end face, a cylindrical projection centrally disposed on said end face, projecting axially therefrom and terminating in a centrally disposed cutting tip, and a plurality of primary cutting members disposed about and radially spaced from said cylindrical projection so as to define gaps between said cutting members and said projection, one of said cutting members being laterally adjacent portions of each of said grooves for directing drilled material into said grooves.

2. The drill bit of claim 1 wherein said primary cutting members are generally rectangular in configuration, are embedded in said shank such that said members extend radially from said cylindrical projection, project axially and radially from end face of said shank and define a plurality of angularly disposed facets thereon, one of said facets being disposed adjacent to and inclined from an upper end portion of each of said discharge grooves.

3. The drill bit of claim 1 wherein said cylindrical projection defines a plurality of primary facets and secondary facets, said primary and second facets terminating in said cutting tip and wherein said secondary facets are inclined between a trailing edge of one of said primary facets and a leading edge of another of said primary facets.

4. The drill bit of claim 1 wherein said cylindrical projection defines a first plurality of facets terminating in said tip and a second plurality of facets terminating in said tip, each of said first plurality of facets defining a leading edge and a trailing edge, each of said second plurality of facets extending at an upward inclination between a trailing edge of one of said first plurality of facets and a leading edge of another of said first plurality of facets whereby drilled material is pulverized and pressurized by said cylindrical projection and channeled by said cylindrical projection into said gaps between said projection and said primary cutting members for compression of said material to assist in the drilling process and enhance drilling speed.

5 5. The drill bit of claim 2 wherein each of said primary cutting members defines second and third facets, said second and third facets being inclined with respect to each other and with respect to said one facet on said cutting member so as to define a cutting tip at the apex of said one, second and third facets.

 6. The drill bit of claim 2 wherein said primary cutting members project radially from said end face of said shank a distance of about 1/32 of an inch.

10 7. The drill bit of claim 2 wherein said cylindrical projection defines a first plurality of facets terminating in said tip and a second plurality of facets terminating in said tip, each of said first plurality of facets defining a leading edge and a trailing edge, each of said second plurality of facets extending at an upward inclination between a trailing edge of one of said first plurality of facets and a leading edge of another of said first plurality of facets whereby drilled material is pulverized and pressurized by said cylindrical projection and channeled by said cylindrical projection into said gaps between said projection and said primary cutting members for compression of said material to assist in the drilling process and enhance drilling speed.

20 8. The drill bit of claim 7 wherein said primary cutting members project radially from said end face of said shank a distance of about 1/32 of an inch.

 9. A drill bit for use in rotary hammer drilling machines comprising an axially extending shank having a plurality of helical discharge grooves therein and terminating in an end face, a cylindrical projection centrally disposed on said end face, projecting axially therefrom and terminating in a plurality of inclined facets defining a centrally disposed pyramid-shaped cutting tip, and a plurality of primary cutting members disposed about and radially spaced from said projection so as to define gaps between said cutting members and said projection, one of said cutting members being laterally adjacent each of said grooves for directing drilled material into said grooves and wherein said inclined facets on said central projection are configured so as to pulverize and pressurize drilled material and to direct drilled material along said central projection and into said

gaps for compression of said material to assist in the drilling process and enhance drilling speed.

10. The drill bit of claim 9 wherein said primary cutting members project
5 radially from said end face of said shank a distance of about 1/32 of an inch.

11. The drill bit of claim 9 wherein said facets comprise a plurality of primary
facets and a plurality of secondary facets, said secondary facets being inclined between a
trailing edge of one of said primary facets and a leading edge of another of said primary
10 facets.

12. The drill bit of claim 9 wherein said end face of said shank is continuously
convex.

13. The drill bit of claim 11 wherein said primary cutting members project
15 radially from said end face of said shank a distance of about 1/32 of an inch.

14. A drill bit for use in rotary hammer drilling machines comprising an axially
extending shank having a plurality of helical discharge grooves therein and terminating in
20 a continuously convex end face, a cylindrical projection centrally disposed on said end
face, projecting axially therefrom and terminating in a plurality of inclined facets defining
a centrally disposed pyramid-shaped cutting tip, and a plurality of primary cutting
members disposed about and radially spaced from said projection so as to define gaps
between said cutting members and said projection, said inclined facets on said central
25 projection being configured so as to pulverize and pressurize drilled material and to direct
drilled material along said central projection and into said gaps for compression of said
material to assist in the drilling process and enhance drilling speed.

15. The drill bit of claim 14 wherein said primary cutting members are of a
30 generally rectangular configuration and radially disposed in said end face with one of said
cutting members being laterally adjacent each of said grooves for directing drilled material
into said grooves.

16. The drill bit of claim 15 wherein said primary cutting members project radially from said end face of said shank a distance of about 1/32 of an inch.

17. A drill bit for use in rotary hammer drilling machines comprising an axially
5 extending shank having a plurality of helical discharge grooves therein and terminating in
a convex end face, a cylindrical projection centrally disposed on said end face, projecting
axially therefrom and terminating in a plurality of inclined facets defining a centrally
disposed pyramid-shaped cutting tip, and a plurality of generally rectangularly-shaped
primary cutting members disposed about and radially spaced from said projection so as to
10 define gaps between said cutting members and said projection and extend radially beyond
said shank a distance of about 1/32 of an inch, one of said cutting members being laterally
adjacent each of said grooves, and wherein said inclined facets on said central projection
are configured so as to pulverize and pressurize drilled material and to direct drilled
material along said central projection and into said gaps for compression therein and
15 subsequent discharge through said grooves.

18. The drill bit of claim 17 wherein said facets comprise a plurality of primary
facets and a plurality of secondary facets, said secondary facets being inclined between a
trailing edge of one of said primary facets and a leading edge of another of said primary
20 facets.

19. The drill bit of claim 17 wherein said end face of said shank is continuously
convex.

1/2

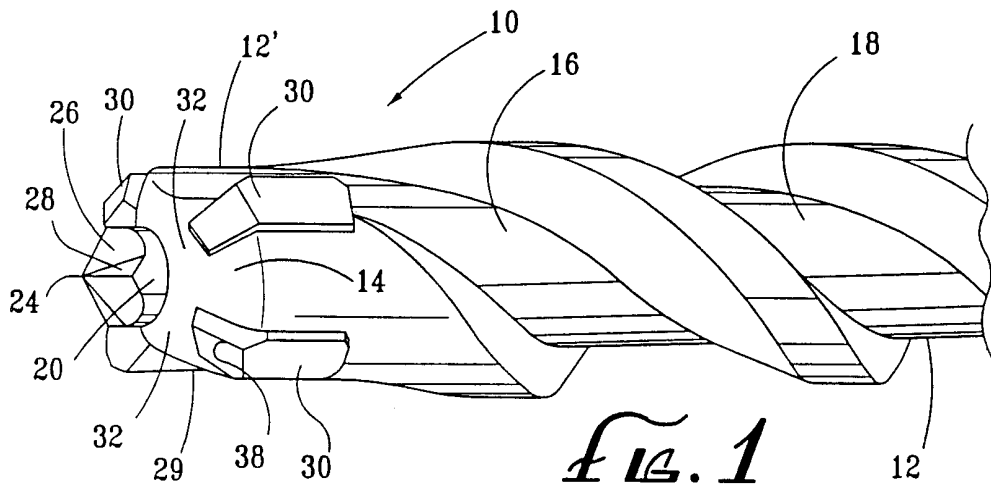


FIG. 1

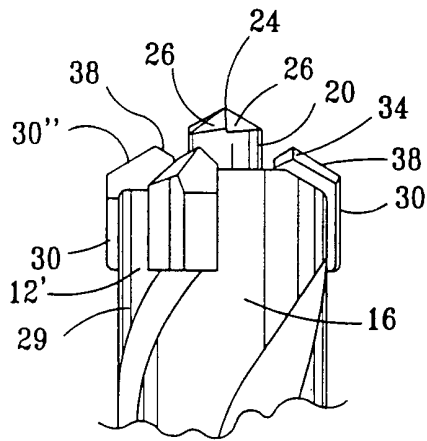


FIG. 3

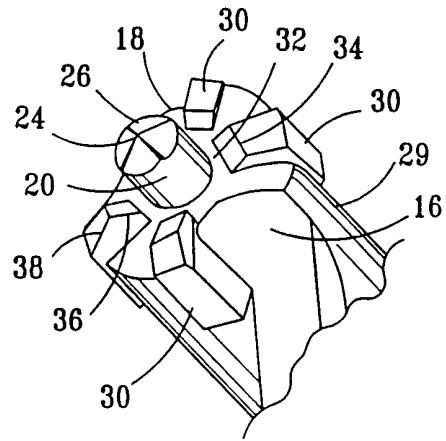


FIG. 2

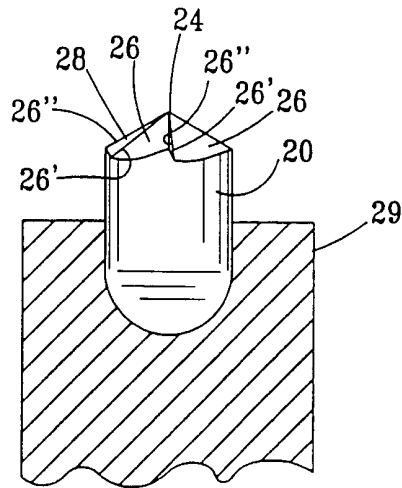


FIG. 5

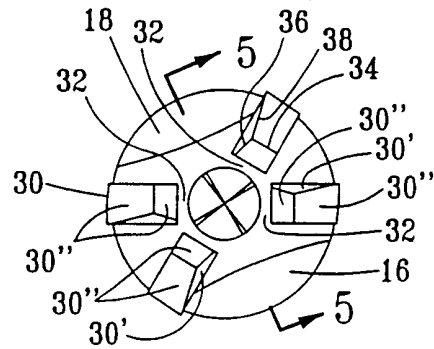


FIG. 4




FIG. 6




FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/30010

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :E21B 10/44

US CL :175/323,394

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 175/323,394,395,415,420,385,386,388,390: 408/230

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

none

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

none

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	US 6,102,634 A (TURNER ET AL) 15 August 2000 (15/08/00), see entire document.	1-3,6,9-19
X	US 4,942,931 A (MOSER) 24 July 1990 (24/07/90), see entire document.	1,3
X	US 2,858,109 A (TENGBERG) 28 October 1958 (28/10/58), see entire document.	1,2,6
X	US 3,773,122 A (CHROMY) 20 November 1973 (20/11/73), see entire document.	1-3,6,9-19
X	US 5,403,130 A (MOSER ET AL) 04 April 1995 (04/04/95), see entire document.	1-3

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

25 JANUARY 2001

Date of mailing of the international search report

22 MAR 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

WILLIAM P. NEUDER *Diane Smith*

Telephone No. (703) 308-2150