



(51) International Patent Classification:

F41H 5/02 (2006.01) F41H 7/04 (2006.01)
C09D 123/10 (2006.01)

(21) International Application Number:

PCT/US2015/025498

(22) International Filing Date:

13 April 2015 (13.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/320,846 1 July 2014 (01.07.2014) US

(71) Applicant (for all designated States except US): **THE GOVERNMENT OF THE UNITED STATES OF AMERICA, AS REPRESENTED BY THE SECRETARY OF THE NAVY** [US/US]; Naval Research Laboratory, 4555 Overlook Ave., SW, Code 1008.2, Washington, DC 20375 (US).

(72) Inventors; and

(71) Applicants (for US only): **ROLAND, Charles, M.** [US/US]; Naval Research Laboratory, 4555 Overlook Ave,

SW, Washington, DC 20375 (US). **GAMACHE, Raymond, M.** [US/US]; Naval Research Laboratory, 4555 Overlook Ave, SW, Washington, DC 20375 (US).

(74) Agent: **RESSING, Amy, L.**; Us Naval Research Laboratory, 4555 Overlook Ave, SW, Code 1008.2, Washington, DC 20375 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: POLYMER COATINGS FOR ENHANCED AND FIELD-REPAIRABLE TRANSPARENT ARMOR

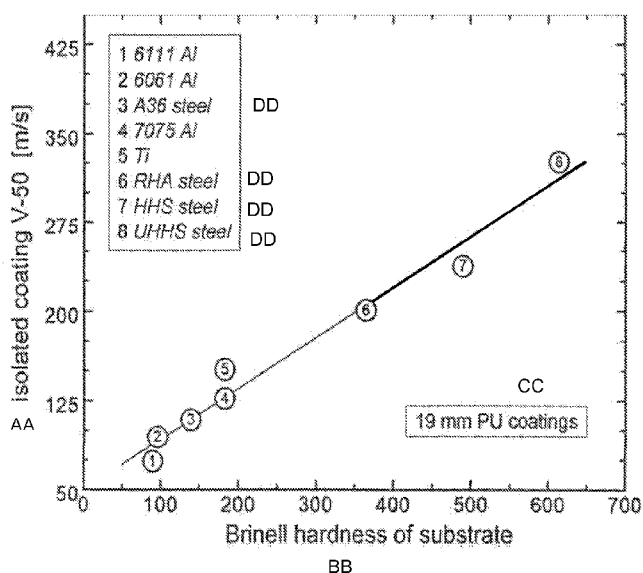


FIG. 1

(57) Abstract: A coating of atactic polypropylene over a transparent armor substrate improves resistance to penetration while allowing convenient repair of minor abrasions and scratches.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, **Published:**

LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— with international search report (Art. 21(3))

TITLE

Polymer Coatings for Enhanced and Field-Repairable Transparent Armor

BACKGROUND

[0001] Drawbacks to conventional transparent armor include the need to use thicker panels to achieve desired levels of protection, thus incurring a weight penalty, and environmental erosion and scratching of the surface, which reduces transparency. A need exists to mitigate these problems.

BRIEF SUMMARY

[0002] In a first embodiment, an armor system includes a hard, transparent armor substrate, and a transparent coating of atactic polypropylene bonded to the armor substrate.

[0003] In another embodiment, a vehicle incorporates the armor system of the first embodiment, with the transparent coating configured to face an exterior surface of the vehicle, the armor system configured as a window, windscreen, or viewing port of said vehicle.

[0004] A further embodiment involves treating the armor system of the first embodiment by heating and smoothing the transparent coating, thereby improving optical clarity thereof.

BRIEF DESCRIPTION OF THE DRAWING

[0005] FIG. 1 shows the increase in velocity required to penetrate armor (V-50) due to the presence of a 19mm polyurea coating.

DETAILED DESCRIPTION

Definitions

[0006] Before describing the present invention in detail, it is to be understood that the terminology used in the specification is for the purpose of describing particular embodiments, and is not necessarily intended to be limiting. Although many methods, structures and materials similar, modified, or equivalent to those described herein can be used in the practice of the present invention without undue experimentation, the preferred methods, structures and materials are described herein. In describing and claiming the present invention, the following terminology will be used in accordance with the definitions set out below.

[0007] As used in this specification and the appended claims, the singular forms “a”, “an,” and “the” do not preclude plural referents, unless the content clearly dictates otherwise.

[0008] As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0009] As used herein, the term “about” when used in conjunction with a stated numerical value or range denotes somewhat more or somewhat less than the stated value or range, to within a range of $\pm 10\%$ of that stated.

[0010] As used herein, the term “armor substrate” refers to new and conventional forms of transparent armor including, without limitation, laminates of soda-lime or borosilicate glass with polycarbonate as well as transparent ceramic armor including aluminum oxynitride (“Alon”), spinel (including nanocrystalline spinel), and the like, and combinations thereof.

Description

[0011] Elastomeric coatings were found to substantially increase the ballistic limit of underlying steel armor substrates, with a composite array of elastomer–steel panels enjoying increases armor penetration resistance, as reported in Roland et al., “Elastomer–steel laminate armor” *Composite Structures* 92 (2010) 1059–1064, incorporated herein by reference.

[0012] Various coatings including polyurea and butyl rubber have shown to function well in this application, and the coating itself may include a combination of materials.

[0013] FIG. 1 shows the increase in average velocity required to penetrate armor (V-50) due to the presence of a 19mm polyurea coating. The coating contribution to penetration resistance systematically increases with increasing substrate hardness. On steel substrates, mass efficiencies exceeding a factor of two have been achieved.

[0014] With regard to conventional transparent armor, thicker panels are required to achieve higher ballistic performance, with a concomitant weight penalty which is especially undesirably in the case of vehicles, adversely impacting performance, fuel economy, and payload, while the bulkier panels impinge on interior space. Furthermore, conventional transparent armor can be prone to environmental abrasion or scratching, reducing transparency and requiring costly and time-consuming repair.

[0015] This armor system may be applied to vehicles including manned or unmanned vehicles suitable for travel on the ground, or in the air, on the surface of water or underwater, and combinations thereof. It may be used in windows, windscreens, viewing ports, and the like.

[0016] As described herein, a transparent armor system includes a polymer coating applied to a transparent armor substrate. The density by area of this transparent armor system can be less than that of conventional armor systems while providing equal or greater protection.

[0017] The protective function of the coating is believed to arise from an impact-induced phase transition with consequent large energy absorption, so that the substrate should be stiff enough to allow rapid compression of the coating. Atactic polypropylene with a glass transition temperature of about -20°C functions as a suitable coating due to this phenomenon, while providing the desired transparency.

Armor Substrate

[0018] The armor substrate is preferably transparent and with sufficient rigidity and hardness to support the coating while also itself resisting penetration. Most preferably, the armor substrate has a hardness of at least 150, 200, 300, 400, 500, or more, as measured using the Brinell method with a tungsten ball of 10 mm diameter and 3,000 kg force.

[0019] The armor substrate may be one or more new or conventional forms of transparent armor including, without limitation, laminates of soda-lime or borosilicate glass with polycarbonate and transparent ceramic armor including aluminum oxynitride (“Alon”), spinel (including nanocrystalline spinel), and the like, and combinations thereof. Nanocrystalline ceramic material that might be suitable for use as an armor substrate is described in commonly-owned US Provisional Patent Application No. 61/907,440 filed on Nov. 22, 2013, incorporated herein by reference.

[0020] Traditional bullet-resistant glass is available with coatings under the trade names MARGARD and MAKROLON intended to improve scratch resistance. The present armor system may be used with any such forms of coated transparent substrates, termed secondary coatings to distinguish them from the atactic polypropylene coating of the invention. It is believed that hard coatings may increase the effective hardness of the glass, thus improving performance of the system as seen in FIG. 1. The polypropylene coating senses the hardness of

the substrate of length-scales commensurate with the wavelength of the longitudinal pressure wave – this may guide the design of the thickness of a secondary coating.

Coating

[0021] The polymeric coating is preferably atactic polypropylene. It was found that isotactic polypropylene would crystallize and fail to provide the desired ballistic performance. A suitable molecular weight may be from about 40 to about 80 kilograms/mol for an atactic polypropylene polymer. In preparing the polymer, it should be cooled quickly to avoid formation of crystals large enough to scatter visible light.

[0022] The coating thickness may range, for example, from about 0.25 cm to about 2.0 cm.

[0023] The coating may be bonded to the armor substrate using various techniques. It may be in direct contact with the armor substrate or bonded thereto via an intermediate adhesive. It may be cast into place on the armor substrate. Mechanical bonding may be used, for example using a frame, clamps, bolts, or other fasteners. A combination of bonding techniques may be used.

[0024] An advantage of this transparent polymeric coating is its reversible solidification (as opposed to solidification via a practically irreversible chemical change in other polymers). Thus, abrasions and scratches may be removed by heating, optionally while contacting the surface of the polymer with a smooth surface. It was found that a temperature of about 100°C was sufficient to repair atactic polypropylene. Such repairs could easily be made in the field.

Concluding Remarks

[0025] All documents mentioned herein are hereby incorporated by reference for the purpose of disclosing and describing the particular materials and methodologies for which the document was cited.

[0026] Although the present invention has been described in connection with preferred embodiments thereof, it will be appreciated by those skilled in the art that additions, deletions, modifications, and substitutions not specifically described may be made without departing from the spirit and scope of the invention. Terminology used herein should not be construed as being “means-plus-function” language unless the term “means” is expressly used in association therewith.

CLAIMS

What is claimed is:

1. A transparent armor system comprising:
a hard, transparent armor substrate, and
a transparent coating of atactic polypropylene
bonded to the armor substrate.
2. The transparent armor system of Claim 1, wherein said armor substrate is selected from the group consisting of (1) laminates of soda-lime or borosilicate glass with polycarbonate and (2) transparent ceramic armor.
3. The transparent armor system of Claim 1, wherein said armor substrate is aluminum oxynitride or spinel.
4. The transparent armor system of Claim 1, wherein said armor substrate has a hardness of at least 150 Brinell as measured with a tungsten ball of 10 mm diameter and 3,000 kg force.
5. The transparent armor system of Claim 1, further comprising a secondary coating with a hardness greater than that of the armor substrate, disposed between the armor substrate and the transparent coating of atactic polypropylene.
6. The transparent armor system of Claim 1, wherein said transparent coating has a thickness from about 0.25 cm to about 2.0 cm.
7. The transparent armor system of Claim 1, wherein said transparent coating is bonded to said armor substrate mechanically and/or with an adhesive.

8. A vehicle comprising
 - a transparent armor comprising:
 - a hard, transparent armor substrate, and
 - a transparent coating of atactic polypropylene bonded to the armor substrate, configured to face an exterior surface of said vehicle,
 - wherein said transparent armor system is configured as a window, windscreen, or viewing port of said vehicle.
9. A method of treating a transparent armor system, the method comprising:
 - (a) providing an armor system comprising:
 - a hard, transparent armor substrate, and
 - a transparent coating of atactic polypropylene bonded to the armor substrate; and
 - (b) heating and smoothing the transparent coating, thereby improving optical clarity thereof.
10. The method of Claim 9, wherein said heating and smoothing comprises contacting with said transparent coating with a smooth surface.

1/1

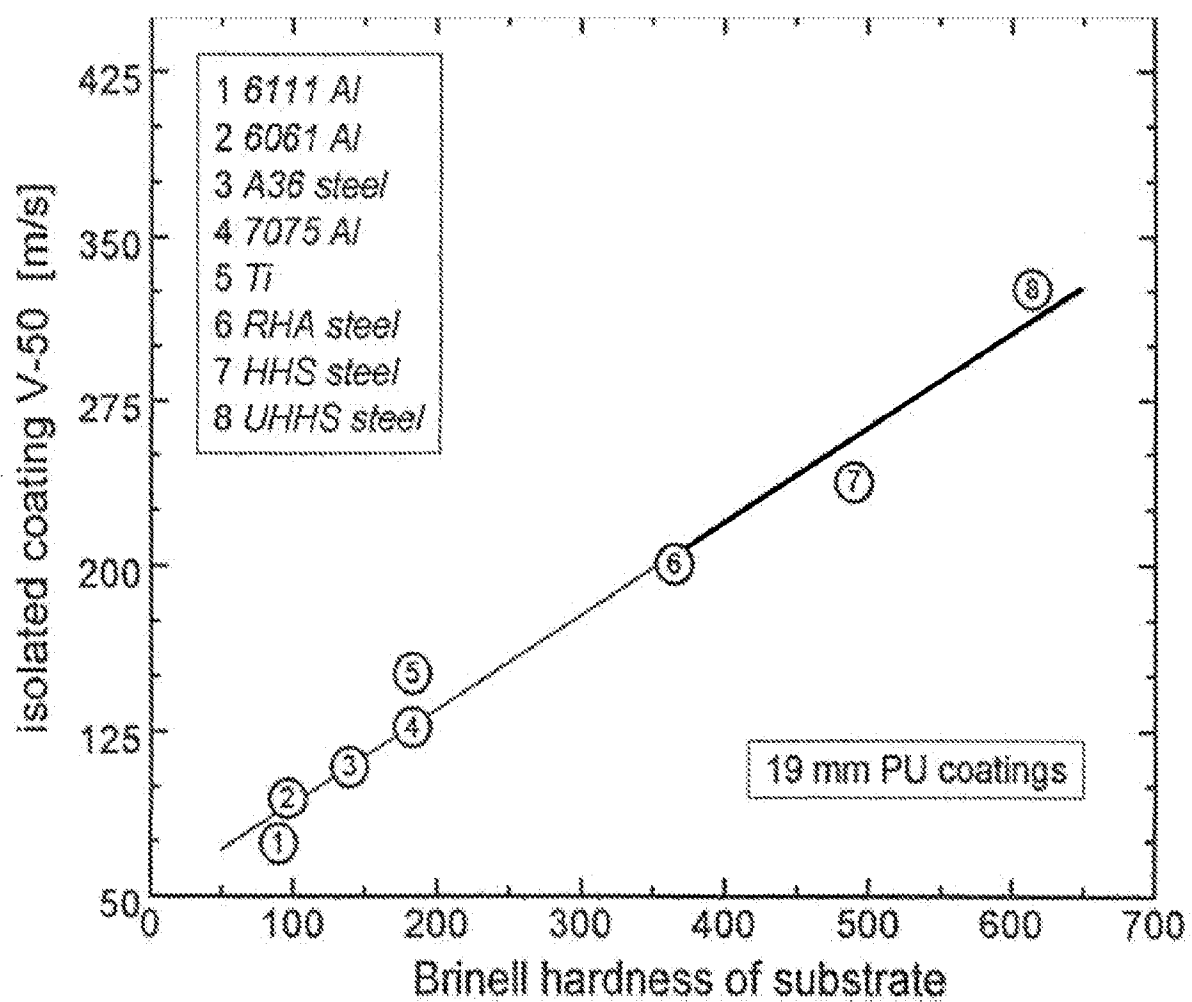


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/025498**A. CLASSIFICATION OF SUBJECT MATTER****F41H 5/02(2006.01)i, C09D 123/10(2006.01)i, F41H 7/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F41H 5/02; B32B 17/10; B32B 7/02; B32B 27/32; F41H 5/04; C09D 123/10; F41H 7/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: transparent armor, coating, atactic polypropylene, window, vehicle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014-0127500 A1 (CARBERRY et al.) 08 May 2014 See paragraphs [0004], [0017], [0023], [0055]-[0056] and figure 1.	1-10
Y	US 2010-0143676 A1 (HAHN et al.) 10 June 2010 See abstract and paragraphs [0152], [0167].	1-10
A	US 2013-0305912 A1 (WEINHOLD, CARSTEN) 21 November 2013 See paragraphs [0045]-[0047] and claim 1.	1-10
A	US 8746122 B1 (ROLAND et al.) 10 June 2014 See abstract and column 2, lines 25-55, column 7, lines 17-19.	1-10
A	US 2012-0297964 A1 (CARBERRY et al.) 29 November 2012 See abstract, claim 1 and figure 20.	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 July 2015 (14.07.2015)

Date of mailing of the international search report

15 July 2015 (15.07.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HWANG, Chan Yoon

Telephone No. +82-42-481-3347



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/025498

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0127500 A1	08/05/2014	DE 102013112201 A1	08/05/2014
US 2010-0143676 A1	10/06/2010	AU 2007-297789 A1	27/03/2008
		CA 2663040 A1	27/03/2008
		EP 2064282 A1	03/06/2009
		JP 2010-504392 A	12/02/2010
		WO 2008-036222 A1	27/03/2008
US 2013-0305912 A1	21/11/2013	CN 101815688 A	25/08/2010
		CN 101815688 B	17/07/2013
		EP 2244988 A2	03/11/2010
		EP 2244988 A4	02/04/2014
		TW 200930674 A	16/07/2009
		TW I450869 B	01/09/2014
		US 8603616 B1	10/12/2013
		WO 2009-042877 A2	02/04/2009
		WO 2009-042877 A3	28/05/2009
US 8746122 B1	10/06/2014	US 2015-061182 A1	05/03/2015
		US 8789454 B1	29/07/2014
US 2012-0297964 A1	29/11/2012	DE 112012001630 T5	27/02/2014
		WO 2013-002865 A1	03/01/2013